

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."


SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAE AS81935/8

FEDERAL SUPPLY CLASS
3120

RATIONALE

THIS IS THE INITIAL RELEASE OF AN ALL CORROSION RESISTANT STEEL (CRES) VERSION OF AS81935/8.

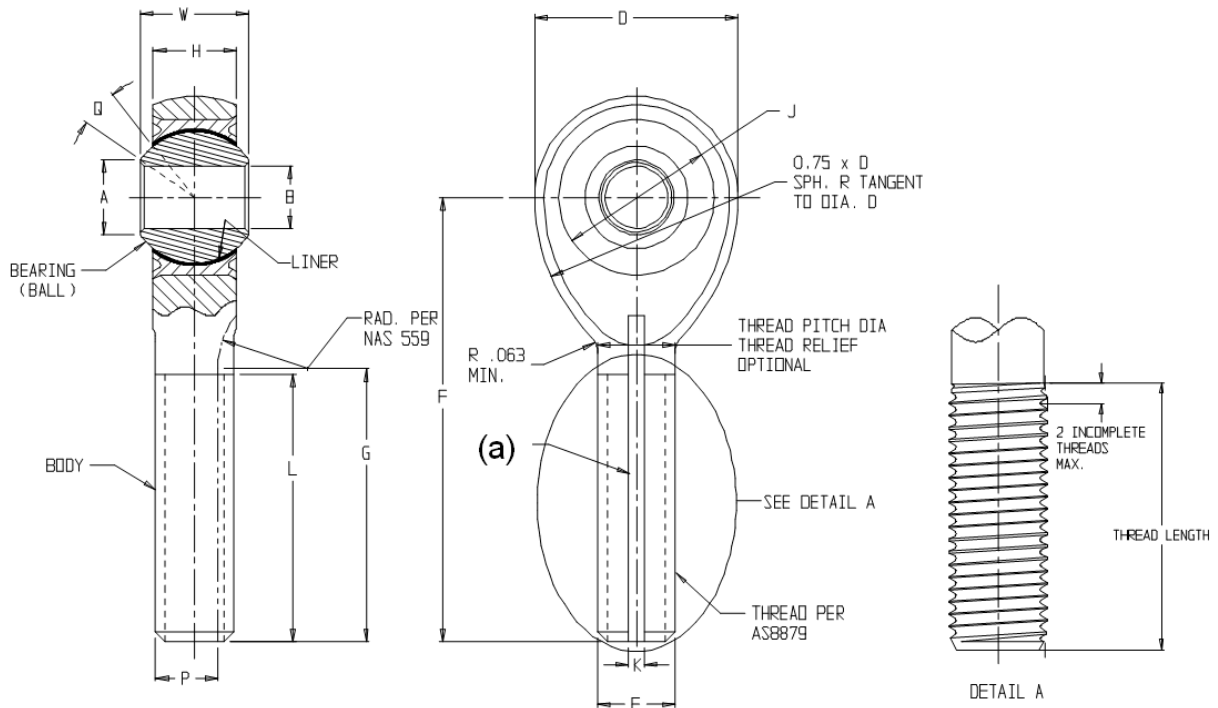


- (a) KEYWAY SHALL BE ORIENTED ALONG THE CENTERLINE OF THE THREADED SHANK. THE PLANE OF THE BOTTOM OF THE KEYWAY SHALL BE PARALLEL TO THE PLANE MADE BY THE FACE OF THE ROD END HOOP.

FIGURE 1 – ROD END ASSEMBLY

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS81935/8>

THIRD ANGLE PROJECTION



CUSTODIAN: ACBG – PLAIN BEARING

PROCUREMENT SPECIFICATION: AS81935

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

BEARING, PLAIN, ROD END, SELF-ALIGNING, SELF-LUBRICATING, NARROW, EXTERNALLY THREADED, STEEL, CORROSION RESISTANT (CRES)-65 TO +325 °F

SAE AS81935/8
SHEET 1 OF 3

Copyright 2011 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)

Tel: +1 724-776-4970 (outside USA)

Fax: 724-776-0790

Licensee: New Hampshire Ball Bearings, Inc. (Holland/599/0472003) User: Juntawee, K
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

Copyright SAE International
Provided by Accuris under license with SAE
No reproduction or networking permitted without license from Accuris

ISSUED 2011-06

TABLE 1 - DIMENSIONS

DASH NUMBER	B	D	L	E	F	W
	BORE +.0000 -.0005	SPH. DIA. ± .010	THREAD LENGTH ±.031	THREAD SIZE UNJF-3A (c)	CTRLINE BALL TO END ±.010	BALL WIDTH +.000 -.002
-03	.1900	.680	.775	.2500-28	1.315	.281
-04	.2500	.827	.775	.2500-28	1.443	.343
-05	.3125	.984	1.187	.3125-24	1.948	.375
-06	.3750	1.131	1.187	.3750-24	2.030	.406
-07	.4375	1.294	1.281	.4375-20	2.250	.437
-08	.5000	1.459	1.468	.5000-20	2.544	.500
-10	.6250	1.763	1.562	.6250-18	2.832	.625
-12	.7500	2.140	1.687	.7500-16	3.193	.750
-14	.8750	2.372	2.000	.8750-14	3.677	.875
-16	1.0000	2.681	2.100	1.0000-12	3.968	1.000

DASH NUMBER	H	A	J	Q°	G	K	P
	BODY WIDTH ± .005	MIN	MAX HOUSING I.D.	MIN	KEYWAY FLAT	KEYWAY (b)	
						+.005 -.000	+.000 -.005
-03	.228	.293	.5625	10	.896/.836	.062	.207
-04	.260	.364	.6562	10	.896/.876	.062	.207
-05	.291	.419	.7500	10	1.308/1.288	.062	.268
-06	.322	.475	.8125	9	1.308/1.288	.093	.319
-07	.353	.530	.9062	8	1.402/1.382	.093	.383
-08	.400	.600	1.0000	8	1.589/1.569	.093	.445
-10	.510	.739	1.1875	8	1.683/1.663	.125	.541
-12	.603	.920	1.4375	8	1.808/1.788	.125	.663
-14	.713	.980	1.5625	8	2.121/2.101	.156	.777
-16	.807	1.118	1.7500	9	2.221/2.201	.156	.900

(b) KEYWAY, WHEN SPECIFIED, IS COMPATIBLE WITH LOCKING DEVICES: AS81935/3 FOR SIZES -03 THROUGH -08, AND NAS 513 FOR SIZES -10 THROUGH -16. KEYWAY TOLERANCES NOT SPECIFIED SHALL BE IN ACCORDANCE WITH AS81935/3 OR NAS 513 AS APPLICABLE.

(c) THREADS SHALL BE FORMED BY A SINGLE ROLLING OPERATION AFTER FINAL HEAT TREAT AS SPECIFIED IN THE THREAD SECTION OF AS81935.

TABLE 2 – LOAD VALUES

DASH NUMBER	(d) ULTIMATE STATIC LOAD (LBS)	(e) FATIGUE LOAD (LBS)	AXIAL PROOF LOAD (LBS)	WEIGHT REF (LBS)	NO LOAD ROTATIONAL BREAKAWAY TORQUE (IN-LBS)	
					MIN	MAX
-03	3000	1100	150	.045	.5	6
-04	5300	1500	430	.060	.5	6
-05	8600	2400	700	.100	1	15
-06	13 000	3600	1100	.135	1	15
-07	17 800	5000	1400	.200	1	15
-08	24 200	6800	2040	.285	1	15
-10	38 500	10 800	2430	.505	1	15
-12	56 600	16 000	2940	.830	1	15
-14	77 400	21 900	3190	1.235	1	24
-16	101 400	28 600	3570	1.725	1	24

(d) ULTIMATE LOADS ARE ANALYTICAL VALUES BASED ON ROD END BANJO FOR -03 AND THREADS FOR ALL OTHER SIZES.

(e) FATIGUE LOADS ARE ANALYTICAL VALUES BASED ON 50 000 CYCLE LIFE. FATIGUE LOADS ARE DEFINED PER PROCUREMENT DOCUMENT AS81935.

 An SAE International Group	AEROSPACE STANDARD	SAE AS81935/8 SHEET 2 OF 3
	BEARING, PLAIN, ROD END, SELF-ALIGNING, SELF-LUBRICATING, NARROW, EXTERNALLY THREADED, STEEL, CORROSION RESISTANT (CRES) -65 TO +325 °F	

REQUIREMENTS:

1. MATERIAL:

BODY: PH13-8MO CRES PER AMS5629

BEARING CARTRIDGE: MS14101-XX WITH A 440C AMS5630 BALL SHALL BE USED AS THE DEFAULT BEARING INSERT. MS14101-XXC WITH A PH13-8MO AMS5629 BALL SHALL BE USED WHEN SPECIFIED IN THE PART NUMBER FOR THE ROD END ASSEMBLY. MS14101A-XX BEARING SHALL BE USED WHEN SPECIFIED IN PART NUMBER. SUFFIX "A" INDICATES THE BEARING CARTRIDGE UTILIZES A PTFE LINER THAT IS AS81820 TYPE "A" QUALIFIED". ABSENSE OF "A" INDICATES STANDARD PTFE LINER QUALIFIED TO AS81820. SEE BELOW FOR PART NUMBER EXAMPLE.

2. HARDNESS:

BODY: HRC 40 TO 44, HEAT TREAT TO CONDITION H1050, IN ACCORDANCE WITH AMS-H-6875 OR AMS2759/3

3. SURFACE TEXTURE: PER ANSI B46.1

BODY: BORE, Ra 32 MAX., SIDES OF THE THREAD AND ROOT AREA, Ra 32, THREAD RELIEF, Ra 63.
ALL OTHER MACHINED SURFACES, Ra 125 MAX.

4. CLEANING: PASSIVATE ROD END BODY AS DETAIL PER AMS2700, METHOD 1 (NITRIC ACID) OR METHOD 2 (CITRIC ACID), OR ASTM-A-967 CITRIC 1, CITRIC 2, AND CITRIC 3 ARE ACCEPTABLE.

5. TOLERANCES: UNLESS OTHERWISE SPECIFIED, DECIMALS $\pm .010$, ANGLES $\pm \frac{1}{2}$ DEGREE.

6. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.

7. BREAK SHARP EDGES AND CORNERS AND REMOVE ALL BURRS AND SLIVERS.

8. NONDESTRUCTIVE TESTING: THE ROD END BODY ONLY, AFTER ALL FINISH MACHINING, HEAT TREAT, PASSIVATION, AND PRIOR TO BEARING INSTALLATION, SHALL BE MAGNETIC PARTICLE INSPECTED PER ASTM-E-1444. THE ACCEPTANCE CRITERIA SHALL BE AS DEFINED IN THE PROCUREMENT DOCUMENT AS81935 (UNDER MAGNETIC PARTICLE INSPECTION).

9. NOTE: THE PARTS DEFINED IN THE AS81935/8 DOCUMENT ARE MARKED WITH M81935/8-XXXX; SEE EXAMPLE BELOW.

10. EXAMPLE OF PART NUMBER:

