

**Laboratorium
Multimedia dan Internet of Things
Departemen Teknik Komputer
*Institut Teknologi Sepuluh Nopember***

Laporan Akhir Praktikum Jaringan Komputer

Firewall & NAT

Alvis Shohan Fawwaz Nizar - 5024241019


2026

1 Langkah-Langkah Percobaan


1.1 Praktikum 1: Firewall NAT Dasar

Pada praktikum Firewall NAT Dasar dilakukan konfigurasi routing dan NAT pada dua buah router MikroTik agar jaringan lokal dapat saling terhubung serta memperoleh akses ke jaringan luar. Karena koneksi LAN dari server laboratorium mengalami gangguan, koneksi internet pada Router A diperoleh melalui hotspot smartphone menggunakan interface wireless yang dikonfigurasi sebagai *station*. Adapun langkah-langkah yang dilakukan adalah sebagai berikut:


1. Melakukan reset konfigurasi pada Router A dan Router B menggunakan menu {System} → {Reset Configuration}.
2. Membuat interface wireless pada Router A kemudian menghubungkannya dengan hotspot smartphone. Interface wireless tersebut dimasukkan ke dalam bridge sebagai pengganti koneksi LAN laboratorium.

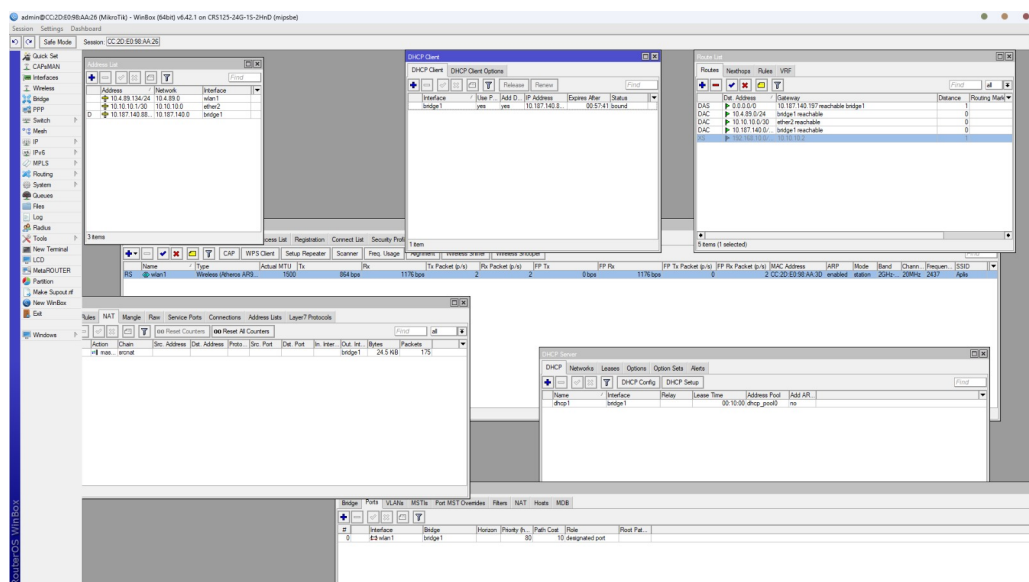


3. Mengkonfigurasi IP Address pada Router A dan Router B sesuai topologi jaringan.

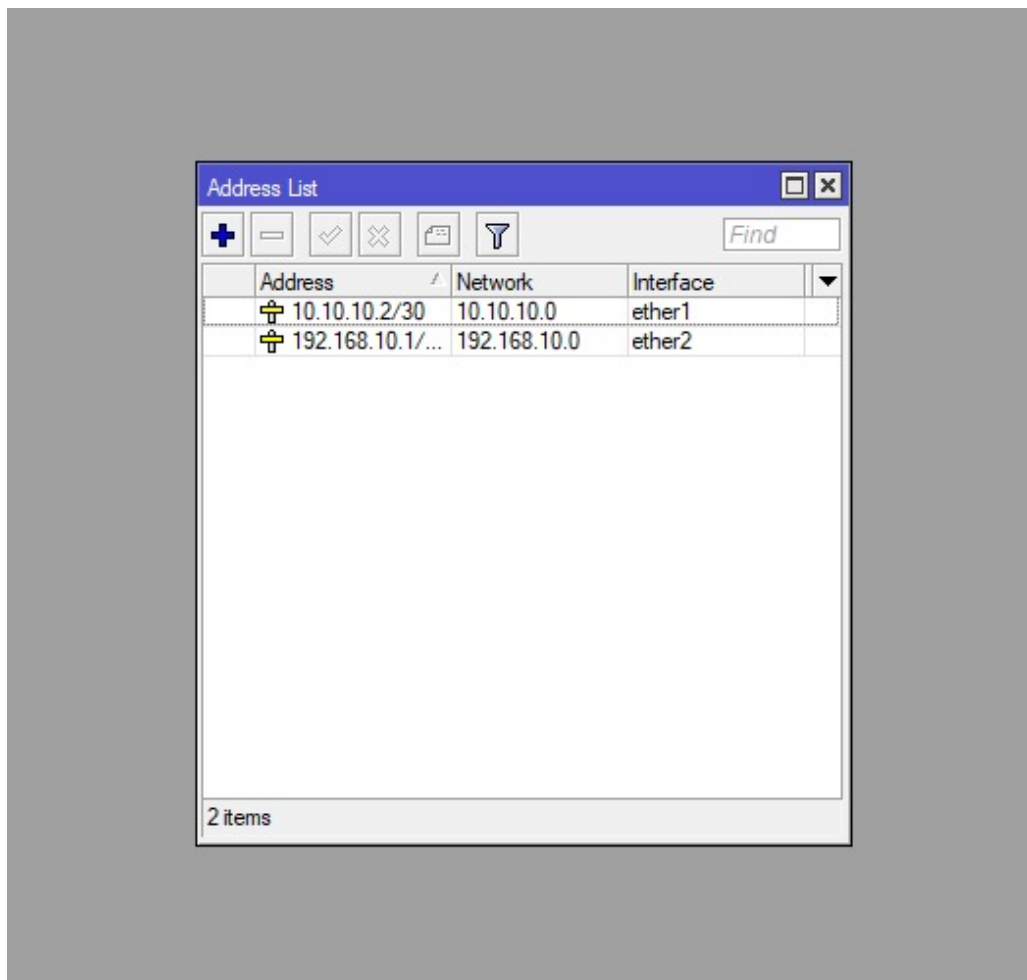


4. Menambahkan static route pada kedua router agar jaringan lokal dapat saling berkomunikasi.

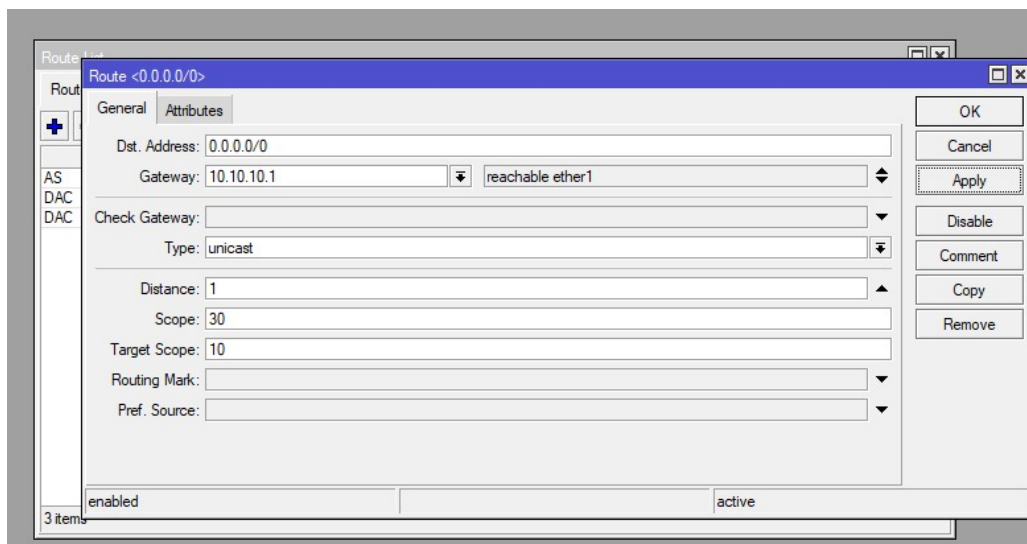

5. Mengkonfigurasi DHCP Server pada masing-masing jaringan lokal.

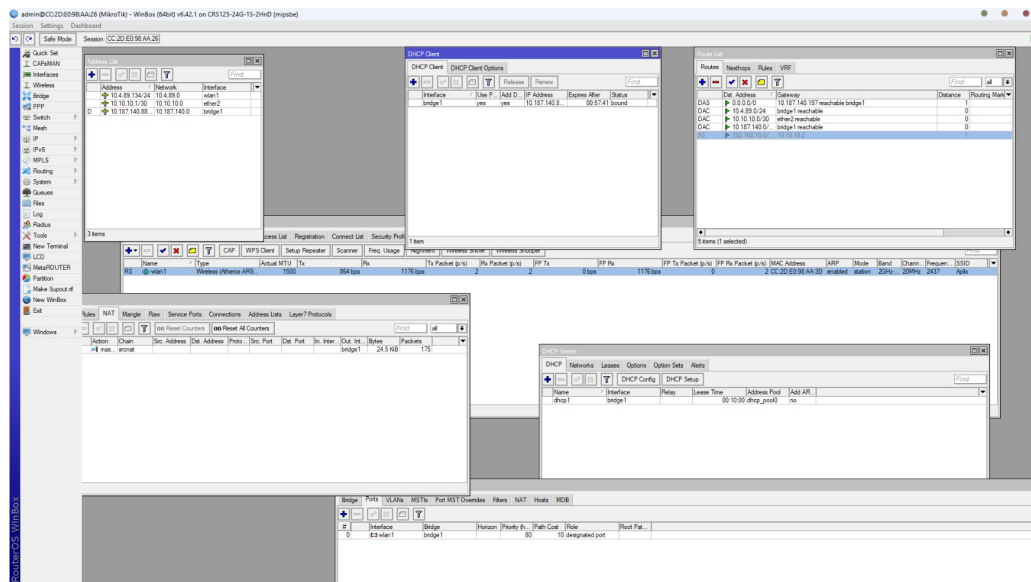

6. Membuat rules NAT dengan action *masquerade* pada router yang terhubung ke jaringan luar.

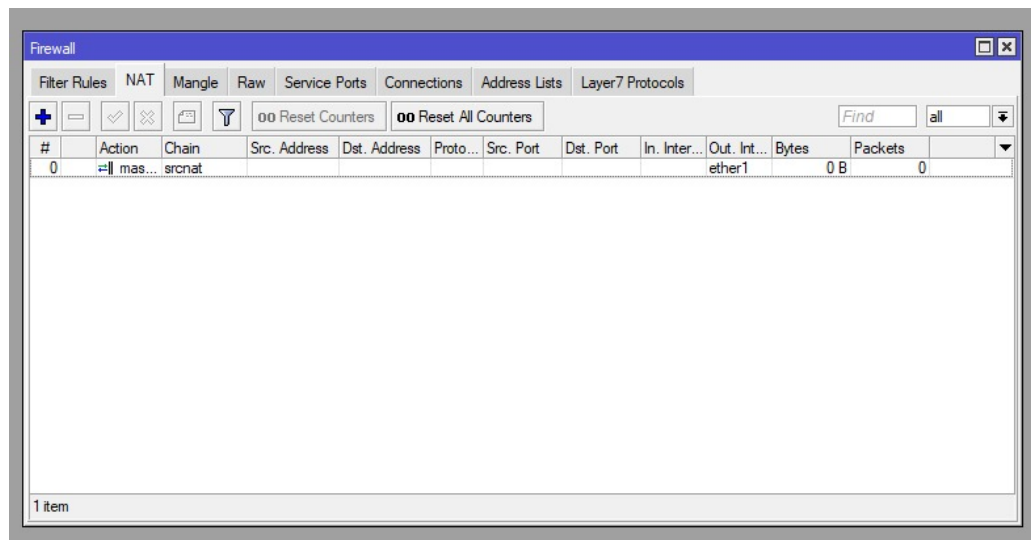

7. Mengkonfigurasi IP Address pada PC Client sesuai jaringan masing-masing.

Edit IP settings

IPv4

☒ On

IP address

192.168.10.2

Subnet mask

255.255.255.0

Gateway

192.168.10.1

Preferred DNS

8.8.8.8

DNS over HTTPS

Off

Alternate DNS

Save Cancel

8. Melakukan pengujian konektivitas menggunakan perintah *ping* antar perangkat dan pengujian akses internet.

```
Command Prompt
Microsoft Windows [Version 10.0.26200.8524]
(c) Microsoft Corporation. All rights reserved.

C:\Users\WINDOWS 11>ping 192.168.10.1

Pinging 192.168.10.1 with 32 bytes of data:
Reply from 192.168.10.1: bytes=32 time<1ms TTL=64
Reply from 192.168.10.1: bytes=32 time<1ms TTL=64
Reply from 192.168.10.1: bytes=32 time<1ms TTL=64
Reply from 192.168.10.1: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\WINDOWS 11>ping 10.10.10.1

Pinging 10.10.10.1 with 32 bytes of data:
Reply from 10.10.10.1: bytes=32 time<1ms TTL=63
Reply from 10.10.10.1: bytes=32 time<1ms TTL=63
Reply from 10.10.10.1: bytes=32 time<1ms TTL=63
Reply from 10.10.10.1: bytes=32 time<1ms TTL=63

Ping statistics for 10.10.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\WINDOWS 11>ping 10.4.89.134


Pinging 10.4.89.134 with 32 bytes of data:
Reply from 10.4.89.134: bytes=32 time=2ms TTL=63
Reply from 10.4.89.134: bytes=32 time=2ms TTL=63
Reply from 10.4.89.134: bytes=32 time=2ms TTL=63
Reply from 10.4.89.134: bytes=32 time<1ms TTL=63

Ping statistics for 10.4.89.134:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 1ms
```

1.2 Praktikum 2: Firewall Filter (Input dan Forward)

Pada praktikum ini dilakukan pengujian firewall filter menggunakan chain *input* dan *forward* untuk memahami perbedaan proses pemfilteran paket pada router. Adapun langkah-langkah yang dilakukan adalah sebagai berikut:

1. Membuat rules firewall filter pada Router B menggunakan chain *input*.
2. Menentukan action *drop* untuk memblokir paket yang masuk ke Router B.

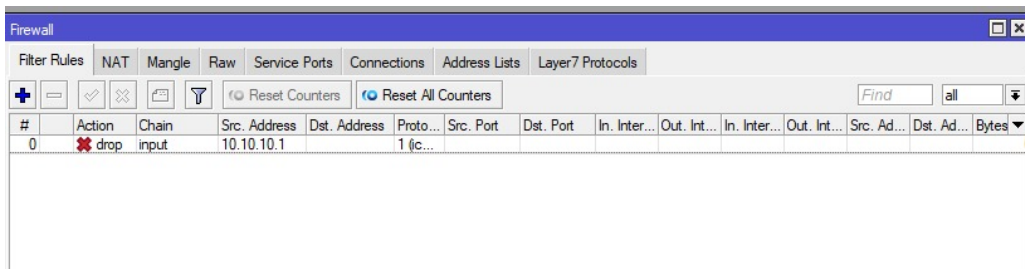

3. Melakukan pengujian koneksi dari Router A menuju Router B dan PC Client.

```

Terminal <1>
a second [Tab] gives possible options

/           Move up to base level
..          Move up one level
/command    Use command at the base level
[admin@MikroTik] > ping 10.10.10.2
  SEQ HOST                                SIZE TTL TIME  STATUS
  0 10.10.10.2                             56 127 2ms  timeout
  1 10.10.10.2                             56 127 2ms  timeout
  2 10.10.10.2                             56 127 2ms  timeout
  3 10.10.10.2                             56 127 2ms  timeout
  4 10.10.10.2                             56 127 2ms  timeout
  sent=5 received=0 packet-loss=100%

[admin@MikroTik] > ping 192.168.10.2
  SEQ HOST                                SIZE TTL TIME  STATUS
  0 192.168.10.2                           56 127 2ms
  1 192.168.10.2                           56 127 3ms
  2 192.168.10.2                           56 127 2ms
  3 192.168.10.2                           56 127 2ms
  4 192.168.10.2                           56 127 3ms
  sent=5 received=5 packet-loss=0% min-rtt=2ms avg-rtt=2ms max-rtt=3ms


[admin@MikroTik] >

```

4. Menonaktifkan rules chain *input*.

5. Membuat rules firewall filter baru menggunakan chain *forward*.

6. Menentukan action *drop* pada chain *forward*.

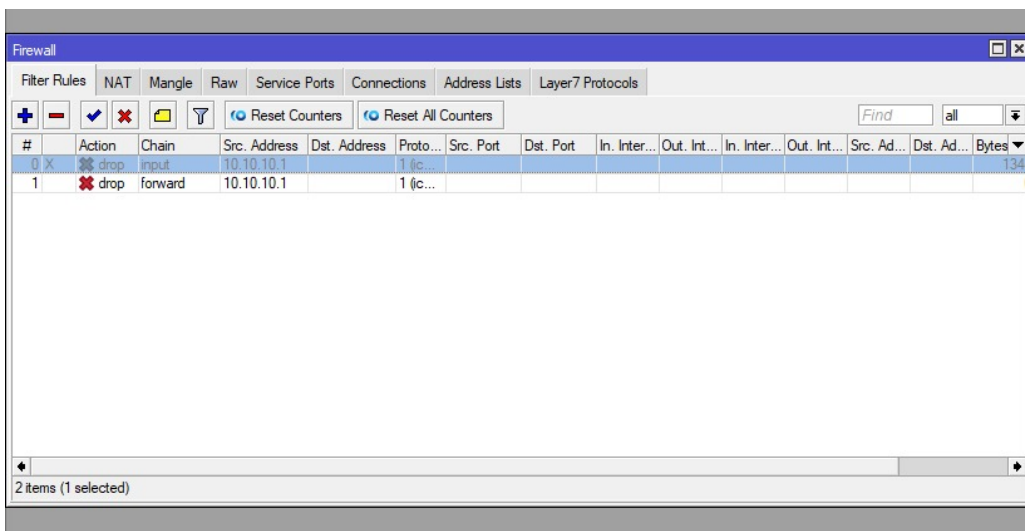

7. Melakukan pengujian kembali untuk mengamati perbedaan hasil antara chain *input* dan chain *forward*.


```

C:\Users\WINDOWS 11>python -m http.server 80
Serving HTTP on :: port 80 (http://[::]:80/) ...

```

5. Melakukan pengujian akses web server dari Router A menggunakan fitur *fetch*.

```

MikroTik RouterOS 6.42.1 (c) 1999-2018      http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments

[Tab] Completes the command/word. If the input is ambiguous,
a second [Tab] gives possible options

/ Move up to base level
.. Move up one level
/command Use command at the base level
[admin@MikroTik] > /tool fetch url="http://10.10.10.2:8080/" keep-result=no
status: finished
downloaded: 3KiB/-z pause]
total: 3KiB
duration: 1s

[admin@MikroTik] >

```

6. Mengamati tabel *Connection Tracking* pada Router B untuk melihat status koneksi yang terbentuk.

Firewall									
Filter Rules NAT Mangle Raw Service Ports Connections Address Lists Layer7 Protocols									
Tracking									
	Src. Address	/	Dst. Address	Proto...	Connecti...	Timeout	TCP State	Orig./Repl. Rate	Orig./Repl. Bytes
SACs	192.168.10.2:49442	/	4.213.25.241:443	6 (tcp)		23:59:41	established	0 bps/0 bps	9.0 KiB/16.8 KiB
SACs	192.168.10.2:49708	/	162.159.135.234:443	6 (tcp)		23:59:59	established	320 bps/1136 bps	56.0 KiB/908.3 KiB
C	192.168.10.2:49720	/	192.168.10.255:20561	17 (u...		00:00:08	established	800 bps/0 bps	288.0 KiB/0 B
SACs	192.168.10.2:51089	/	64.233.170.188:5228	6 (tcp)		23:59:40	established	0 bps/0 bps	4197 B/8.3 KiB
SACs	192.168.10.2:51439	/	8.8.8.8:53	17 (u...		00:00:18	established	0 bps/0 bps	326 B/815 B
SACs	192.168.10.2:53252	/	8.8.4.4:443	17 (u...		00:00:01	established	0 bps/0 bps	3643 B/5.5 KiB
SACs	192.168.10.2:53483	/	13.107.137.11:443	6 (tcp)		23:59:03	established	0 bps/0 bps	26.3 KiB/12.0 KiB
SACs	192.168.10.2:53484	/	52.104.58.55:443	6 (tcp)		23:59:12	established	0 bps/0 bps	6.5 KiB/18.6 KiB
SACs	192.168.10.2:53485	/	13.107.6.158:443	6 (tcp)		23:59:06	established	0 bps/0 bps	3507 B/9.1 KiB
SACs	192.168.10.2:53486	/	20.195.65.193:443	6 (tcp)		23:59:06	established	0 bps/0 bps	3291 B/7.7 KiB
SACs	192.168.10.2:53487	/	20.195.65.193:443	6 (tcp)		23:59:53	established	0 bps/0 bps	4382 B/7.8 KiB
SACs	192.168.10.2:53488	/	13.107.6.158:443	6 (tcp)		23:59:47	established	0 bps/0 bps	10.1 KiB/9.2 KiB
SACs	192.168.10.2:54544	/	8.8.8.8:53	17 (u...		00:02:06	established	0 bps/0 bps	224 B/353 B
SACs	192.168.10.2:54710	/	162.159.140.229:443	6 (tcp)		23:59:57	established	0 bps/0 bps	45.7 KiB/52.8 KiB
SACs	192.168.10.2:55263	/	35.186.224.39:443	6 (tcp)		23:59:35	established	0 bps/0 bps	8.1 KiB/6.5 KiB
SACs	192.168.10.2:55267	/	216.239.34.223:443	6 (tcp)		23:59:54	established	0 bps/0 bps	16.1 KiB/16.1 KiB
SACs	192.168.10.2:55442	/	162.159.136.232:443	6 (tcp)		23:59:32	established	0 bps/0 bps	56.3 KiB/54.5 KiB
39 items				Max Entries: 1048576					

2 Analisis Hasil Percobaan

Berdasarkan hasil praktikum yang telah dilakukan, konfigurasi Firewall dan NAT pada perangkat MikroTik berhasil diterapkan sesuai dengan tujuan percobaan. Pada percobaan Firewall NAT Dasar, kedua jaringan lokal dapat saling berkomunikasi melalui routing statis dan memperoleh akses ke jaringan luar melalui mekanisme NAT *masquerade*. Hasil pengujian menunjukkan bahwa seluruh perangkat dapat melakukan *ping* sesuai dengan topologi yang telah dirancang. Hasil tersebut sesuai dengan teori bahwa NAT berfungsi menerjemahkan alamat IP privat menjadi alamat IP yang dapat digunakan untuk mengakses jaringan luar.

Pada percobaan Firewall Filter, pengujian terhadap chain *input* dan chain *forward* menunjukkan hasil yang sesuai dengan teori firewall. Ketika rules *drop* diterapkan pada chain *input*, paket yang ditujukan langsung ke router berhasil diblokir, sedangkan paket yang hanya melewati router masih dapat diteruskan. Sebaliknya, ketika rules diterapkan pada chain *forward*, lalu lintas yang melewati router menuju jaringan lain dapat diblokir sesuai rules yang dibuat. Hal ini membuktikan bahwa firewall mampu mengendalikan lalu lintas jaringan berdasarkan kebijakan yang telah ditentukan administrator.

Pada percobaan NAT Forwarding, konfigurasi *dst-nat* berhasil mengarahkan koneksi dari jaringan luar menuju web server yang berada pada jaringan lokal. Keberhasilan proses *fetch* dan munculnya koneksi pada menu *Connection Tracking* menunjukkan bahwa router mampu melakukan translasi alamat dan port sekaligus melacak status koneksi yang sedang berlangsung. Hasil ini sesuai dengan teori bahwa *port forwarding* memungkinkan layanan pada jaringan privat diakses dari jaringan luar melalui alamat IP router.

Selama praktikum terdapat kendala pada koneksi LAN laboratorium sehingga Router A tidak dapat memperoleh akses jaringan sesuai topologi pada modul. Untuk mengatasi masalah tersebut digunakan hotspot smartphone yang dihubungkan melalui interface wireless dengan mode *station* sebagai pengganti koneksi jaringan laboratorium. Meskipun terdapat perbedaan media koneksi, fungsi routing, firewall, dan NAT tetap dapat berjalan dengan baik sehingga tujuan praktikum tetap tercapai.

Secara keseluruhan, hasil yang diperoleh telah sesuai dengan teori mengenai Firewall, NAT, dan Connection Tracking.

3 Hasil Tugas Modul


1. Hasil tugas modul 4 berada di Github folder Modul-4/LA/README.md
<https://github.com/aplisfn/Praktikum-Jarkom-2026-Kelompok-24/blob/main/Modul-4/LA/README.md>

README.md

Firewall & NAT - Modul 4

Topologi Jaringan

Topologi jaringan terdiri dari MikroTik sebagai router ISP, FortiGate sebagai firewall utama, Cisco Router sebagai gateway jaringan LAN, Ubuntu Server sebagai web server pada zona DMZ, serta dua client yang mewakili jaringan LAN dan WAN.

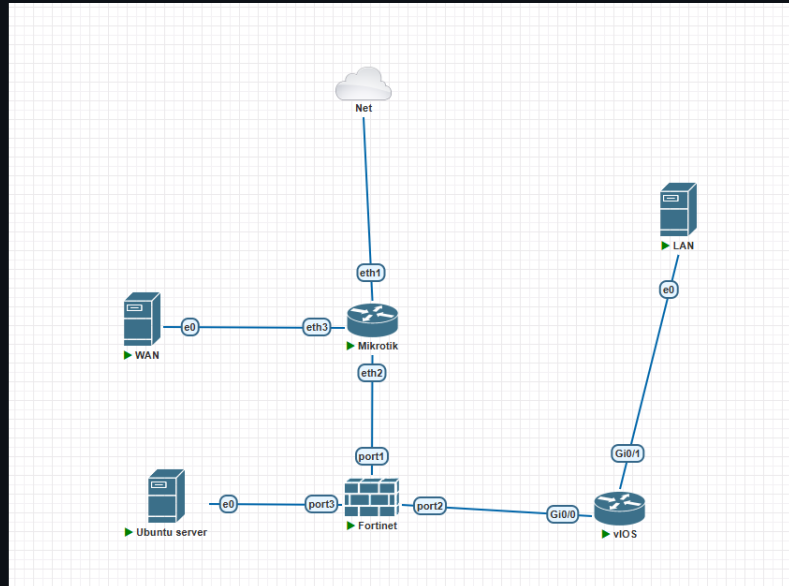

4 Kesimpulan


Berdasarkan praktikum yang telah dilakukan, dapat disimpulkan bahwa konfigurasi Firewall dan Network Address Translation (NAT) pada perangkat MikroTik berhasil diterapkan sesuai dengan tujuan praktikum. Mekanisme NAT *masquerade* memungkinkan perangkat pada jaringan lokal memperoleh akses ke jaringan luar, sedangkan routing statis memungkinkan komunikasi antar jaringan berlangsung dengan baik.

Pengujian Firewall Filter menunjukkan bahwa chain *input* dan chain *forward* memiliki fungsi yang berbeda dalam mengontrol lalu lintas jaringan. Selain itu, konfigurasi *Destination NAT (port forwarding)* berhasil menghubungkan pengguna dari jaringan luar ke layanan web server yang berada pada jaringan lokal. Fitur *Connection Tracking* juga terbukti mampu mencatat dan memantau koneksi yang sedang berlangsung sehingga mendukung proses firewall dan NAT.

Meskipun terdapat kendala pada koneksi LAN laboratorium yang menyebabkan penggunaan hotspot smartphone sebagai pengganti sumber koneksi internet, seluruh percobaan tetap dapat dilaksanakan dengan baik dan menghasilkan keluaran yang sesuai dengan teori.

5 Lampiran

5.1 Dokumentasi saat praktikum

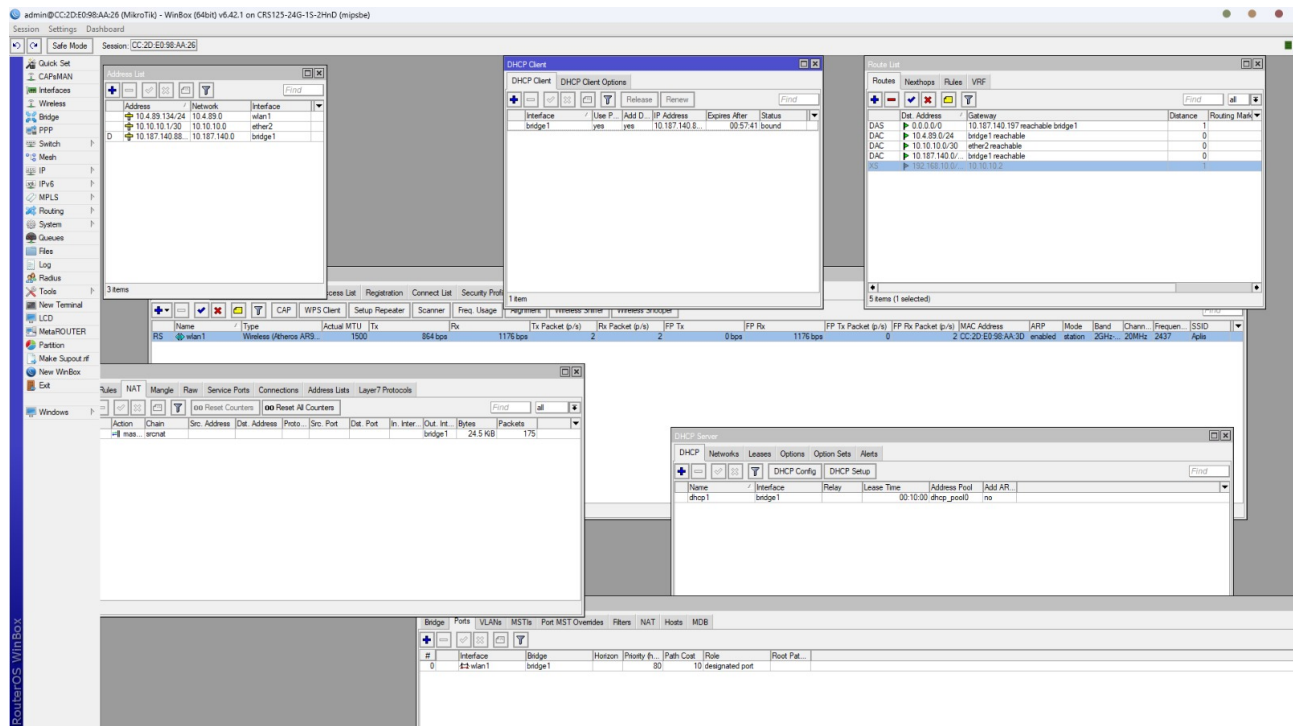

Firewall									
Filter Rules									
NAT									
Mangle									
Raw									
Service Ports									
Connections									
Address Lists									
Layer7 Protocols									
Tracking									
	Src. Address	Dst. Address	Proto...	Connecti...	Timeout	TCP State	Orig./Repl. Rate	Orig./Repl. Bytes	
SACs	192.168.10.2:49442	4.213.25.241:443	6 (tcp)		23:59:41	established	0 bps/0 bps	9.0 KiB/16.8 KiB	
SACs	192.168.10.2:49708	162.159.135.234:443	6 (tcp)		23:59:59	established	320 bps/1136 bps	56.0 KiB/908.3 KiB	
C	192.168.10.2:49720	192.168.10.255:20561	17 (u...)		00:00:08		800 bps/0 bps	288.0 KiB/0 B	
SACs	192.168.10.2:51089	64.233.170.188:5228	6 (tcp)		23:59:40	established	0 bps/0 bps	4197 B/8.3 KiB	
SACs	192.168.10.2:51439	8.8.8.8:53	17 (u...)		00:00:18		0 bps/0 bps	326 B/815 B	
SACs	192.168.10.2:53252	8.8.4.4:443	17 (u...)		00:00:01		0 bps/0 bps	3643 B/5.5 KiB	
SACs	192.168.10.2:53483	13.107.137.11:443	6 (tcp)		23:59:03	established	0 bps/0 bps	26.3 KiB/12.0 KiB	
SACs	192.168.10.2:53484	52.104.58.55:443	6 (tcp)		23:59:12	established	0 bps/0 bps	6.5 KiB/18.6 KiB	
SACs	192.168.10.2:53485	13.107.6.158:443	6 (tcp)		23:59:06	established	0 bps/0 bps	3507 B/9.1 KiB	
SACs	192.168.10.2:53486	20.195.65.193:443	6 (tcp)		23:59:06	established	0 bps/0 bps	3291 B/7.7 KiB	
SACs	192.168.10.2:53487	20.195.65.193:443	6 (tcp)		23:59:53	established	0 bps/0 bps	4382 B/7.8 KiB	
SACs	192.168.10.2:53488	13.107.6.158:443	6 (tcp)		23:59:47	established	0 bps/0 bps	10.1 KiB/9.2 KiB	
SACs	192.168.10.2:54544	8.8.8.8:53	17 (u...)		00:02:06		0 bps/0 bps	224 B/353 B	
SACs	192.168.10.2:54710	162.159.140.229:443	6 (tcp)		23:59:57	established	0 bps/0 bps	45.7 KiB/52.8 KiB	
SACs	192.168.10.2:55263	35.186.224.39:443	6 (tcp)		23:59:35	established	0 bps/0 bps	8.1 KiB/6.5 KiB	
SACs	192.168.10.2:55267	216.239.34.223:443	6 (tcp)		23:59:54	established	0 bps/0 bps	16.1 KiB/16.1 KiB	
SACs	192.168.10.2:55442	162.159.136.232:443	6 (tcp)		23:59:32	established	0 bps/0 bps	56.3 KiB/54.5 KiB	
39 items				Max Entries: 1048576					

Firewall

Filter RulesNATMangleRawService PortsConnectionsAddress ListsLayer7 Protocols

Reset Counters

Reset All Counters

Find

all

#	Action	Chain	Src. Address	Dst. Address	Proto...	Src. Port	Dst. Port	In. Inter...	Out. Int...	In. Inter...	Out. Int...	Src. Ad...	Dst. Ad...	Bytes
0	mas...	srcnat							ether1					249.8
1	dst...	dstnat		10.10.10.2	6 (tcp)		8080							

2 items

```

Terminal <1>
MMMM   MMM   KKK               TTTTTTTTTT   KKK
MMM MMMM MMM III KKK KKK RRRRRR   OOOOOO   TTT   III KKK KKK
MMM MM  MMM III KKKKK   RRR RRR   OOO OOO   TTT   III KKKKK
MMM     MMM III KKK KKK RRRRRR   OOO OOO   TTT   III KKK KKK
MMM     MMM III KKK KKK RRR RRR   OOOOOO   TTT   III KKK KKK

MikroTik RouterOS 6.42.1 (c) 1999-2018      http://www.mikrotik.com/

[?]                Gives the list of available commands
command [?]        Gives help on the command and list of arguments

[Tab]              Completes the command/word. If the input is ambiguous,
                    a second [Tab] gives possible options

/                  Move up to base level
..                Move up one level
/command          Use command at the base level
[admin@MikroTik] > /tool fetch url="http://10.10.10.2:8080/" keep-result=no
    status: finished
    downloaded: 3KiB
    total: 3KiB
    duration: 1s

[admin@MikroTik] >

```


Address List			
+ - ✓ ✗ 📄 🔍 Find			
Address	Network	Interface	
📌 10.10.10.2/30	10.10.10.0	ether1	
📌 192.168.10.1/...	192.168.10.0	ether2	
2 items			

Firewall

Filter Rules

NAT

Mangle

Raw

Service Ports

Connections

Address Lists

Layer7 Protocols

+

−

✓

✗

📄

🔍

00

Reset Counters

00

Reset All Counters

Find

all

⌵

#	Action	Chain	Src. Address	Dst. Address	Proto...	Src. Port	Dst. Port	In. Inter...	Out. Int...	Bytes	Packets	
0	mas...	srcnat							ether1	0 B	0	

1 item

Microsoft Windows [Version 10.0.26200.8524]
(c) Microsoft Corporation. All rights reserved.

C:\Users\WINDOWS 11>ping 192.168.10.1

Pinging 192.168.10.1 with 32 bytes of data:
Reply from 192.168.10.1: bytes=32 time<1ms TTL=64
Reply from 192.168.10.1: bytes=32 time<1ms TTL=64
Reply from 192.168.10.1: bytes=32 time<1ms TTL=64
Reply from 192.168.10.1: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.10.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\WINDOWS 11>ping 10.10.10.1

Pinging 10.10.10.1 with 32 bytes of data:
Reply from 10.10.10.1: bytes=32 time<1ms TTL=63
Reply from 10.10.10.1: bytes=32 time<1ms TTL=63
Reply from 10.10.10.1: bytes=32 time<1ms TTL=63
Reply from 10.10.10.1: bytes=32 time<1ms TTL=63

Ping statistics for 10.10.10.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\WINDOWS 11>ping 10.4.89.134

Pinging 10.4.89.134 with 32 bytes of data:
Reply from 10.4.89.134: bytes=32 time=2ms TTL=63
Reply from 10.4.89.134: bytes=32 time=2ms TTL=63
Reply from 10.4.89.134: bytes=32 time=2ms TTL=63
Reply from 10.4.89.134: bytes=32 time<1ms TTL=63

Ping statistics for 10.4.89.134:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 2ms, Average = 1ms


```
Terminal <1>

a second [Tab] gives possible options


/           Move up to base level
..          Move up one level
/command    Use command at the base level
[admin@MikroTik] > ping 10.10.10.2

SEQ HOST                                SIZE TTL TIME  STATUS
0 10.10.10.2                            timeout
1 10.10.10.2                            timeout
2 10.10.10.2                            timeout
3 10.10.10.2                            timeout
4 10.10.10.2                            timeout
sent=5 received=0 packet-loss=100%

[admin@MikroTik] > ping 192.168.10.2

SEQ HOST                                SIZE TTL TIME  STATUS
0 192.168.10.2                          56 127 2ms
1 192.168.10.2                          56 127 3ms
2 192.168.10.2                          56 127 2ms
3 192.168.10.2                          56 127 2ms
4 192.168.10.2                          56 127 3ms
sent=5 received=5 packet-loss=0% min-rtt=2ms avg-rtt=2ms max-rtt=3ms

[admin@MikroTik] > 
```

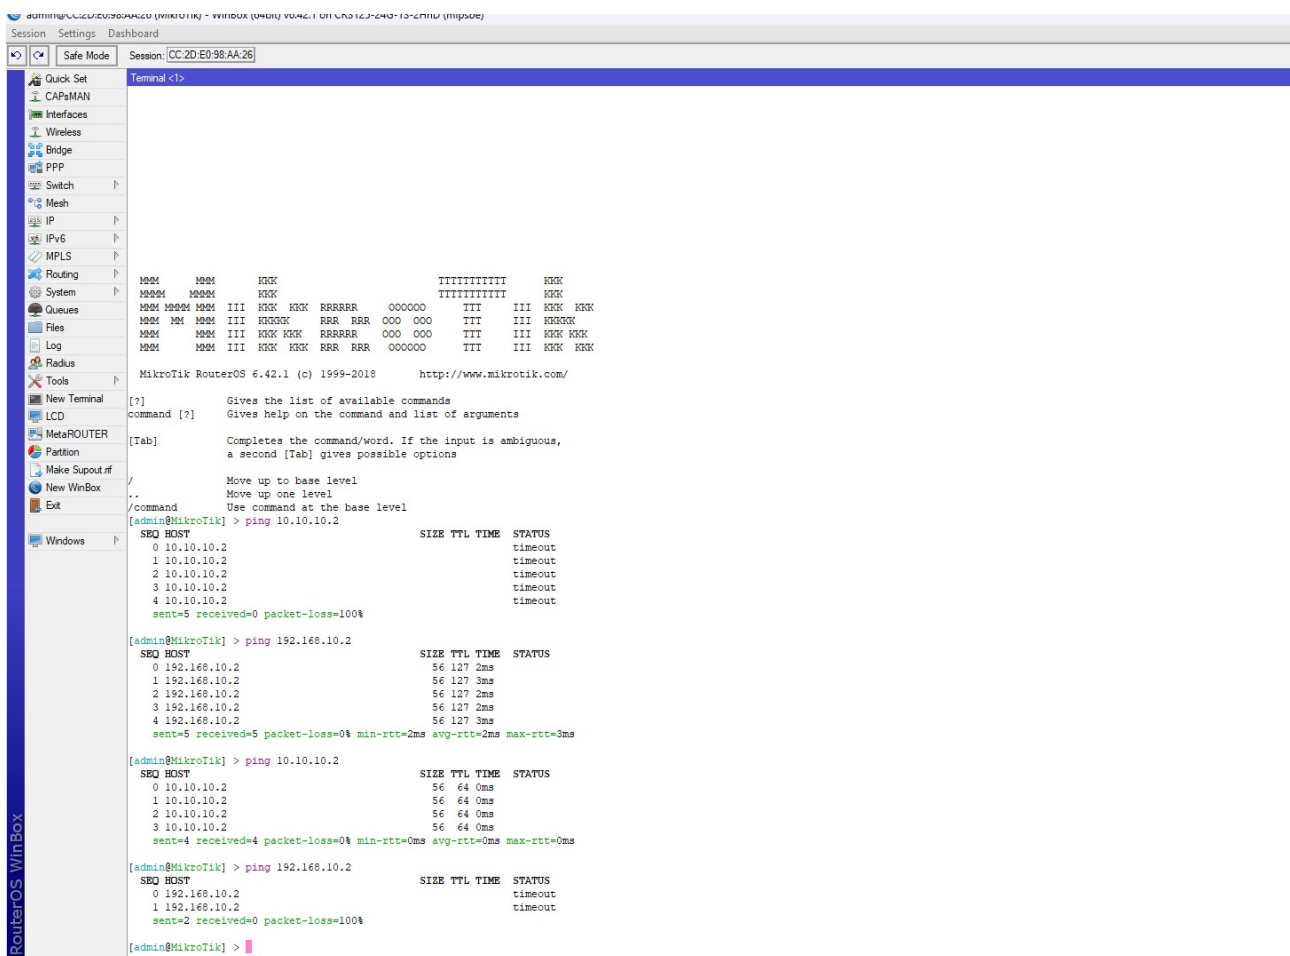

```
Command Prompt - python - X + v
Microsoft Windows [Version 10.0.26200.8524]
(c) Microsoft Corporation. All rights reserved.

C:\Users\WINDOWS 11>python -m http.server 80
Serving HTTP on :: port 80 (http://[::]:80/) ...
```

```
Command Prompt - python - X + v
Microsoft Windows [Version 10.0.26200.8524]
(c) Microsoft Corporation. All rights reserved.

C:\Users\WINDOWS 11>python -m http.server 80
Serving HTTP on :: port 80 (http://[::]:80/) ...
::ffff:10.10.10.1 - - [01/Jun/2026 10:24:45] "GET / HTTP/1.1" 200 -
```

Route <0.0.0.0/0>

General Attributes

Dst. Address: 0.0.0.0/0

Gateway: 10.10.10.1 reachable ether1

Check Gateway:

Type: unicast

Distance: 1

Scope: 30

Target Scope: 10

Routing Mark:

Pref. Source:

OK Cancel Apply Disable Comment Copy Remove

enabled active

3 items

Firewall

Filter Rules NAT Mangle Raw Service Ports Connections Address Lists Layer7 Protocols

#	Action	Chain	Src. Address	Dst. Address	Proto...	Src. Port	Dst. Port	In. Inter...	Out. Int...	In. Inter...	Out. Int...	Src. Ad...	Dst. Ad...	Bytes
0	drop	input	10.10.10.1		1 (ic...									134
1	drop	forward	10.10.10.1		1 (ic...									

2 items (1 selected)

Firewall

Filter Rules NAT Mangle Raw Service Ports Connections Address Lists Layer7 Protocols

#	Action	Chain	Src. Address	Dst. Address	Proto...	Src. Port	Dst. Port	In. Inter...	Out. Int...	In. Inter...	Out. Int...	Src. Ad...	Dst. Ad...	Bytes
0	drop	input	10.10.10.1		1 (ic...									

Edit IP settings

IPv4

☒ On

IP address

192.168.10.2

Subnet mask

255.255.255.0

Gateway

192.168.10.1

Preferred DNS

8.8.8.8



DNS over HTTPS

Off



Alternate DNS

Save

Cancel