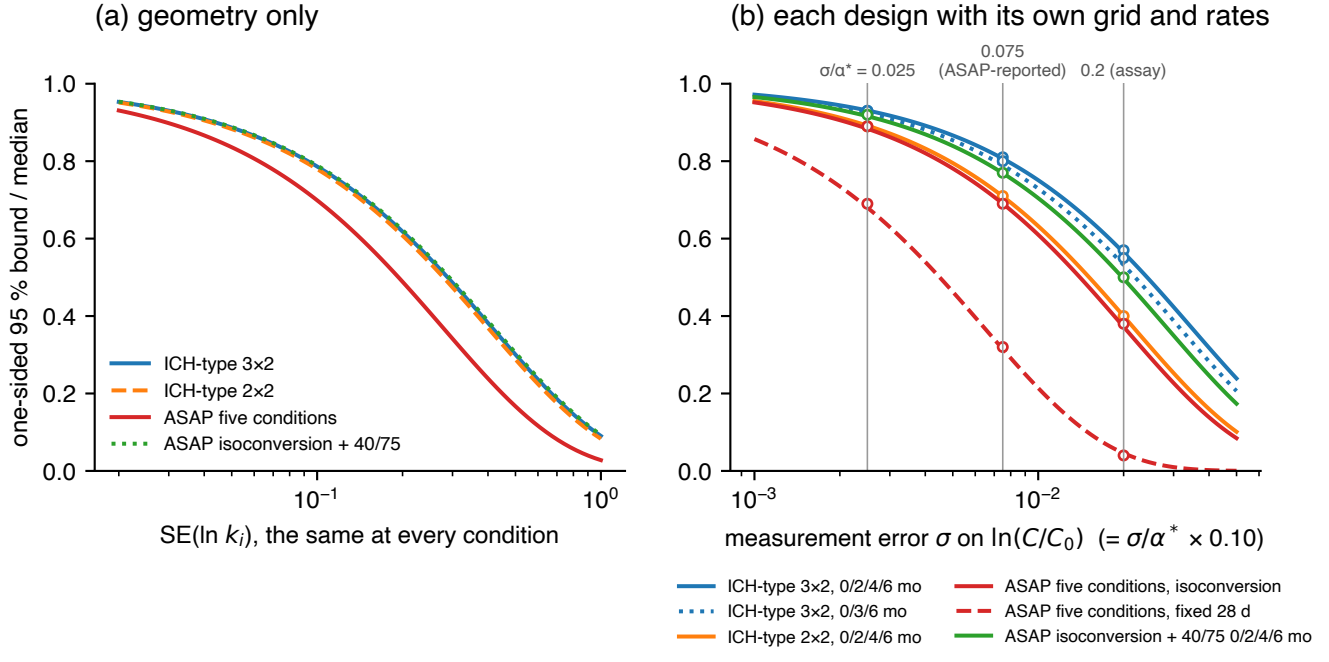
(a) geometry only
one-sided 95 % bound / median
1.0
0.8
0.6
0.4
0.2
0.0
10^{-1}
10^{0}
SE(ln k_i), the same at every condition
ICH-type 3×2
ICH-type 2×2
ASAP five conditions
ASAP isoconversion + 40/75
(b) each design with its own grid and rates
σ/α* = 0.025
0.075
(ASAP-reported)
0.2 (assay)
10^{-3}
10^{-2}
measurement error σ on ln(C/C_0) (= σ/α^* × 0.10)
ICH-type 3×2, 0/2/4/6 mo
ICH-type 3×2, 0/3/6 mo
ICH-type 2×2, 0/2/4/6 mo
ASAP five conditions, isoconversion
ASAP five conditions, fixed 28 d
ASAP isoconversion + 40/75 0/2/4/6 mo