

THREATLENS

PFSense Firewall Home Lab



Table of Contents

1. Introduction	2
2. Basic Terms	2
3. Prerequisites	4
4. Lab Environment Setup	4
4.1 Create pfSense VM	4
4.2 Create Kali VM (Attacker)	5
4.3 Create Ubuntu VM (Victim)	6
5. pfSense SET UP	6
5.1 Reaching pfSense from the WAN	6
5.2 Configure LAN DHCP	8
5.3 Add rule to allow Kali access to Internal LAN network	9
6. Kali Linux Setup (Attacker)	10
7. Ubuntu Setup (Victim)	11
8. Launching the DoS (hping3)	12
9. Blocking the Attack & Verifying	14

1. Introduction

This project focuses on designing and deploying a virtualized network security home lab using Oracle VirtualBox and the open-source pfSense firewall. The environment segments network traffic into an external WAN representing the public internet and an isolated internal LAN serving a client Ubuntu workstation. A Kali Linux virtual machine acts as an external adversary to simulate realistic cyber threats, specifically launching DoS SYN flood attacks against the internal client. Using Wireshark on the Ubuntu target, network traffic spikes and protocol behaviors are captured and analyzed in real time. Finally, targeted stateful firewall filtering and logging rules are configured on pfSense to inspect, log, and successfully mitigate the incoming malicious traffic.

2. Basic Terms

What is PFSense Firewall?

pfSense is an open-source, FreeBSD-based firewall and router software. It provides enterprise-grade perimeter defense, stateful packet filtering, NAT (Network Address Translation), routing, VPN capabilities (IPsec, OpenVPN, WireGuard), and traffic monitoring through a centralized web interface.

What is Wireshark?

Wireshark is an open-source network packet analysis and packet sniffing tool. It captures network traffic passing across an interface in real time, decoding and dissecting raw protocol frames (Ethernet, IP, TCP/UDP, DNS, HTTP) so security analysts and engineers can inspect payloads, troubleshoot network failures, and identify anomalous behavior.

What are Static Packets?

In computer networking, "static packet" generally refers to one of two concepts depending on context:

- **Predefined/Crafted Test Packets:** In penetration testing and firewall analysis (such as using tools like hping3), static packets are customized packets where the headers, flags, payload length, and addresses are hardcoded rather than dynamically negotiated by a running application.
- **Stateless Packet Inspection:** A method where firewall filters evaluate incoming packets purely on static header fields (source IP, destination IP, port, protocol) without tracking the active session state or handshake progression of the connection.

What is LAN?

A Local Area Network (LAN) is a computer network confined to a limited geographical boundary—such as a single home, lab, or office building. LANs typically operate on private IP address ranges (RFC 1918 spaces, such as 192.168.x.x or 10.x.x.x), provide high-bandwidth connectivity, and are owned and managed by a single organization or user.

What is WAN?

A Wide Area Network (WAN) spans large geographical zones (cities, countries, or globally), interconnecting multiple LANs. In home and lab topologies, the WAN interface on a firewall represents the upstream link that faces the outside world or the public internet, terminating incoming external connections before routing them internally.

What is DHCP (Dynamic Host Configuration Protocol)?

DHCP is a network management protocol that automatically distributes network parameters to connected devices. Instead of requiring manual configuration on every client, a DHCP server leases:

- An IPv4/IPv6 address
- A Subnet Mask
- A Default Gateway (the firewall/router)
- DNS Server addresses

What is an ISO Image File?

An ISO image (.iso) is an uncompressed archive format that contains an exact, byte-for-byte replica of an optical disc (CD, DVD, or Blu-ray) file system, typically following the ISO 9660 or UDF standard. In virtualization environments, hypervisors mount ISO images to virtual optical drives to install operating systems.

What is a bridged adapter and an internal network? What difference do they hold?

Feature	Bridged Adapter	Internal Network
How It Connects	Bridges the VM's virtual network card directly to the host's physical network adapter (Ethernet/Wi-Fi).	Creates an isolated software-only virtual switch inside the hypervisor.
IP Address Source	Obtains an IP directly from your physical home/office router on the local LAN.	Requires a virtual router (such as pfSense) or static configuration to get an IP.
Visibility to Host & LAN	Visible as an independent physical device on the host's home network; can communicate with physical devices.	Completely invisible to the host operating system, physical home devices, and the physical router.
Typical Role in a Lab	Used for the WAN interface of a firewall VM so it can pull	Used for the LAN interface and client VMs (e.g., Ubuntu)

Feature	Bridged Adapter	Internal Network
	internet access from the real network.	to isolate lab traffic safely from your real home devices.

What is DoS Attack?

A Denial of Service attack is a cyberattack aimed at making a target machine, network service, or resource inaccessible to authorized users. Attackers achieve this by exhausting system resources (CPU, RAM, bandwidth, state tables) or triggering software vulnerabilities. Common vectors include:

- **Volumetric Floods:** Saturating bandwidth using ICMP floods, UDP floods, or high-volume raw packet generation.
- **Protocol/State Exhaustion:** Depleting connection pools (such as TCP SYN floods) so the target cannot allocate state resources for legitimate handshakes.




3. Prerequisites

- VirtualBox ≥ 7.x installed on host (Windows/macOS/Linux)
- Ubuntu VM
- Kali Linux (Attacker machine)
- PFSense Firewall
- Minimum host resources: 8 GB RAM, 40 GB free disk
- Administrative rights on the host (to create bridged adapters)

4. Lab Environment Setup

4.1 Create PFSense VM

- Name pfSense
- OS Type FreeBSD 64-bit
- CPUs / RAM 2 vCPU / 2 GB
- Disk 20 GB VDI (dynamically-allocated)
- Adapter 1 Bridged → Physical NIC
- Adapter 2 Internal Network → LabNet
- Attach the pfSense ISO under Settings ► Storage and start the VM

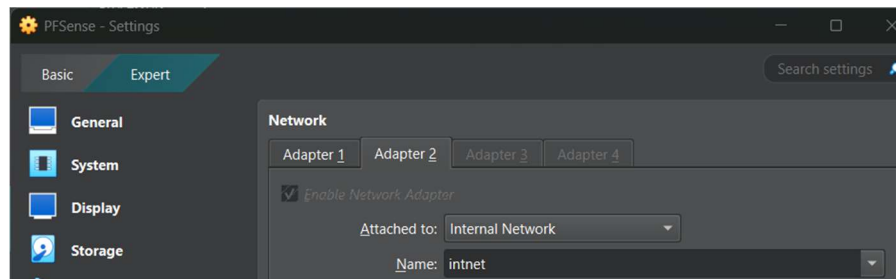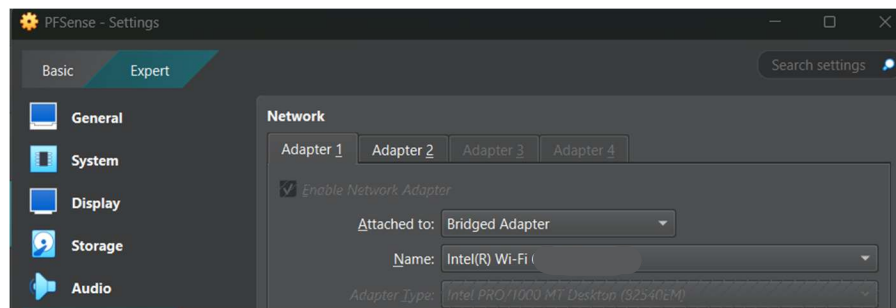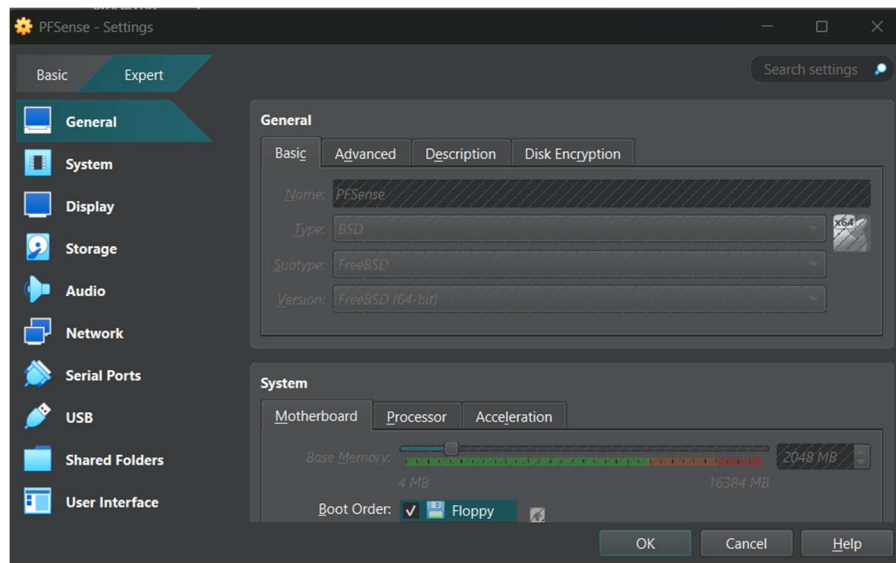

4.2 Create Kali VM (Attacker)

- Debian 64-bit, 2 vCPU, 2 GB RAM
- Adapter 1: Bridged


- Choose the ISO image downloaded and set up the Kali Linux on VBOX. After install you must delete the ISO image and boot from the virtual disk.

4.3 Create Ubuntu VM (Victim)

- Ubuntu 64-bit, 2 vCPU, 2 GB RAM, 15 GB disk.
- Adapter 1: Internal Network → intnet.
- Choose the ISO image downloaded and set up the Ubuntu on VBOX. After install you must delete the ISO image and boot from the virtual disk.

5. PfSense Setup

- Install pfSense (accept defaults).
- Console menu → 1) Assign Interfaces: vtnet0 = WAN (Bridged) vtnet1 = LAN (LabNet).
- Leave WAN as DHCP – pfSense pulls an address from the home router automatically. Watch the console; note the WAN IP (e.g. 192.168.0.58). Default login and password is admin and pfsense respectively.

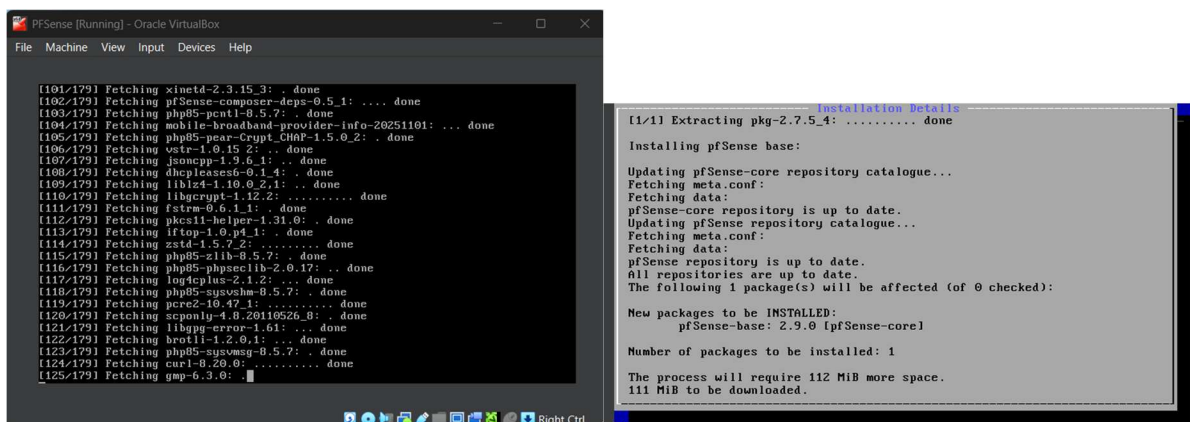

5.1 Reaching pfSense from the WAN

- Via the pfsense you will have to enter the shell and then disable the pfsense firewall by running the following command (default login is root and pfsense): *pfctl -d*

```

login: root
Password:
VirtualBox Virtual Machine - Netgate Device ID:

*** Welcome to pfSense 2.9.0-RELEASE (amd64) on pfSense ***

WAN (wan) -> em0 -> v4/DHCP4:
v6/DHCP6:
LAN (lan) -> em1 -> v4:


0) Logout / Disconnect SSH          9) pfTop
1) Assign Interfaces                10) Filter Logs
2) Set interface(s) IP address      11) Restart GUI
3) Reset admin account and password 12) PHP shell + pfSense tools
4) Reset to factory defaults        13) Update from console
5) Reboot system                   14) Enable Secure Shell (ssh)
6) Halt system                     15) Restore recent configuration
7) Ping host                       16) Restart PHP-FPM
8) Shell

Enter an option: 8


[2.9.0-RELEASE][root@pfSense.home.arpal/root: pfctl -d
pf disabled
[2.9.0-RELEASE][root@pfSense.home.arpal/root:

```

- Now log into the PFSense over the WAN using the WAN IP address. Default credentials are admin and pfsense. One can change the password later.

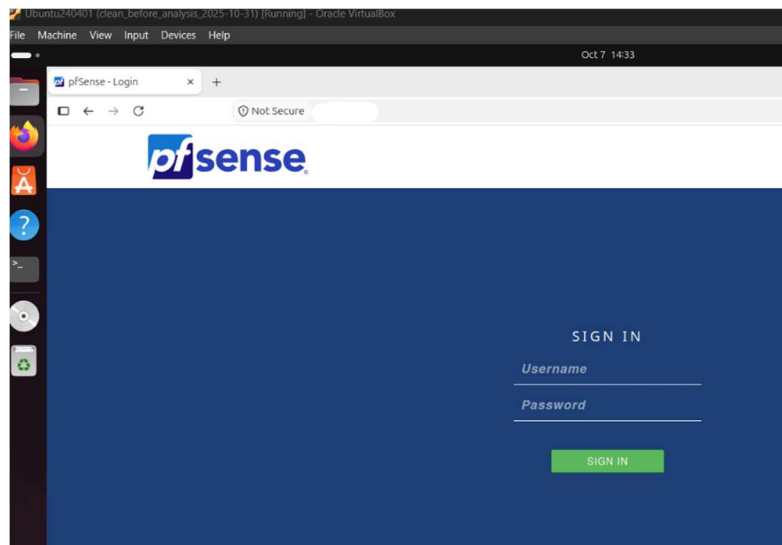


- You will need to add a firewall rule to allow WAN GUI access, which can be done as follows:
- Firewall ► Rules ► WAN ► Add: Action Pass, Protocol TCP, Source <home network>, Destination <pfsense WAN>, Description "Allow GUI access from home network".

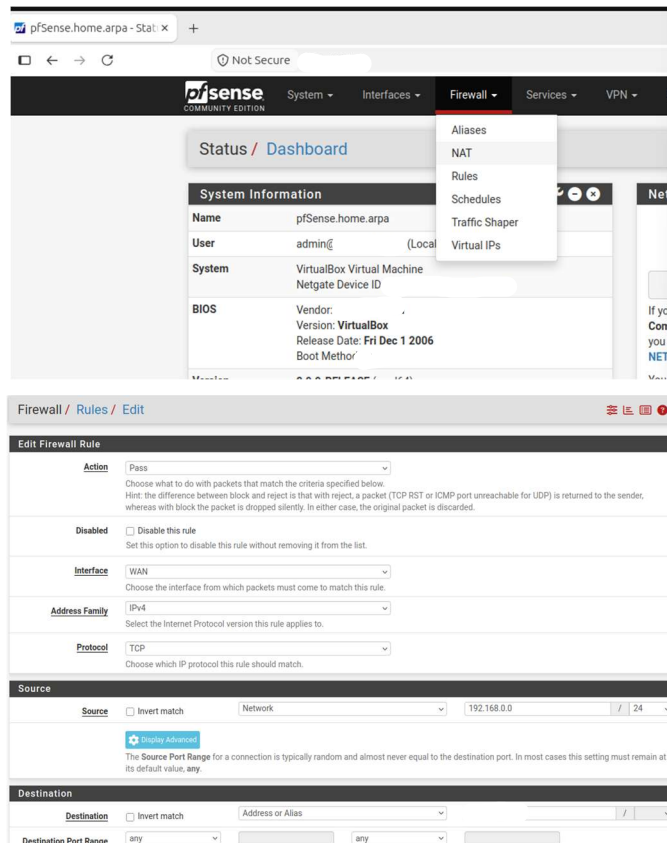

- Apply and save the rule and now you should have WAN access

5.2 Configure LAN DHCP

- You can do so by navigating to Services ► DHCP Server ► LAN.

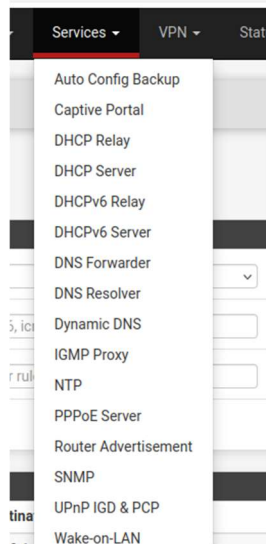

- Tick “Enable DHCP server on LAN interface.”
- Range: 192.168.1.10 – 192.168.1.245
- DNS servers: 192.168.0.1 (home router)
- Save → Apply Changes.

DHCP Backend		ISC DHCP	
Enable	☒ Enable DHCP server on LAN interface		
BOOTP	☐ Ignore BOOTP queries		
Deny Unknown Clients	Allow all clients When set to Allow all clients, any DHCP client will get an IP address within this scope/range on this interface, any DHCP client with a MAC address listed in a static mapping on any scope(s)/interface(s) clients from only this interface, only MAC addresses listed in static mappings on this interface will g		
Ignore Denied Clients	☐ Ignore denied clients rather than reject This option is not compatible with failover and cannot be enabled when a Failover Peer IP address is		
Ignore Client Identifiers	☐ Do not record a unique identifier (UID) in client lease data if present in the client DHCP request This option may be useful when a client can dual boot using different client identifiers but the same I server behavior violates the official DHCP specification.		
Primary Address Pool			
Subnet	192.168.1.0/24		
Subnet Range	192.168.1.1 - 192.168.1.254		
Address Pool Range	192.168.1.10 192.168.1.245 FromTo The specified range for this pool must not be within the range configured on any other address pool		
Additional Pools	+ Add Address Pool If additional pools of addresses are needed inside of this subnet outside the above range, they may t		
Server Options			
WINS Servers	WINS Server 1 WINS Server 2		
DNS Servers	192.168.0.1		

5.3 Add rule to allow Kali access to Internal LAN network

- This is being done purely to demonstrate the flood attack which we will then block by adding another rule later on. Add the rule on the WAN interface.
- Firewall ► Rules ► WAN ► Add: Action Pass, Protocol Any, Source <Kali Linux IP>, Destination <Ubuntu LAN IP>, Description “Allow Kali access to Ubuntu”.

Edit Firewall Rule

Action Pass
 Choose what to do with packets that match the criteria specified below.
 Hint: the difference between block and reject is that with reject, a packet (TCP RST or ICMP port unreachable for UDP) whereas with block the packet is dropped silently. In either case, the original packet is discarded.

Disabled ☐ Disable this rule
 Set this option to disable this rule without removing it from the list.

Interface WAN
 Choose the interface from which packets must come to match this rule.

Address Family IPv4
 Select the Internet Protocol version this rule applies to.

Protocol ICMP
 Choose which IP protocol this rule should match.

ICMP Subtypes any
 Alternate Host
 Datagram conversion error
 Echo reply
 For ICMP rules on IPv4, one or more of these ICMP subtypes may be specified.

Source
Source ☐ Invert match Address or Alias

Destination
Destination ☐ Invert match Address or Alias

Extra Options
Log ☒ Log packets that are handled by this rule
 Hint: the firewall has limited local log space. Don't turn on logging for everything. If doing a lot of logging, consider using the [Status: System Logs: Settings](#) page).

6. Kali Linux Setup (Attacker)

- Kali gets its address from the home router automatically. On the CLI on the Kali Machine, you can check the IP address by running the below command
ifconfig

```
(kali㉿kali)-[~]
$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.1.255 netmask 255.255.255.0 broadcast 192.168.1.255
    inet6 ::1 prefixlen 64 scopeid 0x20<link>
    ether 08:00:27:00:00:00 txqueuelen 1000 (Ethernet)
    RX packets 1548 bytes 114637 (111.9 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 809 bytes 79136 (77.2 KiB)
    TX errors 0 dropped 16 overruns 0 carrier 0 collisions 0

eth1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.1.255 netmask 255.255.255.0 broadcast 192.168.1.255
    inet6 ::1 prefixlen 64 scopeid 0x20<link>
    inet6 ::1 prefixlen 64 scopeid 0x0<global>
    ether 08:00:27:00:00:00 txqueuelen 1000 (Ethernet)
    RX packets 1543 bytes 110700 (108.1 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 616 bytes 64349 (62.8 KiB)
    TX errors 0 dropped 8 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 12 bytes 816 (816.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 12 bytes 816 (816.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

- Next we will add a route on the Kali to provide reachability to the Internal subnet

where the Ubuntu sits *sudo ip route add 192.168.1.0/24 via <PFSENSE_WAN_IP>*

Replace <PFSENSE_WAN_IP> with the real value (e.g. 192.168.0.58).

```
(kali㉿kali)-[~]
$ sudo ip route add 192.168.1.0/24 via [REDACTED]
[sudo] password for kali:
```

7. Ubuntu Setup (Victim)

- Ubuntu boots, grabs Ubuntu WAN IP from pfSense DHCP, and sets pfSense (192.168.1.1) as gateway & DNS

ifconfig

```
vboxuser@Ubuntu240401:~$ ifconfig
br-[REDACTED]: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet [REDACTED] netmask 255.255.0.0 broadcast [REDACTED]
    inet6 [REDACTED] prefixlen 64 scopeid 0x20<link>
    ether [REDACTED] txqueuelen 0 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

docker0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    inet [REDACTED] netmask 255.255.0.0 broadcast [REDACTED]
    ether [REDACTED] txqueuelen 0 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 44 overruns 0 carrier 0 collisions 0

enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet [REDACTED] netmask 255.255.255.0 broadcast [REDACTED]
    ether [REDACTED] txqueuelen 1000 (Ethernet)
    RX packets 667953 bytes 591102177 (591.1 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 29727 bytes 2881545 (2.8 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

- Test Internet reachability on Ubuntu

ping -c 3 google.com

```
vboxuser@Ubuntu240401:~$ ping -c 3 google.com
PING google.com (142.250.193.46) 56(84) bytes of data:
64 bytes from del11s15-in-f14.1e100.net (142.250.193.46): icmp_seq=1 ttl=112 time=33.6 ms
64 bytes from del11s15-in-f14.1e100.net (142.250.193.46): icmp_seq=2 ttl=112 time=31.4 ms
64 bytes from del11s15-in-f14.1e100.net (142.250.193.46): icmp_seq=3 ttl=112 time=32.9 ms

--- google.com ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2014ms
rtt min/avg/max/mdev = 31.371/32.602/33.550/0.912 ms
```

- Once all devices have gotten IP's and you have the necessary firewall rules and static routes in place, test connectivity by pinging from Kali to the Ubuntu machine and it should succeed.

8. Launching the DoS (hping3)

- Start Wireshark on Ubuntu

sudo apt update

```
vboxuser@Ubuntu240401:~$ sudo apt update
[sudo] password for vboxuser:
Get:1 https://download.docker.com/linux/ubuntu noble InRelease [48.5 kB]
Get:2 https://download.docker.com/linux/ubuntu noble/stable amd64 Packages [68.0 kB]
Hit:3 http://in.archive.ubuntu.com/ubuntu noble InRelease
Get:4 http://in.archive.ubuntu.com/ubuntu noble-updates InRelease [126 kB]
Get:5 http://in.archive.ubuntu.com/ubuntu noble-backports InRelease [126 kB]
```

sudo apt install -y wireshark

```
vboxuser@Ubuntu240401:~$ sudo apt install -y wireshark
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  libglapi-mesa libwoff1
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  i965-vdso-driver intel-media-vdso-driver libaacs0 libavcodec60 libavformat60
  libavutil58 libb2-1 libbcb729-0 libbdplus0 libbluray2 libchromaprint1
  libcjson1 libcodec2-1.2 libdouble-conversion3 libegl-mesa0 libgbm1
  libgl1-mesa-dri libglx-mesa0 libgme0 libgsm1 libgdkmm12 liblua5.2-0
  libmbedcrypto7t64 libmd4c0 libminizip1t64 libnghttp3-3 libnorm1t64
  libopencl-amrnb0 libopenmpt0t64 libpcre2-16-0 libpgm-5.3-0t64
  libqt6core5compat6 libqt6core6t64 libqt6dbus6t64 libqt6gui6t64
  libqt6multimedia6 libqt6network6t64 libqt6opengl6t64 libqt6printsupport6t64
  libqt6qml6 libqt6qmlmodels6 libqt6quick6 libqt6svg6 libqt6waylandclient6
  libqt6waylandcompositor6 libqt6waylandeglclienthwhintegration6
  libqt6waylandeglcompositorhwhintegration6 libqt6widgets6t64
  libqt6wslshellintegration6 librabbitmq4 librist4 libshine3 libsmi2t64
```

`sudo wireshark` # capture on eth0

```
vboxuser@Ubuntu240401:~$ sudo wireshark
** (wireshark:50427) 19:44:17.235042 [GUI WARNING] -- QStandardPaths: XDG_RUNTIME_DIR not set, defaulting to '/tmp/runtime-root'
** (wireshark:50427) 19:44:56.461603 [Capture MESSAGE] -- Capture Start ...
** (wireshark:50427) 19:44:56.509302 [Capture MESSAGE] -- Capture started
** (wireshark:50427) 19:44:56.509539 [Capture MESSAGE] -- File: "/tmp/wireshark-XXXXXX.pcapng"
```


- Start the flood from Kali
`sudo hping3 -1 --flood <Ubuntu WAN IP>` # ICMP flood

```
(kali@kali)-[~]
$ sudo hping3 -1 --flood
HPING [redacted] (eth1 [redacted]: icmp mode set, 28 headers + 0 data bytes
hping in flood mode, no replies will be shown
^C
----- hping statistic -----
139227 packets transmitted, 0 packets received, 100% packet loss
round-trip min/avg/max = 0.0/0.0/0.0 ms
```

- SYN flood: `sudo hping3 --flood -S -p 80 192.168.1.100`

```
(kali@kali)-[~]
$ sudo hping3 --flood -S -p 80 [redacted]
HPING [redacted] (S set, 40 headers + 0 data bytes
hping in flood mode, no replies will be shown
^C
----- hping statistic -----
169886 packets transmitted, 0 packets received, 100% packet loss
round-trip min/avg/max = 0.0/0.0/0.0 ms
```

- View Packets spike in Wireshark.

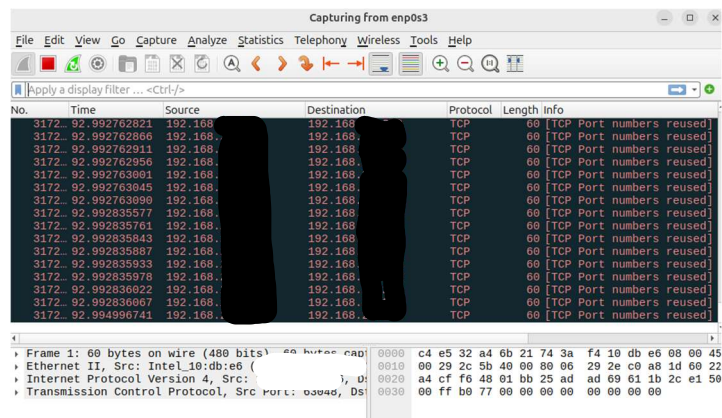

9. Blocking the Attack & Verifying

- Now we will navigate to the PFSENSE WebGUI and add a new security rule to block traffic from the Kali to the Ubuntu Machine
- PFSense Firewall ► Rules ► WAN ► Add (TOP): Action Block, Source Kali-IP, Destination Ubuntu WAN IP, Log ✓, Description “Block Kali DoS”.
- Apply – traffic halts, check Wireshark on the Ubuntu machine and you shouldn't see the flood anymore.

The screenshot shows the 'Edit Firewall Rule' page in the PFSense WebGUI. The browser address bar shows 'firewall_rules_edit.php?id=0'. The page is titled 'Edit Firewall Rule' and contains several sections for configuring a firewall rule.

- Action:** Set to 'Block'. A hint explains the difference between block and reject.
- Disabled:** A checkbox labeled 'Disable this rule' is unchecked.
- Interface:** Set to 'WAN'. A hint explains that this is the interface from which packets must come to match this rule.
- Address Family:** Set to 'IPv4'. A hint explains that this is the Internet Protocol version this rule applies to.
- Protocol:** Set to 'TCP'. A hint explains that this is the IP protocol this rule should match.
- Source:** Includes an 'Invert match' checkbox (unchecked) and a dropdown menu set to 'Address or Alias'. Below this is a 'Display Advanced' button and a hint about the Source Port Range.
- Destination:** Includes an 'Invert match' checkbox (unchecked) and a dropdown menu set to 'Address or Alias'. Below this is a 'Destination Port Range' section with 'From' and 'To' dropdowns, both set to 'any', and 'Custom' input fields. A hint explains that the 'To' field may be left empty if only filtering a single port.
- Extra Options:** Includes a 'Log' checkbox which is checked. A hint explains that the firewall has limited local log space and suggests using a remote syslog if doing a lot of logging.

- On the PFSense go the firewall rule and you can check the logs for the rule where you enabled logging to verify that malicious flood traffic is being blocked.

Status / System Logs / Firewall / Normal View

System Firewall DHCP Authentication IPsec PPP PPPoE/L2TP Server OpenVPN NTP Packages Settings

Normal View Dynamic View Summary View

Last 500 Firewall Log Entries. (Maximum 500)

Action	Time	Interface	Rule	Source	Destination	Protocol
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	Default deny rule IPv4 (1000000103)	192.168.1.1	192.168.1.2	ICMP

Not Secure tatus_logs_filter_dynamic.php?logfile=filter&view=dynamic

pfSense COMMUNITY EDITION System Interfaces Firewall Services VPN Status Diagnostics Help

Status / System Logs / Firewall / Dynamic View

System Firewall DHCP Authentication IPsec PPP PPPoE/L2TP Server OpenVPN NTP Packages Settings

Normal View Dynamic View Summary View

Last 500 Firewall Log Entries. (Maximum 500) Pause

Action	Time	Interface	Source	Destination	Protocol
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP
✗	Oct 8 06:56:05	WAN	192.168.1.1	192.168.1.2	ICMP

