



Vidyavardhini's College of Engineering & Technology  
Department of Artificial Intelligence and Data Science (AI&DS)

---

<b>Name:</b>	Jay Patil
<b>Roll No:</b>	41
<b>Class/Sem:</b>	SE/IV
<b>Experiment No.:</b>	1
<b>Title:</b>	To perform basic arithmetic operations on 16-bit data.
<b>Date of Performance:</b>	
<b>Date of Submission:</b>	
<b>Marks:</b>	
<b>Sign of Faculty:</b>	

**Aim:** Assembly Language Program to perform basic arithmetic operations (addition, subtraction, multiplication, and division) on 16-bit data.

**Theory:**

**MOV:** MOV Destination, Source.

The MOV instruction copies data from a specified destination. word or byte of data from a specified destination.

Source: Register, Memory Location, Immediate Number

Destination: Register, Memory Location

MOV CX, 037AH; Put immediate number 037AH to CX.

**ADD:** ADD Destination, Source.

These instructions add a number source to a number from some destination and put the result in the specified destination.

Source: Register, Memory Location, Immediate Number

Destination: Register, Memory Location

The source and the destination in an instruction cannot both be memory locations.

ADD AL, 74H; add the immediate number to 74H to the content of AL. Result in AL.

**SUB:** SUB Destination, Source.

These instructions subtract the number in some source from the number in some destination and put the result in the destination.



## Vidyavardhini's College of Engineering & Technology

### Department of Artificial Intelligence and Data Science (AI&DS)

---

Source: Immediate Number, Register, or Memory Location.

Destination: Register or a Memory Location.

The source and the destination in an instruction cannot both be memory locations.

SUB AX, 3427H; Subtract immediate number 3427H from AX.

**MUL:** MUL Source.

This instruction multiplies an unsigned byte from some source times an unsigned byte in the AL register or an unsigned word from some source times an unsigned word in the AX register.

Source: Register, Memory Location.

MUL CX; Multiply AX with CX; result in high word in DX, low word in AX.

**DIV:** DIV Source.

This instruction is used to divide an unsigned word by a byte or to divide an unsigned double word (32 bits) by a word.

Source: Register, Memory Location.

If the divisor is 8-bit, then the dividend is in AX register. After division, the quotient is in AL and the remainder in AH.

If the divisor is 16-bit, then the dividend is in DX-AX register. After division, the quotient is in AX and the remainder in DX.

DIV CX; divide double word in DX and AX by word in CX; Quotient in AX; and remainder in DX.

#### Algorithm to add two 16-bit numbers

1. Load the first number in AX
2. Load the second number in BX
- 3 Add the second number to AX
4. Store the result in AX.

#### Algorithm to subtract two 16-bit numbers

1. Load the first number in AX.
2. Load the second number. in BX 3. Subtract the second number AX
4. Store the result in AX.

#### Algorithm to multiply a 16-bit number by an 8-bit number

1. Load the first number in AX.
2. Load the second number. in BL
3. Multiply DX and AX.
4. The result is in DX and AX.

#### Algorithm to divide a 16-bit number by an 8-bit number

1. Load the first number in AX.



## Vidyavardhini's College of Engineering & Technology

### Department of Artificial Intelligence and Data Science (AI&DS)

---

2. Load the second number. in BL
3. Divide AX by BL.
4. After division, the quotient is in AL and the remainder is in AH.

#### Assembly code:

1. Add

A screenshot of a text editor window titled "original source co...". The window contains assembly code with line numbers 01 to 05 on the left. The code is:  
01 mov ax, 0004  
02 mov bx, 0002  
03 add bx, ax  
04  
05  
The third line, "add bx, ax", is highlighted in yellow.

2. Subtract

A screenshot of a text editor window titled "original source co...". The window contains assembly code with line numbers 01 to 05 on the left. The code is:  
01 mov ax, 0004  
02 mov bx, 0002  
03 sub ax, bx  
04  
05  
The third line, "sub ax, bx", is highlighted in yellow.

3. Multiply

A screenshot of a code editor window titled "original source co...". The window contains assembly code for multiplication. The code is as follows:

```
01 mov ax, 0004
02 mov bx, 0002
03 mul bx
04
05
```

The third line, "mul bx", is highlighted in yellow. The window has a standard Windows-style title bar with minimize, maximize, and close buttons.

#### 4. Division

A screenshot of a code editor window titled "original source co...". The window contains assembly code for division. The code is as follows:

```
01 mov ax, 0004
02 mov bx, 0002
03 div bx
04
05
```

The third line, "div bx", is highlighted in yellow. The window has a standard Windows-style title bar with minimize, maximize, and close buttons.


#### Output:

##### 1. Add




# Vidyavardhini's College of Engineering & Technology

## Department of Artificial Intelligence and Data Science (AI&DS)

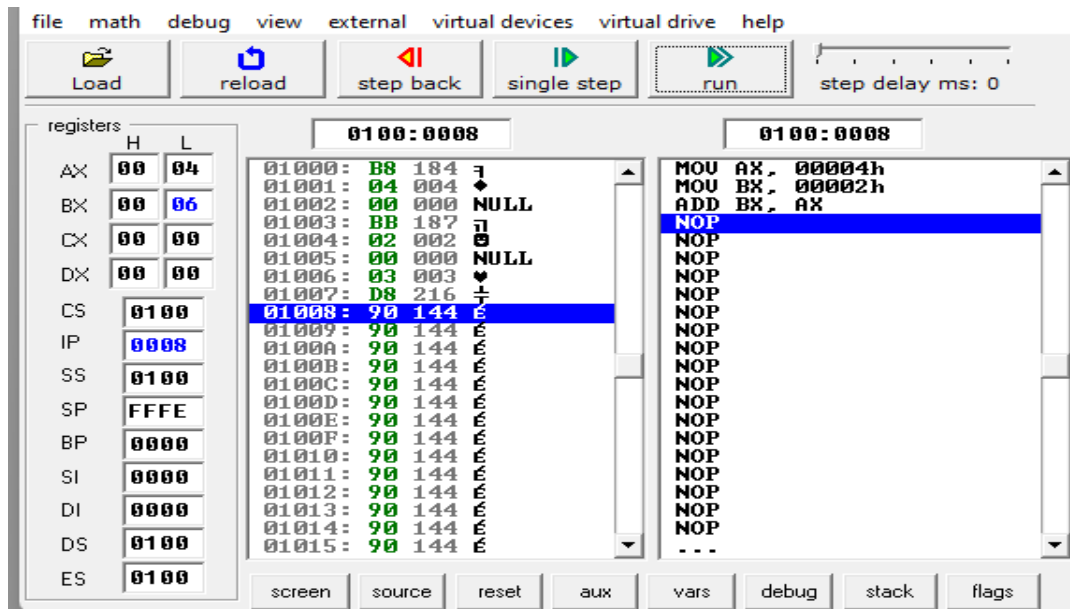

### 2. Subtract

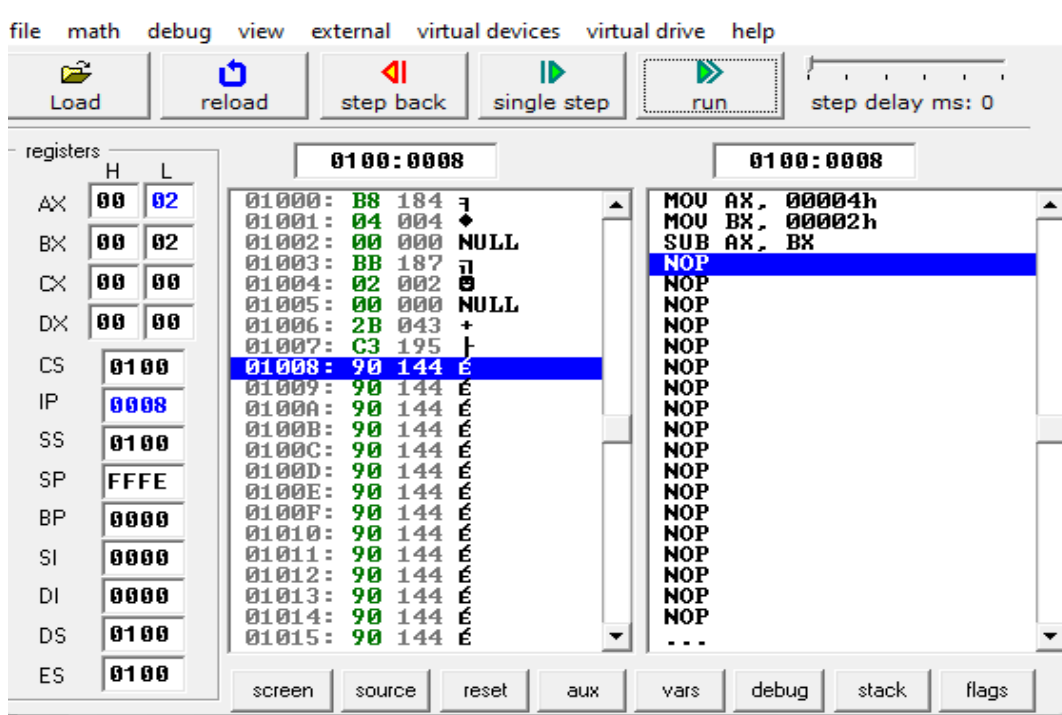

### 3. Multiply



# Vidyavardhini's College of Engineering & Technology

## Department of Artificial Intelligence and Data Science (AI&DS)

file math debug view external virtual devices virtual drive help

Load reload step back single step run step delay ms: 0

registers

	H	L
AX	00	08
BX	00	02
CX	00	00
DX	00	00
CS	0100	
IP	0008	
SS	0100	
SP	FFFE	
BP	0000	
SI	0000	
DI	0000	
DS	0100	
ES	0100	

0100:0008 0100:0008

Address	Hex	Dec	Symbol
01000:	B8	184	↵
01001:	04	004	♦
01002:	00	000	NULL
01003:	BB	187	↵
01004:	02	002	0
01005:	00	000	NULL
01006:	F7	247	≈
01007:	E3	227	Π
01008:	90	144	É
01009:	90	144	É
0100A:	90	144	É
0100B:	90	144	É
0100C:	90	144	É
0100D:	90	144	É
0100E:	90	144	É
0100F:	90	144	É
01010:	90	144	É
01011:	90	144	É
01012:	90	144	É
01013:	90	144	É
01014:	90	144	É
01015:	90	144	É

MOV AX, 00004h  
MOV BX, 00002h  
MUL BX  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
...

screen source reset aux vars debug stack flags

#### 4. Division

file math debug view external virtual devices virtual drive help

Load reload step back single step run step delay ms: 0

registers

	H	L
AX	00	02
BX	00	02
CX	00	00
DX	00	00
CS	0100	
IP	0008	
SS	0100	
SP	FFFE	
BP	0000	
SI	0000	
DI	0000	
DS	0100	
ES	0100	

0100:0008 0100:0008

Address	Hex	Dec	Symbol
01000:	B8	184	↵
01001:	04	004	♦
01002:	00	000	NULL
01003:	BB	187	↵
01004:	02	002	0
01005:	00	000	NULL
01006:	F7	247	≈
01007:	F3	243	£
01008:	90	144	É
01009:	90	144	É
0100A:	90	144	É
0100B:	90	144	É
0100C:	90	144	É
0100D:	90	144	É
0100E:	90	144	É
0100F:	90	144	É
01010:	90	144	É
01011:	90	144	É
01012:	90	144	É
01013:	90	144	É
01014:	90	144	É
01015:	90	144	É

MOV AX, 00004h  
MOV BX, 00002h  
DIV BX  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
NOP  
...

screen source reset aux vars debug stack flags

Conclusion:



## Vidyavardhini's College of Engineering & Technology

### Department of Artificial Intelligence and Data Science (AI&DS)

---

1. Explain the features of 8086.

Ans. The Intel 8086, a 16-bit microprocessor, revolutionized computing with its features. It boasts a 16-bit architecture, allowing it to process data in 16-bit chunks for enhanced performance. With a clock speed up to 5 MHz, it executes instructions swiftly. Its 20-bit address bus can access up to 1 MB of memory, facilitating large-scale applications. The 8086 supports a rich instruction set, including arithmetic, logical, and control operations, enabling versatile computing tasks. It incorporates powerful segmentation and addressing modes for efficient memory management. Additionally, its compatibility with a wide range of peripherals and software makes it a cornerstone in the evolution of personal computing.

2. Explain general purpose and special purpose registers.

Ans. General-purpose registers (GPRs) are registers within a computer processor that can be used for a wide variety of purposes, hence the name "general-purpose." These registers are typically used to store data temporarily during program execution. They are versatile and can be employed by the programmer for tasks such as arithmetic operations, data manipulation, memory addressing, and holding intermediate results.

Special-purpose registers, on the other hand, are registers that are designed for specific functions within the processor. These registers serve dedicated purposes and often have predefined roles in the execution of instructions or in managing the processor's operation. Examples of special-purpose registers include the program counter (PC), which holds the memory address of the next instruction to be executed; the instruction register (IR), which holds the currently fetched instruction; and the status register (flags register), which stores information about the outcome of arithmetic or logical operations, such as whether the result is zero or negative.

In summary, while general-purpose registers offer flexibility and can be used for various tasks, special-purpose registers serve specific functions critical to the operation of the processor and execution of instructions.