



AQROOT DEMO - BOARD PROFILE (Edge.Cuts) - D-806


TOP VIEW, scale 1.8 : 1 on A3. All dimensions mm. Gerber frame: Y_gerber = -Y_kicad.

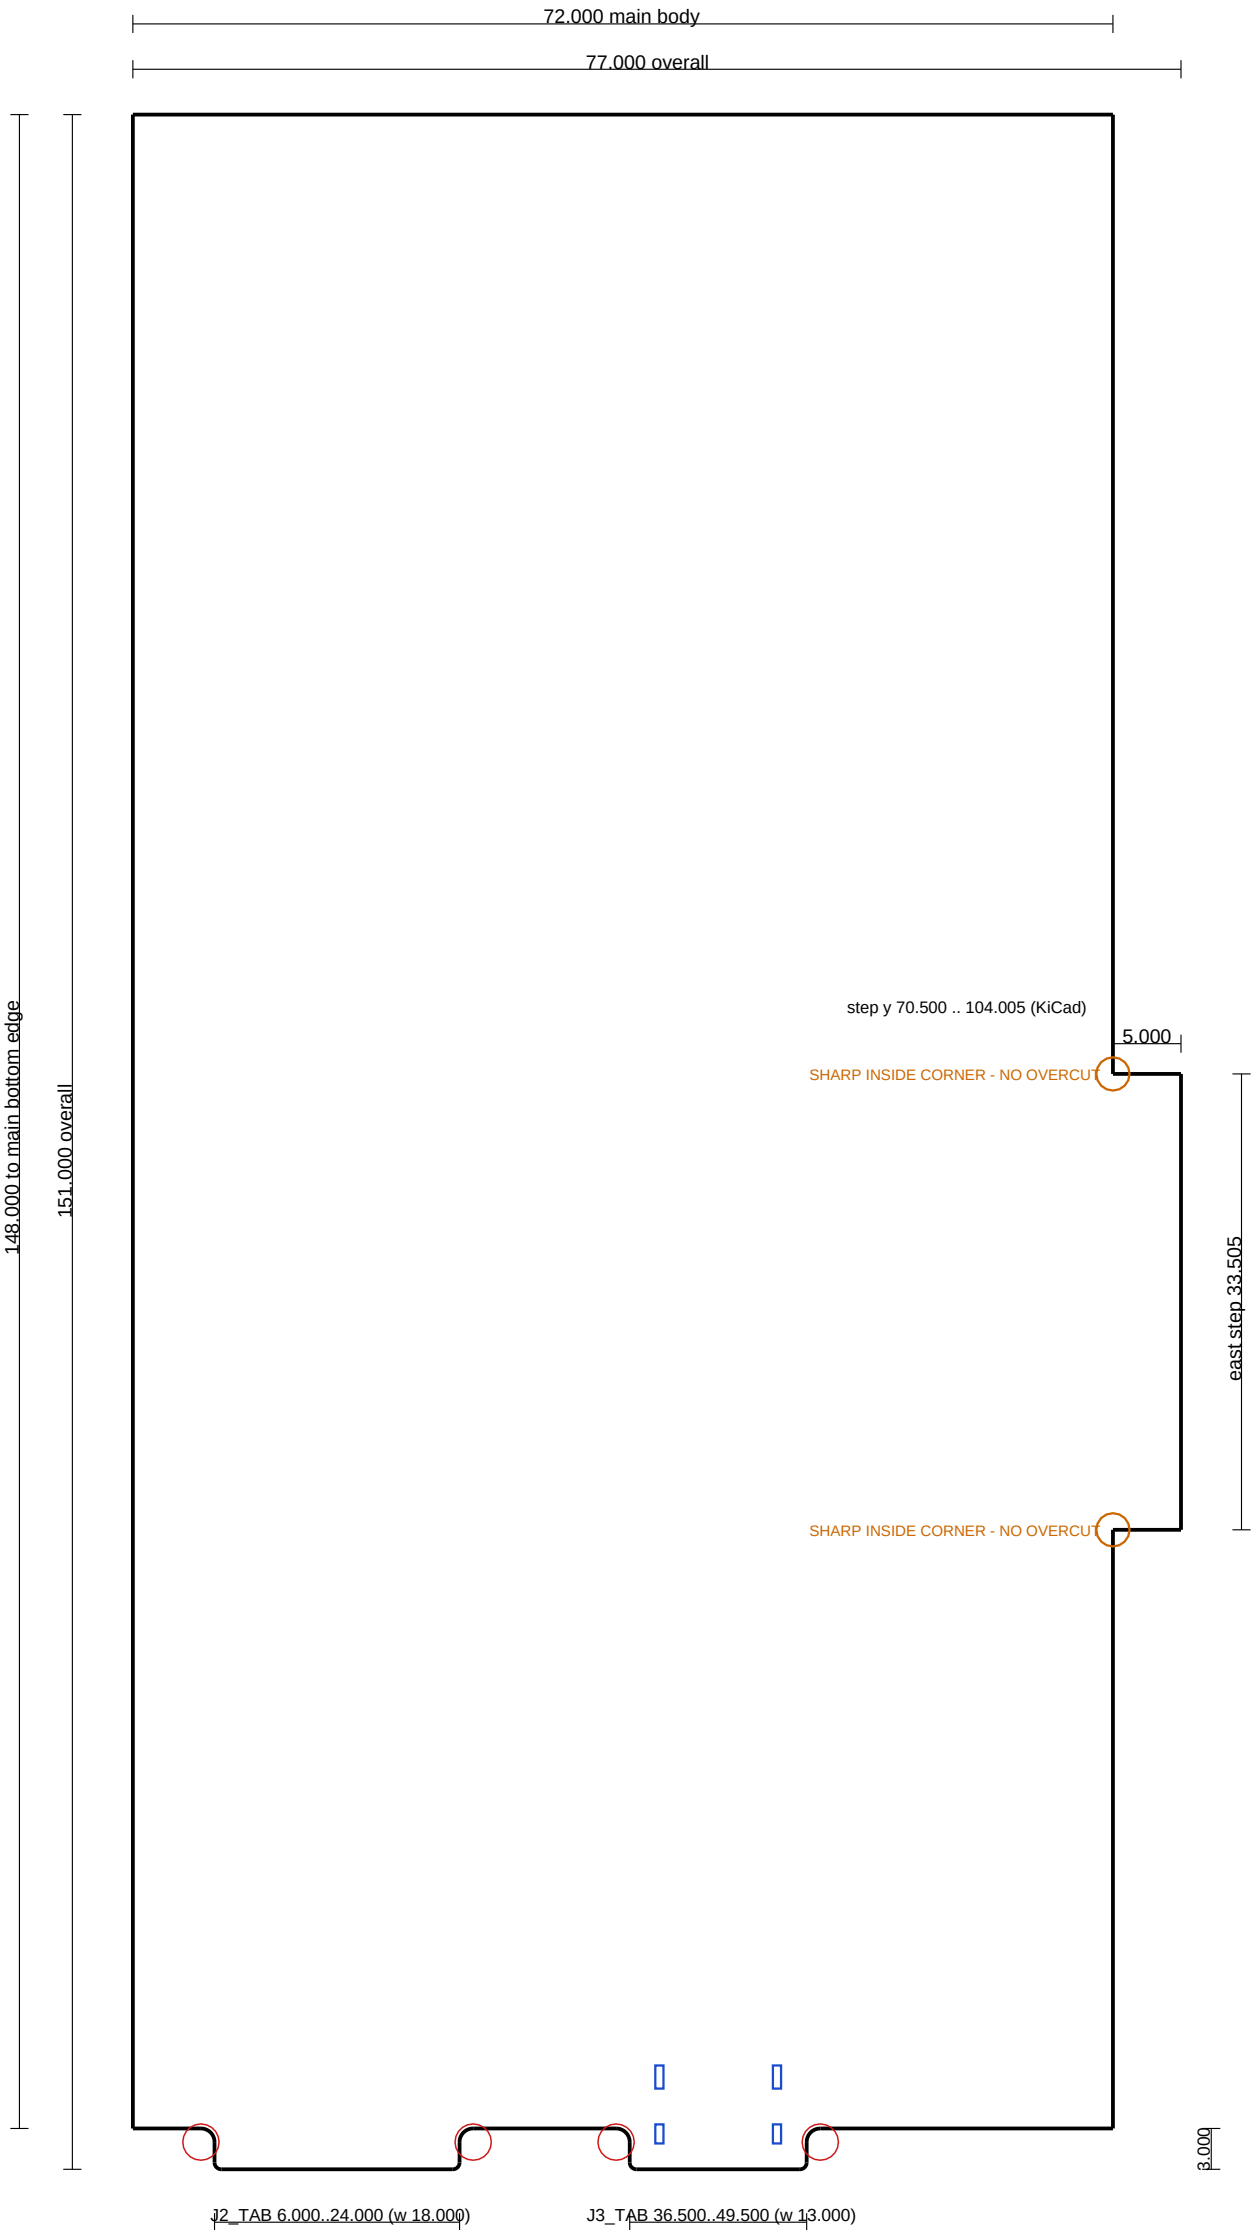

DETAIL J2_TAB (scale 5.2 : 1)

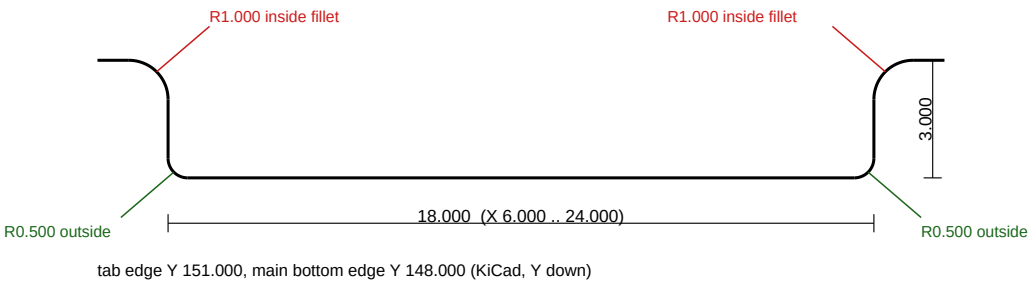

DETAIL J3_TAB (scale 6.0 : 1)

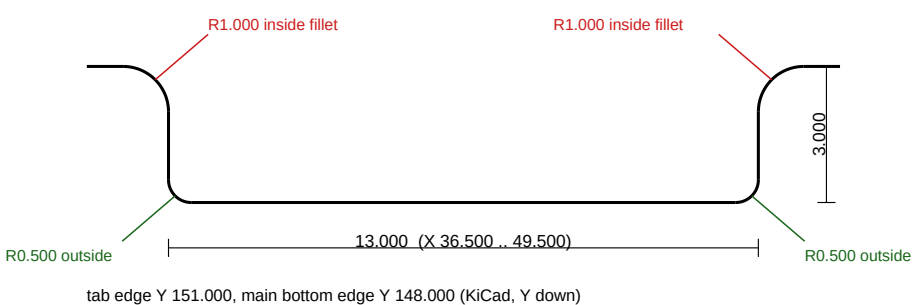

The outline is NOT a rectangle: two bottom tabs (J2 microSD, J3 USB-C) and an east step (SW9 / J8).

Page 2 lists WHAT CAM MUST NOT NORMALISE and every Edge.Cuts primitive; aqroot-Demo-board-profile.json is the machine-readable copy.

Edge.Cuts: 16 lines + 8 arcs (4 drawn inside fillets R1.000, 4 outside corners R0.500); 2 sharp inside + 6 sharp outside corners; 4 plated routed slots.

Board sha256 0e59fb64fe72b0a54b9feea96c19bcaec2db52a82a871bcec270e064d7fda547

BOARD PROFILE - EVERY Edge.Cuts PRIMITIVE (KiCad frame, Y down; Gerber Y = -Y)

WHAT CAM MUST NOT NORMALISE

- The outline is NOT a rectangle. Do not straighten, square, extend or fill the bottom edge between or beside the two tabs.
- J2_TAB and J3_TAB project 3.000 mm below the main bottom edge; keep both, at the stated X spans.
- The four r 1.000 inside fillets are DRAWN: rout them as drawn (tool radius <= 1.000 mm); do not replace them with sharp corners or larger radii.
- The four r 0.500 outside corners are drawn; keep them.
- The two sharp inside corners of the east step keep the router's own retained radius (<= 1.00 mm); NO plunge, relief or over-cut toward copper.
- The east step x 72..77 is real board; do not trim it to the 72 mm main width.
- The four J3 shell slots are PLATED ROUTED SLOTS (Excellon G85): do not convert them to drilled holes.
- If edge rails / a panel are added, the finished single-board outline must be exactly this profile after depanelization.

#	kind	start	end	centre	radius	role
1	arc	(5.000, 148.000)	(6.000, 149.000)	(5.000, 149.000)	1.000	inside fillet (drawn)
2	arc	(6.500, 151.000)	(6.000, 150.500)	(6.500, 150.500)	0.500	outside corner
3	arc	(24.000, 149.000)	(25.000, 148.000)	(25.000, 149.000)	1.000	inside fillet (drawn)
4	arc	(24.000, 150.500)	(23.500, 151.000)	(23.500, 150.500)	0.500	outside corner
5	arc	(35.500, 148.000)	(36.500, 149.000)	(35.500, 149.000)	1.000	inside fillet (drawn)
6	arc	(37.000, 151.000)	(36.500, 150.500)	(37.000, 150.500)	0.500	outside corner
7	arc	(49.500, 149.000)	(50.500, 148.000)	(50.500, 149.000)	1.000	inside fillet (drawn)
8	arc	(49.500, 150.500)	(49.000, 151.000)	(49.000, 150.500)	0.500	outside corner
9	line	(0.000, 0.000)	(0.000, 148.000)	-	-	edge
10	line	(0.000, 148.000)	(5.000, 148.000)	-	-	edge
11	line	(6.000, 149.000)	(6.000, 150.500)	-	-	edge
12	line	(6.500, 151.000)	(23.500, 151.000)	-	-	tab edge
13	line	(24.000, 150.500)	(24.000, 149.000)	-	-	edge
14	line	(25.000, 148.000)	(35.500, 148.000)	-	-	edge
15	line	(36.500, 149.000)	(36.500, 150.500)	-	-	edge
16	line	(37.000, 151.000)	(49.000, 151.000)	-	-	tab edge
17	line	(49.500, 150.500)	(49.500, 149.000)	-	-	edge
18	line	(50.500, 148.000)	(72.000, 148.000)	-	-	edge
19	line	(72.000, 0.000)	(0.000, 0.000)	-	-	edge
20	line	(72.000, 70.500)	(72.000, 0.000)	-	-	edge
21	line	(72.000, 104.005)	(77.000, 104.005)	-	-	edge
22	line	(72.000, 148.000)	(72.000, 104.005)	-	-	edge
23	line	(77.000, 70.500)	(72.000, 70.500)	-	-	edge
24	line	(77.000, 104.005)	(77.000, 70.500)	-	-	edge

PLATED ROUTED SLOTS (Excellon G85, PTH file)

- J3.SH width 0.600 length 1.700 centre (38.680, 144.220) KiCad - plated, routed, NOT a drilled hole
- J3.SH width 0.600 length 1.400 centre (38.680, 148.400) KiCad - plated, routed, NOT a drilled hole
- J3.SH width 0.600 length 1.700 centre (47.320, 144.220) KiCad - plated, routed, NOT a drilled hole
- J3.SH width 0.600 length 1.400 centre (47.320, 148.400) KiCad - plated, routed, NOT a drilled hole