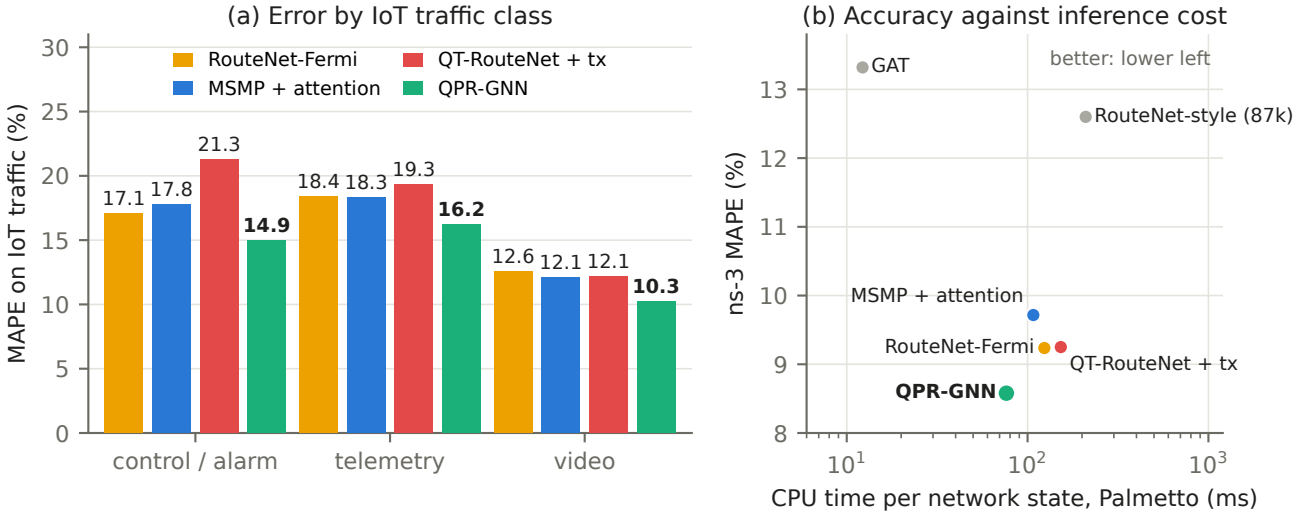
(a) Error by IoT traffic class
RouteNet-Fermi
MSMP + attention
QT-RouteNet + tx
QPR-GNN
MAPE on IoT traffic (%)
30
25
20
15
10
5
0
17.1
17.8
21.3
14.9
18.4
18.3
19.3
16.2
12.6
12.1
12.1
10.3
control / alarm
telemetry
video
(b) Accuracy against inference cost
better: lower left
GAT
RouteNet-style (87k)
ns-3 MAPE (%)
13
12
11
10
9
8
MSMP + attention
RouteNet-Fermi
QT-RouteNet + tx
QPR-GNN
10^1
10^2
10^3
CPU time per network state, Palmetto (ms)