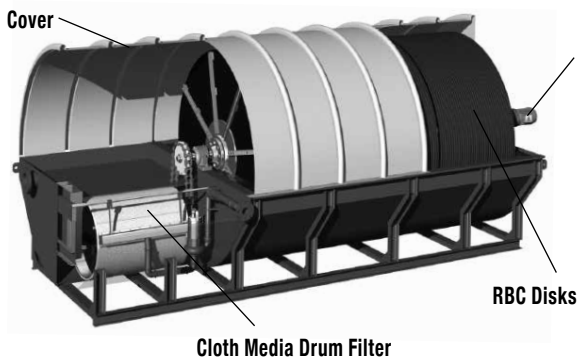

Aqua BioMax™ DUAL TREATMENT SYSTEM

Features/ Benefits

- Combination of Rotating Biological Contactor (RBC) and Cloth Media Filtration (CMF) Technology
- Ideal for low flow applications (1,000 gpd–75,000 gpd)
- 20/20/3 (BOD/TSS/ $\text{NH}_3\text{-N}$) effluent
- Minimum energy consumption
- Simple operation
- No need for mechanical aeration or diffuser systems with blowers
- Package unit
- No secondary clarifier required
- Minimal additional equipment required



Applications

- Small communities
- Tourist complexes and hotels
- Camping sites
- Construction sites
- Industrial wastewater
- Schools
- Highway rest areas