
24 V entry: reverse-polarity P-FET, TVS, bulk, fuses




Logic, fan and motor supplies (TRACO TSR SIP bucks)




StepStick (BTT TMC2209 V1.3; A4988 compatible) and motor, VMOT = +12 V

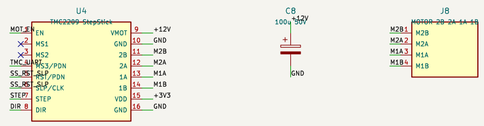

Link to ctrl card and 1-Wire sensor headers

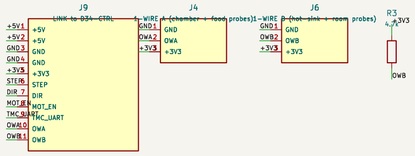



Generated by electronics/d34/build.py from design.py — do not hand-edit
+12 V goes to the tec card on a JST VH-3 lead: 5 V/3.3 V and logic go to the ctrl card on XH-11.
24 V brick: reverse P-FET, TVS, bulk, 7.5 A DPS fuse, 1.1 A PTC aux; 12 V/5 V SIP bucks; StepStick

Sheet: /
File: d34-pwr.kicad_sch

Title: Cat feeder D34 power card (24 V entry, bucks, DPS feed, stepper; 225

Size: A2	Date: 2026-10-26	**Rev: D34-2**
KiCad E.D.A. 9.0.2		Id: 1/1