


Assembly Language for x86 Processors

Eighth Edition

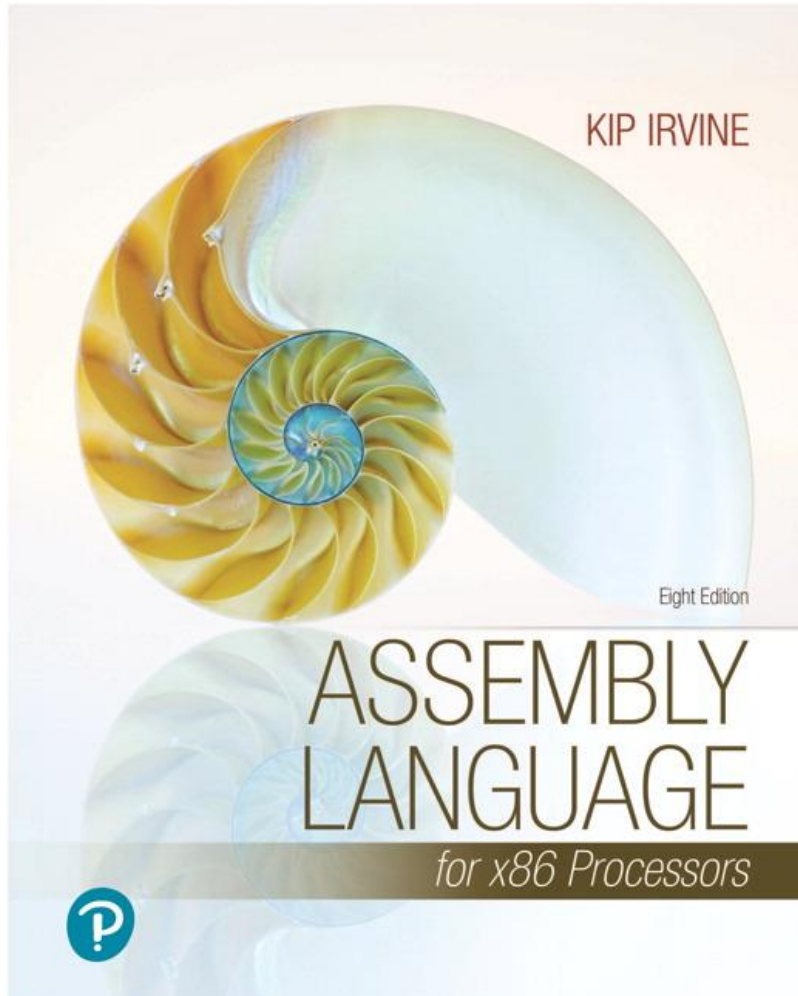

Chapter 2

x86 Processor Architecture

Chapter Overview


- General Concepts
- IA-32 Processor Architecture
- IA-32 Memory Management
- 64-bit Processors
- Components of an IA-32 Microcomputer
- Input-Output System

General Concepts

- Basic microcomputer design
- Instruction execution cycle
- Reading from memory
- How programs run


Basic Microcomputer Design

- clock synchronizes CPU operations
- control unit (CU) coordinates sequence of execution steps
- ALU performs arithmetic and bitwise processing

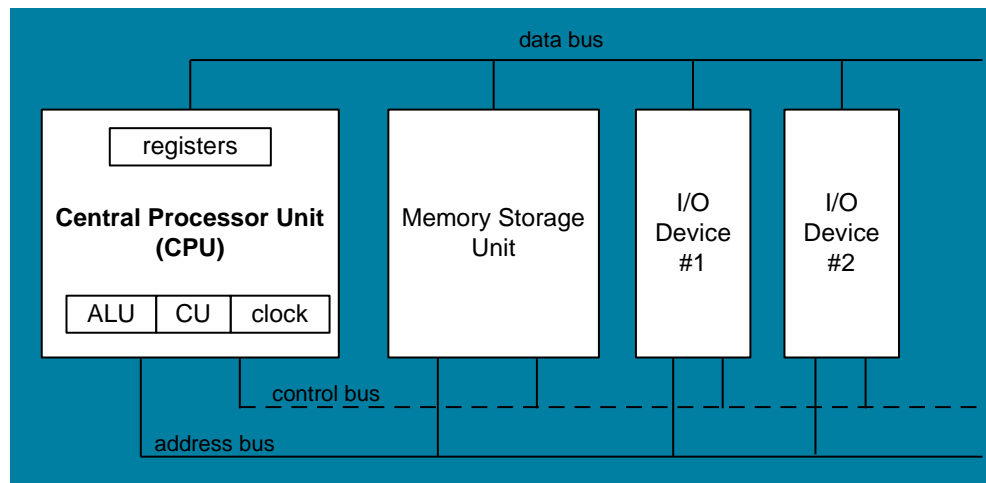

Clock

- synchronizes all CPU and BUS operations
- machine (clock) cycle measures time of a single operation
- clock is used to trigger events

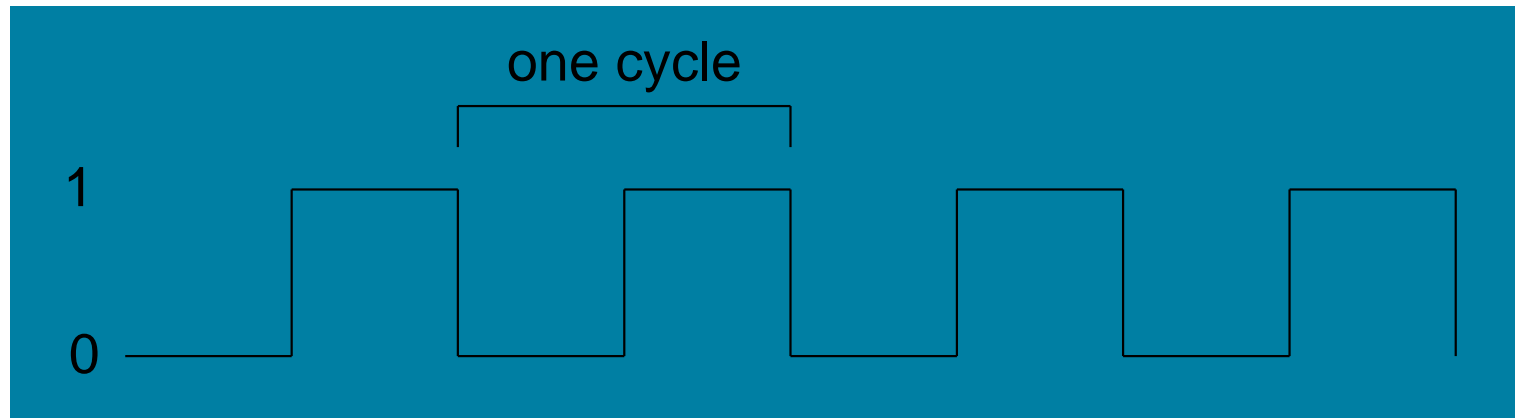


What's Next (1 of 5)

- General Concepts
- **IA-32 Processor Architecture**
- IA-32 Memory Management
- 64-Bit Processors
- Components of an IA-32 Microcomputer
- Input-Output System

Instruction Execution Cycle

- Fetch
- Decode
- Fetch operands
- Execute
- Store output

Figure 2–2 Simplified Pentium CPU Block Diagram.

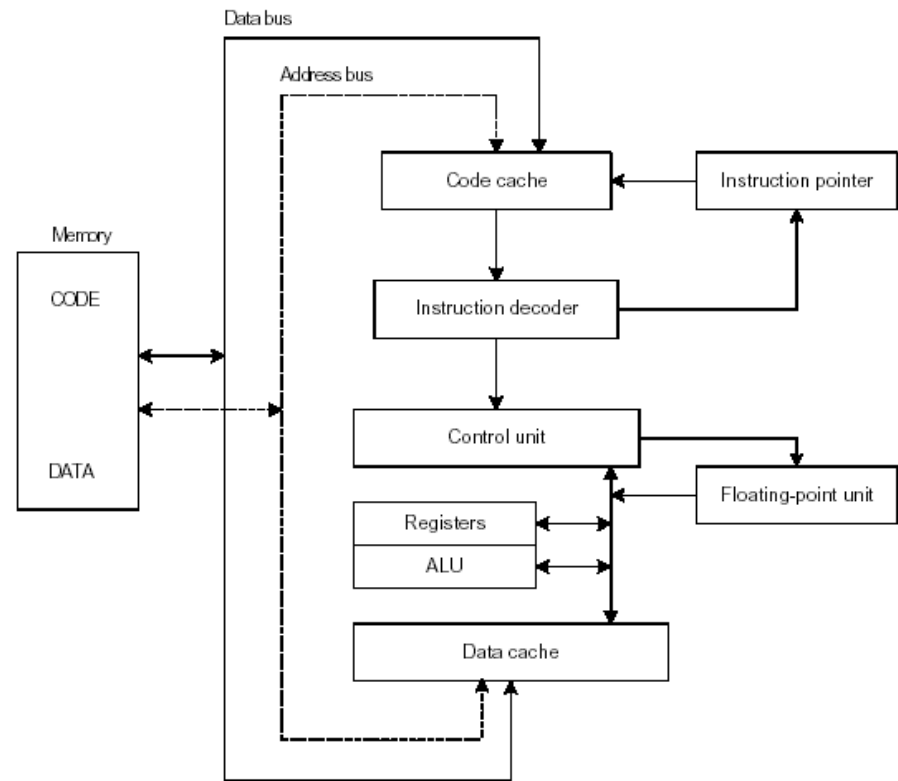

Reading from Memory


Multiple machine cycles are required when reading from memory, because it responds much more slowly than the CPU. The steps are:

1. Place the address of the value you want to read on the address bus.
2. Assert (changing the value of) the processor's RD (read) pin.
3. Wait one clock cycle for the memory chips to respond.
4. Copy the data from the data bus into the destination operand

Cache Memory

- High-speed expensive static RAM both inside and outside the CPU.
 - Level-1 cache: inside the CPU
 - Level-2 cache: outside the CPU
- Cache hit: when data to be read is already in cache memory
- Cache miss: when data to be read is not in cache memory.

How a Program Runs

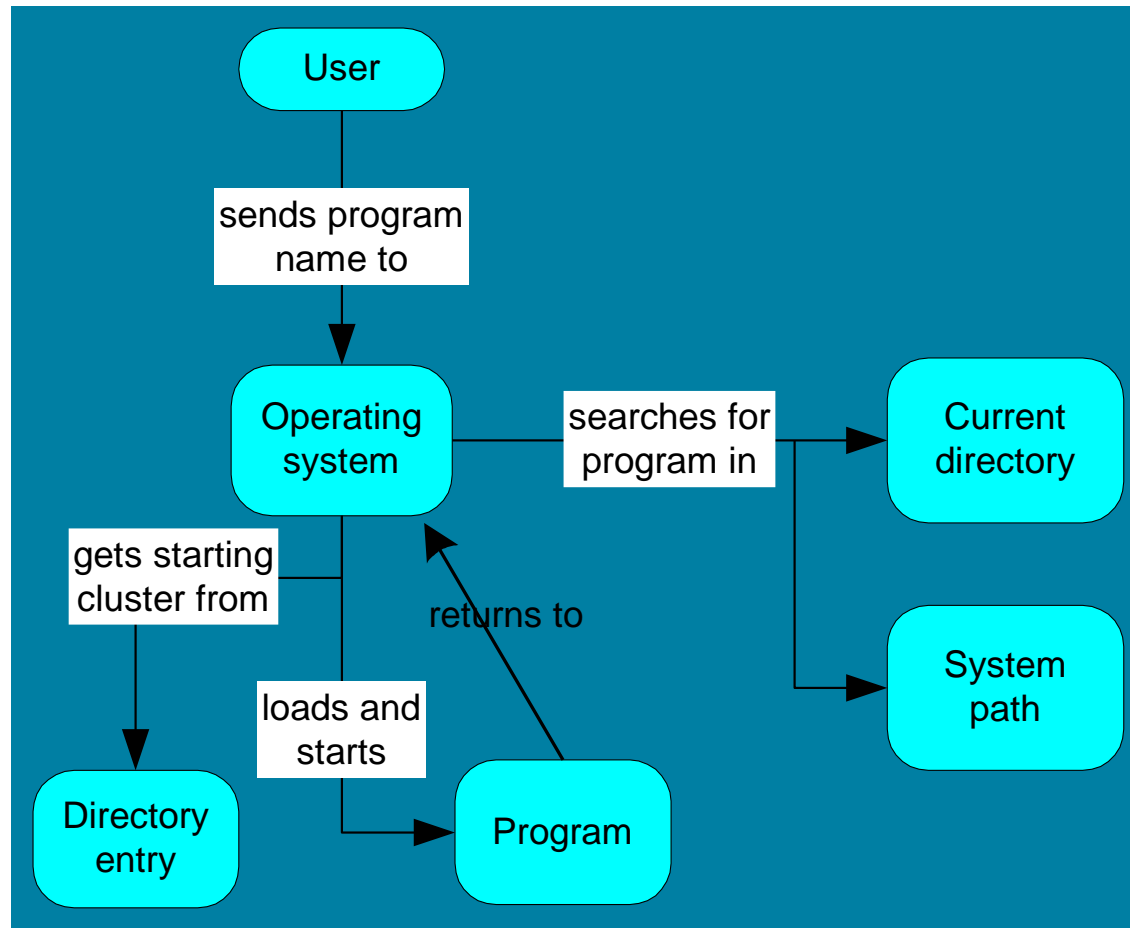

IA-32 Processor Architecture

- Modes of operation
- Basic execution environment
- Floating-point unit
- Intel Microprocessor history

Modes of Operation

- Protected mode
 - native mode (Windows, Linux)
 - Real-address mode
 - native MS-DOS
 - System management mode
 - power management, system security, diagnostics
- Virtual-8086 mode
 - hybrid of Protected
 - each program has its own 8086 computer

Basic Execution Environment

- Addressable memory
- General-purpose registers
- Index and base registers
- Specialized register uses
- Status flags
- Floating-point, MMX, XMM registers

Addressable Memory

- Protected mode
 - 4 GB
 - 32-bit address
- Real-address and Virtual-8086 modes
 - 1 MB space
 - 20-bit address

General-Purpose Registers

Named storage locations inside the CPU, optimized for speed.

32-bit General-Purpose Registers

EAX
EBX
ECX
EDX

EBP
ESP
ESI
EDI


16-bit Segment Registers

EFLAGS
EIP

CS	ES
SS	FS
DS	GS

Accessing Parts of Registers

- Use 8-bit name, 16-bit name, or 32-bit name
- Applies to EAX, EBX, ECX, and EDX

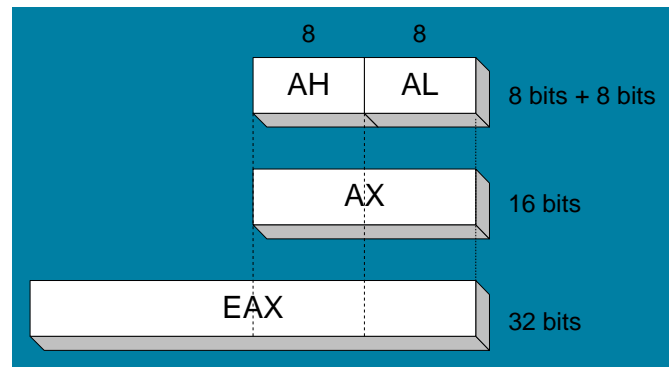

32-bit	16-bit	8-bit (high)	8-bit (low)
EAX	AX	AH	AL
EBX	BX	BH	BL
ECX	CX	CH	CL
EDX	DX	DH	DL

Index and Base Registers

- Some registers have only a 16-bit name for their lower half:

32-bit	16-bit
ESI	SI
EDI	DI
EBP	BP
ESP	SP

Some Specialized Register Uses (1 of 2)

- General-Purpose
 - EAX – accumulator
 - ECX – loop counter
 - ESP – stack pointer
 - ESI, EDI – index registers
 - EBP – extended frame pointer (stack)
- Segment
 - CS – code segment
 - DS – data segment
 - SS – stack segment
 - ES, FS, GS - additional segments

Some Specialized Register Uses (2 of 2)


- EIP – instruction pointer
- EFLAGS
 - status and control flags
 - each flag is a single binary bit

Status Flags

- Carry
 - unsigned arithmetic out of range
- Overflow
 - signed arithmetic out of range
- Sign
 - result is negative
- Zero
 - result is zero
- Auxiliary Carry
 - carry from bit 3 to bit 4
- Parity
 - sum of 1 bits is an even number

Floating-Point, MMX, XMM Registers

- Eight 80-bit floating-point data registers
 - ST(0), ST(1), . . . , ST(7)
 - arranged in a stack
 - used for all floating-point arithmetic
- Eight 64-bit MMX registers
- Eight 128-bit XMM registers for single-instruction multiple-data (SIMD) operations

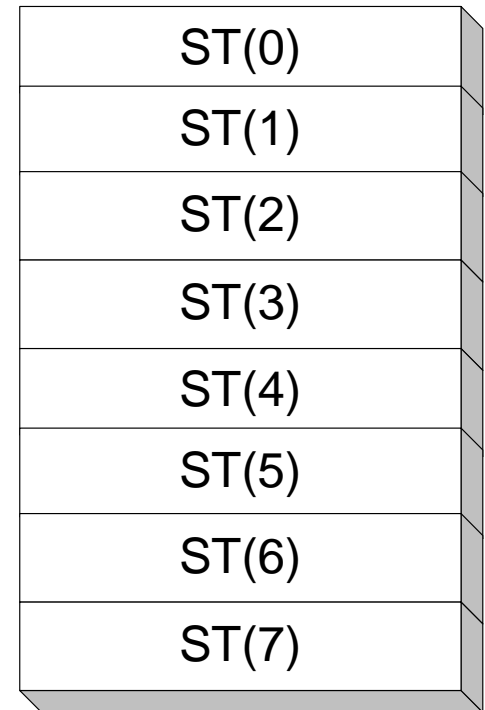

What's Next (2 of 5)

- General Concepts
- IA-32 Processor Architecture
- **IA-32 Memory Management**
- 64-Bit Processors
- Components of an IA-32 Microcomputer
- Input-Output System

IA-32 Memory Management

- Real-address mode
- Calculating linear addresses
- Protected mode
- Multi-segment model
- Paging

Protected Mode

- 4 GB addressable RAM
 - (00000000 to FFFFFFFFh)
- Each program assigned a memory partition which is protected from other programs
- Designed for multitasking
- Supported by Linux & MS-Windows

What's Next (3 of 5)

- General Concepts
- IA-32 Processor Architecture
- IA-32 Memory Management
- **64-Bit Processors**
- Components of an IA-32 Microcomputer
- Input-Output System

64-Bit Processors

- 64-Bit Operation Modes
 - Compatibility mode – can run existing 16-bit and 32-bit applications (Windows supports only 32-bit apps in this mode)
 - 64-bit mode – Windows 64 uses this
- Basic Execution Environment
 - addresses can be 64 bits (48 bits, in practice)
 - 16 64-bit general purpose registers
 - 64-bit instruction pointer named RIP

64-Bit General Purpose Registers

- 32-bit general purpose registers:
 - EAX, EBX, ECX, EDX, EDI, ESI, EBP, ESP, R8D, R9D, R10D, R11D, R12D, R13D, R14D, R15D
- 64-bit general purpose registers:
 - RAX, RBX, RCX, RDX, RDI, RSI, RBP, RSP, R8, R9, R10, R11, R12, R13, R14, R15

What's Next (4 of 5)

- General Concepts
- IA-32 Processor Architecture
- IA-32 Memory Management
- 64-Bit Processors
- **Components of an IA-32 Microcomputer**
- Input-Output System


Components of an IA-32 Microcomputer

- Motherboard
- Video output
- Memory
- Input-output ports

Motherboard


- CPU socket
- External cache memory slots
- Main memory slots
- BIOS chips
- Sound synthesizer chip (optional)
- Video controller chip (optional)
- IDE, parallel, serial, USB, video, keyboard, joystick, network, and mouse connectors
- PCI bus connectors (expansion cards)

Intel D850MD Motherboard

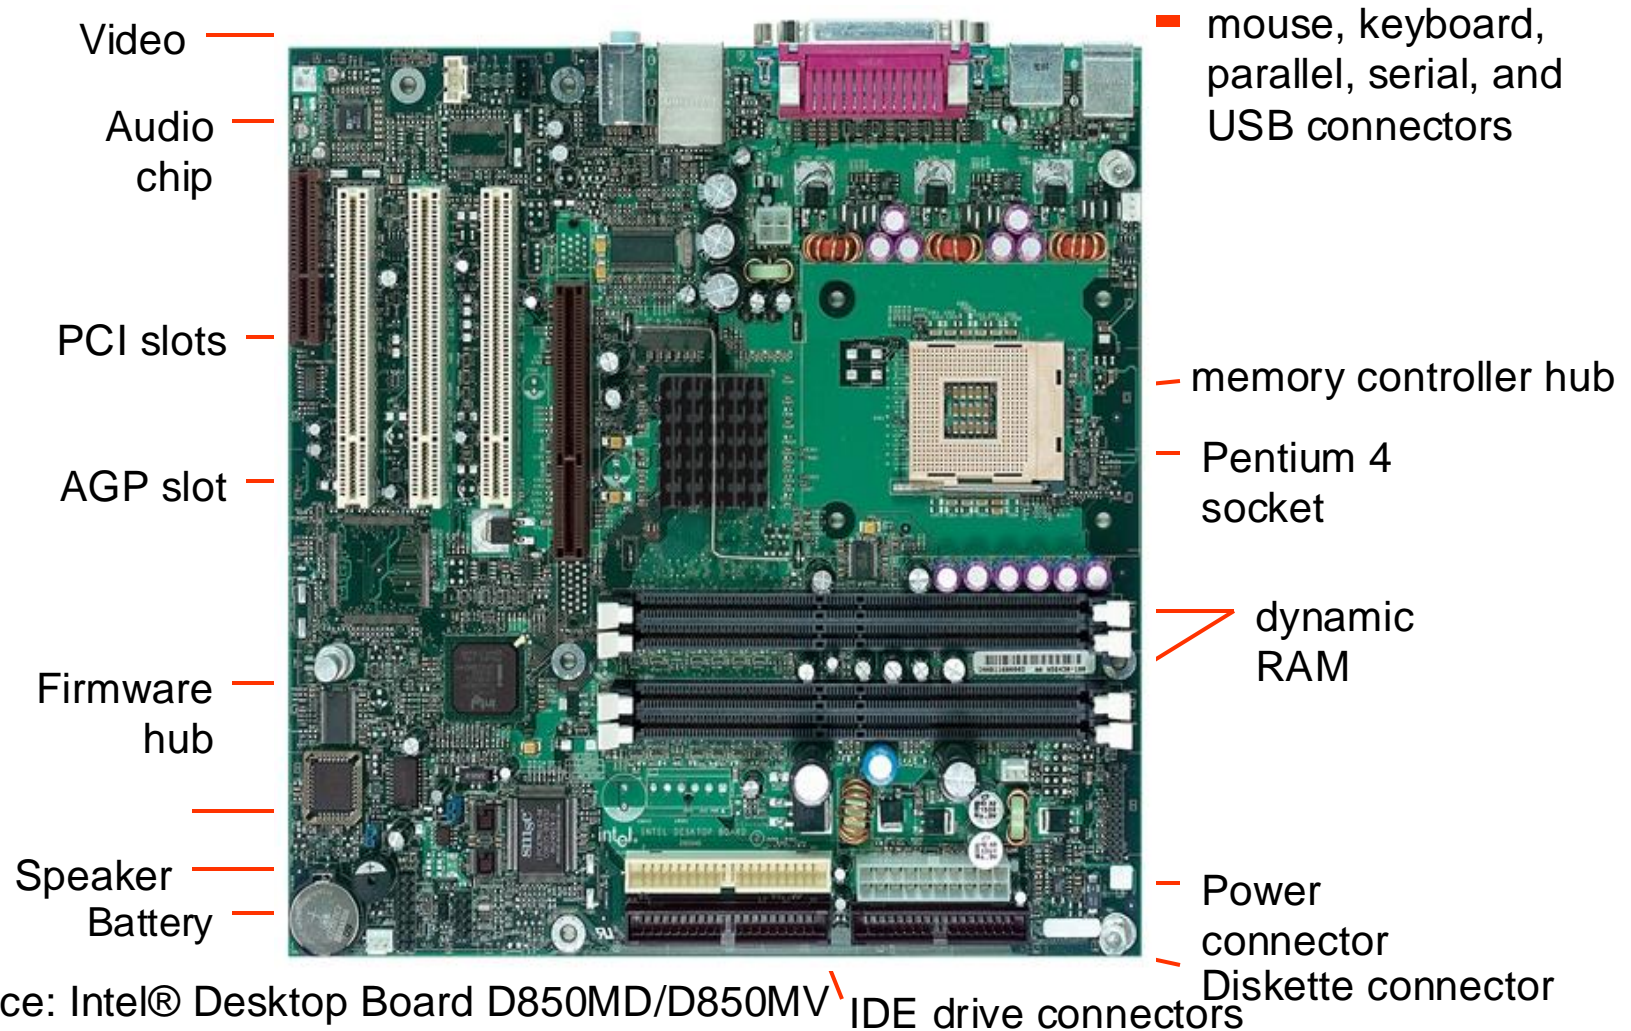

Source: Intel® Desktop Board D850MD/D850MV
Technical Product Specification

Intel 965 Express Chipset

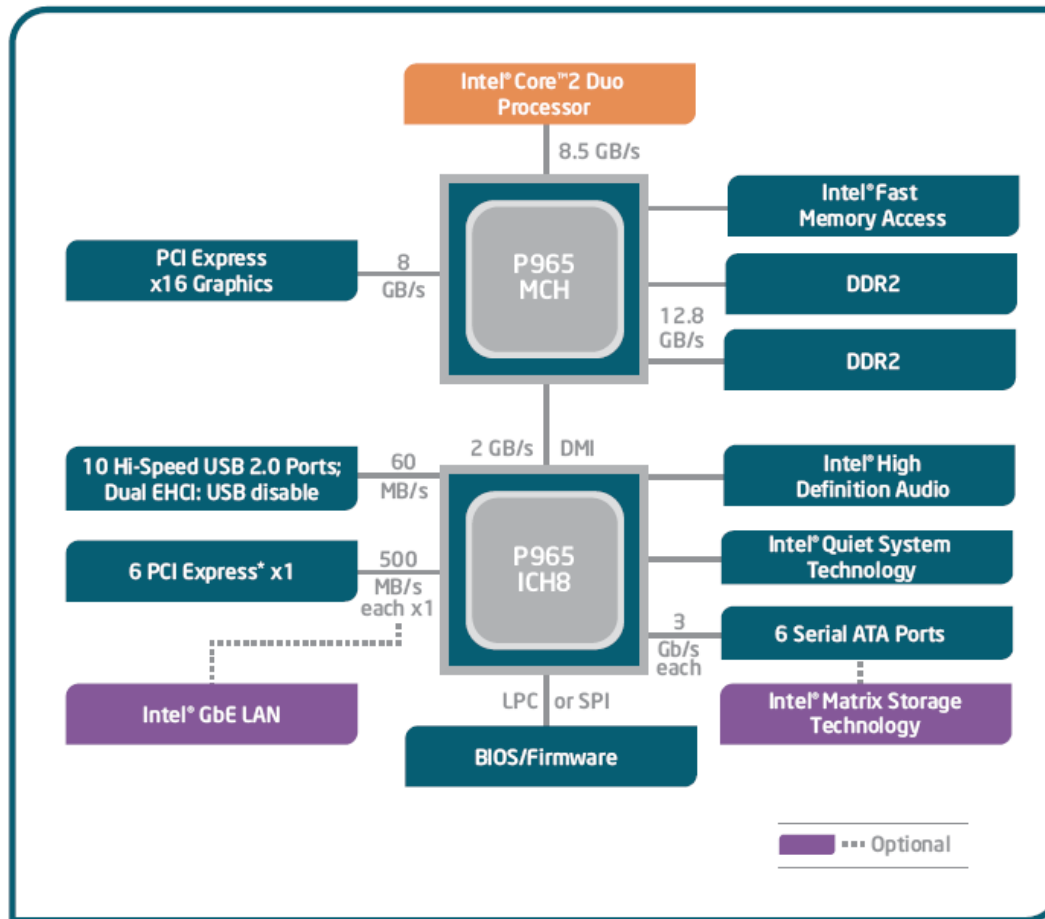

Video Output


- Video controller
 - on motherboard, or on expansion card
 - AGP ([accelerated graphics port technology](#))*
- Video memory (VRAM)
- Video CRT Display
 - uses raster scanning
 - horizontal retrace
 - vertical retrace
- Direct digital LCD monitors
 - no raster scanning required

* This link may change over time.

Sample Video Controller (ATI Corp.) (1 of 2)

- 128-bit 3D graphics performance powered by RAGE™ 128 PRO
- 3D graphics performance
- Intelligent TV-Tuner with Digital VCR
- TV-ON-DEMAND™
- Interactive Program Guide
- Still image and MPEG-2 motion video capture
- Video editing
- Hardware DVD video playback
- Video output to TV or VCR

Sample Video Controller (ATI Corp.) (2 of 2)

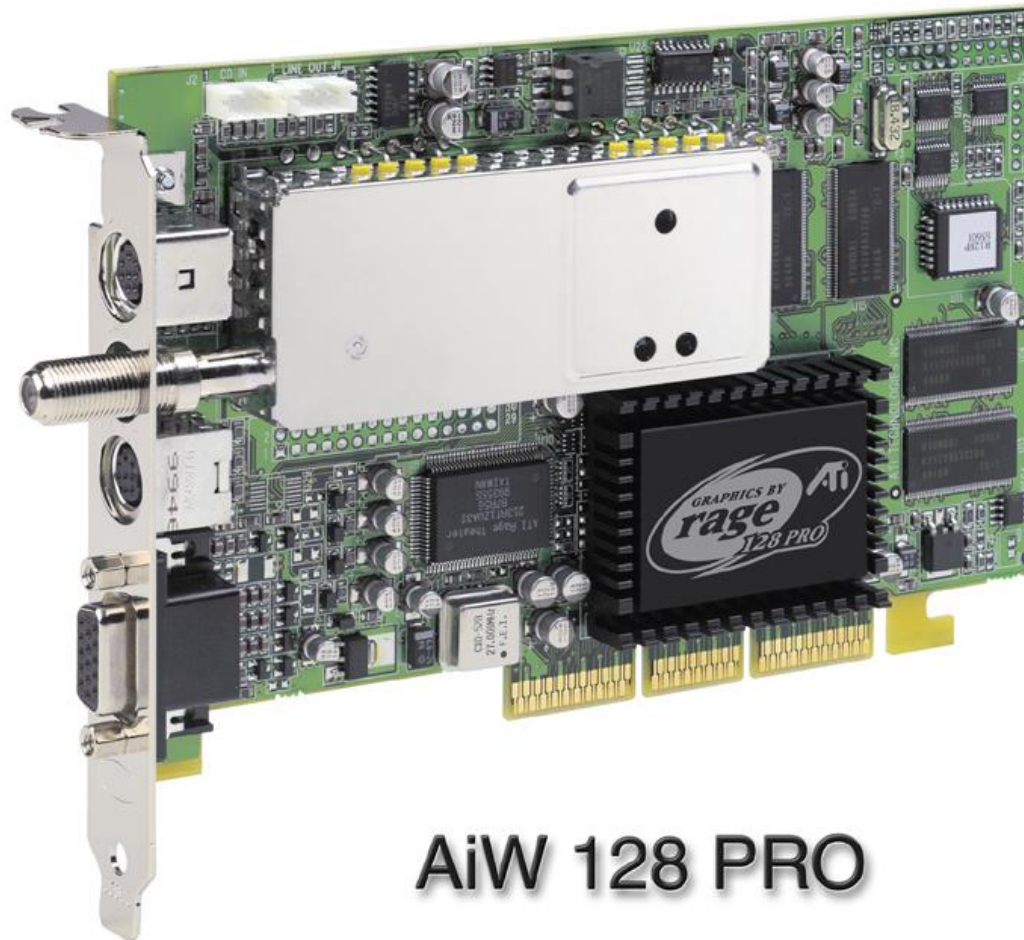

AiW 128 PRO

Memory (1 of 2)

- ROM
 - read-only memory
- EPROM
 - erasable programmable read-only memory
- Dynamic RAM (DRAM)
 - inexpensive; must be refreshed constantly
- Static RAM (SRAM)
 - expensive; used for cache memory; no refresh required

Memory (2 of 2)

- Video RAM (VRAM)
 - dual ported; optimized for constant video refresh
- CMOS RAM
 - complimentary metal-oxide semiconductor
 - system setup information
- See: [Intel platform memory](#) (Intel technology brief: link address may change)

Input-Output Ports

- USB (universal serial bus)
 - intelligent high-speed connection to devices
 - up to 12 megabits/second
 - USB hub connects multiple devices
 - *enumeration*: computer queries devices
 - supports *hot* connections
- Parallel
 - short cable, high speed
 - common for printers
 - bidirectional, parallel data transfer
 - Intel 8255 controller chip

Input-Output Ports (cont)

- Serial
 - RS-232 serial port
 - one bit at a time
 - uses long cables and modems
 - 16550 UART (universal asynchronous receiver transmitter)
 - programmable in assembly language

Device Interfaces

- ATA host adapters
 - intelligent drive electronics (hard drive, CDROM)
- SATA (Serial ATA)
 - inexpensive, fast, bidirectional
- FireWire
 - high speed (800 MB/sec), many devices at once
- Bluetooth
 - small amounts of data, short distances, low power usage
- Wi-Fi (wireless Ethernet)
 - IEEE 802.11 standard, faster than Bluetooth

What's Next (5 of 5)


- General Concepts
- IA-32 Processor Architecture
- IA-32 Memory Management
- Components of an IA-32 Microcomputer
- **Input-Output System**

Levels of Input-Output

- Level 3: High-level language function
 - examples: C++, Java
 - portable, convenient, not always the fastest
- Level 2: Operating system
 - Application Programming Interface (API)
 - extended capabilities, lots of details to master
- Level 1: BIOS
 - drivers that communicate directly with devices
 - OS security may prevent application-level code from working at this level


Displaying a String of Characters

When a HLL program displays a string of characters, the following steps take place:

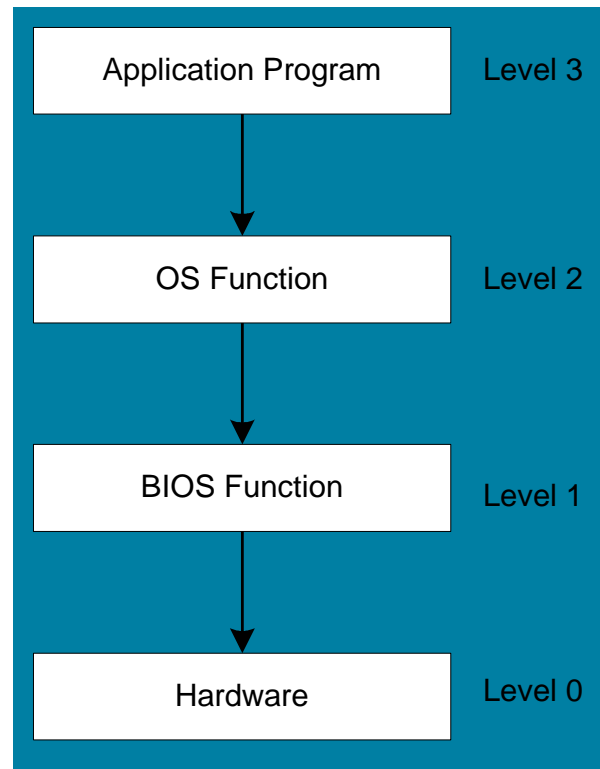

Programming levels

Assembly language programs can perform input-output at each of the following levels:

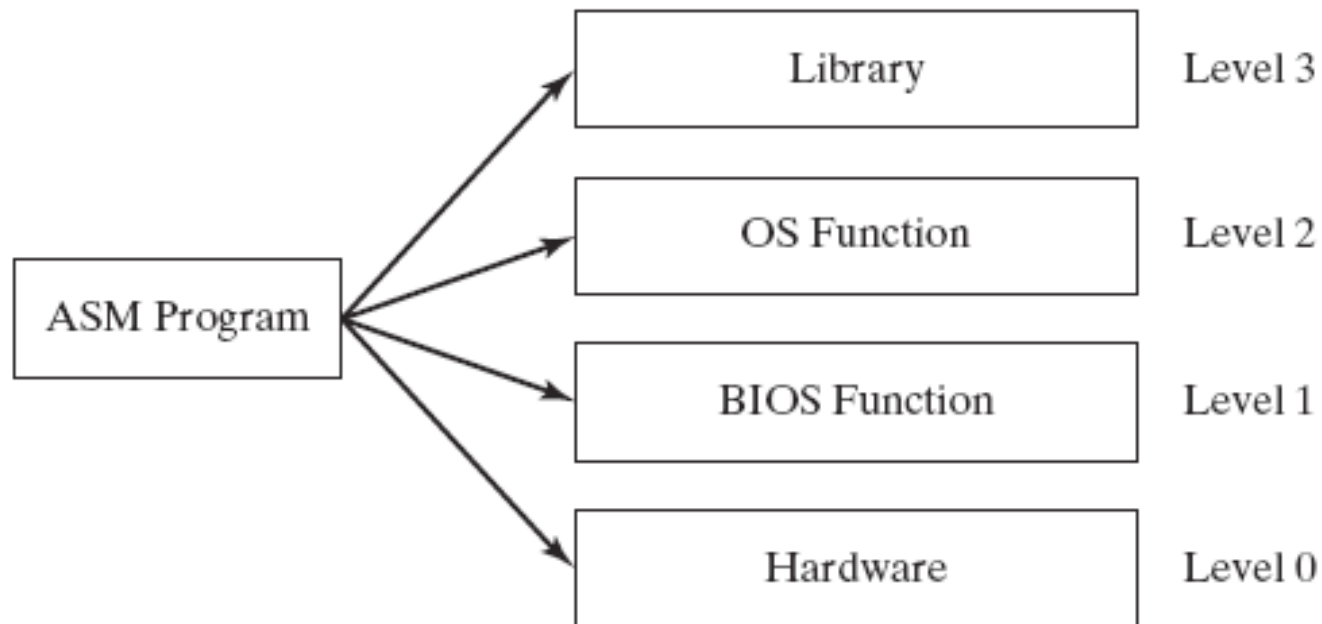

Summary

- Central Processing Unit (CPU)
- Arithmetic Logic Unit (ALU)
- Instruction execution cycle
- Multitasking
- Floating Point Unit (FPU)
- Complex Instruction Set
- Real mode and Protected mode
- Motherboard components
- Memory types
- Input/Output and access levels

42 69 6E 61 72 79

What does this say?

Copyright



This work is protected by United States copyright laws and is provided solely for the use of instructors in teaching their courses and assessing student learning. Dissemination or sale of any part of this work (including on the World Wide Web) will destroy the integrity of the work and is not permitted. The work and materials from it should never be made available to students except by instructors using the accompanying text in their classes. All recipients of this work are expected to abide by these restrictions and to honor the intended pedagogical purposes and the needs of other instructors who rely on these materials.