

LemgoRL: An open-source Benchmark Tool to Train Reinforcement Learning Agents for Traffic Signal Control in a real-world simulation scenario

Arthur Müller¹, Vishal Rangras¹, Georg Schnittker², Michael Waldmann², Maxim Friesen³, Tobias Ferfers¹, Lukas Schreckenber¹, Florian Hufen¹, Jürgen Jasperneite¹, and Marco Wiering⁴

Abstract—Sub-optimal control policies in intersection traffic signal controllers (TSC) contribute to congestion and lead to negative effects on human health and the environment. Reinforcement learning (RL) for traffic signal control is a promising approach to design better control policies and has attracted considerable research interest in recent years. However, most work done in this area used simplified simulation environments of traffic scenarios to train RL-based TSC. To deploy RL in real-world traffic systems, the gap between simplified simulation environments and real-world applications has to be closed. Therefore, we propose LemgoRL, a benchmark tool to train RL agents as TSC in a realistic simulation environment of Lemgo, a medium-sized town in Germany. In addition to the realistic simulation model, LemgoRL encompasses a traffic signal logic unit that ensures compliance with all regulatory and safety requirements. LemgoRL offers the same interface as the well-known OpenAI gym toolkit to enable easy deployment in existing research work. Our benchmark tool drives the development of RL algorithms towards real-world applications. We provide LemgoRL as an open-source tool at <https://github.com/rl-ina/lemgorl>.

I. INTRODUCTION

Urban traffic is mainly controlled by intersection *traffic signal controllers* (TSC). Most TSC are actuator-based, i.e. they choose the traffic light signals according to the current traffic demand. Conventional TSC policies in most cases represent a set of many rules implemented by traffic engineers. Due to the dynamic and stochastic nature of traffic, manually designed TSC policies cannot control traffic optimally in all situations. This leads to inefficient use of existing infrastructure and thus to congestion, which has negative effects on the environment and human health [1]. It is also a huge economic problem. According to [2], the cost of traffic congestion in 2017 in urban areas of the United States is estimated at \$179 billion.

Reinforcement Learning (RL), a long-standing research area in the field of artificial intelligence, is a promising

approach to overcome the limitations of manually designed TSC policies. In RL an agent acting with an environment tries to optimize its behavior in order to achieve an optimization goal (e.g. smooth traffic flow). RL for traffic signal control has been extensively researched over the last two decades. In particular, the combination of deep learning and RL, referred to as Deep RL, has initiated an increased interest in RL for traffic signal control. This is because Deep RL has led to breakthroughs in solving complex problems such as the game of GO [3]. As a result of the extensive research made, there are several RL-based approaches in literature that have been shown to be superior to conventional TSC in simulation environments [4], [5]. Despite all efforts in this field, there is no real-world deployment of an actual RL-based TSC to date. In fact, it has not yet been proven that RL is even applicable as TSC in a real-world setting. Every investigation so far has been done only in simplified simulation environments [5]. To close the gap from training an RL agent in a simplified environment to deploy an RL-based TSC in a real-world intersection, a realistic simulation environment is required as an intermediate step.

To this end, we introduce *LemgoRL*, a benchmark tool to train RL agents for traffic signal control in a realistic simulation scenario of an intersection in Lemgo, a medium-sized town in Germany. LemgoRL provides

- a realistic model of a road network in Lemgo,
- simulation of all road user groups (vehicles, cyclists, and pedestrians) and not only considering vehicles,
- simulation of different vehicle classes (cars, motorcyclists, trucks, trucks with trailers, busses) and not only considering cars,
- simulation of the traffic volume according to measured data and not synthetic data,
- a set of realistic traffic phases designed by traffic engineers (domain experts),
- a mechanism to carry out transitions from one traffic light phase to another in a realistic manner, taking into account safety and regulatory requirements,
- and a mechanism to ensure compliance with all safety and regulatory requirements (e.g. adherence to the minimum duration of traffic light phases) at all times during execution.

To the best of our knowledge, there is no simulation environment available in literature offering this degree of

*This work is part of the KI4LSA project and was supported by the German Federal Ministry of Transport and Digital Infrastructure (BMVI).

¹The authors are with the Fraunhofer IOSB-INA, 32657 Lemgo, Germany: arthur.mueller@iosb-ina.fraunhofer.de

²The authors are with Stührenberg GmbH, 32758 Detmold, Germany: g.schnittker@stuehrenberg.de

³M. Friesen is with the Institute Industrial IT, OWL University of Applied Sciences and Arts, 32657 Lemgo, Germany: maxim.friesen@th-owl.de

⁴M. Wiering is with the Department of Artificial Intelligence and Cognitive Engineering, University of Groningen, 9712 CP Groningen, The Netherlands: m.a.wiering@rug.nl

realism and complexity for RL-based TSC. LemgoRL is based on the programming language Python and offers the same interface like the well-known OpenAI Gym toolkit [6], allowing RL researchers easy integration into their work. It is an intermediate step in our research work towards the deployment of an RL-based TSC at a real-world intersection in the city of Lemgo.

II. PRELIMINARIES

A. Reinforcement Learning

In RL an *agent* is interacting with its *environment*. At each time step t , the agent gets information about the current situation of the environment called *state* s_t . Based on this information the agent selects the next *action* a_t to take in the environment. The behavior or decisions made by the agent are determined by the current *policy* π . It is a function that maps states to actions $\pi(a_t|s_t)$. Additionally, at each time step the agent receives a *reward* signal r_t from the environment, which is a scalar value. The goal of the agent is to maximize the cumulative reward in the long run.

Typically RL problems are formalized as *Markov decision processes* (MDP). A MDP is a tuple consisting of the following elements [7]:

- A set of states \mathcal{S} ,
- a set of actions \mathcal{A} ,
- a state transition probability function $\mathcal{T}(s_{t+1}, s_t, a_t)$ which defines a probability distribution over the successor state s_{t+1} given the former state s_t and action a_t ,
- a reward function $\mathcal{R}(s_t, a_t)$ determining the reward r_{t+1} , when taking action a_t in state s_t ,
- and a discount factor $\gamma \in [0, 1]$, discounting future rewards.

A central requirement for a MDP is the so-called Markov property, which assumes that the current state s_t contains all relevant information of the past states. Thus, the successor state s_{t+1} only depends on the current state and not the past states. Furthermore, MDP models can represent *continuous*, meaning endless tasks, or *episodic* tasks in which there is a terminal state.

B. Traffic simulator

In order to train RL agents for TSC, a simulation environment is needed. Sampling data in reality would be too dangerous because sub-optimal decisions during training may lead to safety issues. Also, RL algorithms are usually sample-inefficient, which would make training too slow. There are several traffic simulation tools that can provide the required simulation environment. According to [8], they can be categorized as macroscopic, mesoscopic, microscopic and submicroscopic simulators, with increasing levels of detail. For training and testing of TSC, usually microscopic traffic simulators are chosen which provide a reasonable tradeoff between simulation speed and required level of detail. Among these, there are commercial software tools like Vissim [9], Aimsun [10], and Quadstone Paramics [11] and

free and open-source tools like MATSim [12] and SUMO [13].

For our simulation model, we use SUMO, mainly for two reasons. First, according to a recent survey paper, it is the most used tool for training RL as TSC. Over 70% of all analyzed papers about Deep RL approaches for TSC used SUMO in their work [5]. Since we want LemgoRL to be highly applicable and easy to use for the research community, choosing a well-known and widely used traffic simulator helps achieving this goal. Second, SUMO provides an extensive interface to Python called TraCI¹ (Traffic Control Interface). This allows retrieving and setting values for most simulated objects during simulation runtime (e.g. speed of a vehicle), which is necessary to extract the relevant information for the MDP-setting.

III. DESIGN OF LEMGORL

LemgoRL consists of several software components including a simulation model made with SUMO, a traffic signal logic unit (TSLU) implemented with the traffic engineering software LISA, a middleware, and an environment controller, both implemented in Python. The environment controller encapsulates the components as a single Python class and provides an interface to the agent which is compatible with the OpenAI Gym toolkit.

In Fig. 1 the process diagram of LemgoRL is shown. An RL agent computes the next action, which represents the agent's wish for the next traffic light phase. The environment controller passes this next action to the middleware, where it is packed into a message and sent via a REST API to the TSLU. There, it gets processed according to the logic designed by traffic engineers. Depending on the phase request and that logic, the TSLU keeps the current phase or initiates a transition to another one. Then a response message is sent back to the middleware containing the next phase with its corresponding signal states. The environment controller maps these signal states to the traffic lights in the simulation model. Following this approach, the simulated traffic lights are now in the traffic light phase, selected by the TSLU. Subsequently, SUMO executes a step in the simulation model and provides the information of the new traffic situation to the environment controller. The latter processes the information to obtain the state and reward signal of the underlying MDP and forwards them to the agent.

In the following subsections, the components of LemgoRL and their communication with each other are explained in more detail.

A. Simulation Model

We built a simulation model for the intersection "OWL322" and its immediate vicinity in Lemgo (see Fig. 2). The intersection is known to suffer from congestion. The majority of traffic flows in the west-east direction. The traffic volume to and from the south is relatively low. All four incoming streets each have a shared lane for straight and

¹<https://sumo.dlr.de/docs/TraCI.html>

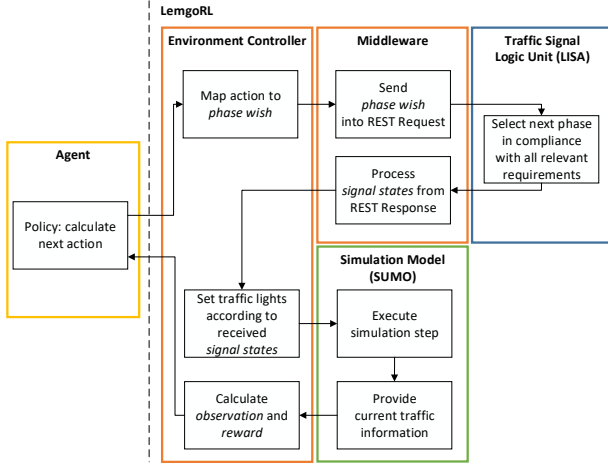



Fig. 1: Process Diagram of LemgoRL




Fig. 2: Satellite Photo of the intersection "OWL322" in Lemgo

right-turning traffic, as well as a separate left-turn lane. On the west and east street, bicycles share the road with vehicles. On the north and south street, bicycles have a separate lane with a dedicated waiting area in front of the vehicles. Furthermore, the intersection includes pedestrian crossings in all four directions and bus stations nearby, which are part of the simulation model as well. The simulation model is shown in Fig. 3. It consists of several files encoding information for the road network data, traffic demand, and traffic infrastructure, referred to as the *simulation scenario* in the SUMO setting [14].

The default way of communicating with a running SUMO instance is TraCI, which is based on a TCP client/server architecture. However, there is an alternative called Libsumo², which we also integrated into LemgoRL. It is a reimple-

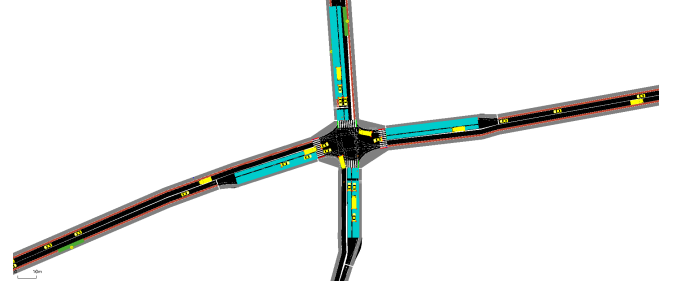

(a) OWL322 distant

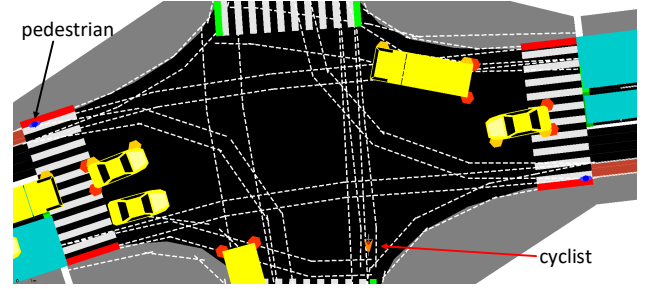

(b) OWL322 close

Fig. 3: OWL322 intersection SUMO model

mentation of TraCI with static C++ functions avoiding the need for socket communication. Based on our observations, this brings an increase in performance of up to a factor of 10. However, the usage of Libsumo requires the additional effort of compiling SUMO from source. This is why we make it optional so that a user can choose between TraCI and Libsumo.

B. Traffic Signal Logic Unit

In order to have a realistic simulation environment, mechanisms are necessary to guarantee compliance with all safety and regulatory requirements. To this end, we developed a TSLU incorporating these mechanisms. The logic for these mechanisms was implemented by traffic engineers from our team, knowing and being able to apply all relevant requirements. The TSLU is based on the professional traffic engineering software LISA (Version 7.2) from the company Schlothauer und Wauer³, so that the engineers were able to implement the logic in a domain-specific tool. LISA is a widely used and established commercial software package for planning, developing, and evaluating traffic signal controllers, that can be deployed in real-world traffic light systems.

C. Middleware

LISA provides the option to export traffic signal programs to a Java executable that can communicate with the traffic simulation tool Vissim (Vissim export). The purpose of this is mainly to evaluate traffic signal controllers developed with LISA in simulation environments created with Vissim. The communication runs via a REST API. We utilize the REST

²<https://sumo.dlr.de/docs/Libsumo.html>

³<https://www.schlothauer.de/en/software-systems/lisa/>

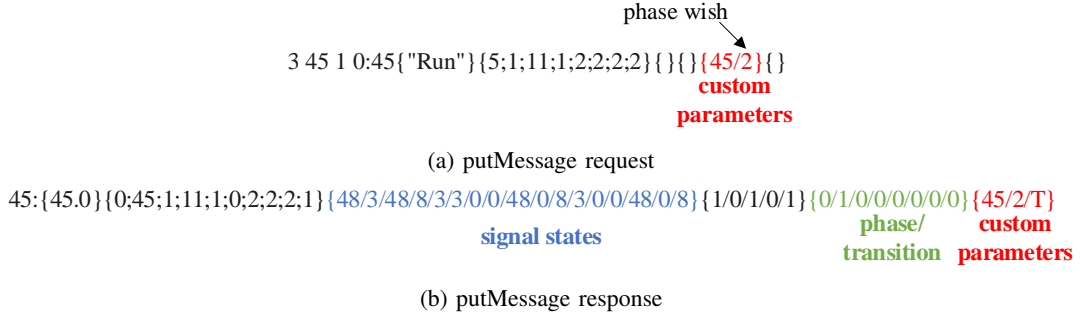


Fig. 4: REST communication between LISA controller and environment controller

API of the Vissim export to build a middleware that connects the TSLU with our Python code. This was necessary since to date there is no native way of integrating LISA-made TSC with Python. Furthermore, there is no official documentation of the REST API for the LISA controller. Therefore we built the middleware mainly based on the information given in [15] and [16] and reverse engineered missing features.

When running LemgoRL, the middleware first initializes a connection between the LISA controller and the environment controller by executing four REST API calls (see [16] for details). Afterwards, information is exchanged through the "putMessage" method. In Fig. 4, an example putMessage request and response between the environment controller and the LISA controller is depicted. The agent's phase wish is encoded in the fifth pair of curly brackets in the request message, which contains custom parameters (called "AP values" in LISA-context). The most important information for LemgoRL in the response message is found in the third pair of curly brackets, which contains the signal states. LISA encodes these signal states according to the rules in [17]. The middleware converts them to SUMO-readable signal states.

IV. FEATURES OF LEMGORL

In the following section, we want to highlight some features of LemgoRL.

A. Realistic Traffic Demand

In order to increase the realism in our simulation scenario we measured the actual traffic in the OWL322 intersection during the afternoon rush hour (from 15:00 to 16:10) and transferred the results to the model. We counted the number of cars, motorcyclists, trucks, trucks with trailers, buses, and bicyclists in 5-minute periods according to their respective directions of travel. The usage of these vehicle categories for measuring the traffic volume is recommended by the German Federal Ministry of Transport [18]. We also counted the number of pedestrians crossing the street in the same time periods. The total number of all road users over time is shown in Fig. 5.

From the measured traffic data, we calculated the "spawning" probabilities for all vehicle types and pedestrians per second and integrated them in the model as SUMO "flows". The underlying probability distribution for a vehicle or pedestrian to spawn is the binomial distribution. By using

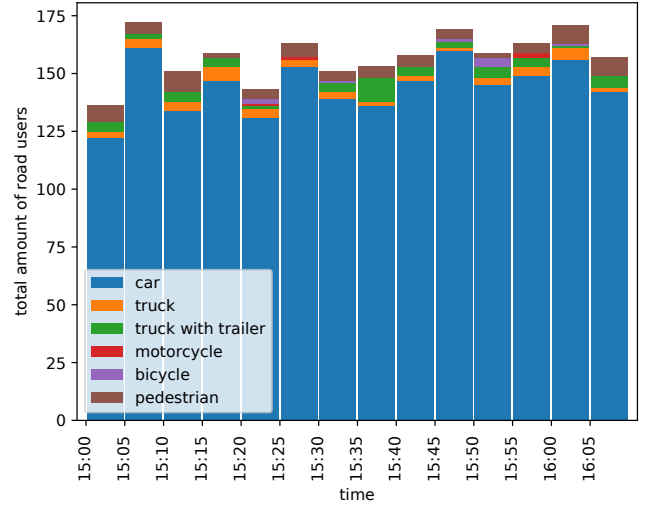


Fig. 5: Measured Traffic Volume

these probabilities, each training iteration exhibits a slightly different traffic demand and dynamics. This provides the RL agent a richer dataset during training, potentially leading to more robust policies. We have open-sourced the measured data as well as a Python script to convert this data to SUMO flows along with LemgoRL. To further increase the realism of the model, we added all bus stops near the intersection and busses driving according to the routes and schedule of the local transport companies⁴.

B. MDP

LemgoRL formalizes the problem of controlling the OWL322 traffic lights as a MDP in order to be solvable with RL algorithms. The MDP is episodic with one episode lasting 4200s, which corresponds to the recorded time interval of the traffic measurement. Unlike most other related work, we select a short interaction time of 1s for interactions between the agent and its environment. This interaction time resembles the common processing time of traffic light systems in Germany, where the entire cycle from processing the detector values to setting the traffic light phases takes 1s.

⁴<https://teutoowl.de/owlvl/>, <https://www.stadtbus-lemgo.de/>

1) *State definition*: We define the state as

$$s_t = \{queue_{t,l}, wave_{t,l}, avg_speed_{t,l}, wait_veh_{t,l}, wait_ped_{t,l}, phase_id_t\}_{l \in L}, \quad (1)$$

where l corresponds to the incoming lanes and pedestrian crosswalks of the OWL322. The definitions for $wave$ and $wait_veh$ are following [19]. $wave$ is the number of nearing vehicles per lane, whereas $wait_veh$ represents the cumulative waiting time of a lane's leading vehicle. $queue$ measures the length of all waiting vehicles in a lane (queue length) while avg_speed is the average speed of all vehicles in the respective lane. Equivalent to the definition of $wait_veh$, the cumulative waiting time for the first person waiting for a green signal at a crosswalk is given by $wait_ped$. Furthermore, we also include a one-hot encoded vector representing the current phase $phase_id$. We provide this rich state representation for two reasons. First, the proper state space design for TSC is still an open research question [5]. By providing this variety, researchers can select a subset as state space representations tailored to the requirements of the used algorithms. Second, the analysis conducted in [20] indicates that a broader scope of information in the state signal leads to better performance when facing non-stationarity due to changes in traffic dynamics. The latter is the case in real-world scenarios like LemgoRL.

2) *Reward definition*: For the reward, we extend the definition in [19] by including the cumulative waiting time of pedestrians $wait_ped$:

$$r_{t+1} = - \sum_{l \in L} (queue_{t+1,l} + \alpha_{veh} \cdot wait_veh_{t+1,l} + \alpha_{ped} \cdot wait_ped_{t+1,l}) \quad (2)$$

By adjusting the tradeoff coefficients α_{veh} and α_{ped} , the agent can be influenced to prioritize pedestrians over vehicles or vice versa. This could be used, for example, in congested cities to provide incentives for people not to use cars.

3) *Action definition*: Modern traffic light systems are usually controlled by a phase-oriented approach, i.e. the controller selects traffic light phases based on the current traffic situation or according to a fixed time scheme. A traffic light phase represents a combination of signal states (i.e. signal colors like red or green). It determines which non- or partially conflicting traffic flows are allowed to cross the intersection and which have to wait [21]. One phase for example would allow traffic on the west-east direction while stopping traffic on the north-south direction.

In LemgoRL, traffic engineers designed a set of 8 traffic light phases that are used in the current real-world implementation of the OWL322 (see table I). Phase 1 represents the "all-red-phase". It is required as an intermediate phase to ensure safe transitions, e.g. when transitioning from phase 3 (vehicles west-east) to phase 7 (vehicles north-south). Note-worthy is also phase 5 with a priority green signal for left turning traffic. It can only be reached when transitioning from phase 4 after waiting for several seconds to allow traffic coming from the east to clear the intersection. This phase

TABLE I: Traffic Light Phases for OWL322

phase nr	veh west	veh east	veh north	veh south	ped w&e	ped n&s
1	r	r	r	r	r	r
2	g	g	r	r	r	g
3	g	g	r	r	r	r
4	g	r	r	r	r	r
5	g+left g	r	r	r	r	r
6	r	r	g	g	g	r
7	r	r	g	g	r	r
8	r	r	g	r	r	r

* vehicle traffic signal encompasses all directions (e.g. veh west=all vehicles coming from west and traveling to the north, east or south)

** r=red, g=green, left g=left turning vehicles have priority green

handles the large traffic demand coming from the west and heading north. Except for phase 1, all phases are accessible to the agent as the action-space.

C. Realistic Traffic Light Phase Transitions

Whenever the agent selects a phase other than the current one, the TSLU checks whether the transition is allowed or not. For example, if the current phase is 2 (vehicles west-east, pedestrians north and south), a phase transition is only permitted if the minimum green time for pedestrians crossing the street is not undercut. Otherwise, a phase transition would violate safety requirements, as pedestrians would not have sufficient time to safely cross the street. In this case, the TSLU would ignore the agent's phase wish and would stay in the current phase.

Designing proper phase transitions is a sophisticated traffic engineering task. It requires determining all transition and intergreen times for "all combinations of conflicting traffic flows" [21]. The intergreen times are composed of crossing, clearance and entering times. They in turn depend on the permissible speed, the road user groups and actual topology and geometrical dimensions of the intersection. In contrast to the related work, where simplified phase transitions are used, LemgoRL provides realistic phase transitions for all possible combinations.

D. Transferability to real-world application

The ultimate goal of our research work is to deploy a trained RL agent as TSC at the OWL322 intersection. Therefore, we designed our benchmark tool in way that supports this goal. By providing the agent with the real traffic phases, ensuring proper phase transitions by the TSLU and ensuring compliance to all safety and regulatory requirements at all times, the trained agent in combination with the TSLU can be deployed at the real OWL322 intersection. In Fig. 6, the schema for a real-world deployment is shown. It should be noted, that the current sensors at the OWL322 intersection are not sufficient to capture all necessary information for calculating the MDP state signal. Therefore, additional camera or radar sensors need to be installed.

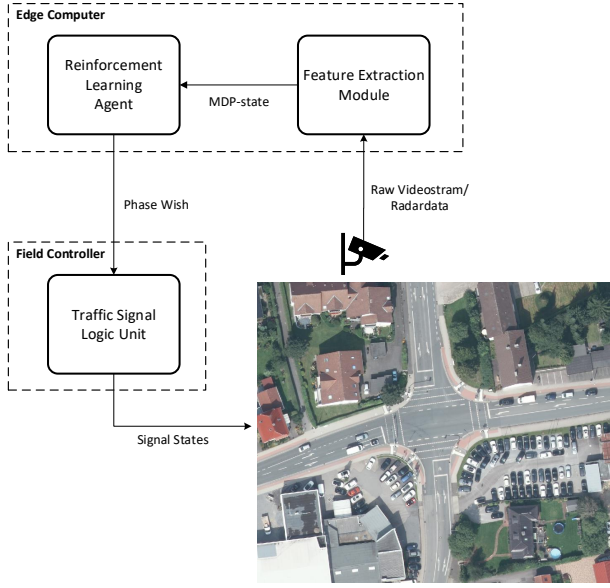


Fig. 6: Schema for Real-World Deployment of LemgoRL

The workflow of the real-world deployment is similar to that of LemgoRL. The raw data of the sensors will be processed in a feature extraction module running on an edge computer. It converts the data to MDP state signals. The state signal must be identical in dimensions with that from the training process in order to be applicable to the RL agent. Based on this state signal, the RL agent selects the next phase which will be handed over to the TSLU running on the field controller of the traffic light system. Finally, the TSLU sets the state signals for all traffic light devices of the intersection.

V. CONCLUSION

In this paper, we have presented LemgoRL, an open-source benchmark tool to train RL agents as TSC in a realistic simulation environment. By enabling researchers to train and evaluate algorithms in such a realistic environment and by providing a blueprint of how to ensure compliance with all regulatory and safety requirements, this tool drives the development of RL algorithms for traffic signal control towards real-world deployment.

In future work, we will focus on developing and training RL agents that outperform conventional TSC in the benchmark tool. Subsequently, we plan to deploy the trained agents at the real-world OWL322 intersection. We want to prove the applicability and superiority of RL-based TSC in a real-world deployment.

ACKNOWLEDGMENT

The authors would like to thank Mirko Barthauer⁵, Jakob Erdmann⁶, Maximiliano Bottazi⁶ and the company

Schlothauer & Wauer for giving us helpful information about the interface to the LISA controller.

REFERENCES

- [1] S. Pandian, S. Gokhale, and A. K. Ghoshal, "Evaluating effects of traffic and vehicle characteristics on vehicular emissions near traffic intersections," *Transportation Research Part D: Transport and Environment*, vol. 14, no. 3, pp. 180–196, may 2009.
- [2] D. Schrank, B. Eisele, and T. Lomax, "Urban Mobility Report 2019," The Texas A&M Transportation Institute, Tech. Rep., 2019. [Online]. Available: <https://static.tti.tamu.edu/tti.tamu.edu/documents/mobility-report-2019.pdf>
- [3] D. Silver, J. Schrittwieser, K. Simonyan, I. Antonoglou, A. Huang, A. Guez, T. Hubert, L. Baker, M. Lai, A. Bolton, Y. Chen, T. Lillicrap, F. Hui, L. Sifre, G. van den Driessche, T. Graepel, and D. Hassabis, "Mastering the game of Go without human knowledge," *Nature*, vol. 550, no. 7676, pp. 354–359, oct 2017.
- [4] K. L. A. Yau, J. Qadir, H. L. Khoo, M. H. Ling, and P. Komisarczuk, "A survey on Reinforcement learning models and algorithms for traffic signal control," *ACM Computing Surveys*, vol. 50, no. 3, 2017.
- [5] A. Haydari and Y. Yilmaz, "Deep Reinforcement Learning for Intelligent Transportation Systems: A Survey," *IEEE Transactions on Intelligent Transportation Systems*, pp. 1–22, 2020.
- [6] G. Brockman, V. Cheung, L. Pettersson, J. Schneider, J. Schulman, J. Tang, and W. Zaremba, "OpenAI Gym," *arXiv preprint arXiv:1606.01540*, pp. 1–4, 2016.
- [7] R. S. Sutton and A. G. Barto, *Reinforcement Learning: An Introduction*. The MIT Press, 2018.
- [8] S. Krauß, "Microscopic Modeling of Traffic Flow: Investigation of Collision Free Vehicle Dynamics," Ph.D. dissertation, Universität zu Köln, 1998.
- [9] M. Fellendorf, "VISSIM: A microscopic Simulation Tool to Evaluate Actuated Signal Control including Bus Priority," *64th Institute of Transportation Engineers Annual Meeting*, pp. 1–9, 1994.
- [10] J. Casas, J. L. Ferrer, D. Garcia, J. Perarnau, and A. Torday, "Traffic Simulation with Aimsun," in *Fundamentals of Traffic Simulation*, 2010, pp. 173–232.
- [11] G. D. B. Cameron and G. I. D. Duncan, "PARAMICS - Parallel microscopic simulation of road traffic," *The Journal of Supercomputing*, vol. 10, no. 1, pp. 25–53, 1996.
- [12] A. Horni, A., Nagel, K., *The Multi-Agent Transport Simulation MAT-Sim*. London: Ubiquity Press Ltd., 2016.
- [13] D. Krajewicz, J. Erdmann, M. Behrisch, and L. Bieker, "Recent Development and Applications of SUMO - Simulation of Urban Mobility," *International Journal On Advances in Systems and Measurements*, vol. 5, no. 3, pp. 128–138, 2012.
- [14] P. A. Lopez, M. Behrisch, L. Bieker-Walz, J. Erdmann, Y. P. Flotterod, R. Hilbrich, L. Lucken, J. Rummel, P. Wagner, and E. Wiebner, "Microscopic Traffic Simulation using SUMO," *IEEE Conference on Intelligent Transportation Systems, Proceedings, ITSC*, vol. 2018-Novem, pp. 2575–2582, 2018.
- [15] M. Bottazzi, L. C. T. Tcheumadjeu, J. Trumpold, and R. Oertel, "LiSuM : Design and Development of a Middleware to couple Virtual LISA + TLS Controller and SUMO Simulation," *SUMO 2017-Towards Simulation for Autonomous Mobility*, vol. 31, pp. 179–192, 2017.
- [16] M. Barthauer and B. Friedrich, "Connecting microscopic traffic simulation and LISA+ external signal control," *Transportation Research Procedia*, vol. 27, pp. 420–427, 2017. [Online]. Available: <https://doi.org/10.1016/j.trpro.2017.12.007>
- [17] "OCIT-C Center to Center TSS supply data," p. 124, 2016. [Online]. Available: https://www.ocit.org/media/ocit-c-_-tss-_-supplydata-_-v1.2-_-r1.pdf
- [18] "Richtlinien für die Straßenverkehrszählung 2020 im Jahre 2021 auf den Bundesfernstraßen," Bundesministerium für Verkehr und digitale Infrastruktur, Referat StB 11, Tech. Rep., 2021.
- [19] T. Chu, J. Wang, L. Codeca, and Z. Li, "Multi-Agent Deep Reinforcement Learning for Large-Scale Traffic Signal Control," *IEEE Transactions on Intelligent Transportation Systems*, pp. 1–10, 2019.
- [20] L. N. Alegre, A. L. C. Bazzan, and B. C. da Silva, "Quantifying the Impact of Non-Stationarity in Reinforcement Learning-Based Traffic Signal Control," *arXiv preprint arXiv:2004.04778*, apr 2020.
- [21] Forschungsgesellschaft für Straßen- und Verkehrswesen, Ed., *Richtlinien für Lichtsignalanlagen : RiLSA : Lichtzeichenanlagen für den Straßenverkehr*. Cologne: FGSV Verlag GmbH, 2015.

⁵Technische Universität Braunschweig

⁶German Aerospace Center