


1. BATTERY INPUT, REVERSE POLARITY, TVS CLAMP

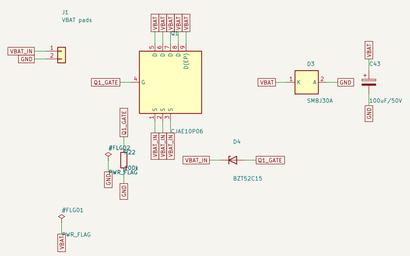


2. 5 V BUCK — TPS54360, values verbatim from TI SLVSBB4G Fig. 34

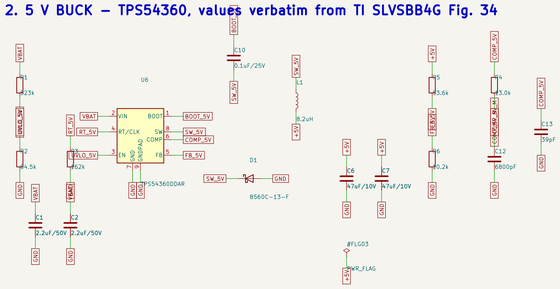


3. 9 V VTX BUCK — TPS54360, L recomputed and R31/C14/C15 from TI Eq 44–51

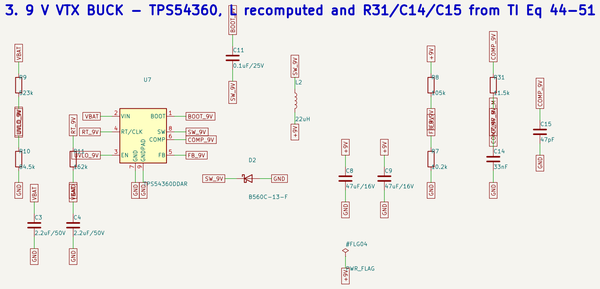


4. 3.3 V LDO AND USB VBUS OR-ING

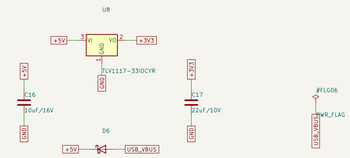


5. MCU — STM32F405RGT7, LQFP-64. Pin map per DESIGN_PLAN sec 4

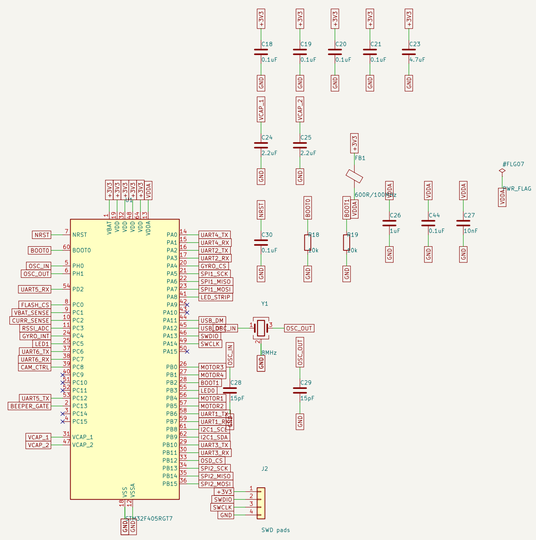


6. IMU — ICM-42688-P, own SPI1

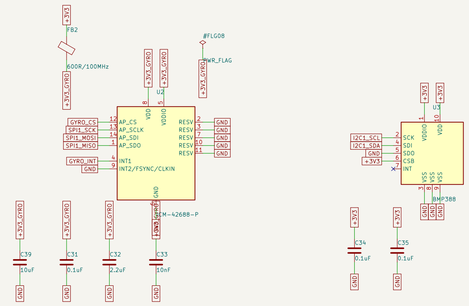


7. BAROMETER — BMP388 on I2C1

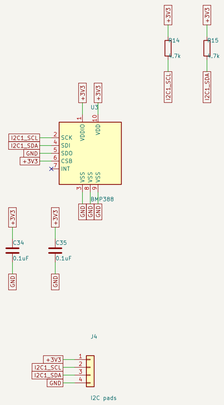


8. OSD — AT7456E. DVDD on 3.3 V so SDOUT never puts 5 V on shared SPI2

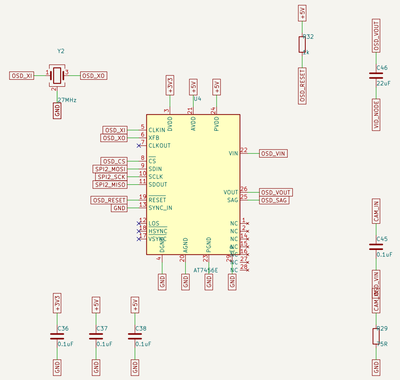


9. BLACKBOX FLASH — W25Q128JV on SPI2




10. USB-C + ESD

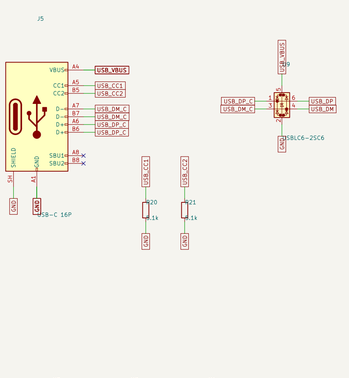


11. ESC CONNECTOR AND POWER PADS



12. ADC FRONT ENDS



13. INDICATORS, BUZZER, EXTERNAL PADS

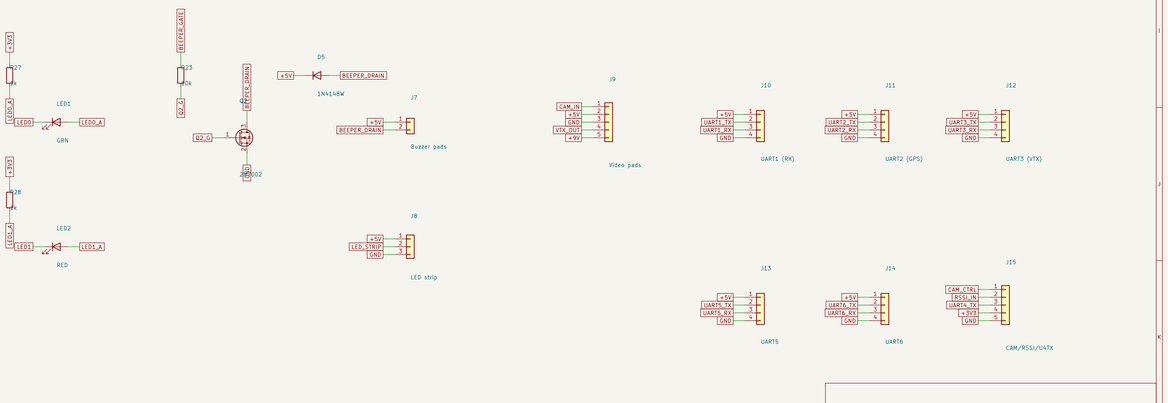

H1 M3 H2 M3 H3 M3 H4 M3

Sheet: /
File: fc_f405.kicad_sch
Title:
Size: A1 Date: Rev:
KiCad E.D.A. 10.0.5 Id: 1/1