Chapter 3: Processes

To introduce the notion of a process
To describe the various features of processes
To explore interprocess communication
To describe communication in client-server systems

Contents

- Process Concept
- Process Scheduling
- Operations on Processes
- Interprocess Communication
- Examples of IPC Systems
- Communication in Client-Server Systems

Multiprogramming

Uni-programming (한번에 하나의 프로그램만 실행)

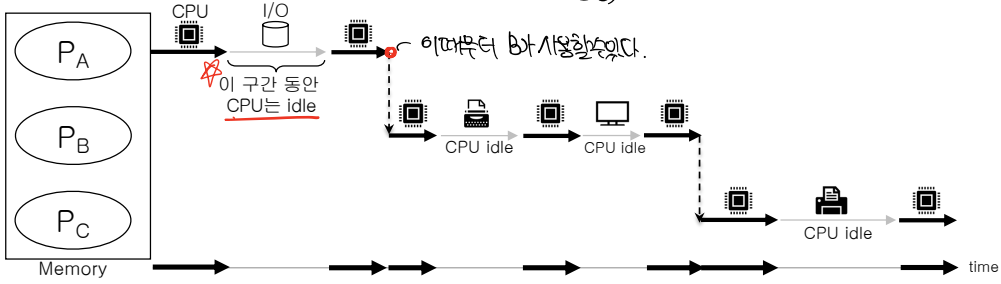

Multi-programming (여러 프로그램 동시 실행)

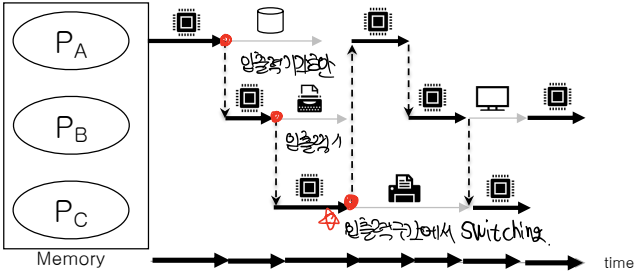

Throughput ↑

Utilization ↑

Degree of multiprogramming

3.1 Process Concept

- An operating system executes a variety of programs:
  - Batch system – **jobs**
  - Time-shared systems – **user programs** or **tasks**
  - Textbook uses the terms ***job*** and ***process*** almost interchangeably
- **Process** – a program in execution
- Multiple parts
  - The program code, also called **text section**
  - Current activity including **program counter**, processor registers
  - **Stack** containing temporary data
    - Function parameters, return addresses, local variables
  - **Data section** containing global variables
  - **Heap** containing memory dynamically allocated during run time

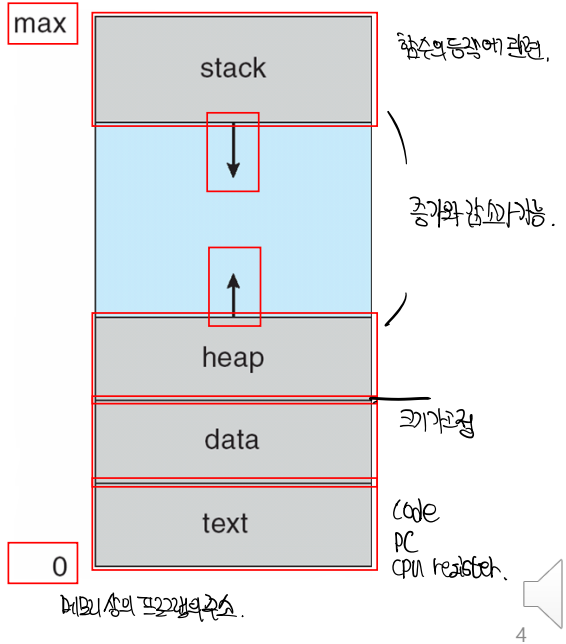

Process Concept (Cont.)

- Program is ***passive*** entity stored on disk (**executable file**), process is ***active***
  - Program becomes process when executable file loaded into memory
- Execution of program started via GUI mouse clicks, command line entry of its name, etc
- One program can be several processes
  - Consider multiple users executing the same program

Process State

- As a process executes, it changes **state**
  - **new**: The process is being created
  - **ready**: The process is waiting to be assigned to a processor
  - **running**: Instructions are being executed
  - **waiting**: The process is waiting for some event to occur
  - **terminated**: The process has finished execution

Diagram of Process State

⇒ 프로세스 상태 변화 다이어그램

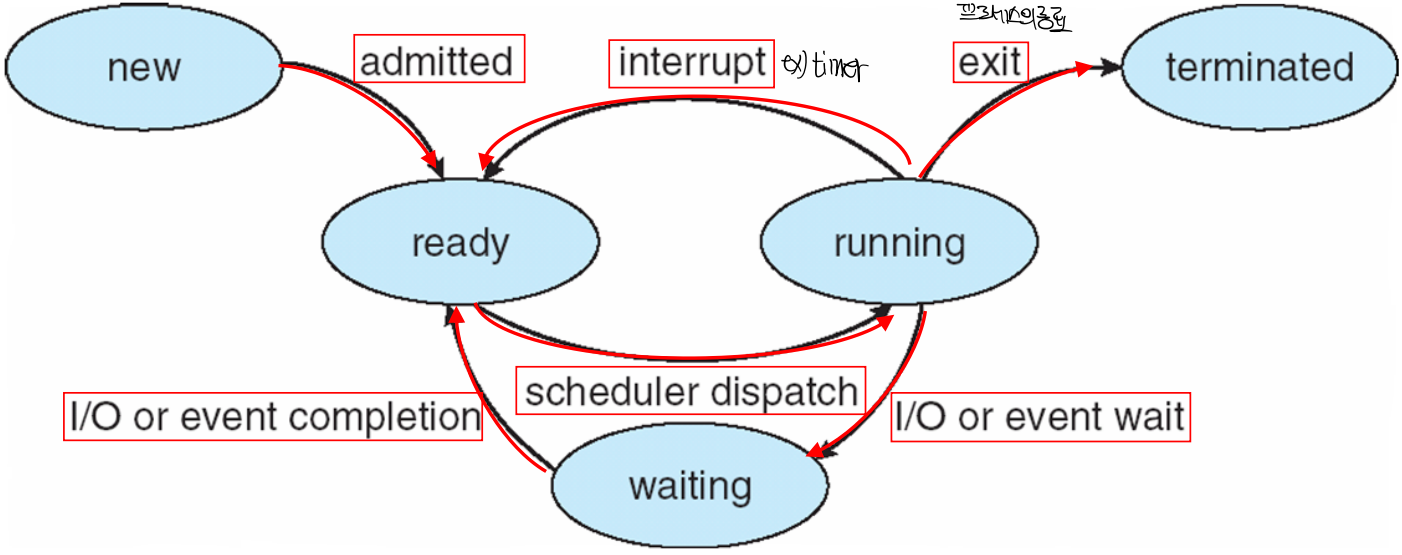

Process Control Block (PCB)

= 운영체제이 개별프로세스를 위한 자료구조.

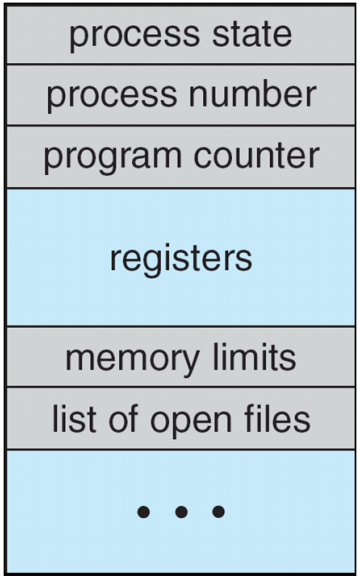

Information associated with each process(also called **task control block**)

- Process state – running, waiting, etc
- Process ID
- Program counter – location of instruction to next execute 복사문에서.
- CPU registers – contents of all process-centric registers
- CPU scheduling information- priorities, scheduling queue pointers
- Memory-management information – memory allocated to the process
- Accounting information – CPU used, clock time elapsed since start, time limits 이 파일에서 사용된다.
- I/O status information – I/O devices allocated to process, list of open files

CPU Switch From Process to Process

⇒ CPU 사용의 전환

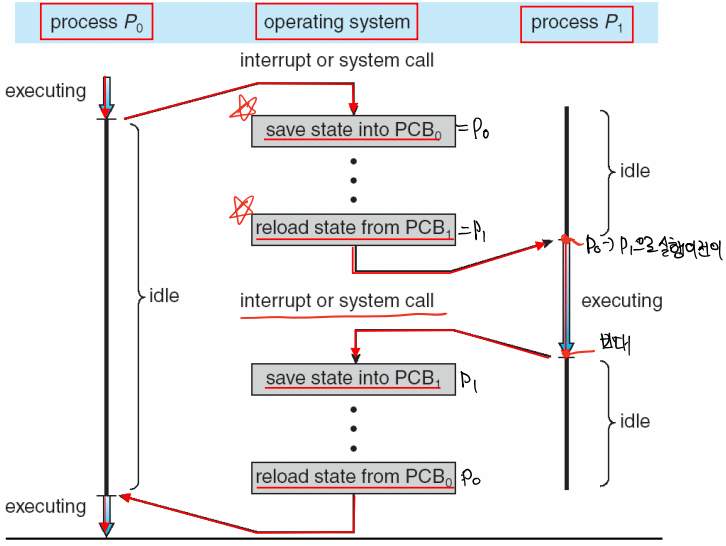

Process Representation in Linux

Represented by the C structure `task_struct`

```
pid_t pid; /* process identifier */
long state; /* state of the process */
unsigned int time_slice /* scheduling information */
struct task_struct *parent; /* this process's parent */
struct list_head children; /* this process's children */
struct files_struct *files; /* list of open files */
struct mm_struct *mm; /* address space of this process */
```

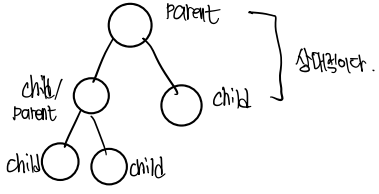

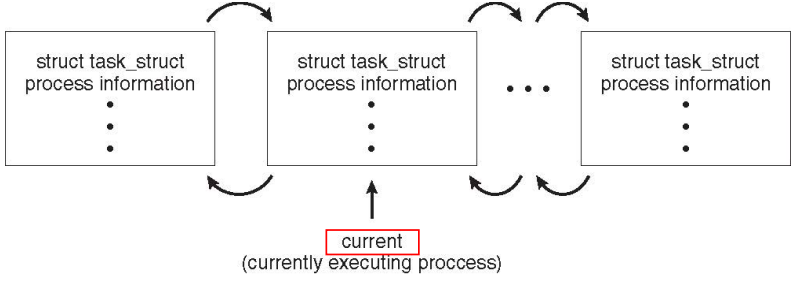

3.2 Process Scheduling

- Maximize CPU use, quickly switch processes onto CPU for time sharing
- **Process scheduler** selects among available processes for next execution on CPU
- Maintains **scheduling queues** of processes
  - **Ready queue** – set of all processes residing in main memory, ready and waiting to execute
  - **Device queues** – set of processes waiting for an I/O device
  - **Job queue** – set of all processes in the system
  - Processes migrate among the various queues

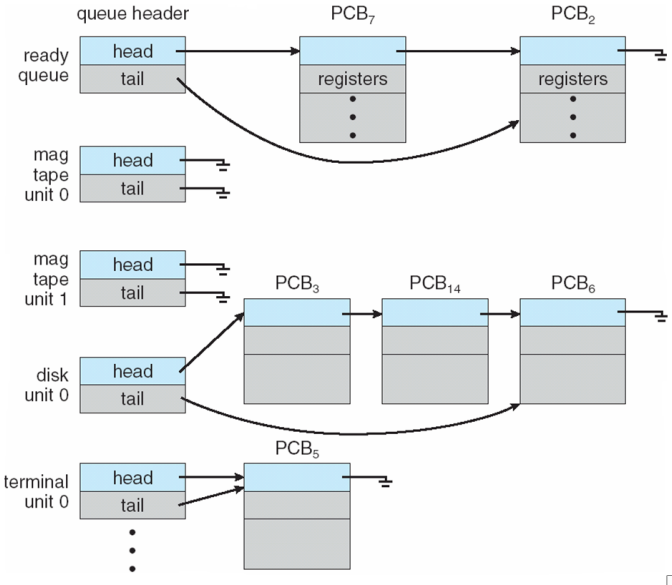

Schedulers

- **Short-term scheduler** (or **CPU scheduler**) – selects which process should be executed next and allocates CPU
  - Sometimes the only scheduler in a system
  - Short-term scheduler is **invoked frequently** (milliseconds) ⇒ (must be fast)
- **Long-term scheduler** (or **job scheduler**) – selects which processes should be brought into the ready queue
  - Long-term scheduler is **invoked infrequently** (seconds, minutes) ⇒ (may be slow)
  - The long-term scheduler controls the **degree of multiprogramming**
- Processes can be described as either:
  - **I/O-bound process** – spends more time doing I/O than computations, many short CPU bursts
  - **CPU-bound process** – spends more time doing computations; few very long CPU bursts
- Long-term scheduler strives for good ***process mix***

Addition of Medium Term Scheduling

- **Medium-term scheduler** can be added if degree of multiple programming needs to decrease
  - Remove process from memory, store on disk, bring back in from disk to continue execution: **swapping** 디스크의 일부공간으로 내보내고 여유가생길시 다시 메모.

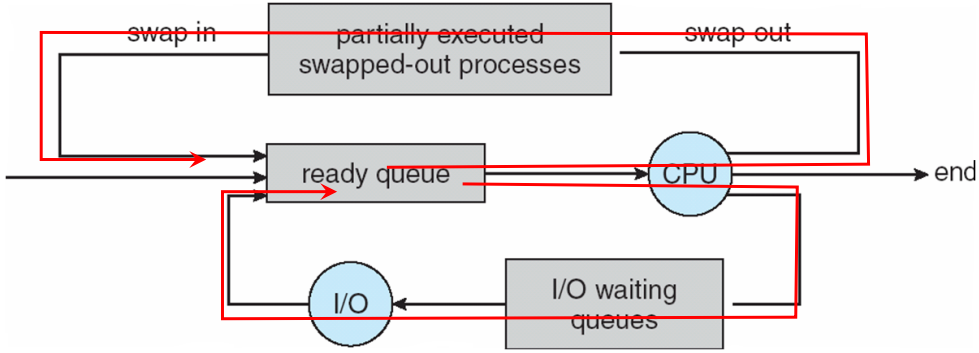

Context Switch

⇒ 문맥교환 : 이전의 공정들의 ($P_0 \rightarrow P_1$ / $P_1 \rightarrow P_0$)

- When CPU switches to another process, the system must **save the state** of the old process and load the **saved state** for the new process via a **context switch** 외부에서 레지스터로 가져온다. 1. register 2. memory 3. system.
- **Context** of a process represented in the PCB
- Context-switch time is overhead; the system does no useful work while switching
  - The more complex the OS and the PCB ➔ the longer the context switch ⇒ context switch 자체가 overhead 이다.
- Time dependent on hardware support
  - Some hardware provides multiple sets of registers per CPU ➔ multiple contexts loaded at once

3.3 Operations on Processes

- System must provide mechanisms for:
  - process creation
  - process termination
  - and so on as detailed next

대표적인 연산
System call을 통해 호출가능.

Process Creation

- **Parent** process create **children** proce sses, which, in turn create other proc esses, forming a **tree** of processes
- Generally, process identified and ma naged via a **process identifier (pid)**
- Resource sharing options
  - Parent and children share all resources
  - Children share subset of parent's reso urces
  - Parent and child share no resources
- Execution options
  - Parent and children execute concurrently
  - Parent waits until children terminate

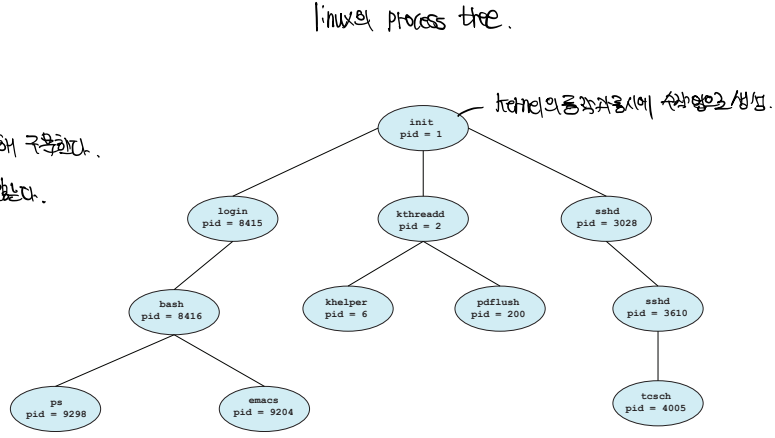

Process Creation (Cont.)

- Address space
  - Child duplicate of parent
  - Child has a program loaded into it
- UNIX examples
  - **`fork()`** system call creates new process 부모와 동일한 프로세스의 이미지 생성.
  - **`exec()`** system call used after a **`fork()`** to replace the process' memory space with a new program 이미지를 교체해 자신의 프로그램을 생성.

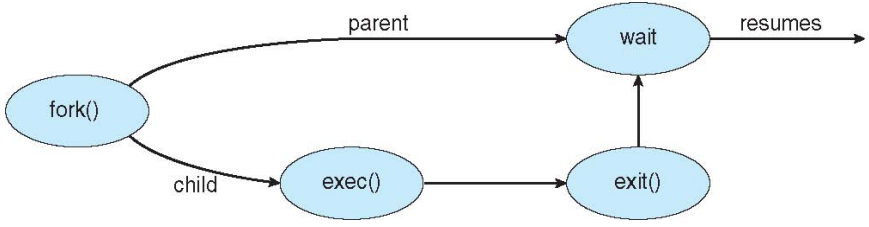

C Program Forking Separate Process

```
#include <sys/types.h>
#include <stdio.h>
#include <unistd.h>

int main()
{
pid_t pid;

   /* fork a child process */
   pid = fork();

   if (pid < 0) { /* error occurred */
      fprintf(stderr, "Fork Failed");
      return 1;
   }
   else if (pid == 0) { /* child process */
      execlp("/bin/ls","ls",NULL);
   }
   else { /* parent process */
      /* parent will wait for the child to complete */
      wait(NULL);
      printf("Child Complete");
   }
   return 0;
}
```

(Unix의 fork)
switch나 if문을 부르면 자신복제.
부모는 자식의 PID
자식은 0 PID를 받음

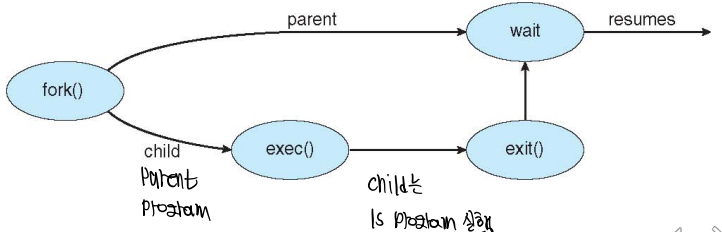

Creating a Separate Process via Windows API

= Win32API

```
#include <stdio.h>
#include <windows.h>

int main(VOID)
{
STARTUPINFO si;
PROCESS_INFORMATION pi;

   /* allocate memory */
   ZeroMemory(&si, sizeof(si));
   si.cb = sizeof(si);
   ZeroMemory(&pi, sizeof(pi));

   /* create child process */
   if (!CreateProcess(NULL, /* use command line */
    "C:\\WINDOWS\\system32\\mspaint.exe", /* command */
    NULL, /* don't inherit process handle */
    NULL, /* don't inherit thread handle */
    FALSE, /* disable handle inheritance */
    0, /* no creation flags */
    NULL, /* use parent's environment block */
    NULL, /* use parent's existing directory */
    &si,
    &pi))
   {
      fprintf(stderr, "Create Process Failed");
      return -1;
   }
   /* parent will wait for the child to complete */
   WaitForSingleObject(pi.hProcess, INFINITE);
   printf("Child Complete");

   /* close handles */
   CloseHandle(pi.hProcess);
   CloseHandle(pi.hThread);
}
```

Process Termination

- Process executes last statement and then asks the operating system to delete it using the **`exit()`** system call.
  - Returns status data from child to parent (via **`wait()`**)
  - Process' resources are deallocated by operating system
- Parent may terminate the execution of children processes using the **`abort()`** system call. Some reasons for doing so:
  - Child has exceeded allocated resources
  - Task assigned to child is no longer required
  - The parent is exiting and the operating systems does not allow a child to continue if its parent terminates

Process Termination

- Some operating systems do not allow child to exists if its parent has terminated. If a process terminates, then all its children must also be terminated.
  - **cascading termination.** All children, grandchildren, etc. are terminated.
  - The termination is initiated by the operating system. 자식의 하위프로세스 모두종료.
- The parent process may wait for termination of a child process by using the **`wait()`** system call. The call returns status information and the pid of the terminated process

```
pid = wait(&status);
```

부모의 wait 생성 / exit()을통해 종료상태를전달.

- If no parent waiting (did not invoke **`wait()`**) process is a **zombie**
- If parent terminated without invoking **`wait`**, process is an **orphan**

3.4 Interprocess Communication

⇒ IPC

- Processes within a system may be ***independent*** or ***cooperating***

  독립적으로 실행 ⇒ 영향 X

  협력하여 실행 ⇒ 영향을 준다.

- Reasons for cooperating processes:
  - Information sharing
  - Computation speedup
  - Modularity
  - Convenience
- Cooperating processes need **interprocess communication** (**IPC**)
- Two models of IPC
  - **Shared memory**
  - **Message passing**

Interprocess Communication – Shared Memory

- An area of memory shared among the processes that wish to communicate
- The communication is under the control of the users processes not the operating system.
- Major issues is to provide mechanism that will allow the user processes to synchronize their actions when they access shared memory. Synchronization is discussed in great details in Chapter 5.

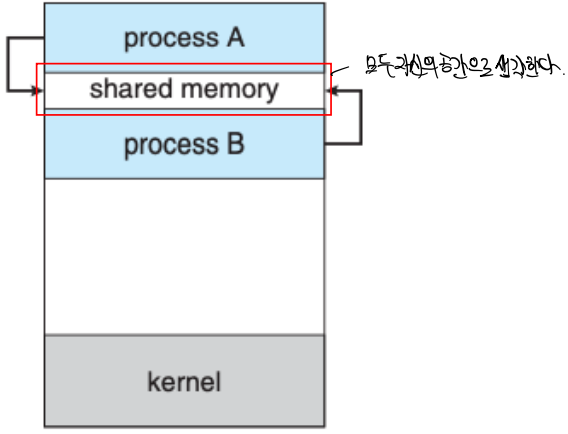

Producer-Consumer Problem

= synchronize의 문제의 예시

- Paradigm for cooperating processes, *producer* process produces information that is consumed by a *consumer* process
  - **unbounded-buffer** places no practical limit on the size of the buffer
  - **bounded-buffer** assumes that there is a fixed buffer size

Bounded-Buffer – Shared-Memory Solution

- Shared data

```
#define BUFFER_SIZE 10
typedef struct {
        . . .
} item;

item buffer[BUFFER_SIZE];

int in = 0;
int out = 0;
```

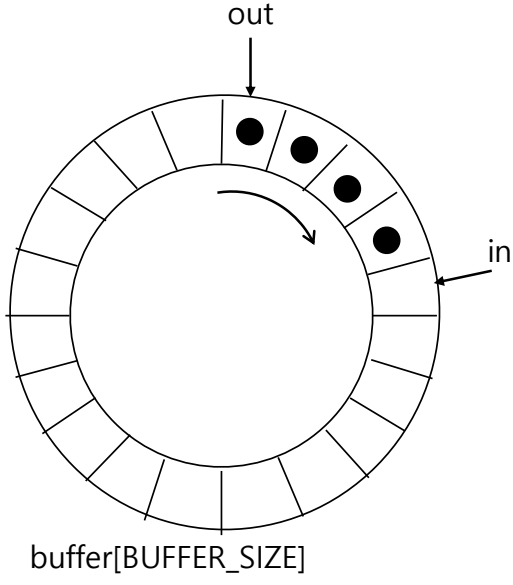

Bounded-Buffer – Producer and Consumer

Producer

```
item next_produced;

while (true) {

    /* produce an item */

    while (((in+1)%BUFFER_SIZE)==out)
      ; /* do nothing */
    buffer[in] = next_produced;
    in = (in + 1) % BUFFER_SIZE;
}
```

Circular Buffer

Consumer

```
item next_consumed;

while (true) {

    while (in == out)
      ; /* do nothing */
    next_consumed = buffer[out];
    out = (out + 1) % BUFFER_SIZE;

    /* consume the item */
}
```

Interprocess Communication – Message Passing

- Mechanism for processes to communicate and to synchronize their actions
- Message system – processes communicate with each other without resorting to shared variables
- IPC facility provides two operations:
  - **send**(*message*)
  - **receive**(*message*)
- The *message* size is either fixed or variable

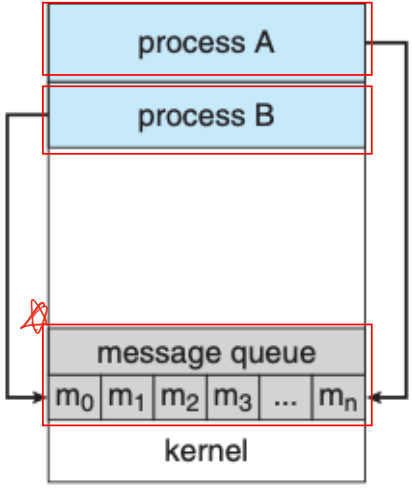

Direct Communication

⇒ naming을 사용.

- Processes must name each other explicitly:
  - **send** (*P, message*) – send a message to process P
  - **receive**(*Q, message*) – receive a message from process Q
- Properties of communication link 특징
  - Links are established automatically
  - A link is associated with exactly one pair of communicating processes. Between each pair there exists exactly one link ⇒ 다리간 통신을가
  - The link may be unidirectional, but is usually bi-directional

Indirect Communication

- Messages are directed and received from mailboxes (also referred to as ports)
  - Each mailbox has a unique id
  - Processes can communicate only if they share a mailbox
- Properties of communication link
  - Link established only if processes share a common mailbox
  - A link may be associated with many processes
  - Each pair of processes may share several communication links
  - Link may be unidirectional or bi-directional

Indirect Communication

- Operations
  - create a new mailbox (port)
  - send and receive messages through mailbox
  - destroy a mailbox
- Primitives are defined as:

  send(*A, message*) – send a message to mailbox A

  receive(*A, message*) – receive a message from mailbox A
- Mailbox sharing
  - P_1, P_2, and P_3 share mailbox A
  - P_1, sends; P_2 and P_3 receive
  - Who gets the message?
    - Allow a link to be associated with at most two processes
    - Allow only one process at a time to execute a receive operation
    - Allow the system to select arbitrarily the receiver. Sender is notified who the receiver was.

Synchronization

⇒ 메시지 송수신의 동기화

- Message passing may be either blocking or non-blocking
- **Blocking** is considered **synchronous**
  - **Blocking send** -- the sender is blocked until the message is received
  - **Blocking receive** -- the receiver is blocked until a message is available
- **Non-blocking** is considered **asynchronous** ⇒ 끝나지 않고
  - **Non-blocking** send -- the sender sends the message and continue
  - **Non-blocking** receive -- the receiver receives:
    - A valid message, or
    - Null message ⇒ 빈 메시지라도 받음
- Different combinations possible
  - If both send and receive are blocking, we have a **rendezvous** 라고 한다.

Synchronization (Cont.)

- Producer-consumer becomes trivial

```
message next_produced;
while (true) {
    /* produce an item in next produced */
send(next_produced);
}

message next_consumed;
while (true) {
   receive(next_consumed);

   /* consume the item in next consumed */
}
```

message passing에서
send와 receive가 동기화를 강제한다.

Buffering

- Queue of messages attached to the link.
- implemented in one of three ways
  1. Zero capacity – no messages are queued on a link.
     Sender must wait for receiver (rendezvous)
  2. Bounded capacity – finite length of *n* messages
     Sender must wait if link full
  3. Unbounded capacity – infinite length
     Sender never waits

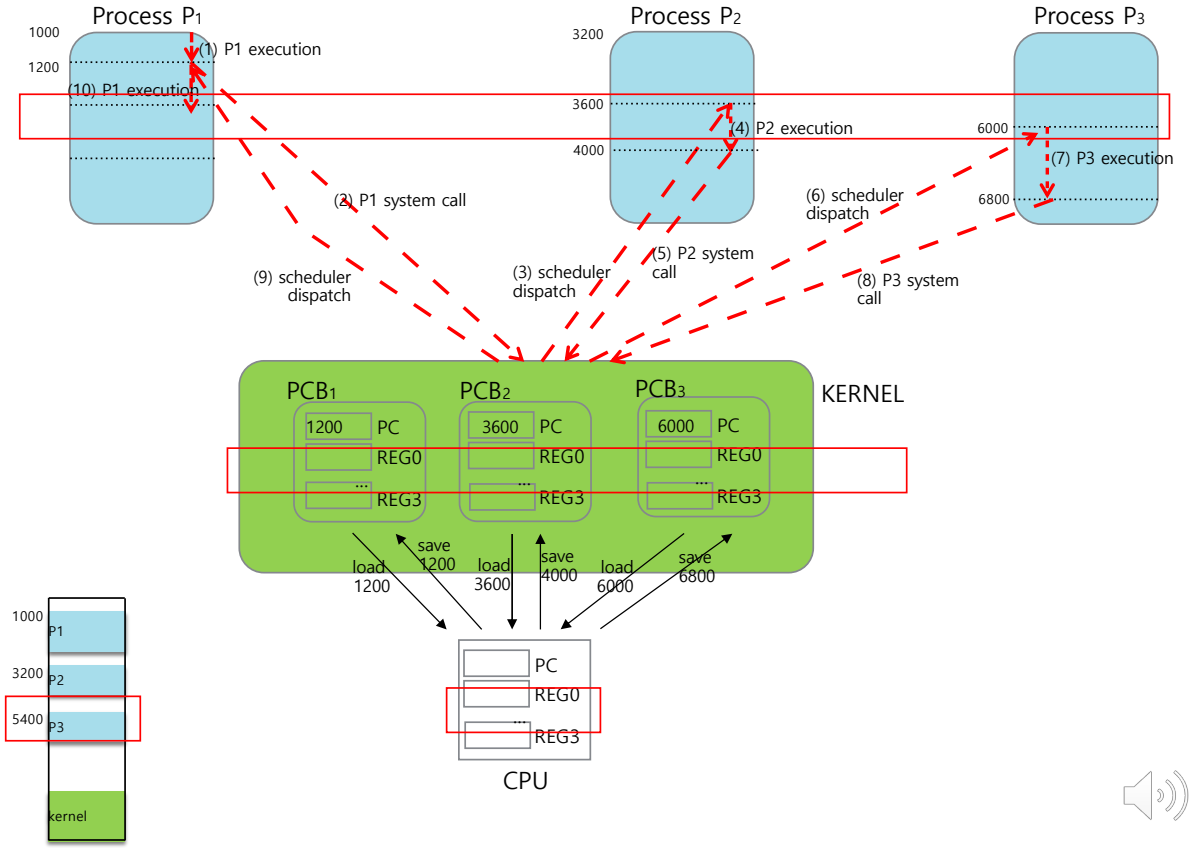
Process P1
Process P2
Process P3
1000
1200
3200
3600
4000
6000
6800
(1) P1 execution
(10) P1 execution
(2) P1 system call
(9) scheduler dispatch
(3) scheduler dispatch
(4) P2 execution
(5) P2 system call
(6) scheduler dispatch
(7) P3 execution
(8) P3 system call
PCB1
PCB2
PCB3
KERNEL
1200 PC
REG0
... REG3
3600 PC
REG0
... REG3
6000 PC
REG0
... REG3
load 1200
save 1200
load 3600
save 4000
load 6000
save 6800
PC
REG0
... REG3
CPU
1000
P1
3200
P2
5400
P3
kernel