
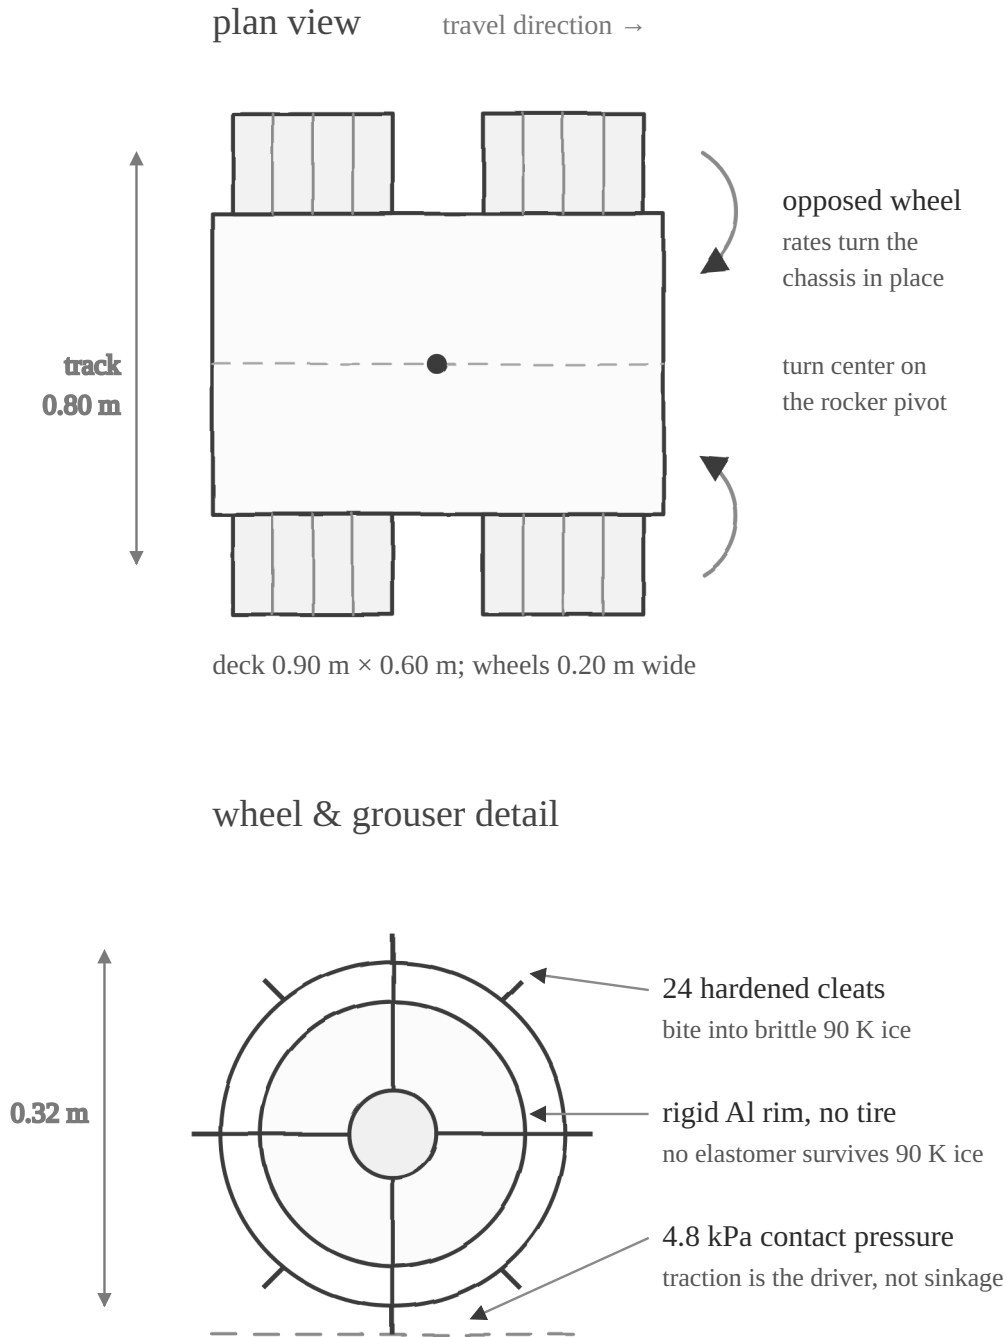


Europa Ice-Shell Characterization Rover — Mobility Solution

four-wheel differential drive on a single-pivot rocker, cleated rigid wheels, struts jettisoned after checkout

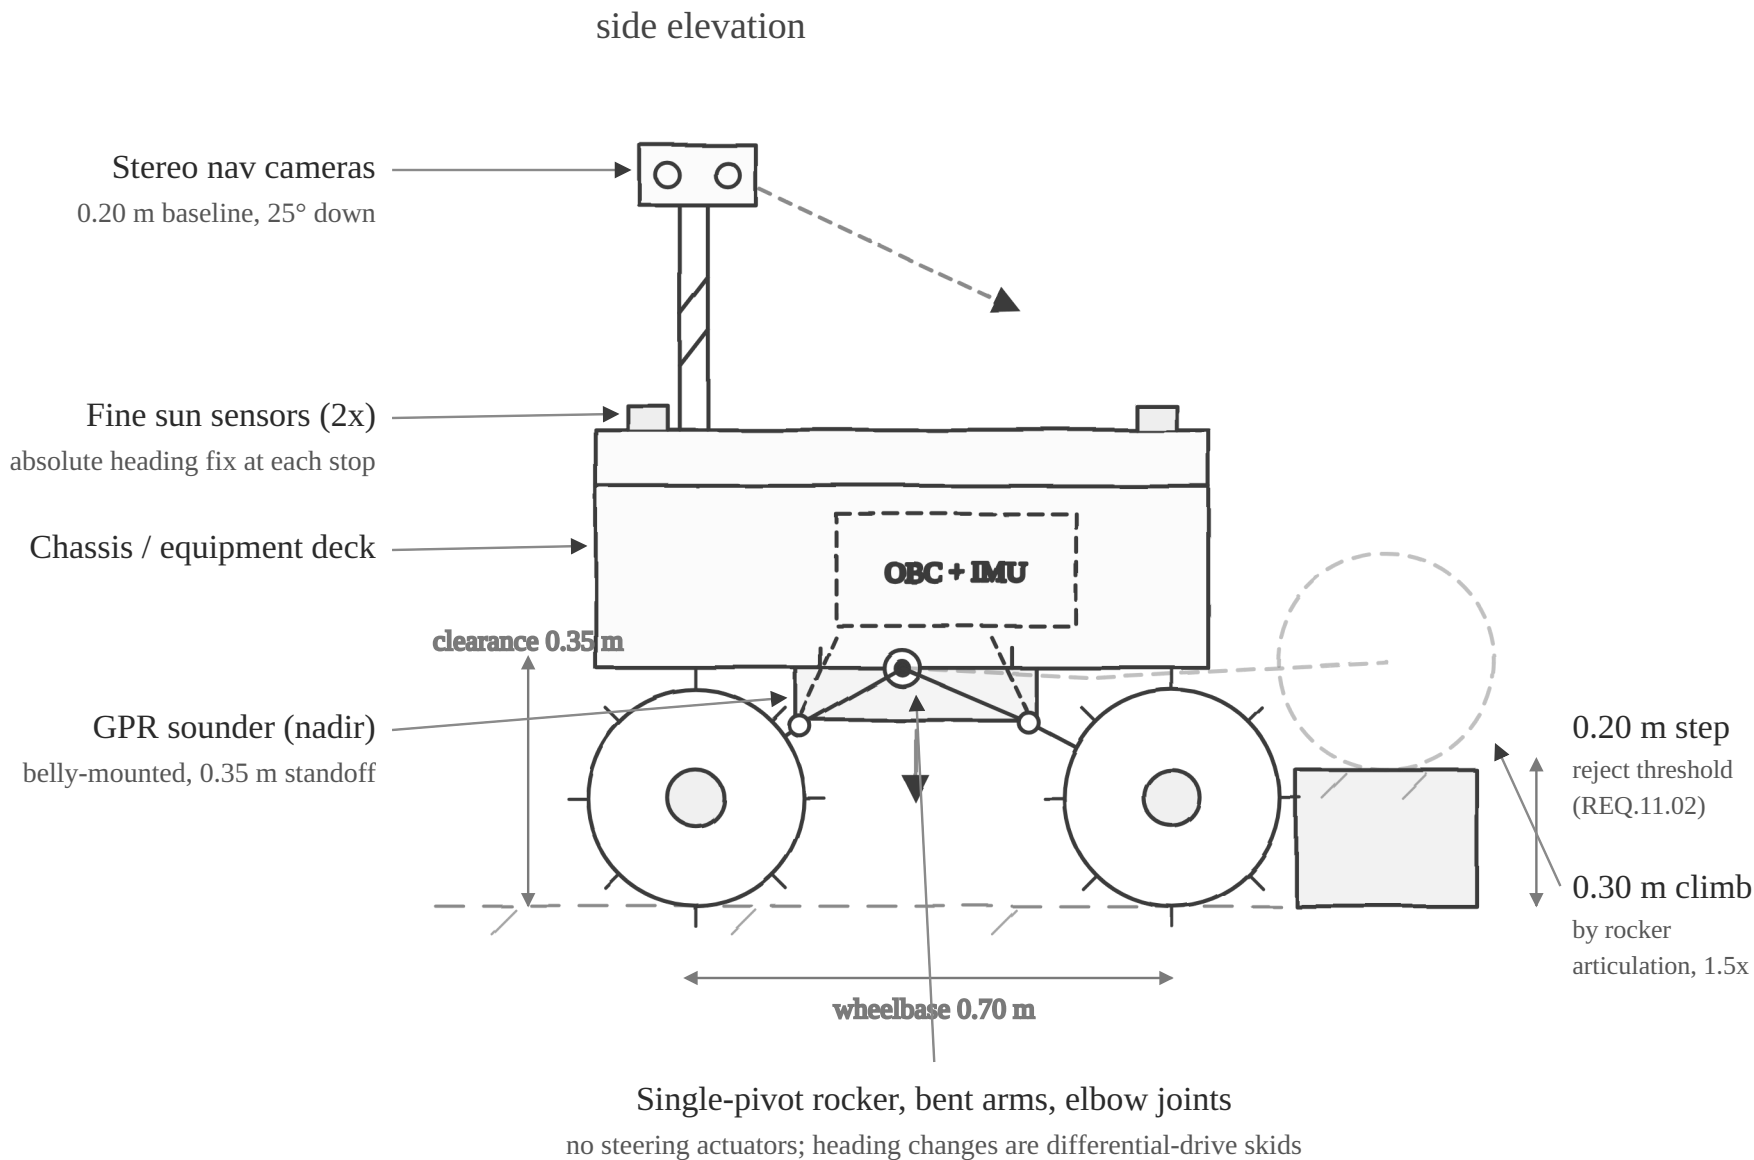

wheel 0.32 m dia · track 0.80 m · wheelbase 0.70 m · clearance 0.35 m · 2 cm/s commanded · 3.74 N·m per wheel at 20°

4x drive actuators, 0 steering actuators · 187 m/sol capability against the 100 m/sol floor in REQ.06.01

figure drafted with AI assistance