INFINITY STORY

Women's ready-to-wear · Technical specification

Pattern Brief (for pattern maker): FLORAL RUFFLE-BIB BLOUSE

Style No.	IS-WV-002	Style name	FLORAL RUFFLE-BIB BLOUSE	Document	Pattern Brief (for pattern maker)
Brand	Infinity Story (Russia)	Season	FW 2026/27	Date / version	08 Sep 2026 / v1.0
Size range	Base size XS–S (RU 42–44); grading later	Sample size	M–L / XL–2XL	Units	XS–S, PDF pattern, 1:1
					centimetres (cm), grams (g)

1 · BRIEF

Develop a production-ready base pattern in size **XS–S (RU 42–44)** for a semi-relaxed short-sleeve blouse in printed woven fabric. Cut-on (grown-on) short sleeves, 2 cm stand collar with a single ruffle, front inset bib with self-fabric piping and a ruffled 7-button placket. Straight hem, 60 cm at centre back. Overlock construction.

Deliverables:


- PDF pattern 1:1, A4 tiled with registration marks and A0 sheet; both with seam allowances included and marked; piece name, size, grain, qty, notches, fold lines on every piece.
- Pattern piece list with cut quantities and fusing plan (table 6).
- Pattern measurements checked against table 4; report any point the pattern cannot meet.
- Optional: DXF (AAMA) export for grading later.

Fit target: bust 84–88, waist 66–70, hip 92–96, height 164–172. Ease at chest approx. +16–20 cm, straight body, no darts, no waist shaping. Pull-over with placket buttoned open is not required: garment opens fully at placket to bib bottom; neck opening with placket unbuttoned must pass over head (≥ 60 cm opening circumference).


REFERENCE PHOTO
ref_blouse.jpg
(attached as separate image file with this pack)

Reference photo (design intent). Note: reference has contrast piping; brand chose **self-fabric** piping.

2 · TECHNICAL DRAWINGS

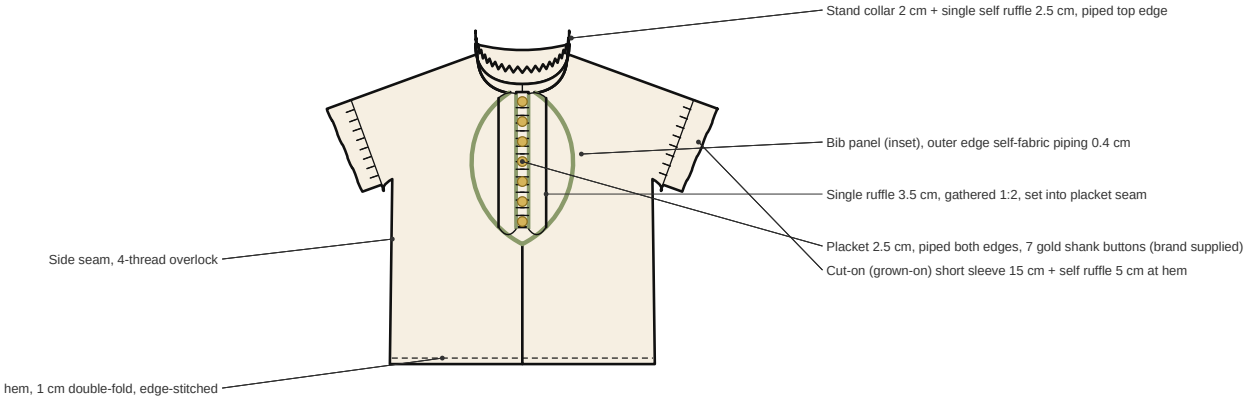

FRONT VIEW · not to scale · all-over floral print not shown

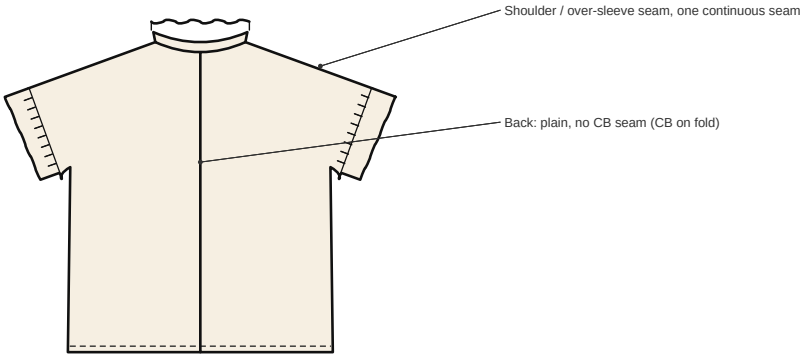

BACK VIEW · not to scale

3 · BODY MEASUREMENTS – RUSSIAN SIZING

RU size	EU size	Intl.	Bust	Waist	Hip	Height
42	34	XS	84	66	92	164–172
44	36	S	88	70	96	
46	38	M	92	74	100	
48	40	L	96	78	104	
50	42	XL	100	82	108	
52	44	2XL	104	86	112	

Body measurements = EU standard + 1–2 cm (Russian standard grading, per brand instruction). **TBC** Brand to confirm against its own size chart.

4 · FINISHED GARMENT MEASUREMENTS – BASE SIZE

POM	Point of measure	XS–S (RU 42–44)	Tol. ±
A	Centre back length, collar seam to hem edge	60	1.0
A2	Front length, HPS to hem edge	62	1.0
B	Chest width, 2.5 cm below underarm, half	52	1.0
C	Waist width at 40 cm from HPS, half (straight body)	52	1.0
D	Hem width, half	53	1.0
E	Neck width at collar seam, HPS to HPS	18	0.5
F	Front neck drop, HPS to collar seam at CF	8	0.5
G	Back neck drop, HPS to collar seam at CB	2	0.3
H	Collar stand height, finished	2	0.2
I	Collar ruffle width, finished (above stand)	2.5	0.3
J	Underarm depth, HPS to underarm point (straight)	25	0.5
K	Cut-on sleeve: HPS along shoulder line to sleeve hem edge	27	0.7
K2	of which natural shoulder length (HPS to shoulder point)	12	0.5
K3	of which sleeve length beyond shoulder point	15	0.5
L	Sleeve hem opening, straight, half	18	0.5
M	Sleeve ruffle width, finished	5	0.3
N	Shoulder slope, HPS to shoulder point drop	4	0.3
O	Placket width, finished	2.5	0.2
P	Placket length, collar seam to bottom	27	0.5
Q	Bib length at CF, collar seam to bottom point	30	0.5
R	Bib width at widest, piping edge to piping edge	22	0.5
S	Bib ruffle width, finished	3.5	0.3
T	Piping, finished width (flat, no cord)	0.4	0.1
U	Buttons: 7 pcs · first 1.5 cm below collar seam · spacing	3.8	0.2
V	Hem depth, finished (double fold)	1	0.2

All measurements flat, garment buttoned, ruffles excluded unless stated. Pattern to be drafted so the sewn garment meets these figures with the seam allowances of table 5.


5 · CONSTRUCTION NOTES FOR THE PATTERN

Area	Instruction
Front body	Cut ×2 (mirror). CF opening from collar seam to bib bottom (27 cm placket). Bib shape removed from the front as an inset (recommended) so the bib seam carries piping and lies flat; alternative appliqué bib only if the fabric proves too light for an inset seam – pattern maker to advise. Below the bib the two fronts are joined at CF (seam or CF on fold below the bib – pattern maker's choice, mark on pattern).
Back body	Cut ×1 on fold at CB. No darts, no yoke, no CB seam.
Cut-on sleeve	Shoulder line extended 15 cm beyond shoulder point, sleeve angle approx. 20° below horizontal so the sleeve hangs without pulling; slight over-sleeve shaping allowed. Sleeve hem straight, 18 cm half opening. Underarm curve smooth into side seam at 25 cm below HPS; add 1 cm gusset-free ease in underarm curve for movement.
Bib panel	Cut ×2 (mirror), pointed oval, 30 cm at CF, 22 cm widest at 10–12 cm below collar seam, inner edge = placket seam line. Grain: straight grain parallel to CF.
Placket	Two-piece placket, each 2.5 cm finished, folded band (cut 2× width + SA), both outer edges piped. Wearer's right = buttonhole side, over wearer's left = button side, full overlap 2.5 cm. Bottom of placket closed and enclosed inside the bib seam / point.
Ruffles	All single-layer, straight grain, gathering ratio 1:2, finished widths: collar 2.5, bib/placket 3.5, sleeve 5. Add 0.7 cm SA on attachment edge and 0.6 cm for narrow rolled hem on free edge. Bib ruffle inserted into placket seam (between placket and bib), running full placket length and meeting at the bib point.
Collar	Stand collar 2 cm finished, front ends straight (no button on stand), CB on fold. Cut outer + inner stand; ruffle and piping in top edge seam. Neck edge length = neckline of body (approx. 40 cm) + 2 × placket width at CF.
Piping	Flat self-fabric piping, 0.4 cm finished, no cord; bias strip 2.2 cm. Applied in: bib inset seam, both placket edges, collar top edge.
Hem	Straight, 1 cm finished double fold (cut 2 cm allowance).

Seam allowances to include in the pattern

Seam	SA, cm	Finish
Shoulder / over-sleeve, side / underarm	1.0	4-thread overlock, pressed to back
Bib inset seam, placket seams, collar to neck	1.0	Overlock 3-thread after seaming / enclosed
Collar top edge, placket band fold edges	0.7	Enclosed
Ruffle attachment edge	0.7	Caught in seam
Ruffle free edge, sleeve hem ruffle join	0.6	Rolled hem (3-thread) / overlock
Hem	2.0	1 cm double fold, edge-stitch 0.1

6 · PATTERN PIECE LIST

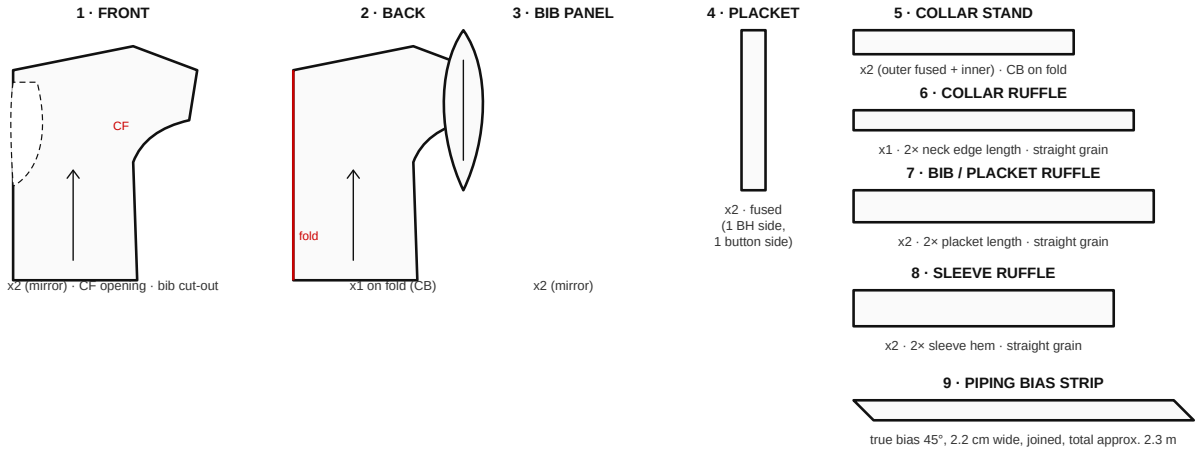

PATTERN PIECE LIST · schematic, not to scale · seam allowances per table 5

#	Piece	Cut	Grain	Fusing
1	Front with cut-on sleeve	2 (mirror)	Straight, parallel CF	—
2	Back with cut-on sleeve	1 on fold	Straight, CB fold	—
3	Bib panel	2 (mirror)	Straight	Optional light fuse if fabric < 120 g/m²
4	Placket band	2 (1 BH side, 1 button side)	Straight	Full fuse, light woven 40 g/m²
5	Collar stand outer / inner	1 + 1 on fold	Straight	Outer fused
6	Collar ruffle	1	Straight	—
7	Bib / placket ruffle	2	Straight	—
8	Sleeve ruffle	2	Straight	—
9	Piping bias strip 2.2 cm	approx. 2.3 m joined	True bias 45°	—

Add notches: sleeve hem ruffle quarter points, bib widest point, placket bottom, collar CB and shoulder match points, gather start/stop.

7 · FABRIC INFORMATION FOR THE PATTERN MAKER

Printed viscose / cotton-viscose jacquard, approx. 130–150 g/m², width 140–145 cm, non-stretch, **brand supplied**. Directional floral print: mark pattern pieces "one-way" and note print matching is not required, but avoid cutting a large flower head on the bib centre. Pre-wash shrinkage to be tested by brand and reported; pattern to include shrinkage allowance if > 2%. TBC Final fabric to be confirmed before grading.

Toile: first fit in a mock-up (calico or similar-weight fabric) on a size 44 form; photos front / back / side + measurement check before releasing the PDF.