Example Programs for CVODES v2.8.1

Radu Serban and Alan C. Hindmarsh Center for Applied Scientific Computing Lawrence Livermore National Laboratory

 $March\ 30,\ 2015$



DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

This work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344.

Contents

1	Introduction	1
2	Forward sensitivity analysis example problems 2.1 A serial nonstiff example: cvsAdvDiff_FSA_non	6
	2.2 A serial dense example. cvshoberts_FSA_dnis	
3	Adjoint sensitivity analysis example problems	18
	3.1 A serial dense example: cvsRoberts_ASAi_dns	18
	3.2 A parallel nonstiff example: cvsAdvDiff_ASAp_non_p	21
	3.3 A parallel example using CVBBDPRE: cvsAtmDisp_ASAi_kry_bbd_p	24
4	Parallel tests	2 9
\mathbf{R}	eferences	31

1 Introduction

This report is intended to serve as a companion document to the User Documentation of CVODES [2]. It provides details, with listings, on the example programs supplied with the CVODES distribution package.

The CVODES distribution contains examples of the following types: serial and parallel examples of Initial Value Problem (IVP) integration, serial and parallel examples of forward sensitivity analysis (FSA), and serial and parallel examples of adjoint sensitivity analysis (ASA). The names of all the examples are given in the following table.

	Serial examples	Parallel examples
IVP	cvsRoberts_dns cvsRoberts_dnsL	cvsAdvDiff_non_p
	cvsRoberts_dns_uw cvsRoberts_klu	cvsDiurnal_kry_p
	cvsRoberts_sps cvsAdvDiff_bnd	cvsDiurnal_kry_bbd_p
	cvsAdvDiff_bndL cvsDiurnal_kry	
	cvsDiurnal_kry_bp cvsDirectDemo_ls	
	cvsKrylovDemo_ls cvsKrylovDemo_prec	
FSA	cvsRoberts_FSA_dns cvsAdvDiff_FSA_non	cvsAdvDiff_FSA_non_p
	cvsDiurnal_FSA_kry	cvsDiurnal_FSA_kry_p
ASA	cvsRoberts_ASAi_dns cvsAdvDiff_ASAi_bnd	cvsAdvDiff_ASAp_non_p
	cvsFoodWeb_ASAi_kry cvsFoodWeb_ASAp_kry	cvsAtmDisp_ASAi_kry_bbd_p
	cvsHessian_ASA_FSA	

With the exception of "demo"-type example files, the names of all the examples distributed with SUNDIALS are of the form [slv][PbName]_[SA]_[ls]_[prec]_[p], where

[slv] identifies the solver (for CVODES examples this is cvs);

[PbName] identifies the problem;

- [SA] identifies sensitivity analysis examples. This field can be one of: FSA for forward sensitivity examples, ASAi for adjoint sensitivity examples using an integral-form model output, or ASAp for adjoint sensitivity examples using an pointwise model output;
- [ls] identifies the linear solver module used (for examples using functional iteration for the nonlinear system solver, non specifies that no linear solver was used);
- [prec] indicates the CVODES preconditioner module used, bp for CVBANDPRE or bbd for CVBBDPRE (only if applicable, for examples using a Krylov linear solver);
- [p] indicates an example using the parallel vector module NVECTOR_PARALLEL.

The examples are briefly described next. Note that the CVODES distribution includes all of the CVODE C examples (denoted here as examples for IVP integration). More details on these can be found in the CVODE Example Program document [1].

Supplied in the *srcdir*/examples/cvodes/serial directory are the following serial examples (using the NVECTOR_SERIAL module):

- cvsRoberts_dns solves a chemical kinetics problem consisting of three rate equations. This program solves the problem with the BDF method and Newton iteration, with the CVDENSE linear solver and a user-supplied Jacobian routine. It also uses the rootfinding feature of CVODES.
- cvsRoberts_dnsL is the same as cvsRoberts_dns but uses the Lapack implementation of CVDENSE.
- cvsRoberts_dns_uw is the same as cvsRoberts_dns but demonstrates the user-supplied error weight function feature of CVODES.
- cvsRoberts_klu is the same as cvsRoberts_dns but uses the KLU sparse direct linear solver.
- cvsRoberts_sps is the same as cvsRoberts_dns but uses the SuperLUMT sparse direct linear solver (with one thread).
- cvsAdvDiff_bnd solves the semi-discrete form of an advection-diffusion equation in 2-D.
 - This program solves the problem with the BDF method and Newton iteration, with the CVBAND linear solver and a user-supplied Jacobian routine.
- cvsAdvDiff_bndL is the same as cvsAdvDiff_bnd but uses the Lapack implementation of CVBAND.
- cvsDiurnal_kry solves the semi-discrete form of a two-species diurnal kinetics advection-diffusion PDE system in 2-D.
 - The problem is solved with the BDF/GMRES method (i.e. using the CVSPGMR linear solver) and the block-diagonal part of the Newton matrix as a left preconditioner. A copy of the block-diagonal part of the Jacobian is saved and conditionally reused within the preconditioner setup routine.
- cvsDiurnal_kry_bp solves the same problem as cvsDiurnal_kry, with the BDF/GM-RES method and a banded preconditioner, generated by difference quotients, using the module CVBANDPRE.
 - The problem is solved twice: with preconditioning on the left, then on the right.
- cvsDirectDemo_ls is a demonstration program for CVODES with direct linear solvers. Two separate problems are solved using both the Adams and BDF linear multistep methods in combination with functional and Newton iterations.
 - The first problem is the Van der Pol oscillator for which the Newton iteration cases use the following types of Jacobian approximations: (1) dense, user-supplied, (2) dense, difference-quotient approximation, (3) diagonal approximation. The second problem is a linear ODE with a banded lower triangular matrix derived from a 2-D advection PDE. In this case, the Newton iteration cases use the following types of Jacobian approximation: (1) banded, user-supplied, (2) banded, difference-quotient approximation, (3) diagonal approximation.
- cvsKrylovDemo_ls solves the same problem as cvsDiurnal_kry, with the BDF method, but with three Krylov linear solvers: CVSPGMR, CVSPBCG, and CVSPTFQMR.

• cvsKrylovDemo_prec is a demonstration program with the GMRES linear solver. This program solves a stiff ODE system that arises from a system of partial differential equations. The PDE system is a six-species food web population model, with predator-prev interaction and diffusion on the unit square in two dimensions.

The ODE system is solved using Newton iteration and the CVSPGMR linear solver (scaled preconditioned GMRES).

The preconditioner matrix used is the product of two matrices: (1) a matrix, only defined implicitly, based on a fixed number of Gauss-Seidel iterations using the diffusion terms only; and (2) a block-diagonal matrix based on the partial derivatives of the interaction terms only, using block-grouping.

Four different runs are made for this problem. The product preconditioner is applied on the left and on the right. In each case, both the modified and classical Gram-Schmidt options are tested.

- cvsRoberts_FSA_dns solves a 3-species kinetics problem (from cvsRoberts_dns). CVODES computes both its solution and solution sensitivities with respect to the three reaction rate constants appearing in the model. This program solves the problem with the BDF method, Newton iteration with the CVDENSE linear solver, and a user-supplied Jacobian routine. It also uses the user-supplied error weight function feature of CVODES.
- cvsAdvDiff_FSA_non solves the semi-discrete form of an advection-diffusion equation in 1-D.

CVODES computes both its solution and solution sensitivities with respect to the advection and diffusion coefficients. This program solves the problem with the option for nonstiff systems, i.e. Adams method and functional iteration.

- cvsDiurnal_FSA_kry solves the semi-discrete form of a two-species diurnal kinetics advection-diffusion PDE system in 2-D space (from cvsDiurnal_kry).

 CVODES computes both its solution and solution sensitivities with respect to two parameters affecting the kinetic rate terms. The problem is solved with the BDF/GMRES method (i.e. using the CVSPGMR linear solver) and the block-diagonal part of the Newton matrix as a left preconditioner.
- cvsRoberts_ASAi_dns solves a 3-species kinetics problem (from cvsRoberts_dns). The adjoint capability of CVODES is used to compute gradients of a functional of the solution with respect to the three reaction rate constants appearing in the model. This program solves both the forward and backward problems with the BDF method, Newton iteration with the CVDENSE linear solver, and user-supplied Jacobian routines.
- \bullet cvsAdvDiff_ASAi_bnd solves a semi-discrete 2-D advection-diffusion equation (from cvsAdvDiff_bnd).
 - The adjoint capability of CVODES is used to compute gradients of the average (over both time and space) of the solution with respect to the initial conditions. This program solves both the forward and backward problems with the BDF method, Newton iteration with the CVBAND linear solver, and user-supplied Jacobian routines.
- cvsFoodWeb_ASAi_kry solves a stiff ODE system that arises from a system of partial differential equations (from cvsKrylovDemo_prec). The PDE system is a six-species food web population model, with predator-prey interaction and diffusion on the unit square in two dimensions.

The adjoint capability of CVODES is used to compute gradients of the average (over both time and space) of the concentration of a selected species with respect to the initial conditions of all six species. Both the forward and backward problems are solved with the BDF/GMRES method (i.e. using the CVSPGMR linear solver) and the block-diagonal part of the Newton matrix as a left preconditioner.

- cvsFoodWeb_ASAp_kry solves the same problem as cvsFoodWeb_ASAi_kry, but computes gradients of the average over space at the *final time* of the concentration of a selected species with respect to the initial conditions of all six species.
- cvsHessian_ASA_FSA is an example of using the *forward-over-adjoint* method for computing 2nd-order derivative information, in the form of Hessian-times-vector products.

Supplied in the *srcdir*/examples/cvodes/parallel directory are the following seven parallel examples (using the NVECTOR_PARALLEL module):

- cvsAdvDiff_non_p solves the semi-discrete form of a 1-D advection-diffusion equation. This program solves the problem with the option for nonstiff systems, i.e. Adams method and functional iteration.
- cvsDiurnal_kry_p is a parallel implementation of cvsDiurnal_kry.
- cvsDiurnal_kry_bbd_p solves the same problem as cvsDiurnal_kry_p, with BDF and the GMRES linear solver, using a block-diagonal matrix with banded blocks as a preconditioner, generated by difference quotients, using the module CVBBDPRE.
- cvsAdvDiff_FSA_non_p is a parallel version of cvsAdvDiff_FSA_non.
- cvsDiurnal_FSA_kry_p is a parallel version of cvsDiurnal_FSA_kry.
- cvsAdvDiff_ASAp_non_p solves a semi-discrete 1-D advection-diffusion equation (from cvsAdvDiff_non_p).
 - The adjoint capability of CVODES is used to compute gradients of the average over space of the solution at the *final time* with respect to both the initial conditions and the advection and diffusion coefficients in the model. This program solves both the forward and backward problems with the option for nonstiff systems, i.e. Adams method and functional iteration.
- cvsAtmDisp_ASAi_kry_bbd_p solves an adjoint sensitivity problem for an advection-diffusion PDE in 2-D or 3-D using the BDF/GMRES method and the CVBBDPRE preconditioner module on both the forward and backward phases.
 - The adjoint capability of CVODES is used to compute the gradient of the space-time average of the squared solution norm with respect to problem parameters which parametrize a distributed volume source.

In the following sections, we give detailed descriptions of some (but not all) of the sensitivity analysis examples. We do not discuss the examples for IVP integration; for those, the interested reader should consult the CVODE Examples document [1]. Any CVODE program will work with CVODES with only two modifications: (1) the main program should include

the header file cvodes.h instead of cvode.h, and (2) the loader command must reference builddir/lib/libsundials_cvodes.lib instead of builddir/lib/libsundials_cvode.lib.

We also give our output files for each of the examples described below, but users should be cautioned that their results may differ slightly from these. Differences in solution values may differ within the tolerances, and differences in cumulative counters, such as numbers of steps or Newton iterations, may differ from one machine environment to another by as much as 10% to 20%.

The final section of this report describes a set of tests done with CVODES in a parallel environment (using NVECTOR_PARALLEL) on a modification of the cvsDiurnal_kry_p example.

In the descriptions below, we make frequent references to the CVODES User Guide [2]. All citations to specific sections (e.g. §4.2) are references to parts of that user guide, unless explicitly stated otherwise.

Note The examples in the CVODES distribution were written in such a way as to compile and run for any combination of configuration options during the installation of SUNDIALS (see Appendix?? in the User Guide). As a consequence, they contain portions of code that will not typically be present in a user program. For example, all example programs make use of the variables SUNDIALS_EXTENDED_PRECISION and SUNDIALS_DOUBLE_PRECISION to test if the solver libraries were built in extended or double precision, and use the appropriate conversion specifiers in printf functions. Similarly, all forward sensitivity examples can be run with or without sensitivity computations enabled and, in the former case, with various combinations of methods and error control strategies. This is achieved in these example through the program arguments.

2 Forward sensitivity analysis example problems

For all the CVODES examples, any of three sensitivity method options (CV_SIMULTANEOUS, CV_STAGGERED, or CV_STAGGERED1) can be used, and sensitivities may be included in the error test or not (error control set on TRUE or FALSE, respectively).

The next three sections describe in detail two serial examples (cvsAdvDiff_FSA_non and cvsRoberts_FSA_dns), and a parallel one (cvsDiurnal_FSA_kry_p). For details on the other examples, the reader is directed to the comments in their source files.

2.1 A serial nonstiff example: cvsAdvDiff_FSA_non

As a first example of using CVODES for forward sensitivity analysis, we treat the simple advection-diffusion equation for u = u(t, x)

$$\frac{\partial u}{\partial t} = q_1 \frac{\partial^2 u}{\partial x^2} + q_2 \frac{\partial u}{\partial x} \tag{1}$$

for $0 \le t \le 5$, $0 \le x \le 2$, and subject to homogeneous Dirichlet boundary conditions and initial values given by

$$u(t,0) = 0, \quad u(t,2) = 0$$

 $u(0,x) = x(2-x)e^{2x}.$ (2)

The nominal values of the problem parameters are $q_1 = 1.0$ and $q_2 = 0.5$. A system of MX ODEs is obtained by discretizing the x-axis with MX+2 grid points and replacing the first and second order spatial derivatives with their central difference approximations. Since the value of u is constant at the two endpoints, the semi-discrete equations for those points can be eliminated. With u_i as the approximation to $u(t, x_i)$, $x_i = i(\Delta x)$, and $\Delta x = 2/(MX + 1)$, the resulting system of ODEs, $\dot{u} = f(t, u)$, can now be written:

$$\dot{u}_i = q_1 \frac{u_{i+1} - 2u_i + u_{i-1}}{(\Delta x)^2} + q_2 \frac{u_{i+1} - u_{i-1}}{2(\Delta x)}.$$
 (3)

This equation holds for $i=1,2,\ldots,$ MX, with the understanding that $u_0=u_{MX+1}=0.$ The sensitivity systems for $s^1=\partial u/\partial q_1$ and $s^2=\partial u/\partial q_2$ are simply

$$\frac{ds_i^1}{dt} = q_1 \frac{s_{i+1}^1 - 2s_i^1 + s_{i-1}^1}{(\Delta x)^2} + q_2 \frac{s_{i+1}^1 - s_{i-1}^1}{2(\Delta x)} + \frac{u_{i+1} - 2u_i + u_{i-1}}{(\Delta x)^2}
s_i^1(0) = 0.0$$
(4)

and

$$\frac{ds_i^2}{dt} = q_1 \frac{s_{i+1}^2 - 2s_i^2 + s_{i-1}^2}{(\Delta x)^2} + q_2 \frac{s_{i+1}^2 - s_{i-1}^2}{2(\Delta x)} + \frac{u_{i+1} - u_{i-1}}{2(\Delta x)}$$

$$s_i^1(0) = 0.0.$$
(5)

This problem uses the Adams (non-stiff) integration formula and functional iteration. It is unrealistically simple*, but serves to illustrate use of the forward sensitivity capabilities in CVODES.

^{*}Increasing the number of grid points to better resolve the PDE spatially will lead to a stiffer ODE for which the Adams integration formula will not be suitable.

The cvsAdvDiff_FSA_non.c file begins by including several header files, including the main CVODES header file, the sundials_types.h header file for the definition of the realtype type, and the NVECTOR_SERIAL header file for the definitions of the serial N_Vector type and operations on such vectors. Following that are definitions of problem constants and a data block for communication with the f routine. That block includes the problem parameters and the mesh dimension.

The main program begins by processing and verifying the program arguments, followed by allocation and initialization of the user-defined data structure. Next, the vector of initial conditions is created (by calling N_VNew_Serial) and initialized (in the function SetIC). The next code block creates and allocates memory for the CVODES object.

If sensitivity calculations were turned on through the command line arguments, the main program continues with setting the scaling parameters pbar and the array of flags plist. In this example, the scaling factors pbar are used both for the finite difference approximation to the right-hand sides of the sensitivity systems (4) and (5) and in calculating the absolute tolerances for the sensitivity variables. The flags in plist are set to indicate that sensitivities with respect to both problem parameters are desired. The array of NS = 2 vectors uS for the sensitivity variables is created by calling N_VCloneVectorArray_Serial and set to contain the initial values $(s_i^1(0) = 0.0, s_i^2(0) = 0.0)$.

The next three calls set optional inputs for sensitivity calculations: the sensitivity variables are included or excluded from the error test (the boolean variable err_con is passed as a command line argument), the control variable rho is set to a value ZERO = 0 to indicate the use of second-order centered directional derivative formulas for the approximations to the sensitivity right-hand sides, and the array of scaling factors pbar is passed to CVODES. Memory for sensitivity calculations is allocated by calling CVodeSensInit1 which also specifies the sensitivity solution method (sensi_meth is passed as a command line argument), and the initial conditions for the sensitivity variables. The problem parameters p and the arrays pbar and plist are passed to CVodeSetSensParam.

Next, in a loop over the NOUT output times, the program calls the integration routine CVode. On a successful return, the program prints the maximum norm of the solution u at the current time and, if sensitivities were also computed, extracts and prints the maximum norms of $s^1(t)$ and $s^2(t)$. The program ends by printing some final integration statistics and freeing all allocated memory.

The f function is a straightforward implementation of Eqn. (3). The rest of the source file contains definitions of private functions. The last two, PrintFinalStats and check_flag, can be used with minor modifications by any CVODES user code to print final CVODES statistics and to check return flags from CVODES interface functions, respectively.

Results generated by cvsAdvDiff_FSA_non are shown in Fig. 1. The output generated by cvsAdvDiff_FSA_non when computing sensitivities with the CV_SIMULTANEOUS method and full error control (cvsAdvDiff_FSA_non -sensi sim t) is as follows:

cvsAdvDiff_FSA_non sample output											
1		diffusion ES (SIMUL	-		size = 10 ERROR CONTROL)					
T	.==== Q	======= Н 	NST		Max	norm					
5.000e-01	4	7.656e-03	115								

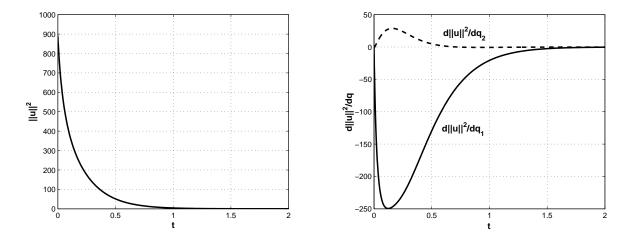


Figure 1: Results for the cvsAdvDiff_FSA_non example problem. The time evolution of the squared solution norm, $||u||^2$, is shown on the left. The figure on the right shows the evolution of the sensitivities of $||u||^2$ with respect to the two problem parameters.

				Solution		3.0529e+00
				Sensitivity	1	3.8668e+00
				Sensitivity		6.2020e-01
				<u>-</u>		
L.000e+00	4	9.525e-03	182			
				Solution		8.7533e-01
				Sensitivity		2.1743e+00
				Sensitivity	2	1.8909e-01
 1.500e+00	3	1.040e-02	255			
				Solution		2.4949e-01
				Sensitivity	1	9.1825e-01
				Sensitivity	2	7.3922e-02
 2.000e+00	2	1.271e-02	330			
				Solution		7.1097e-02
				Sensitivity		
				Sensitivity	2	2.8228e-02
 2.500e+00	2	1.629e-02	402			
				Solution		2.0260e-02
				Sensitivity	1	1.2301e-01
				Sensitivity		
 3.000e+00	2	3.820e-03	473			
				Solution		5.7734e-03
				Sensitivity	1	4.1956e-02
				Sensitivity	2	3.4556e-03
 3.500e+00	2	8.988e-03	540			
				Solution		1.6451e-03
				Sensitivity	1	1.3922e-02
				Sensitivity		
 4.000e+00	2	1.199e-02	 617			
4.000e+00	2	1.199e-02	617	Solution		4.6945e-04

```
Sensitivity 2
                                  Solution
                                  Sensitivity 1
                                                     1.2589e-04
                                  Sensitivity 2
5 0000+00
           1 4.010e-03
                            757
                                  Solution
                                                    3.8656e-05
                                  Sensitivity 1
                                                    4.6451e-04
                                  Sensitivity 2
                                                    4.0616e-05
Final Statistics
            757
nst
nfe
netf
                    nsetups
            1369
nfSe
            2746
                                 5492
netfs
                    nsetupsS
nniS
```

2.2 A serial dense example: cvsRoberts_FSA_dns

This example is a modification of the chemical kinetics example cvRoberts_dns described in [1]. It computes, in addition to the solution of the IVP, sensitivities of the solution with respect to the three reaction rates involved in the model. The ODEs are written as:

$$\dot{y}_1 = -p_1 y_1 + p_2 y_2 y_3
\dot{y}_2 = p_1 y_1 - p_2 y_2 y_3 - p_3 y_2^2
\dot{y}_3 = p_3 y_2^2 ,$$
(6)

with initial conditions at $t_0 = 0$, $y_1 = 1$ and $y_2 = y_3 = 0$. The nominal values of the reaction rate constants are $p_1 = 0.04$, $p_2 = 10^4$ and $p_3 = 3 \cdot 10^7$. The sensitivity systems that are solved together with (6) are

$$\dot{s}_{i} = \begin{bmatrix} -p_{1} & p_{2}y_{3} & p_{2}y_{2} \\ p_{1} & -p_{2}y_{3} - 2p_{3}y_{2} & -p_{2}y_{2} \\ 0 & 2p_{3}y_{2} & 0 \end{bmatrix} s_{i} + \frac{\partial f}{\partial p_{i}} , \quad s_{i}(t_{0}) = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} , \quad i = 1, 2, 3$$

$$\frac{\partial f}{\partial p_{1}} = \begin{bmatrix} -y_{1} \\ y_{1} \\ 0 \end{bmatrix} , \quad \frac{\partial f}{\partial p_{2}} = \begin{bmatrix} y_{2}y_{3} \\ -y_{2}y_{3} \\ 0 \end{bmatrix} , \quad \frac{\partial f}{\partial p_{3}} = \begin{bmatrix} 0 \\ -y_{2}^{2} \\ y_{2}^{2} \end{bmatrix} . \tag{7}$$

The main program is described below with emphasis on the sensitivity related components. These explanations, together with those given for the code cvRoberts_dns in [1], will also provide the user with a template for instrumenting an existing simulation code to perform forward sensitivity analysis. As will be seen from this example, an existing simulation code can be modified to compute sensitivity variables (in addition to state variables) by only inserting a few CVODES calls into the main program.

First note that no new header files need be included. In addition to the constants already defined in cvRoberts_dns, we define the number of model parameters, NP (= 3), the number of sensitivity parameters, NS (= 3), and a constant ZERO = 0.0.

As mentioned in §5.1, the user data structure data must provide access to the array of model parameters as the only way for CVODES to communicate parameter values to the right-hand side function f. In the cvsRoberts_FSA_dns example this is done by defining data to be of type UserData, i.e. a pointer to a structure which contains an array of NP realtype values.

Four user-supplied functions are defined. The function f, passed to CVodeInit, computes the right-hand side of the ODE (6), while Jac computes the dense Jacobian of the problem and is attached to the dense linear solver module CVDENSE through a call to CVDlsSetDenseJacFn. The function fS computes the right-hand side of each sensitivity system (7) for one parameter at a time and is therefore of type SensRhs1. Finally, the function ewt computes the error weights for the WRMS norm estimations within CVODES.

The program prologue ends by defining six private helper functions. The first two, ProcessArgs and WrongArgs (which would not be present in a typical user code), parse and verify the command line arguments to cvsRoberts_FSA_dns, respectively. After each successful return from the main CVODES integrator, the functions PrintOutput and PrintOutputS print the state and sensitivity variables, respectively. The function PrintFinalStats is called after completion of the integration to print solver statistics. The function check_flag is used to check the return flag from any of the CVODES interface functions called by main.

The main program begins with definitions and type declarations. Among these, it defines the vector pbar of NS scaling factors for the model parameters p, and the array yS of vectors (of type N_Vector) which will contain the initial conditions and solutions for the sensitivity variables. It also declares the variable data of type UserData which will contain the user-defined data structure to be passed to CVODES and used in the evaluation of the ODE right-hand sides.

The first code block in main deals with reading and interpreting the command line arguments. cvsRoberts_FSA_dns can be run with or without sensitivity computations turned on and with different selections for the sensitivity method and error control strategy.

The user's data structure is then allocated and its field p is set to contain the values of the three problem parameters. The next block of code is identical to that in <code>cvRoberts_dns.c</code> (see [1]) and involves allocation and initialization of the state variables, and creation and initialization of <code>cvode_mem</code>, the <code>cvodes</code> solver memory. It specifies that a user-provided function (<code>ewt</code>) is to be used for computing the error weights. It also attaches <code>cvdense</code>, with a non-NULL Jacobian function, as the linear solver to be used in the Newton nonlinear iteration.

If sensitivity analysis is enabled (through the command line arguments), the main program will then set the scaling parameters pbar ($pbar_i = p_i$, which can typically be used for nonzero model parameters). Next, the program allocates memory for yS, by calling the NVECTOR_SERIAL function N_VCloneVectorArray_Serial, and initializaes all sensitivity variables to 0.0.

The call to CVodeSensInit1 specifies the sensitivity solution method through the argument sensi_meth (read from the command line arguments) as one of CV_SIMULTANEOUS, CV_STAGGERED, or CV_STAGGERED1. It also specifies the user-defined routine, fS, for evaluation of the right-hand sides of sensitivity equations.

The next three calls specify optional inputs for forward sensitivity analysis: specifying that sensitivity tolerances are to be based on pbar, the error control strategy (read from the

command line arguments), and the information on the model parameters. In this example, only pbar is needed for the estimation of absolute sensitivity variable tolerances; neither p nor plist is required since the sensitivity right-hand sides are computed in the user function fS. As a consequence, we pass NULL for the corresponding arguments in CVodeSetSensParams.

Note that this example uses the default estimates for the relative and absolute tolerances rtols and atols for sensitivity variables, based on the tolerances for state variables and the scaling parameters pbar (see §2.6 for details).

Next, in a loop over the NOUT output times, the program calls the integration routine CVode which, if sensitivity analysis was initialized through the call to CVodeSensInit1, computes both state and sensitivity variables. However, CVode returns only the state solution at tout in the vector y. The program tests the return from CVode for a value other than CV_SUCCESS and prints the state variables. Sensitivity variables at tout are loaded into yS by calling CVodeGetSens. The program tests the return from CVodeGetSens for a value other than CV_SUCCESS and then prints the sensitivity variables.

Finally, the program prints some statistics (function PrintFinalStats) and deallocates memory through calls to N_VDestroy_Serial, N_VDestroyVectorArray_Serial, CVodeFree, and free for the user data structure.

The user-supplied functions f (for the right-hand side of the original ODEs) and Jac (for the system Jacobian) are identical to those in cvRoberts_dns.c, with the notable exeption that model parameters are extracted from the user-defined data structure data, which must first be cast to the UserData type. Similarly, the user-supplied function ewt is identical to that in cvRoberts_dns_uw.c. The user-supplied function fS computes the sensitivity right-hand side for the iS-th sensitivity equation.

Results generated by cvsRoberts_FSA_dns are shown in Fig. 2. The following output is generated by cvsRoberts_FSA_dns when computing sensitivities with the CV_SIMULTANEOUS method and full error control (cvsRoberts_FSA_dns -sensi sim t):

	===		===		========	
T	•	H NST		J	•	уЗ
		4.881e-02 115	===			
		Solution		9.8517e-01	3.3864e-05	1.4794e-02
		Sensitivity	1	-3.5595e-01	3.9025e-04	3.5556e-01
		Sensitivity	2	9.5431e-08	-2.1309e-10	-9.5218e-08
		Sensitivity	3	-1.5833e-11	-5.2900e-13	1.6362e-11
4.000e+00	5	2.363e-01 138				
		Solution		9.0552e-01	2.2405e-05	9.4459e-02
		Sensitivity	1	-1.8761e+00	1.7922e-04	1.8759e+00
		Sensitivity	2	2.9614e-06	-5.8305e-10	-2.9608e-06
		Sensitivity	3	-4.9334e-10	-2.7626e-13	4.9362e-10
 4.000e+01	3	1.485e+00 219				
		Solution		7.1583e-01	9.1856e-06	2.8416e-01
		Sensitivity	1	-4.2475e+00	4.5913e-05	4.2475e+00
		· · · · · · · · · · · · · · · · · · ·		1.3731e-05		
		•		-2.2883e-09		

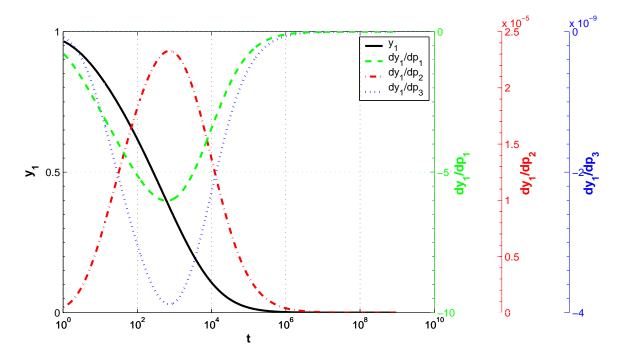


Figure 2: Results for the cvsRoberts_FSA_dns example problem: time evolution of y_1 and its sensitivities with respect to the three problem parameters. (Note the four different vertical scales.)

1.000e+02	3	8.882e+00 331				
		Solution		4.5052e-01	3.2229e-06	5.4947e-01
		Sensitivity	1	-5.9584e+00	3.5431e-06	5.9584e+00
		Sensitivity	2	2.2738e-05	-2.2605e-11	-2.2738e-05
		Sensitivity	3	-3.7896e-09	-4.9948e-14	3.7897e-09
4.000e+03	2	1.090e+02 486				
		Solution		1.8317e-01	8.9403e-07	8.1683e-01
		Sensitivity	1	-4.7500e+00	-5.9957e-06	4.7500e+00
		Sensitivity	2	1.8809e-05	2.3136e-11	-1.8809e-05
		Sensitivity	3	-3.1348e-09	-1.8757e-14	3.1348e-09
4.000e+04	3	1.178e+03 588				
		Solution		3.8977e-02	1.6215e-07	9.6102e-01
		Sensitivity	1	-1.5748e+00	-2.7620e-06	1.5748e+00
		Sensitivity	2	6.2869e-06	1.1002e-11	-6.2869e-06
		Sensitivity	3	-1.0478e-09	-4.5362e-15	1.0478e-09
4.000e+05	3	1.514e+04 645				
		Solution		4.9387e-03	1.9852e-08	9.9506e-01
		Sensitivity	1	-2.3639e-01	-4.5861e-07	2.3639e-01
		Sensitivity	2	9.4525e-07	1.8334e-12	-9.4525e-07
		Sensitivity	3	-1.5751e-10	-6.3629e-16	1.5751e-10
4.000e+06	4	2.323e+05 696				
		Solution		5.1684e-04	2.0684e-09	9.9948e-01
		Sensitivity	1	-2.5667e-02	-5.1064e-08	2.5667e-02
		Sensitivity	2	1.0266e-07	2.0424e-13	-1.0266e-07

```
Sensitivity 3 -1.7111e-11 -6.8513e-17 1.7111e-11
4.000e+07 4 1.776e+06 753
                Solution 5.2039e-05 2.0817e-10
                                                     9.9995e-01
                Sensitivity 1 -2.5991e-03 -5.1931e-09
                                                     2.5991e-03
                Sensitivity 2 1.0396e-08 2.0772e-14 -1.0397e-08
                Sensitivity 3 -1.7330e-12 -6.9328e-18 1.7330e-12
                     802
4.000e+08 4 2.766e+07
                Solution
                             5.2106e-06 2.0842e-11 9.9999e-01
                Sensitivity 1 -2.6063e-04 -5.2149e-10 2.6063e-04
                Sensitivity 2 1.0425e-09 2.0859e-15 -1.0425e-09
                Sensitivity 3 -1.7366e-13 -6.9467e-19 1.7367e-13
                     836
4.000e+09 2 4.183e+08
                             5.1881e-07 2.0752e-12
                Solution
                                                      1.0000e-00
                Sensitivity 1 -2.5907e-05 -5.1717e-11
                                                      2.5907e-05
                Sensitivity 2 1.0363e-10
                                         2.0687e-16 -1.0363e-10
                Sensitivity 3 -1.7293e-14 -6.9174e-20 1.7293e-14
4.000e+10 2 3.799e+09
                     859
                Solution
                             6.5181e-08 2.6072e-13 1.0000e-00
                Sensitivity 1 -2.4884e-06 -3.3032e-12 2.4884e-06
                Sensitivity 2 9.9534e-12 1.3213e-17 -9.9534e-12
                Sensitivity 3 -2.1727e-15 -8.6908e-21 2.1727e-15
Final Statistics
          859
nfe
         1222
netf
           29
                            142
                nsetups =
         1218
                ncfn
nni
nfSe
         3666
                nfeS
                nsetupsS =
netfs
         0
nniS
          0
                ncfnS
          24
                nfeLS
nje
```

2.3 A parallel example with user preconditioner: cvsDiurnal_FSA_kry_p

As an example of using the forward sensitivity capabilities in CVODES with the Krylov linear solver CVSPGMR and the NVECTOR_PARALLEL module, we describe a test problem (derived from cvDiurnal_kry_p) that solves the semi-discrete form of a two-species diurnal kinetics advection-diffusion PDE system in 2-D space, for which we also compute solution sensitivities with respect to problem parameters $(q_1 \text{ and } q_2)$ that appear in the kinetic rate terms.

The PDE system is

$$\frac{\partial c^{i}}{\partial t} = K_{h} \frac{\partial^{2} c^{i}}{\partial x^{2}} + V \frac{\partial c^{i}}{\partial x} + \frac{\partial}{\partial y} K_{v}(y) \frac{\partial c^{i}}{\partial y} + R^{i}(c^{1}, c^{2}, t) \quad (i = 1, 2),$$
(8)

where the superscripts i are used to distinguish the two chemical species, and where the

reaction terms are given by

$$R^{1}(c^{1}, c^{2}, t) = -q_{1}c^{1}c^{3} - q_{2}c^{1}c^{2} + 2q_{3}(t)c^{3} + q_{4}(t)c^{2},$$

$$R^{2}(c^{1}, c^{2}, t) = q_{1}c^{1}c^{3} - q_{2}c^{1}c^{2} - q_{4}(t)c^{2}.$$
(9)

The spatial domain is $0 \le x \le 20$, $30 \le y \le 50$ (in km). The various constants and parameters are: $K_h = 4.0 \cdot 10^{-6}$, $V = 10^{-3}$, $K_v = 10^{-8} \exp(y/5)$, $q_1 = 1.63 \cdot 10^{-16}$, $q_2 = 4.66 \cdot 10^{-16}$, $c^3 = 3.7 \cdot 10^{16}$, and the diurnal rate constants are defined as:

$$q_i(t) = \left\{ \begin{array}{ll} \exp[-a_i/\sin\omega t], & \text{for } \sin\omega t > 0 \\ 0, & \text{for } \sin\omega t \le 0 \end{array} \right\} \quad (i = 3, 4),$$

where $\omega = \pi/43200$, $a_3 = 22.62$, $a_4 = 7.601$. The time interval of integration is [0, 86400], representing 24 hours measured in seconds.

Homogeneous Neumann boundary conditions are imposed on each boundary, and the initial conditions are

$$c^{1}(x, y, 0) = 10^{6} \alpha(x) \beta(y) , \quad c^{2}(x, y, 0) = 10^{12} \alpha(x) \beta(y) ,$$

$$\alpha(x) = 1 - (0.1x - 1)^{2} + (0.1x - 1)^{4} / 2 ,$$

$$\beta(y) = 1 - (0.1y - 4)^{2} + (0.1y - 4)^{4} / 2 .$$
(10)

We discretize the PDE system with central differencing, to obtain an ODE system $\dot{u}=f(t,u)$ representing (8). In this case, the discrete solution vector is distributed across many processes. Specifically, we may think of the processes as being laid out in a rectangle, and each process being assigned a subgrid of size MXSUB×MYSUB of the x-y grid. If there are NPEX processes in the x direction and NPEY processes in the y direction, then the overall grid size is MX×MY with MX=NPEX×MXSUB and MY=NPEY×MYSUB, and the size of the ODE system is $2 \cdot \text{MX} \cdot \text{MY}$.

To compute f in this setting, the processes pass and receive information as follows. The solution components for the bottom row of grid points assigned to the current process are passed to the process below it, and the solution for the top row of grid points is received from the process below the current process. The solution for the top row of grid points for the current process is sent to the process above the current process, while the solution for the bottom row of grid points is received from that process by the current process. Similarly, the solution for the first column of grid points is sent from the current process to the process to its left, and the last column of grid points is received from that process by the current process. The communication for the solution at the right edge of the process is similar. If this is the last process in a particular direction, then message passing and receiving are bypassed for that direction.

The overall structure of main is very similar to that of the code cvsRoberts_FSA_dns described above, with differences arising from the use of the parallel NVECTOR module, NVECTOR_PARALLEL. On the other hand, the user-supplied routines in cvsDiurnal_FSA_kry_p, f for the right-hand side of the original system, Precond for the preconditioner setup, and PSolve for the preconditioner solve, are identical to those defined in the example program cvDiurnal_kry_p described in [1]. The only difference is in the routine fcalc, which operates on local data only and contains the actual calculation of f(t, u), where the problem parameters are first extracted from the user data structure data. The program cvsDiurnal_FSA_kry_p defines no additional user-supplied routines, as it uses the CVODES internal difference quotient routines to compute the sensitivity equation right-hand sides.

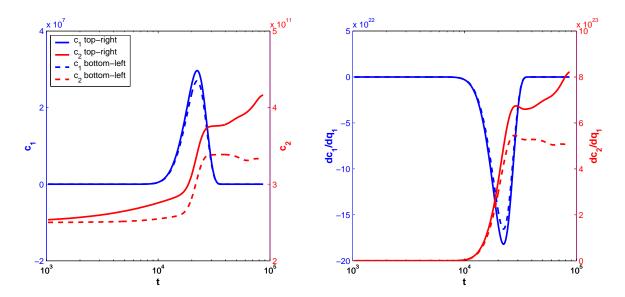


Figure 3: Results for the cvsDiurnal_FSA_kry_p example problem: time evolution of c_1 and c_2 at the bottom-left and top-right corners (left) and of their sensitivities with respect to q_1 .

Sample results generated by cvsDiurnal_FSA_kry_p are shown in Fig. 3. These results were generated on a $(2 \cdot 40) \times (2 \cdot 40)$ spatial grid. The following output is generated by cvsDiurnal_FSA_kry_p when computing sensitivities with the CV_SIMULTANEOUS method and full error control (mpirun -np 4 cvsDiurnal_FSA_kry_p -sensi sim t):

sensitivit	y:	YES (SIMUL	TANEOUS	S + FULL ERROF	R C	ONTROL)	
Т	Q		NST			Bottom left	1 0
		3.544e+01			-==	=========	
				Solution		1.0468e+04	1.1185e+04
							2.6998e+11
				Sensitivity	1	-6.4201e+19	-6.8598e+19
						7.1177e+19	7.6556e+19
				Sensitivity	2	-4.3853e+14	-5.0065e+14
				·		-2.4407e+18	-2.7842e+18
 1.440e+04	3	4.903e+01	640				
				Solution		6.6590e+06	7.3008e+06
						2.5819e+11	2.8329e+11
				Sensitivity	1	-4.0848e+22	-4.4785e+22
						5.9550e+22	6.7173e+22
				Sensitivity	2	-4.5235e+17	-5.4318e+17
				•		-6.5419e+21	-7.8316e+21

				Solution		2.9308e+07 3.3134e+11
				Sensitivity 1	3.8203e+23	-1.7976e+23 4.4991e+23
				Sensitivity 2	-7.6601e+18	
2.880e+04	3	4.499e+01	1542	Solution		9.6501e+06 3.7510e+11
				Sensitivity 1	5.4487e+23	
				Sensitivity 2		-6.1040e+18
3.600e+04	3	1.107e+01	1675	Solution		1.5609e+04 3.7652e+11
				Sensitivity 1		-9.5761e+19 6.6030e+23
				Sensitivity 2		-1.0549e+16 -2.3096e+23
4.320e+04	4	8.016e+01	3146	Solution	-2.5802e-07 3.3823e+11	-2.3679e-07 3.8035e+11
				Sensitivity 1		-3.8876e+08 6.7448e+23
				Sensitivity 2		6.6262e+03 -2.3595e+23
5.040e+04	4	2.431e+02	3194	Solution	8.0708e-08 3.3582e+11	7.0502e-08 3.8645e+11
				Sensitivity 1		-3.9697e+10 6.9664e+23
				Sensitivity 2	-5.5727e+08 -1.8214e+23	
5.760e+04	4	2.523e+02	3216	Solution	-1.8957e-11 3.3203e+11	-1.6762e-11 3.9090e+11
				Sensitivity 1		-1.4035e+06 7.1205e+23
				Sensitivity 2	-2.2867e+02 -1.7780e+23	

6.480e+04	4 2.82	0e+02 3254				
			Solution		-7.8717e-10	-6.7017e-10
					3.3130e+11	3.9634e+11
			Sensitivity	 1	-3.4373e+07	-2 1671e+07
			501151017109	-	5.0442e+23	
			Sensitivity		1.3198e+08	
					-1.7646e+23	-2.5633e+23
7.200e+04	4 3.81	0e+02 3276				
			Solution		-4.4006e-09	-3.7463e-09
					3.3297e+11	4.0389e+11
			C		4 5106-100	2 8200 - 100
			Sensitivity	1	4.5106e+09 5.0783e+23	
			Sensitivity	2	2.0264e+05	2.0791e+05
					-1.7765e+23	-2.6721e+23
7 9200+04	5 6 40	6e+02 3291				
7.9206104	0.40	06.02 3291	Solution		-1.8328e-11	-1.5666e-11
						4.1203e+11
			Sensitivity	1	1.3650e+07 5.0730e+23	
					5.07300+23	7.9960e+25
			Sensitivity	2	6.1764e+01	6.8476e+01
					-1.7747e+23	
0.640-104						
8.6406+04	5 6.40	6e+02 3302	Solution		-2.0206e-13	-1.7557e-13
			20140101			4.1625e+11
			Sensitivity	1	1.1323e+06	
					5.1171e+23	8.2142e+23
			Sensitivity	2	7.6632e+00	
			· 3		-1.7901e+23	
 Final Stat	istics					
rinai stat	120102					
nst =	3302					
nfe =	4387					
netf =	165	nsetups =	508			
nni =	4383	ncfn =	7			
nfSe =	8774	nfeS = :	17548			
netfs =	0	nsetupsS =	0			
nniS =	0	ncfnS =	0			

3 Adjoint sensitivity analysis example problems

The next three sections describe in detail a serial example (cvsRoberts_ASAi_dns) and two parallel examples (cvsAdvDiff_ASAp_non_p and cvsAtmDisp_ASAi_kry_bbd_p) that perform adjoint sensitivity analysis. For details on the other examples, the reader is directed to the comments in their source files.

3.1 A serial dense example: cvsRoberts_ASAi_dns

As a first example of using CVODES for adjoint sensitivity analysis, we examine the chemical kinetics problem (from cvsRoberts_FSA_dns)

$$\dot{y}_1 = -p_1 y_1 + p_2 y_2 y_3
\dot{y}_2 = p_1 y_1 - p_2 y_2 y_3 - p_3 y_2^2
\dot{y}_3 = p_3 y_2^2
y(t_0) = y_0,$$
(11)

for which we want to compute the gradient with respect to p of

$$G(p) = \int_{t_0}^T y_3 dt, \tag{12}$$

without having to compute the solution sensitivities dy/dp. Following the derivation in §2.7, and taking into account the fact that the initial values of (11) do not depend on the parameters p, by (2.20) this gradient is simply

$$\frac{dG}{dp} = \int_{t_0}^{T} \left(g_p + \lambda^T f_p \right) dt \,, \tag{13}$$

where $g(t, y, p) = y_3$, f is the vector-valued function defining the right-hand side of (11), and λ is the solution of the adjoint problem (2.19),

$$\dot{\lambda} = -(f_y)^T \lambda - (g_y)^T$$

$$\lambda(T) = 0.$$
(14)

In order to avoid saving intermediate λ values just for the evaluation of the integral in (13), we extend the backward problem with the following N_p quadrature equations

$$\dot{\xi} = g_p^T + f_p^T \lambda
\xi(T) = 0,$$
(15)

which yield $\xi(t_0) = -\int_{t_0}^T (g_p^T + f_p^T \lambda) dt$ and thus $dG/dp = -\xi^T(t_0)$. Similarly, the value of G in (12) can be obtained as $G = -\zeta(t_0)$, where ζ is solution of the following quadrature equation:

$$\dot{\zeta} = g = y_3
\zeta(T) = 0.$$
(16)

The main program and the user-defined routines are described below, with emphasis on the aspects particular to adjoint sensitivity calculations. The calling program includes the CVODES header files cvodes.h for CVODES definitions and interface function prototypes, the header file $cvodes_dense.h$ for the CVDENSE linear solver module, the header file $nvector_serial.h$ for the definition of the serial implementation of the $nvector_serial.h$ for the definition of the SUNRabs macro. This program also includes two user-defined accessor macros, Ith and IJth, that are useful in writing the problem functions in a form closely matching their mathematical description, i.e. with components numbered from 1 instead of from 0. Following that, the program defines problem-specific constants and a user-defined data structure, which will be used to pass the values of the parameters p to various user routines. The constant STEPS defines the number of integration steps between two consecutive checkpoints. The program prologue ends with the prototypes of four user-supplied functions that are called by CVODES. The first two provide the right-hand side and dense Jacobian for the backward problem, and the last two provide the right-hand side and dense Jacobian for the backward problem.

The main function begins with type declarations and continues with the allocation and initialization of the user data structure, which contains the values of the parameters p. Next, it allocates and initializes q for the quadrature used in computing the value G, and finally sets the scalar relative tolerance reltolQ and vector absolute tolerance abstolQ for the quadrature variables. No tolerances for the state variables are defined since cvsRoberts_ASAi_dns uses its own function to compute the error weights for WRMS norm estimates of state solution vectors.

The call to CVodeCreate creates the main integrator memory block for the forward integration and specifies the CV_BDF integration method with CV_NEWTON iteration. The call to CVodeInit initializes the forward integration by specifying the initial conditions. The call to CVodeWFtolerances specifies a function that computes error weights. The next call specifies the optional user data pointer data. The linear solver is selected to be CVDENSE through the call to its initialization routine CVDense. The user-provided Jacobian routine Jac is specified through a call to CVDlsSetDenseJacFn.

The next code block initializes quadrature computations in the forward phase, by allocating CVODES memory for quadrature integration (the call to CVodeQuadInit specifies the right-hand side fQ of the quadrature equation and the initial values of the quadrature variable), setting the integration tolerances for the quadrature variables, and finally including the quadrature variable in the error test.

Allocation for the memory block of the combined forward-backward problem is accomplished through the call to CVadjInit which specifies STEPS = 150, the number of steps between two checkpoints, and specifies cubic Hermite interpolation.

The call to CVodeF requests the solution of the forward problem to TOUT. If successful, at the end of the integration, CVodeF will return the number of saved checkpoints in the argument ncheck (optionally, a list of the checkpoints can be obtained by calling CVodeGetAdjCheckPointsInfo and the checkpoint information printed).

The next segment of code deals with the setup of the backward problem. First, a serial vector yB of length NEQ is allocated and initalized with the value of $\lambda(=0.0)$ at the final time (TB1 = 4.0E7). A second serial vector qB of dimension NP is created and initialized to 0.0. This vector corresponds to the quadrature variables ξ whose values at t_0 will be the components of the desired gradient of $\partial G/\partial p$ (after a sign change). Following that, the program sets the relative and absolute tolerances for the backward integration.

The CVODES memory for the backward integration is created and allocated by the calls to

the interface routines CVodeCreateB and CVodeInitB which specify the CV_BDF integration method with CV_NEWTON iteration, among other things. The dense linear solver CVDENSE is then initialized by calling the CVDenseB interface routine and specifying a non-NULL Jacobian routine JacB and user data data.

The tolerances for the integration of quadrature variables, reltolB and abstolQB, are specified through CVodeQuadSStolerancesB. The call to CVodeSetQuadErrConB indicates that ξ should be included in the error test. Quadrature computation is initialized by calling CVodeQuadInitB which specifies the right-hand side of the quadrature equations as fQB.

The actual solution of the backward problem is accomplished through two calls to CVodeB — one for intermediate output at t=40, and one for the final time T0 = 0. At each point, the backward solution yB (= λ) is obtained with a call to CVodeGetB and the forward solution with a call to CVodeGetAdjY. The values of the quadrature variables ξ at time T0 are loaded in qB by calling the extraction routine CVodeGetQuadB. The negative of qB gives the gradient $\partial G/\partial p$.

The main program then carries out a second backward problem. It calls to CVodeReInitB and CVodeQuadReInitB to re-initialize the backward memory block for a new adjoint computation with a different final time (TB2 = 50). This is followed by two calls to CVodeB, one for intermediate output at t = 40 and one for the final values at t = 0. Finally, the gradient $\partial G/\partial p$ of the second function G is printed.

The main program ends by freeing previously allocated memory by calling CVodeFree (for the CVODES memory for the forward problem), CVadjFree (for the memory allocated for the combined problem), and N_VFree_Serial (for the various vectors).

The user-supplied functions f and Jac for the right-hand side and Jacobian of the forward problem are straightforward expressions of its mathematical formulation (11). The function ewt is the same as the one for cvRoberts_dns_uw.c. The function fQ implements (16), while fB, JacB, and fQB are mere translations of the backward problem (14) and (15).

The output generated by cvsRoberts_ASAi_dns is shown below.

```
Backward integration from tB0 = 4.0000e+07
returned t: 4.0000e+01
tout: 4.0000e+01
lambda(t): 3.9967e+07 3.9967e+07
y(t): 7.1583e-01 9.1856e-06 2.8416e-01
Done ( nst = 267 )
returned t: 0.0000e+00
lambda(t0): 3.9967e+07 3.9967e+07 3.9967e+07
y(t0): 1.0000e+00 0.0000e+00 0.0000e+00 dG/dp: 7.6836e+05 -3.0688e+00 5.1143e-04
Re-initialize CVODES memory for backward run
Backward integration from tB0 = 5.0000e+01
returned t: 4.0000e+01
tout: 4.0000e+01
lambda(t): 2.8959e-01 1.7624e+00 9.3567e+00 y(t): 7.1583e-01 9.1856e-06 2.8416e-01
Done ( nst = 158 )
returned t: 0.0000e+00
lambda(t0): 8.4191e+00 1.6097e+01 1.6097e+01
y(t0): 1.0000e+00 0.0000e+00 0.0000e+00
dG/dp: 1.7341e+02 -5.0591e-04 8.4323e-08
Free memory
```

3.2 A parallel nonstiff example: cvsAdvDiff_ASAp_non_p

As an example of using the CVODES adjoint sensitivity module with the parallel vector module NVECTOR_PARALLEL, we describe a sample program that solves the following problem: Consider the 1-D advection-diffusion equation

$$\frac{\partial u}{\partial t} = p_1 \frac{\partial^2 u}{\partial x^2} + p_2 \frac{\partial u}{\partial x}
0 = x_0 \le x \le x_1 = 2
0 = t_0 \le t \le t_f = 2.5,$$
(17)

with boundary conditions $u(t, x_0) = u(t, x_1) = 0$, $\forall t$, and initial condition $u(t_0, x) = u_0(x) = x(2-x)e^{2x}$. Also consider the function

$$g(t) = \int_{x_0}^{x_1} u(t, x) dx.$$

We wish to find, through adjoint sensitivity analysis, the gradient of $g(t_f)$ with respect to $p = [p_1; p_2]$ and the perturbation in $g(t_f)$ due to a perturbation δu_0 in u_0 .

The approach we take in the program cvsAdvDiff_ASAp_non_p is to first derive an adjoint PDE which is then discretized in space and integrated backwards in time to yield the desired sensitivities. A straightforward extension to PDEs of the derivation given in §2.7 gives

$$\frac{dg}{dp}(t_f) = \int_{t_0}^{t_f} dt \int_{x_0}^{x_1} dx \mu \cdot \left[\frac{\partial^2 u}{\partial x^2}; \frac{\partial u}{\partial x} \right]$$
 (18)

and

$$\delta g|_{t_f} = \int_{x_0}^{x_1} \mu(t_0, x) \delta u_0(x) dx, \qquad (19)$$

where μ is the solution of the adjoint PDE

$$\frac{\partial \mu}{\partial t} + p_1 \frac{\partial^2 \mu}{\partial x^2} - p_2 \frac{\partial \mu}{\partial x} = 0$$

$$\mu(t_f, x) = 1$$

$$\mu(t, x_0) = \mu(t, x_1) = 0.$$
(20)

Both the forward problem (17) and the backward problem (20) are discretized on a uniform spatial grid of size $M_x + 2$ with central differencing and with boundary values eliminated, leaving ODE systems of size $N = M_x$ each. As always, we deal with the time quadratures in (18) by introducing the additional equations

$$\dot{\xi}_1 = \int_{x_0}^{x_1} dx \mu \frac{\partial^2 u}{\partial x^2}, \quad \xi_1(t_f) = 0,$$

$$\dot{\xi}_2 = \int_{x_0}^{x_1} dx \mu \frac{\partial u}{\partial x}, \quad \xi_2(t_f) = 0,$$
(21)

yielding

$$\frac{dg}{dp}(t_f) = -\left[\xi_1(t_0); \xi_2(t_0)\right]$$

The space integrals in (19) and (21) are evaluated numerically, on the given spatial mesh, using the trapezoidal rule.

Note that $\mu(t_0, x^*)$ is nothing but the perturbation in $g(t_f)$ due to a δ -function perturbation $\delta u_0(x) = \delta(x - x^*)$ in the initial conditions. Therefore, $\mu(t_0, x)$ completely describes $\delta g(t_f)$ for any perturbation δu_0 .

Both the forward and the backward problems are solved with the option for nonstiff systems, i.e. using the Adams method with functional iteration for the solution of the non-linear systems. The overall structure of the main function is very similar to that of the code cvsRoberts_ASAi_dns discussed previously with differences arising from the use of the parallel NVECTOR module. Unlike cvsRoberts_ASAi_dns, the example cvsAdvDiff_ASAp_non_p illustrates computation of the additional quadrature variables by appending NP equations to the adjoint system. This approach can be a better alternative to using special treatment of the quadrature equations when their number is too small for parallel treatment.

Besides the parallelism implemented by CVODES at the NVECTOR level, this example uses MPI calls to parallelize the calculations of the right-hand side routines f and fB and of the spatial integrals involved. The forward problem has size NEQ = MX, while the backward problem has size NB = NEQ + NP, where NP = 2 is the number of quadrature equations in

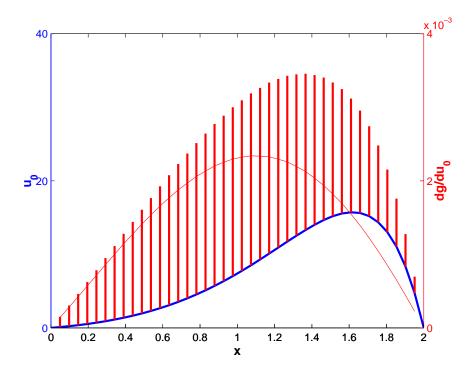


Figure 4: Results for the cvsAdvDiff_ASAp_non_p example problem. The gradient of $g(t_f)$ with respect to the initial conditions u_0 is shown superimposed over the values u_0 .

(21). The use of the total number of available processes on two problems of different sizes deserves some comments, as this is typical in adjoint sensitivity analysis. Out of the total number of available processes, namely nprocs, the first npes = nprocs - 1 processes are dedicated to the integration of the ODEs arising from the semi-discretization of the PDEs (17) and (20), and receive the same load on both the forward and backward integration phases. The last process is reserved for the integration of the quadrature equations (21), and is therefore inactive during the forward phase. Of course, for problems involving a much larger number of quadrature equations, more than one process could be reserved for their integration. An alternative would be to redistribute the NB backward problem variables over all available processes, without any relationship to the load distribution of the forward phase. However, the approach taken in cvsAdvDiff_ASAp_non_p has the advantage that the communication strategy adopted for the forward problem can be directly transferred to communication among the first npes processes during the backward integration phase.

We must also emphasize that, although inactive during the forward integration phase, the last process *must* participate in that phase with a *zero local array length*. This is because, during the backward integration phase, this process must have its own local copy of variables (such as cvadj_mem) that were set only during the forward phase.

Using $\mathtt{MX}=40$ on 4 processes, the gradient of $g(t_f)$ with respect to the two problem parameters is obtained as $dg/dp(t_f)=[-1.13856;-1.01023]$. The gradient of $g(t_f)$ with respect to the initial conditions is shown in Fig. 4. The gradient is plotted superimposed over the initial conditions. Sample output generated by $\mathtt{cvsAdvDiff_ASAp_non_p}$, for $\mathtt{MX}=20$, is shown below.

g(tf) = 2.446335e-02

```
[ 1]: -1.502544e-01
mu(t0)
  [ 1]: 2.775571e-04
    2]: 5.625276e-04
        8.474242e-04
        1.860490e-03
        2.049401e-03
        2.196614e-03
        2.302527e-03
        2.356404e-03
  [12]: 2.360902e-03
  [13]: 2.306966e-03
  [14]: 2.199483e-03
  [15]: 2.032115e-03
  [16]: 1.811731e-03
  [17]: 1.535589e-03
  [18]: 1.212084e-03
  [19]: 8.426858e-04
  [20]: 4.366699e-04
```

3.3 A parallel example using CVBBDPRE: cvsAtmDisp_ASAi_kry_bbd_p

As a more elaborate example of a parallel adjoint sensitivity calculation, we describe next the program cvsAtmDisp_ASAi_kry_bbd_p provided with CVODES. This example models an atmospheric release with an advection-diffusion PDE in 2-D or 3-D and computes the gradient with respect to source parameters of the space-time average of the squared norm of the concentration. Given a known velocity field v(t,x) and source function S, the transport equation for the concentration c(t,x) in a domain Ω is given by

$$\frac{\partial c}{\partial t} - k\nabla^2 c + v \cdot \nabla c + S = 0, \text{ in } (0, T) \times \Omega$$

$$\frac{\partial c}{\partial n} = g, \text{ on } (0, T) \times \partial\Omega$$

$$c = c_0(x), \text{ in } \Omega \text{ at } t = 0,$$
(22)

where Ω is a box in \mathbb{R}^2 or \mathbb{R}^3 and n is the normal to the boundary of Ω . We assume homogeneous boundary conditions (g=0) and a zero initial concentration everywhere in Ω $(c_0(x)=0)$. The wind field has only a nonzero component in the x direction given by a Poiseuille profile along the direction y.

Using adjoint sensitivity analysis, the gradient of

$$G(p) = \frac{1}{2} \int_{0}^{T} \int_{\Omega} \|c(t, x)\|^{2} d\Omega dt$$
 (23)

is obtained as

$$\frac{dG}{dp_i} = \int_t \int_{\Omega} \lambda(t, x) \delta(x - x_i) \, d\Omega \, dt = \int_t \lambda(t, x_i) \, dt \,, \tag{24}$$

where x_i is the location of the source of intensity $S(x_i) = p_i$, and λ is solution of the adjoint PDE

$$-\frac{\partial \lambda}{\partial t} - k\nabla^2 \lambda - v \cdot \lambda = c(t, x), \text{ in } (T, 0) \times \Omega$$

$$(k\nabla \lambda + v\lambda) \cdot n = 0, \text{ on } (0, T) \times \partial \Omega$$

$$\lambda = 0, \text{ in } \Omega \text{ at } t = T.$$
(25)

The PDE (22) is semi-discretized in space with central finite differences, with the boundary conditions explicitly taken into account by using layers of ghost cells in every direction. If the direction x^i of Ω is discretized into m_i intervals, this leads to a system of ODEs of dimension $N = \prod_{i=1}^{d} (m_i + 1)$, with d = 2, or d = 3. The source term S is parameterized as a piecewise constant function and yielding N parameters in the problem. The nominal values of the source parameters correspond to two Gaussian sources.

The source code as supplied runs the 2-D problem. To obtain the 3-D version, add a line #define USE3D at the top of main.

The adjoint PDE (25) is discretized to a system of ODEs in a similar fashion. The space integrals in (23) and (24) are simply approximated by their Riemann sums, while the time integrals are resolved by appending pure quadrature equations to the systems of ODEs.

We use BDF with the CVSPGMR linear solver and the CVBBDPRE preconditioner for both the forward and the backward integration phases. The value of G is computed on the forward phase as a quadrature, while the components of the gradient dG/dp are computed as quadratures during the backward integration phase. All quadrature variables are included in the corresponding error tests.

Communication between processes for the evaluation of the ODE right-hand sides involves passing the solution on the local boundaries (lines in 2-D, surfaces in 3-D) to the 4 (6 in 3-D) neighboring processes. This is implemented in the function f_comm, called in f and fB before evaluation of the local residual components. Since there is no additional communication required for the CVBBDPRE preconditioner, a NULL pointer is passed for gloc and glocB in the calls to CVBBDPrecInit and CVBBDPrecInitB, respectively.

For the sake of clarity, the <code>cvsAtmDisp_ASAi_kry_bbd_p</code> example does not use the most memory-efficient implementation possible, as the local segment of the solution vectors (y on the forward phase and yB on the backward phase) and the data received from neighboring processes is loaded into a temporary array <code>y_ext</code> which is then used exclusively in computing the local components of the right-hand sides.

Note that if cvsAtmDisp_ASAi_kry_bbd_p is given any command line argument, it will generate a series of MATLAB files which can be used to visualize the solution. The results of a 2-D simulation and adjoint sensitivity analysis with cvsAtmDisp_ASAi_kry_bbd_p on a 80×80 grid and $2 \times 4 = 8$ processes are shown in Fig. 5. Results in 3-D[†], on a $80 \times 80 \times 40$ grid and $2 \times 4 \times 2 = 16$ processes are shown in Figs. 6 and 7. A sample output generated by cvsAtmDisp_ASAi_kry_bbd_p for a 2D calculation is shown below.

 ${\tt cvsAtmDisp_ASAi_kry_bbd_p\ sample\ output\ -}$

Parallel Krylov adjoint sensitivity analysis example 2D Advection diffusion PDE with homogeneous Neumann B.C. Computes gradient of $G = int_t_0mega$ (c_i^2) dt d0mega with respect to the source values at each grid point.

[†]The name of the executable for the 3-D version is cvsAtmDisp_ASAi_kry_bbd_p3D.

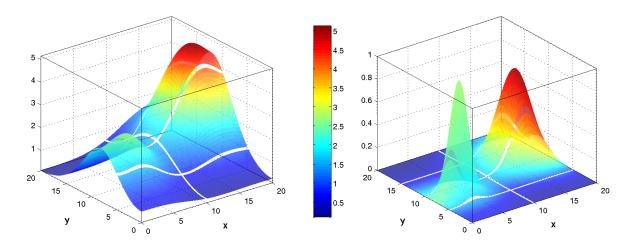


Figure 5: Results for the cvsAtmDisp_ASAi_kry_bbd_p example problem in 2D. The gradient with respect to the source parameters is pictured on the left. On the right, the gradient was color-coded and superimposed over the nominal value of the source parameters.

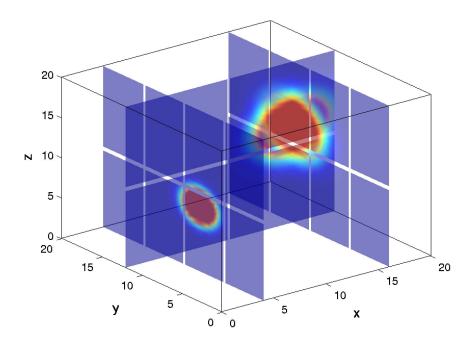


Figure 6: Results for the cvsAtmDisp_ASAi_kry_bbd_p example problem in 3D. Nominal values of the source parameters.

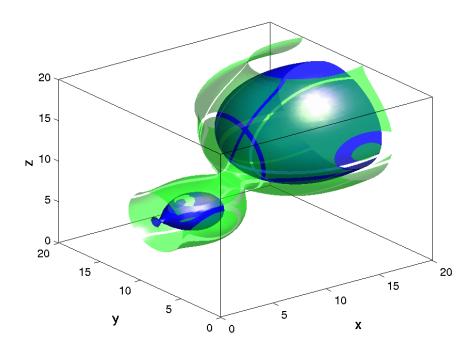


Figure 7: Results for the cvsAtmDisp_ASAi_kry_bbd_p example problem in 3D. Two isosurfaces of the gradient with respect to the source parameters. They correspond to values of 0.25 (green) and 0.4 (blue).

```
Domain:
   0.000000 < x < 20.000000
                                mx = 20
                                          npe_x = 2
   0.000000 < y < 20.000000
                                my = 40
                                          npe_y = 2
Begin forward integration... done.
                                        G = 2.522277e+03
Final Statistics..
             8746
                                   212
lenrw
                       leniw =
             8656
llrw
                       lliw
                                    80
nst
               99
nfe
              106
                                   122
              102
                                   122
nni
               14
                                     0
nsetups =
                       netf
                                   203
                2
npe
                       nps
                0
                       ncfl
                                     0
ncfn
Begin backward integration... done.
Final Statistics..
            17316
                       leniw =
                                   212
lenrw
             8656
llrw
                       lliw
                                    80
nst
               94
                                   160
nfe
              117
                       nfel
              113
                       nli
                                   160
nni
               20
                                     2
nsetups
                       netf
                2
                                   253
npe
                       nps
                0
                                     0
ncfn
                       ncfl
```

4 Parallel tests

The most preeminent advantage of CVODES over existing sensitivity solvers is the possibility of solving very large-scale problems on massively parallel computers. To illustrate this point we present speedup results for the integration and forward sensitivity analysis for an ODE system generated from the following 2-species diurnal kinetics advection-diffusion PDE system in 2 space dimensions. This work was reported in [3]. The PDE is a modification of that described in [4], and takes the form:

$$\frac{dc_i}{dt} = K_h \frac{d^2 c_i}{dx^2} + v \frac{dc_i}{dx} + K_v \frac{d^2 c_i}{dz^2} + R_i(c_1, c_2, t), \quad \text{for } i = 1, 2,$$

where

$$R_1(c_1, c_2, t) = -q_1c_1c_3 - q_2c_1c_2 + 2q_3(t)c_3 + q_4(t)c_2,$$

$$R_2(c_1, c_2, t) = q_1c_1c_3 - q_2c_1c_2 - q_4(t)c_2,$$

 K_h , K_v , v, q_1 , q_2 , and c_3 are constants, and $q_3(t)$ and $q_4(t)$ vary diurnally. The problem is posed on the square $0 \le x \le 20$, $30 \le z \le 50$ (all in km), with homogeneous Neumann boundary conditions, and for time t in $0 \le t \le 86400$ (1 day). The PDE system is treated by central differences on a uniform mesh, except for the advection term, which is treated with a biased 3-point difference formula. The initial profiles are proportional to a simple polynomial in x and a hyperbolic tangent function in z.

The solution with CVODES is done with the BDF/GMRES method (i.e. using the CVSPGMR linear solver) and the block-diagonal part of the Newton matrix as a left preconditioner. A copy of the block-diagonal part of the Jacobian is saved and conditionally reused within the preconditioner setup function.

The problem is solved by CVODES using P processes, treated as a rectangular process grid of size $p_x \times p_z$. Each process is assigned a subgrid of size $n = n_x \times n_z$ of the (x, z) mesh. Thus the actual mesh size is $N_x \times N_z = (p_x n_x) \times (p_z n_z)$, and the ODE system size is $N = 2N_xN_z$. Parallel performance tests were performed on ASCI Frost, a 68-node, 16-way SMP system with POWER3 375 MHz processors and 16 GB of memory per node. We present timing results for the integration of only the state equations (column STATES), as well as for the computation of forward sensitivities with respect to the diffusion coefficients K_h and K_v using the staggered corrector method without and with error control on the sensitivity variables (columns STG and STG_FULL, respectively). Run times for a global problem size of $N = 2N_xN_y = 2 \cdot 1600 \cdot 400 = 1,280,000$ are shown in Fig. 8 and listed below.

\overline{P}	STATES	STG	STG_FULL
4	460.31	1414.53	2208.14
8	211.20	646.59	1064.94
16	97.16	320.78	417.95
32	42.78	137.51	210.84
64	19.50	63.34	83.24
128	13.78	42.71	55.17
256	9.87	31.33	47.95

We note that there was not enough memory to solve the problem (even without carrying sensitivities) using fewer processes.

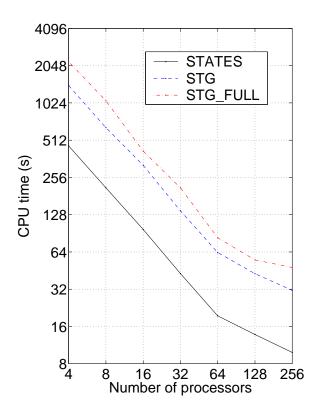


Figure 8: Speedup results for the integration of the state equations only (solid line), staggered sensitivity analysis without error control on the sensitivity variables (dashed line), and staggered sensitivity analysis with full error control (dotted line)

The departure from the ideal line of slope -1 is explained by the interplay of several conflicting processes. On one hand, when increasing the number of processes, the preconditioner quality decreases, as it incorporates a smaller and smaller fraction of the Jacobian, and the cost of interprocess communication increases. On the other hand, decreasing the number of processes leads to an increase in the cost of the preconditioner setup phase and to a larger local problem size which can lead to a point where a node starts memory-paging to disk.

References

- [1] A. C. Hindmarsh and R. Serban. Example Programs for CVODE v2.7.0. Technical report, LLNL, 2011. UCRL-SM-208110.
- [2] A. C. Hindmarsh and R. Serban. User Documentation for CVODES v2.6.0. Technical report, LLNL, 2011. UCRL-SM-208111.
- [3] R. Serban and A. C. Hindmarsh. CVODES, the sensitivity-enabled ODE solver in SUNDIALS. In *Proceedings of the 5th International Conference on Multibody Systems, Nonlinear Dynamics and Control*, Long Beach, CA, 2005. ASME.
- [4] M. R. Wittman. Testing of PVODE, a Parallel ODE Solver. Technical Report UCRL-ID-125562, LLNL, August 1996.