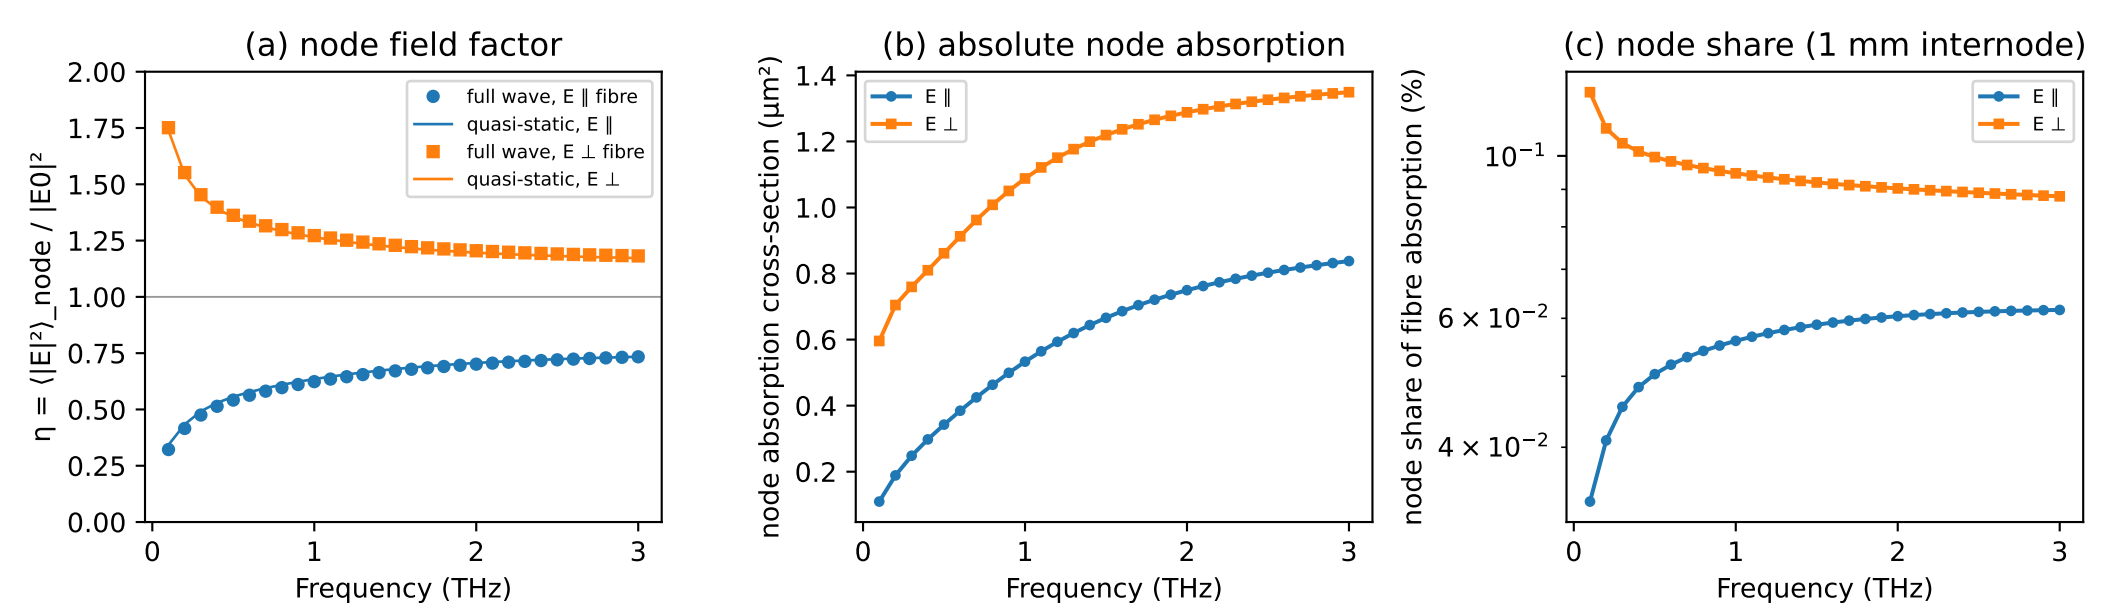
(a) node field factor
η = ⟨|E|²⟩_node / |E0|²
Frequency (THz)
full wave, E ∥ fibre
quasi-static, E ∥
full wave, E ⊥ fibre
quasi-static, E ⊥
(b) absolute node absorption
node absorption cross-section (μm²)
Frequency (THz)
E ∥
E ⊥
(c) node share (1 mm internode)
node share of fibre absorption (%)
Frequency (THz)
E ∥
E ⊥