



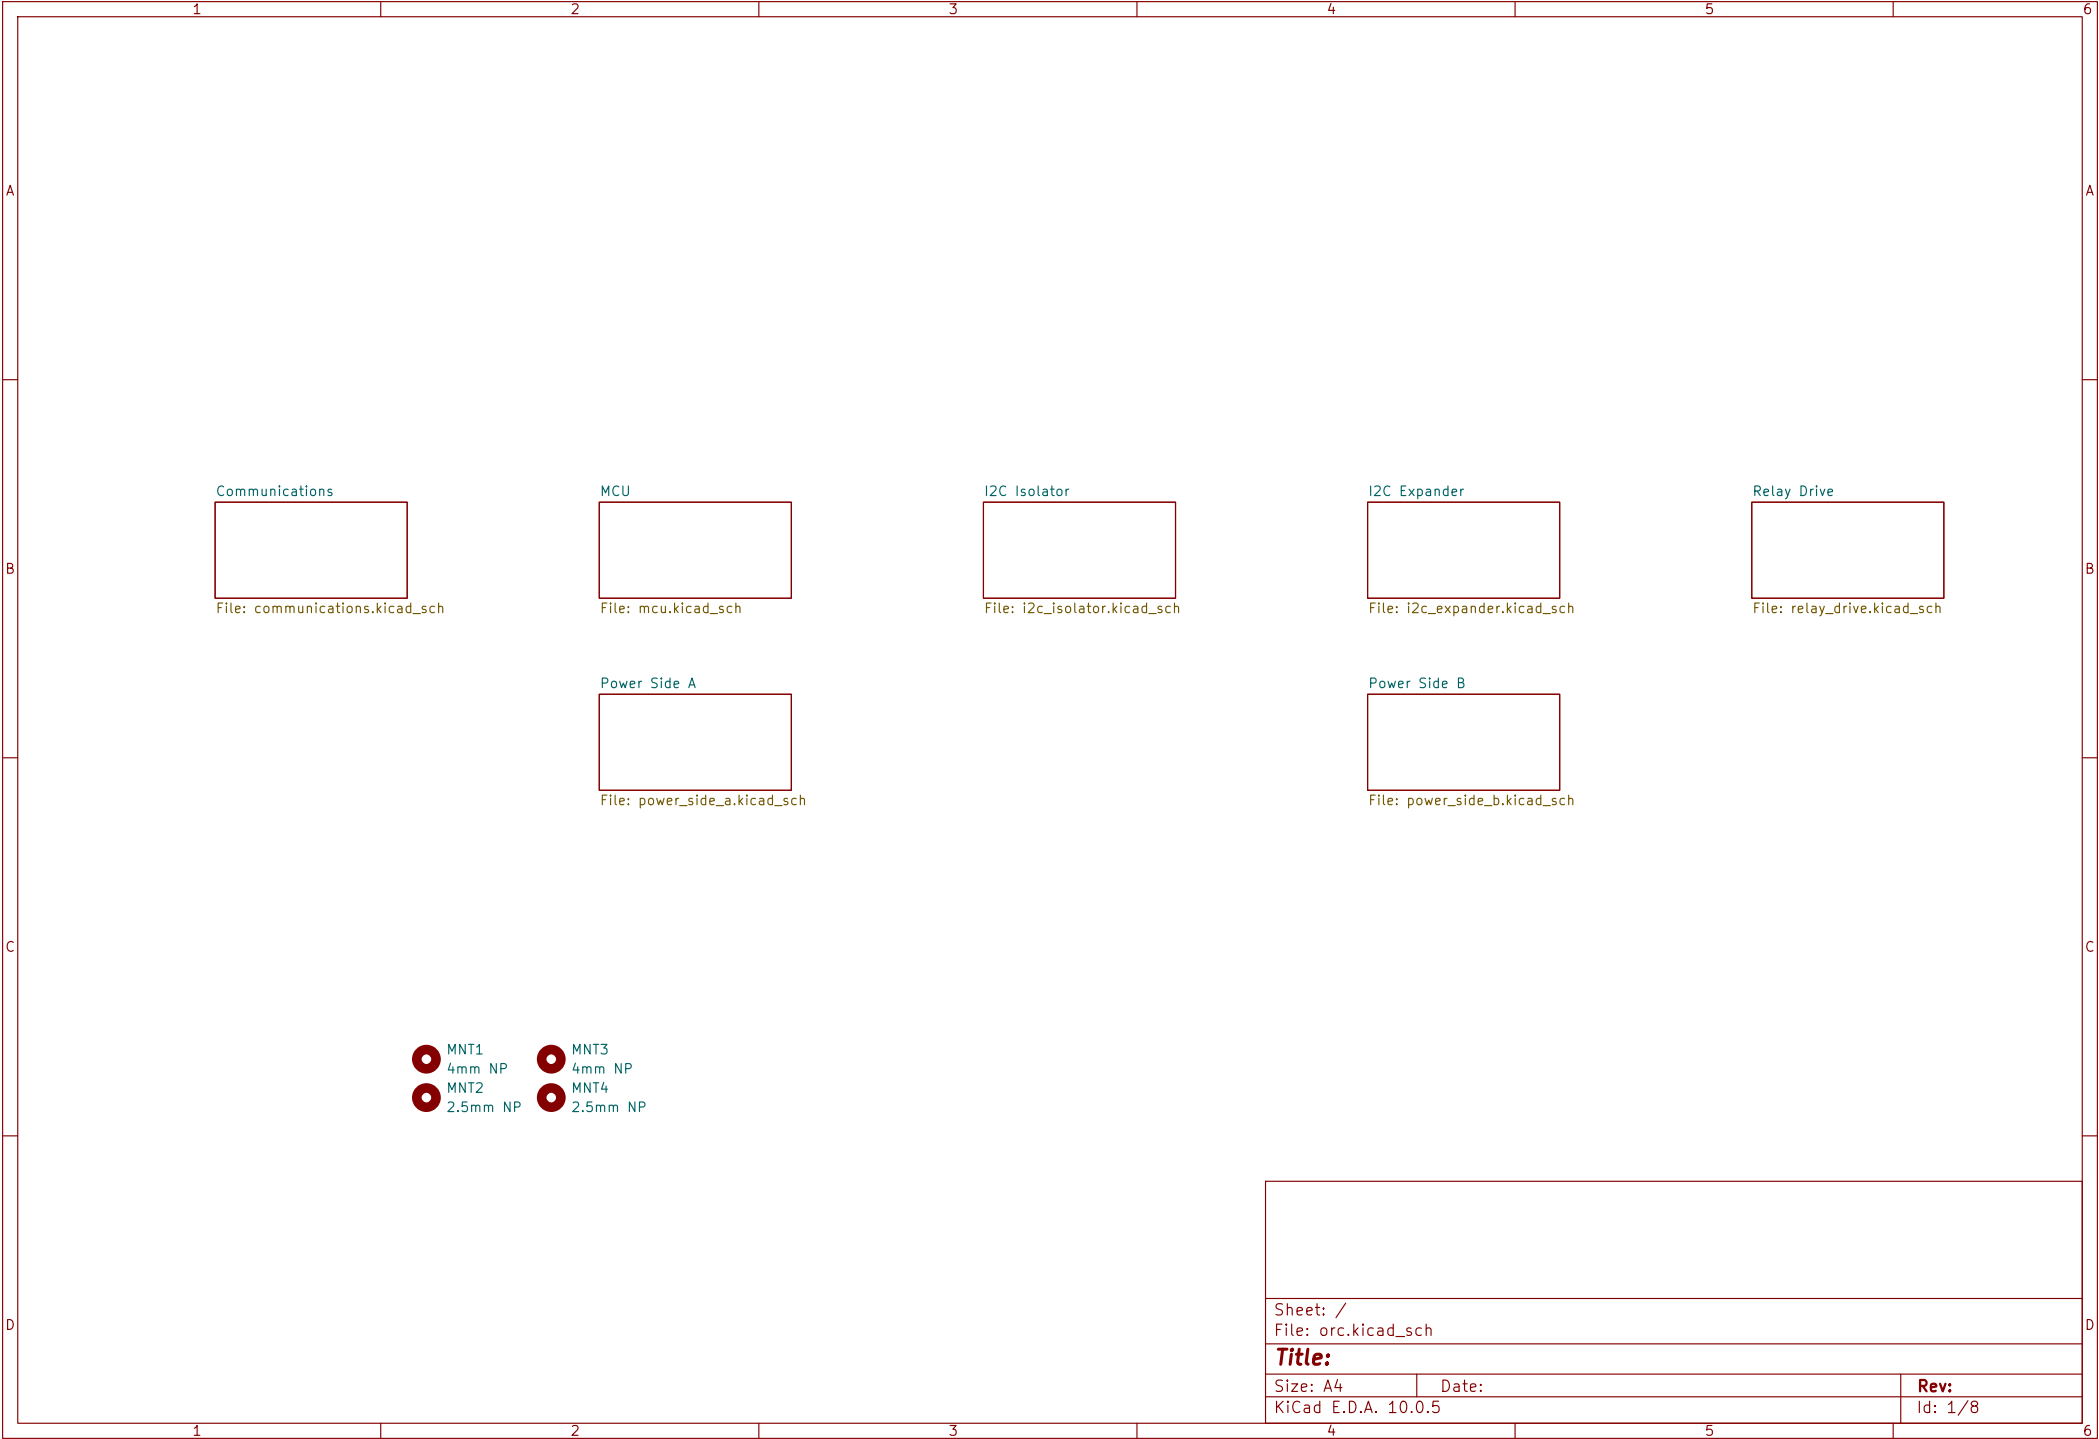


CAN Bus

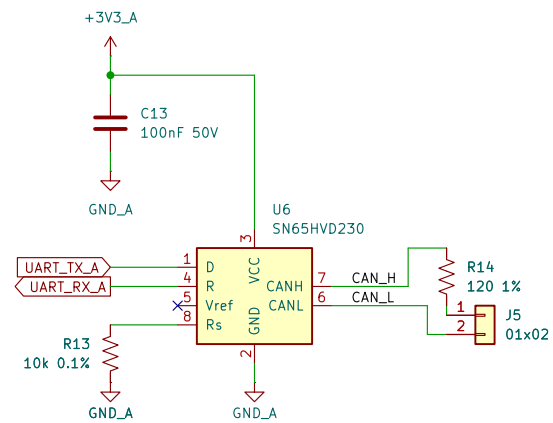

Rs set for approx
14V/us slew rate

Note that this part has
built-in 16kV HBM ESD
protection on bus
interface

CAN Terminal Block



Sheet: /Communications/
File: communications.kicad_sch

Title:

Size: A4	Date:
----------	-------


SIZE: A1	1
KiCad E.D.A. 10.0.5	

Date:


Rev:

Id: 2/8

ESP32-C3 Super Mini

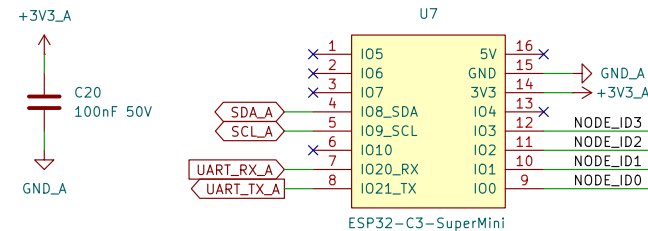

CAN Address

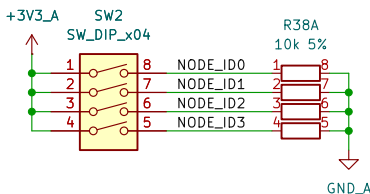

Sheet: /MCU/ File: mcu.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.5		Id: 3/8




Size: A4	
KiCad E.D.A. 10.0.5	

Date:

Rev:

Id: 4/8

I2C Isolator

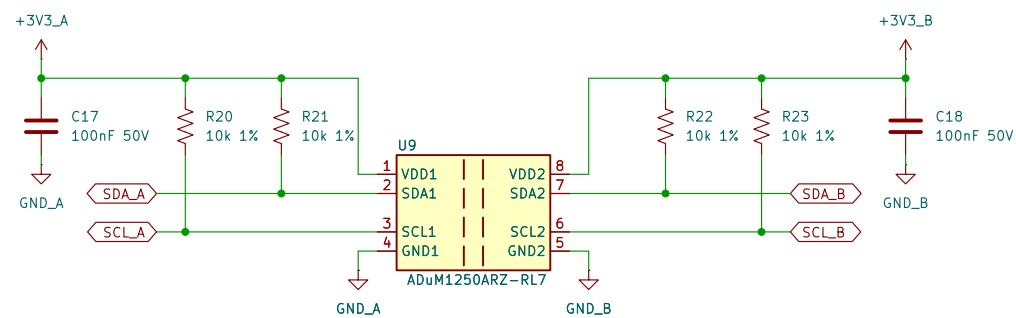

Sheet: /I2C Isolator/
File: i2c_isolator.kicad_sch

Title:



Size: A4

Date:

KiCad E.D.A. 10.0.5

Rev:

Id: 5/8

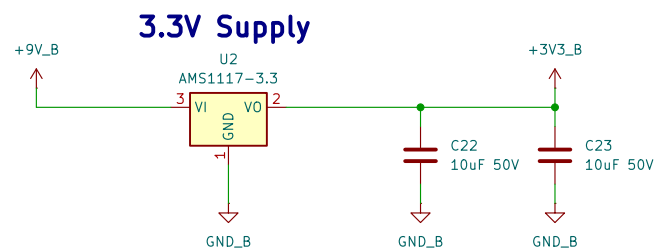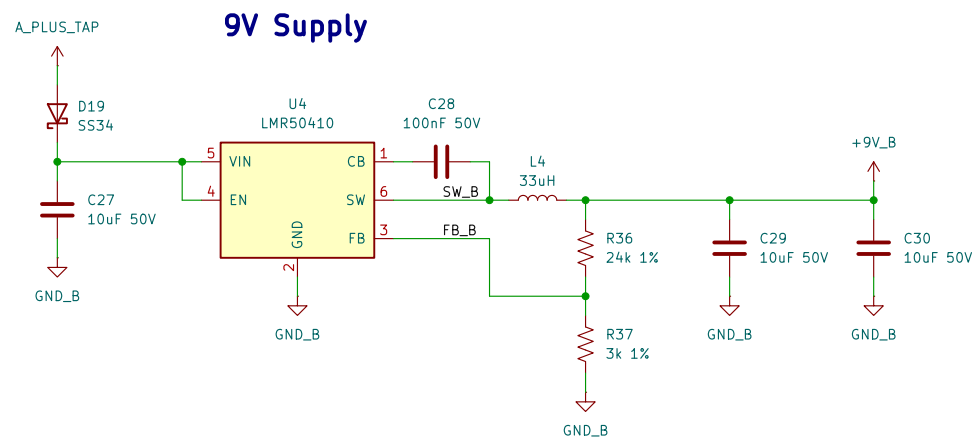

Sheet: /Power Side B/
File: power_side_b.kicad_sch

Title:

Size: A4	Date:
----------	-------


Date:

SIZE: A1	DATE: 10/10/2023
KiCad E.D.A. 10.0.5	

Rev:

Id: 6/8

I2C IO Expander

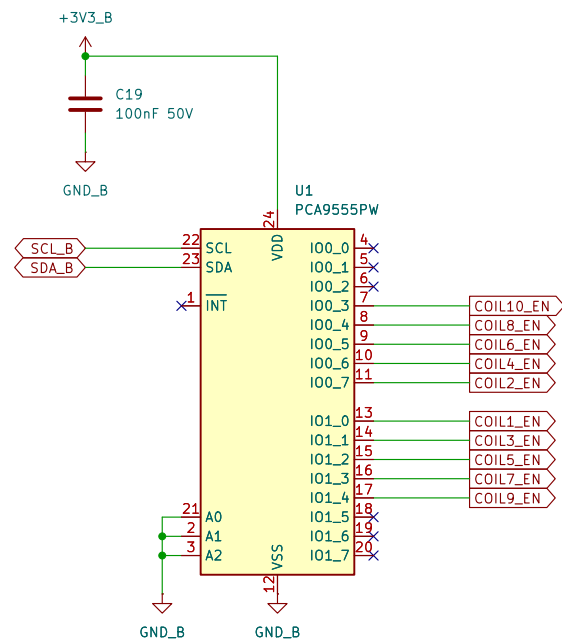

Sheet: /I2C Expander/ File: i2c_expander.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.5		Id: 7/8

10x High Side Coil Drive

Output To Relay Board

Sheet: /Relay Drive/
File: relay_drive.kicad_sch

Title:

Size: A4 Date: Rev: KiCad E.D.A. 10.0.5 Id: 8/8

Wiring diagram for the 14-pin J7 connector:

- Pin 1:** GND_B
- Pin 2:** A_PLUS_TAP
- Pin 3:** COIL1
- Pin 4:** COIL2
- Pin 5:** COIL3
- Pin 6:** COIL4
- Pin 7:** COIL5
- Pin 8:** COIL6
- Pin 9:** COIL7
- Pin 10:** COIL8
- Pin 11:** COIL9
- Pin 12:** COIL10
- Pin 13:** GND_B
- Pin 14:** GND_B

The diagram also shows 10x SS34 diodes connected in series between the ground pins (1, 13, 14) and the coil pins (3-11).

Title:		
Size: A4	Date:	Rev:
KICad E.D.A. 10.0.5		Id: 8/8