


XXXXXX



Wiring Diagram




SPECIFICATIONS

|    |                         |                        |
|----|-------------------------|------------------------|
| 1  | Number of Phase         | 2                      |
| 2  | Step Angle              | 1.8° ±5%               |
| 3  | Holding Torque          | 140 OZ-IN              |
| 4  | Voltage                 | 2.32 VDC               |
| 5  | Current                 | 2.8 A                  |
| 6  | Phase Resistance (20℃)  | 0.83±10%Ω              |
| 7  | Phase Inductance (1KHz) | 2.2±20% $\mu$ H        |
| 8  | Rotor Inertia           | 230g • cm <sup>2</sup> |
| 9  | Insulation Resistance   | 100MΩ 500VDC           |
| 10 | Insulation Class        | B ( 130℃ )             |
| 11 | Ambient Temperature     | -20℃ to 50℃            |
| 12 | Ambient Humidity        | 15% to 95%             |
| 13 | Motor Weight            | Approx 0.65kg          |
| 14 |                         |                        |

DL20GT2-12-635-AF

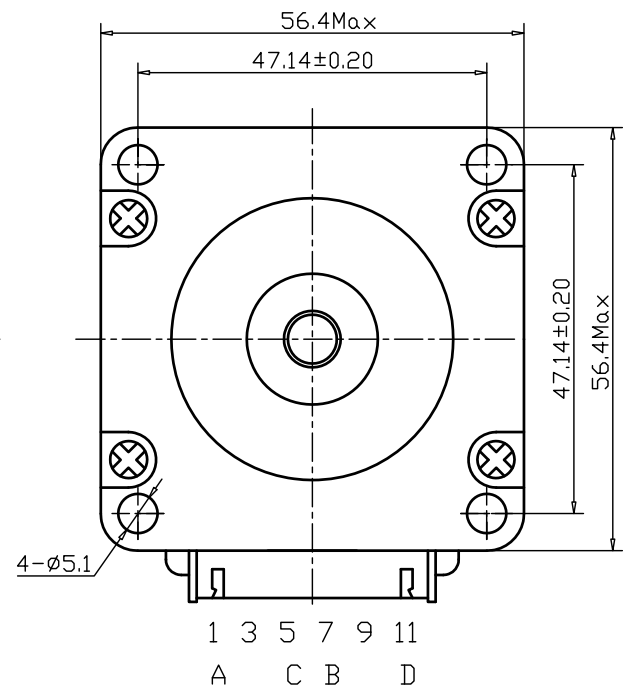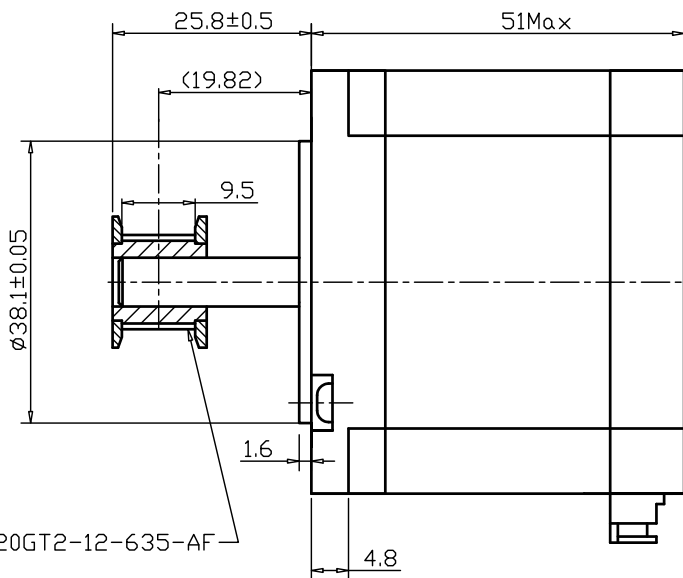

Unit:mm  
第一角画法  
First angle method  
未注线性与角度尺寸公差  
Tolerances for linear and angular dimensions  
without individual tolerance indications  
GB/T 1804-m eqv ISO 2768-1:m  
未注形状与位置尺寸公差  
Geometrical tolerances for features without  
individual tolerance indications  
GB/T 1184-k eqv ISO 2768-2:k



|            |           |          |
|------------|-----------|----------|
| DESIGN     |           | 20151111 |
| CHECK      |           |          |
| TECHNOLOGY |           |          |
| STANDARD   |           |          |
| APPROVE    |           |          |
| NAMES      | SINGATURE | DATE     |

STEPPING MOTOR

TYPE: HYBRID STEPPING MOTOR SCALE XX Rev. 1.0 SHEET 1 OF 1

Model: KL23H251-28-4Ap

|      |          |
|------|----------|
| V1.0 | 20151111 |
| REV. | DATE     |