



Power


BATT : 7.2-24V

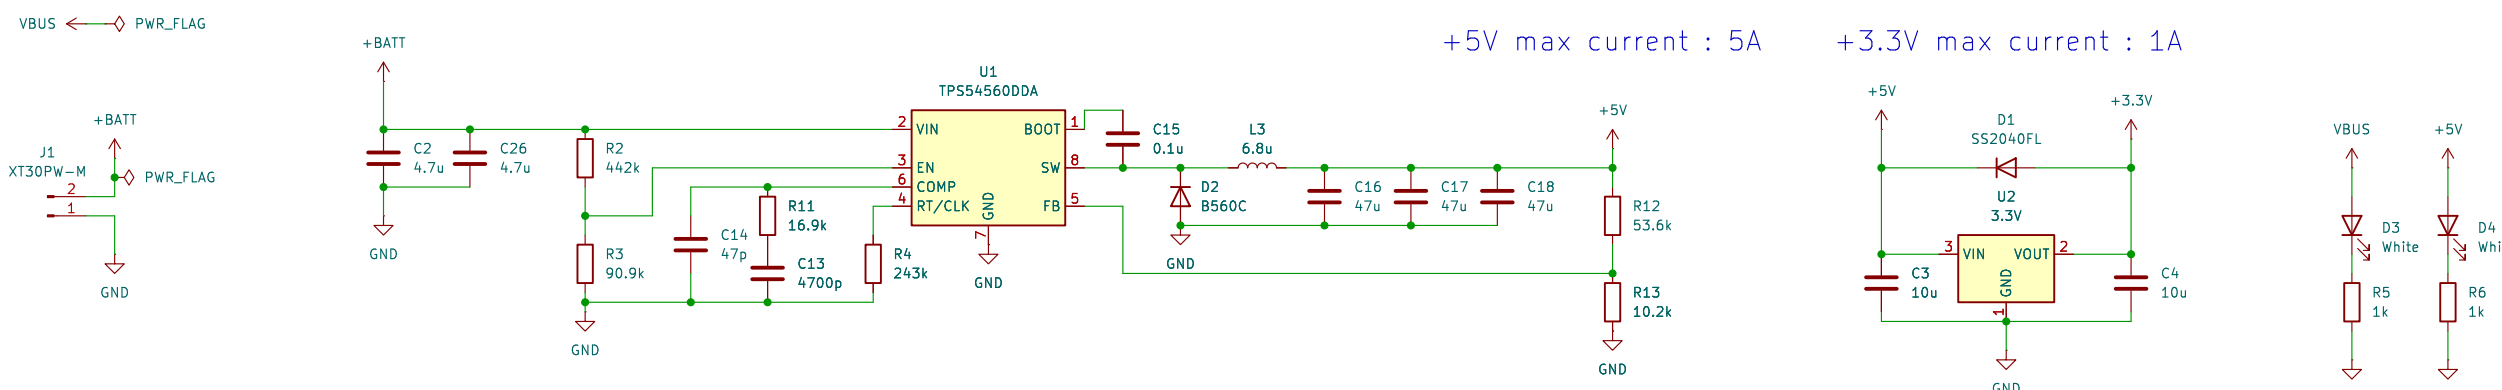


Ethernet+RJ45

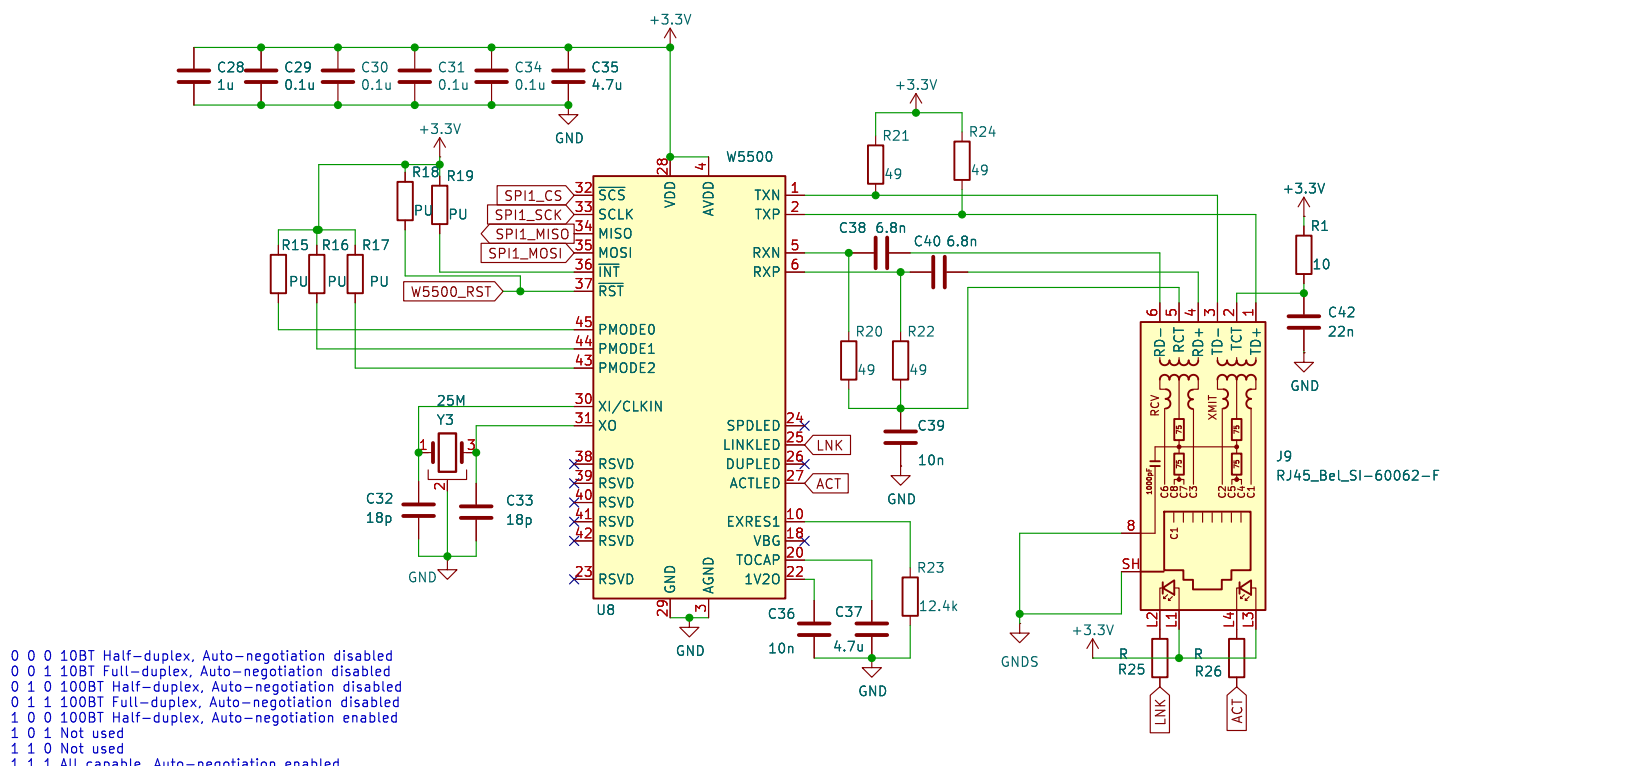


MCU_uart to USB type-C

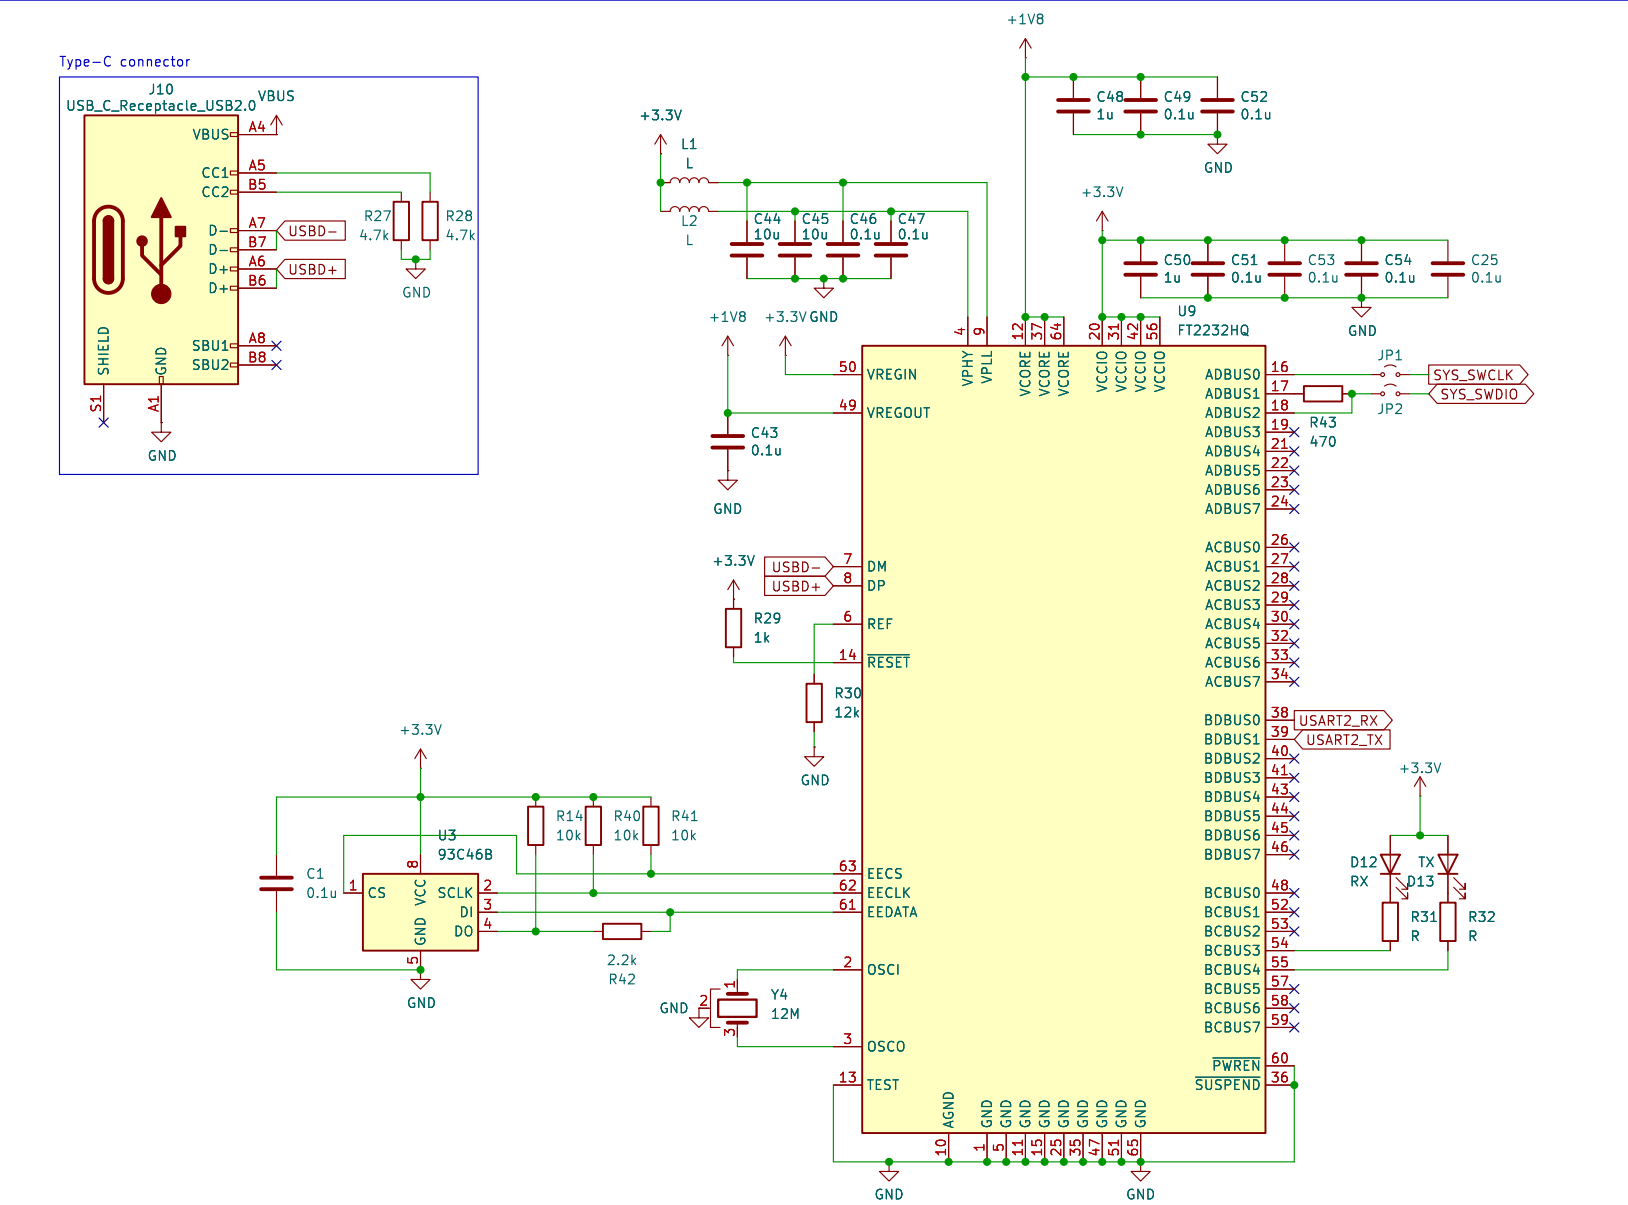


Interfaces

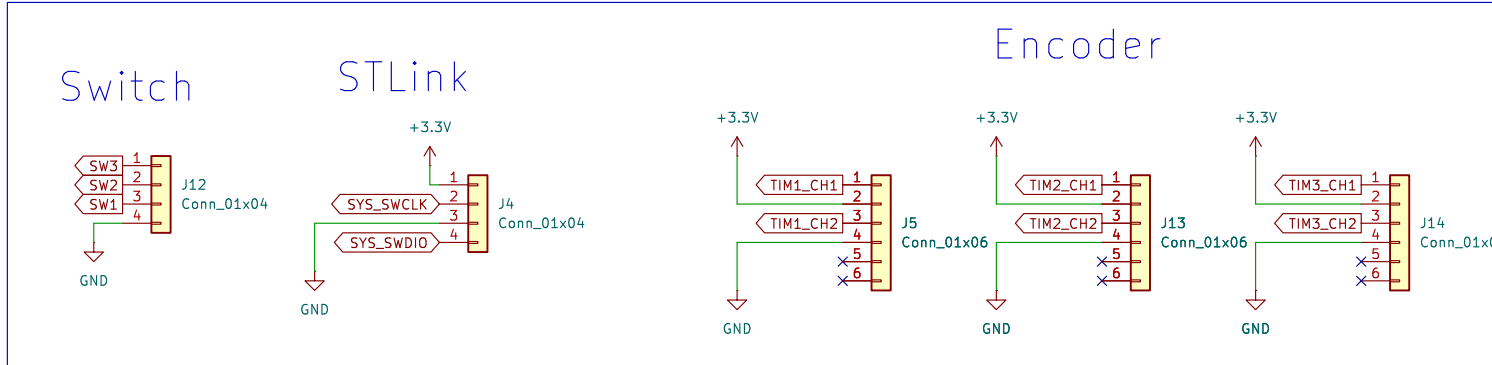


CAN

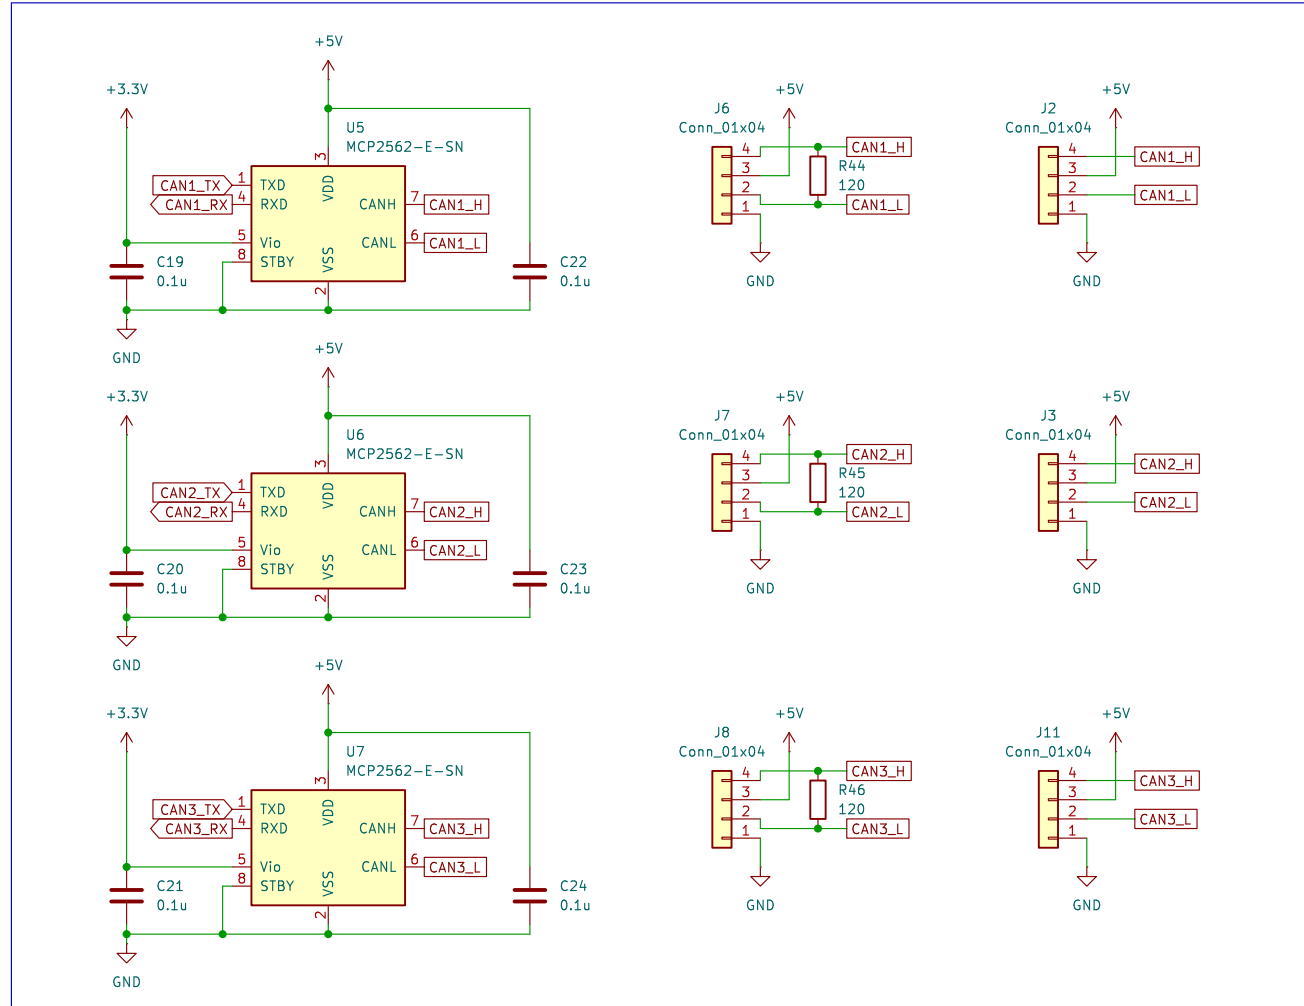

Gyro

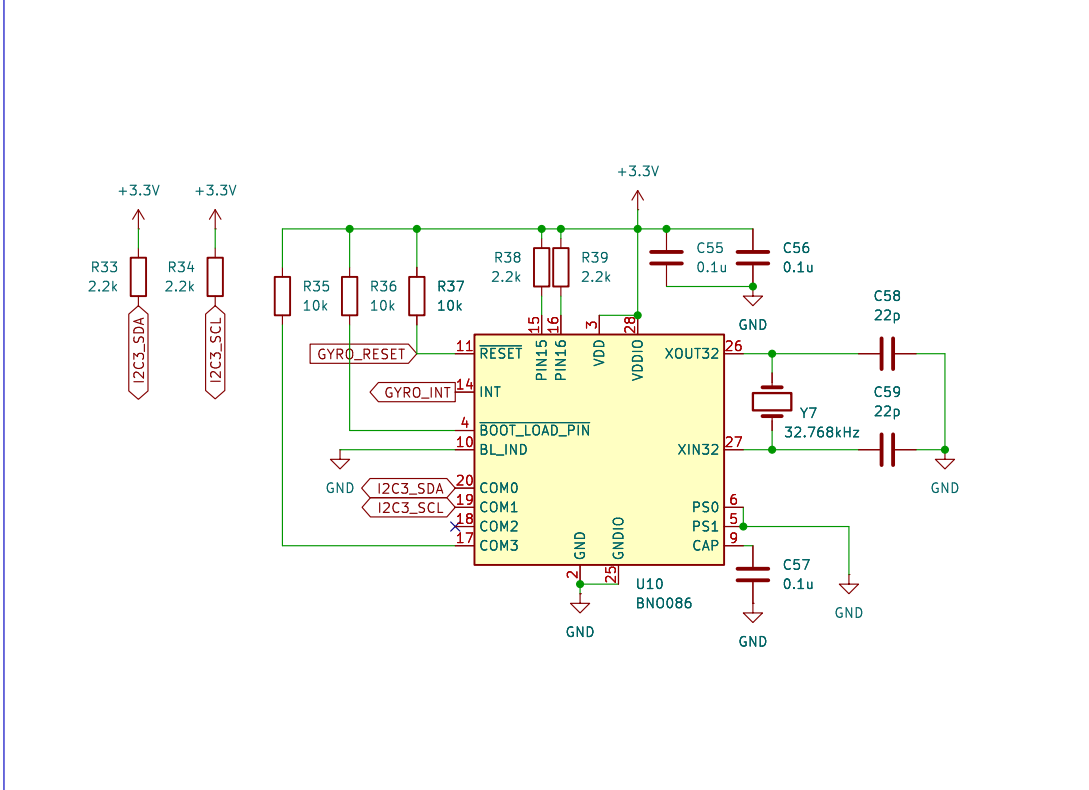

MCU

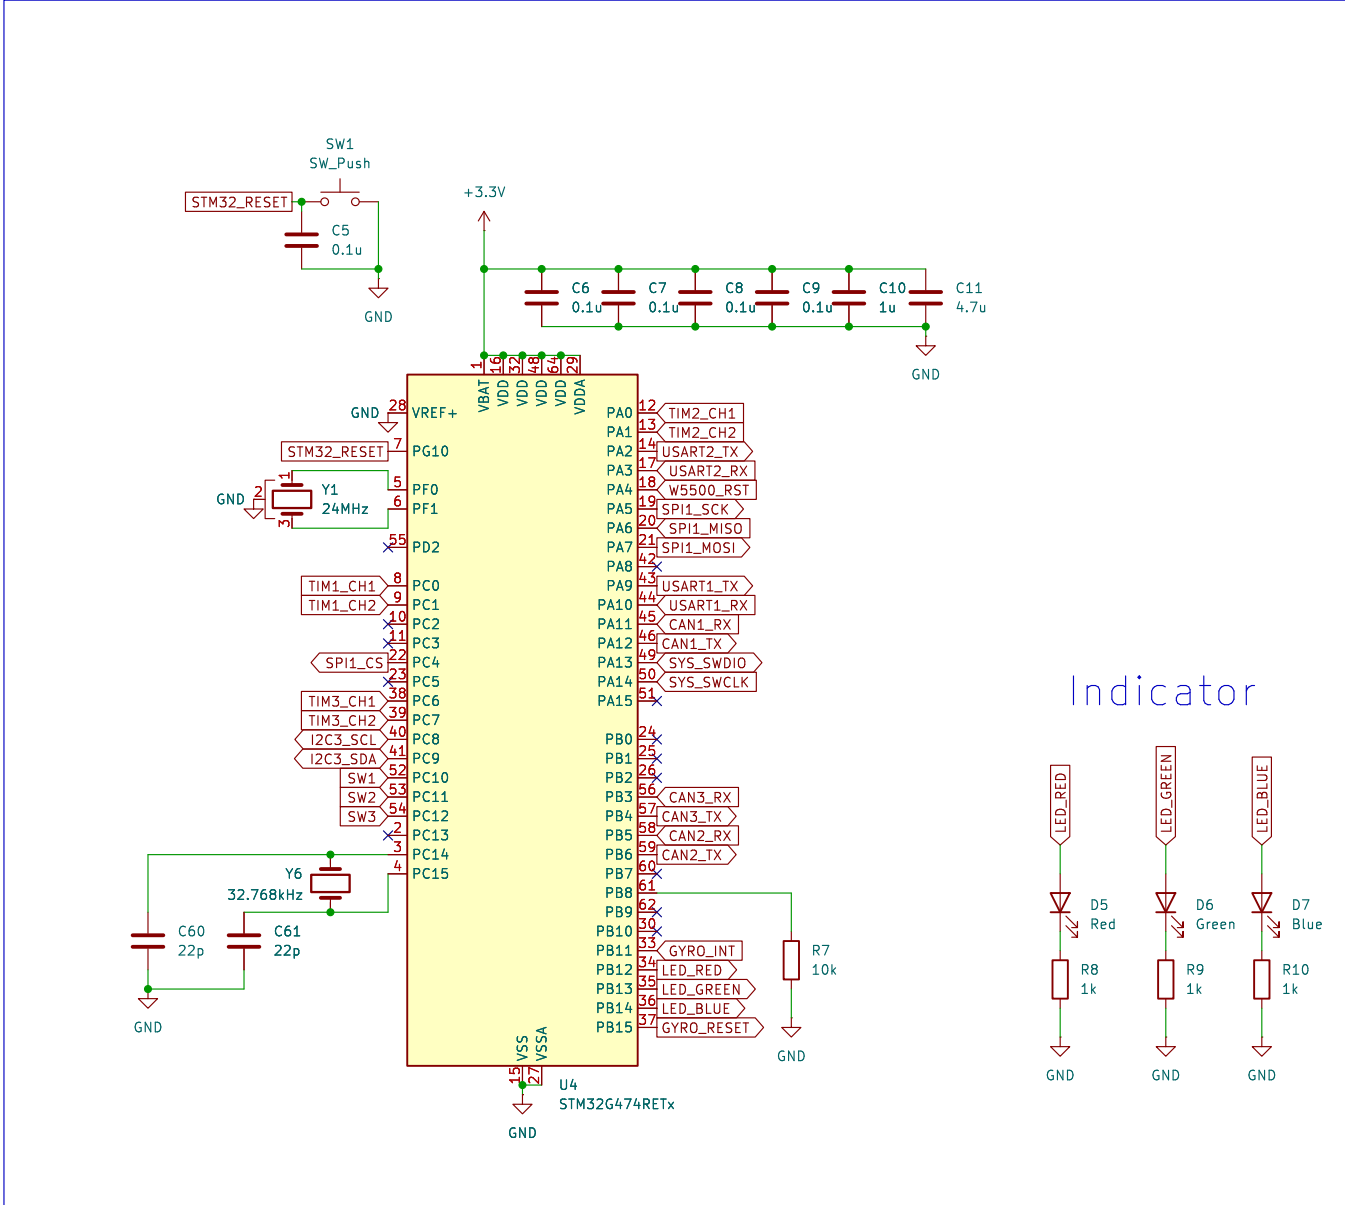

Indicator

