



Power



BATT : 7.2-24V

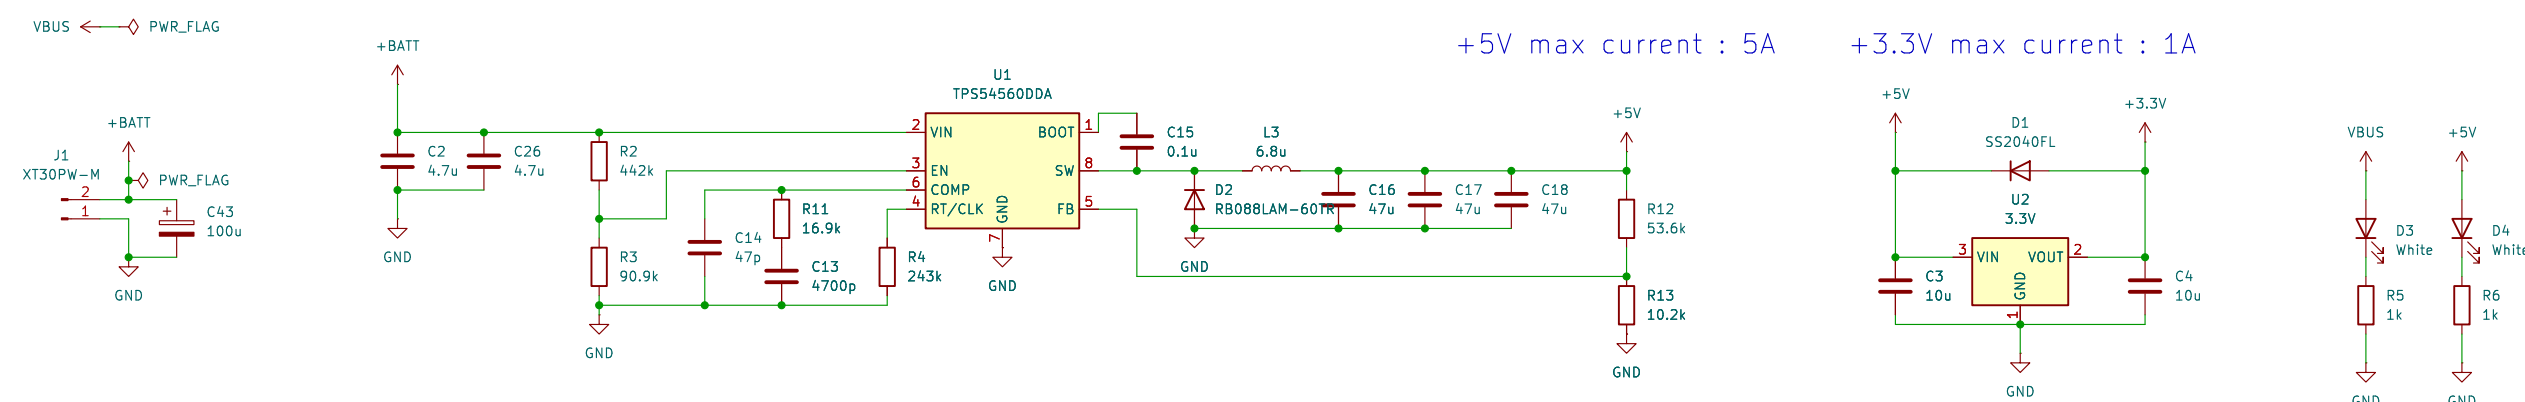



Ethernet+RJ45

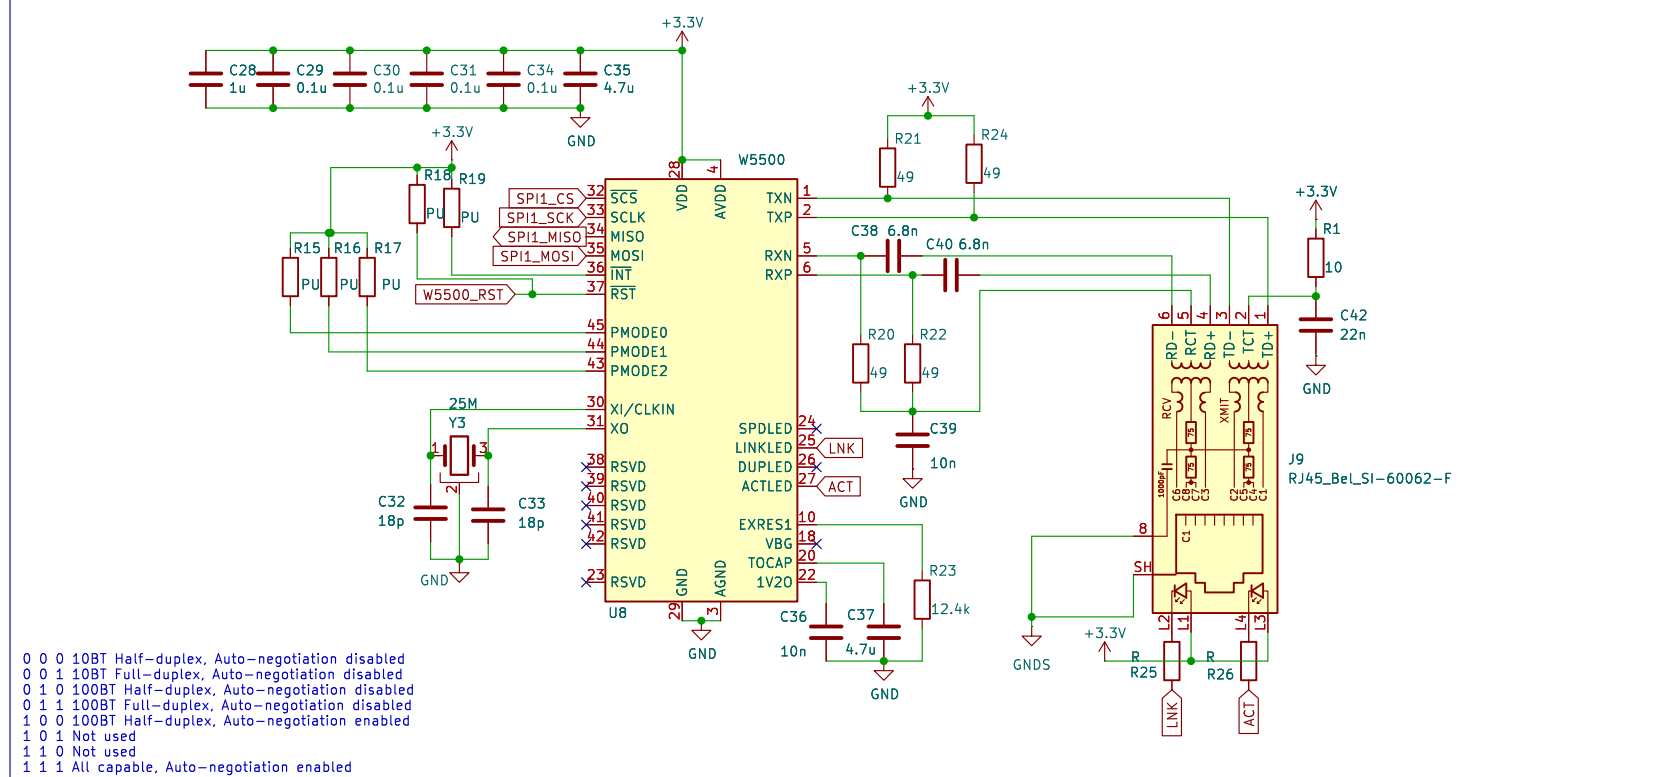


MCU uart to USB type-C

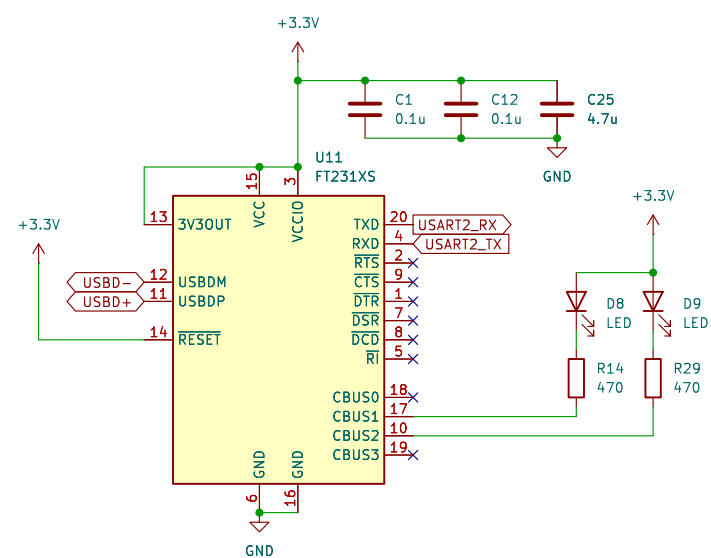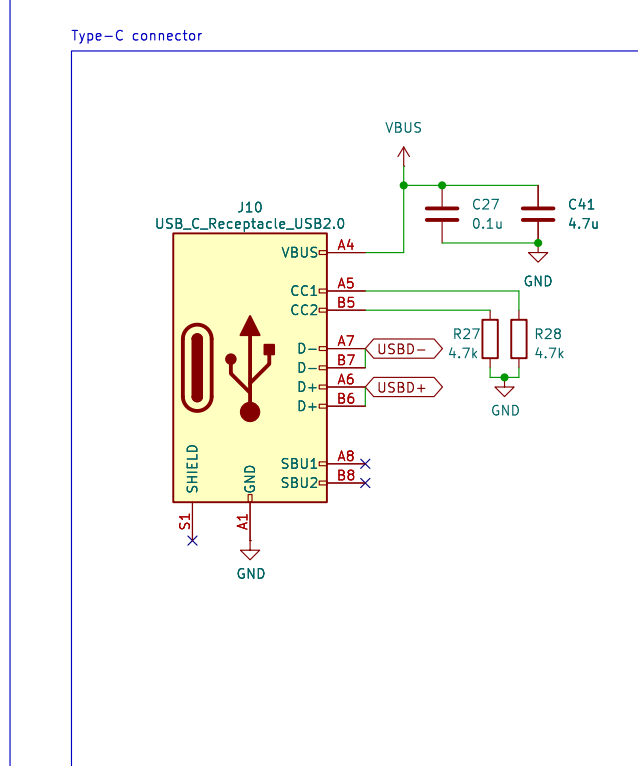


Gyro

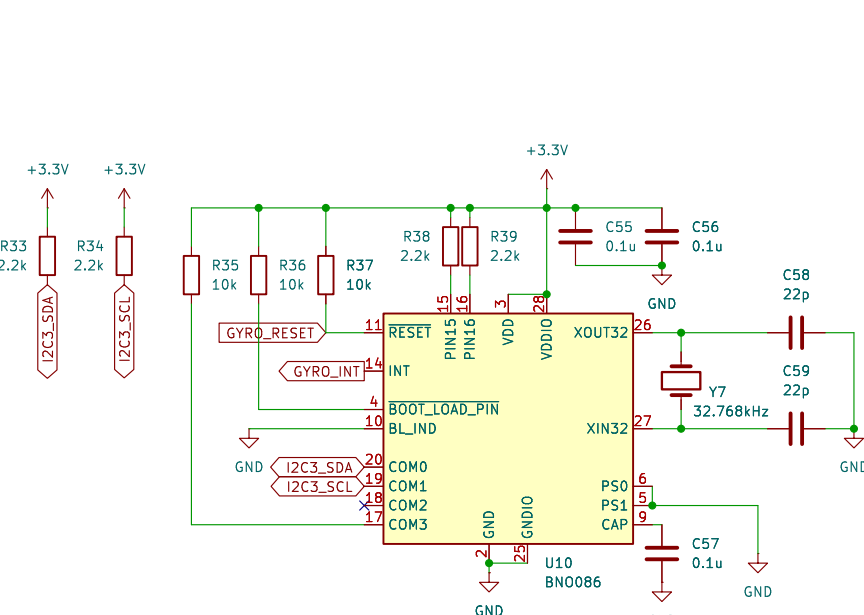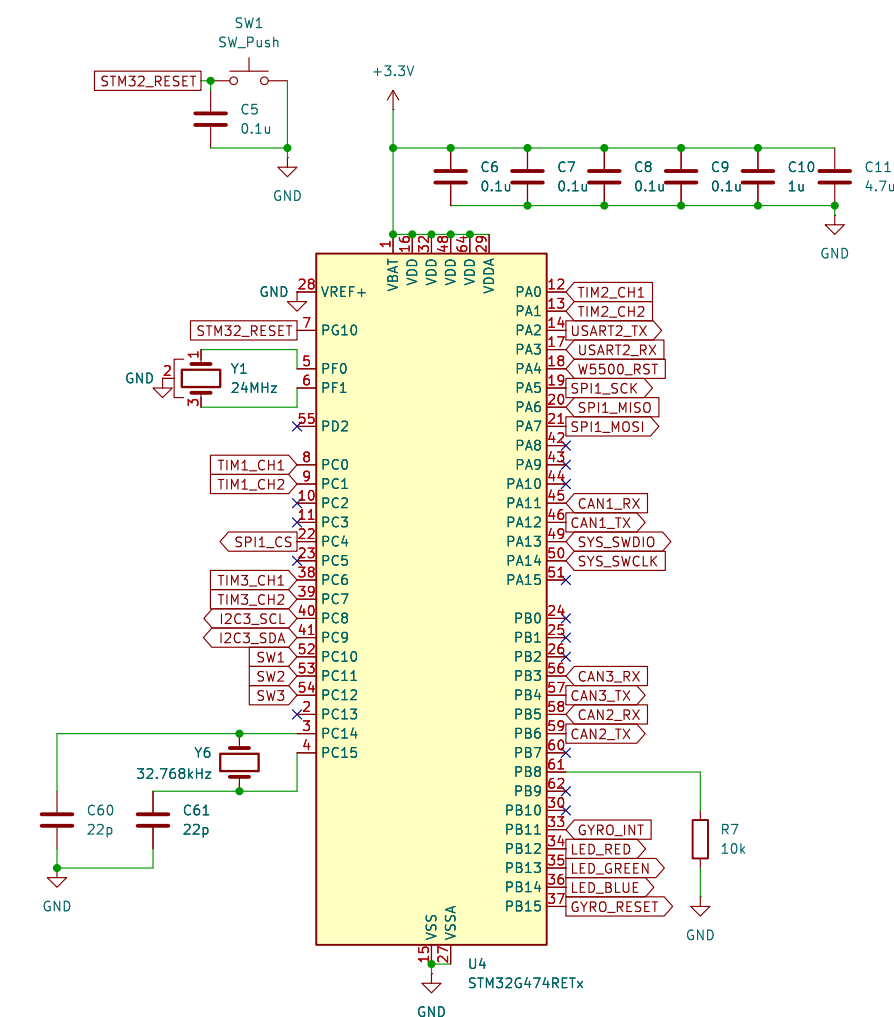MCU

Interfaces

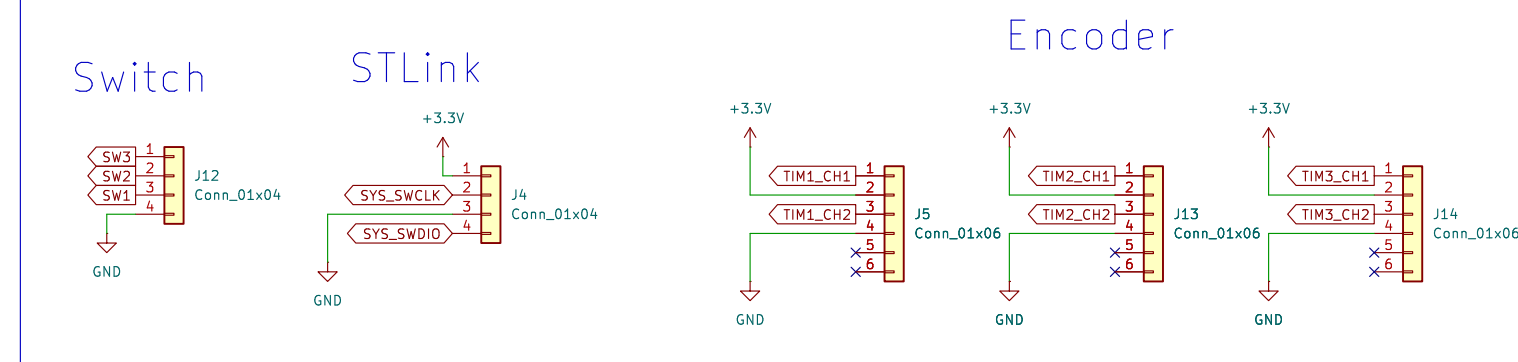

CAN

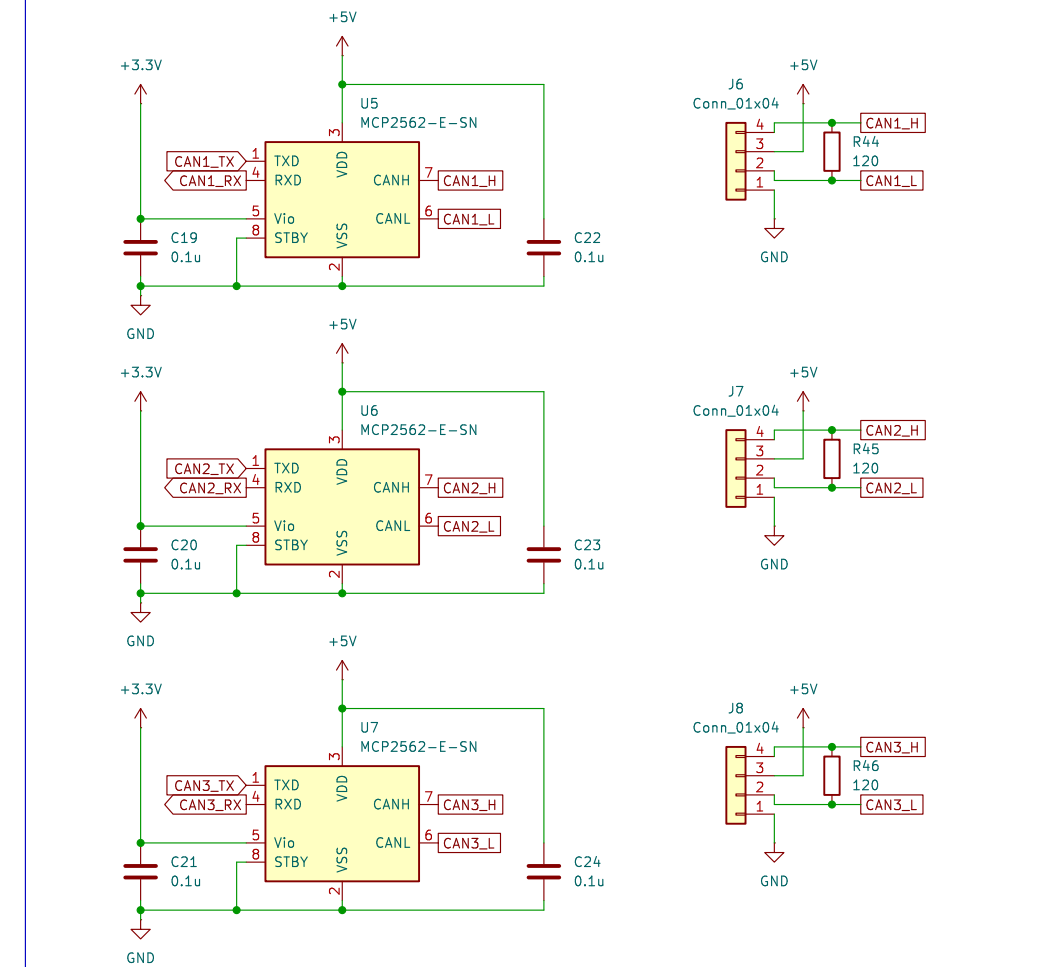

Indicator

