


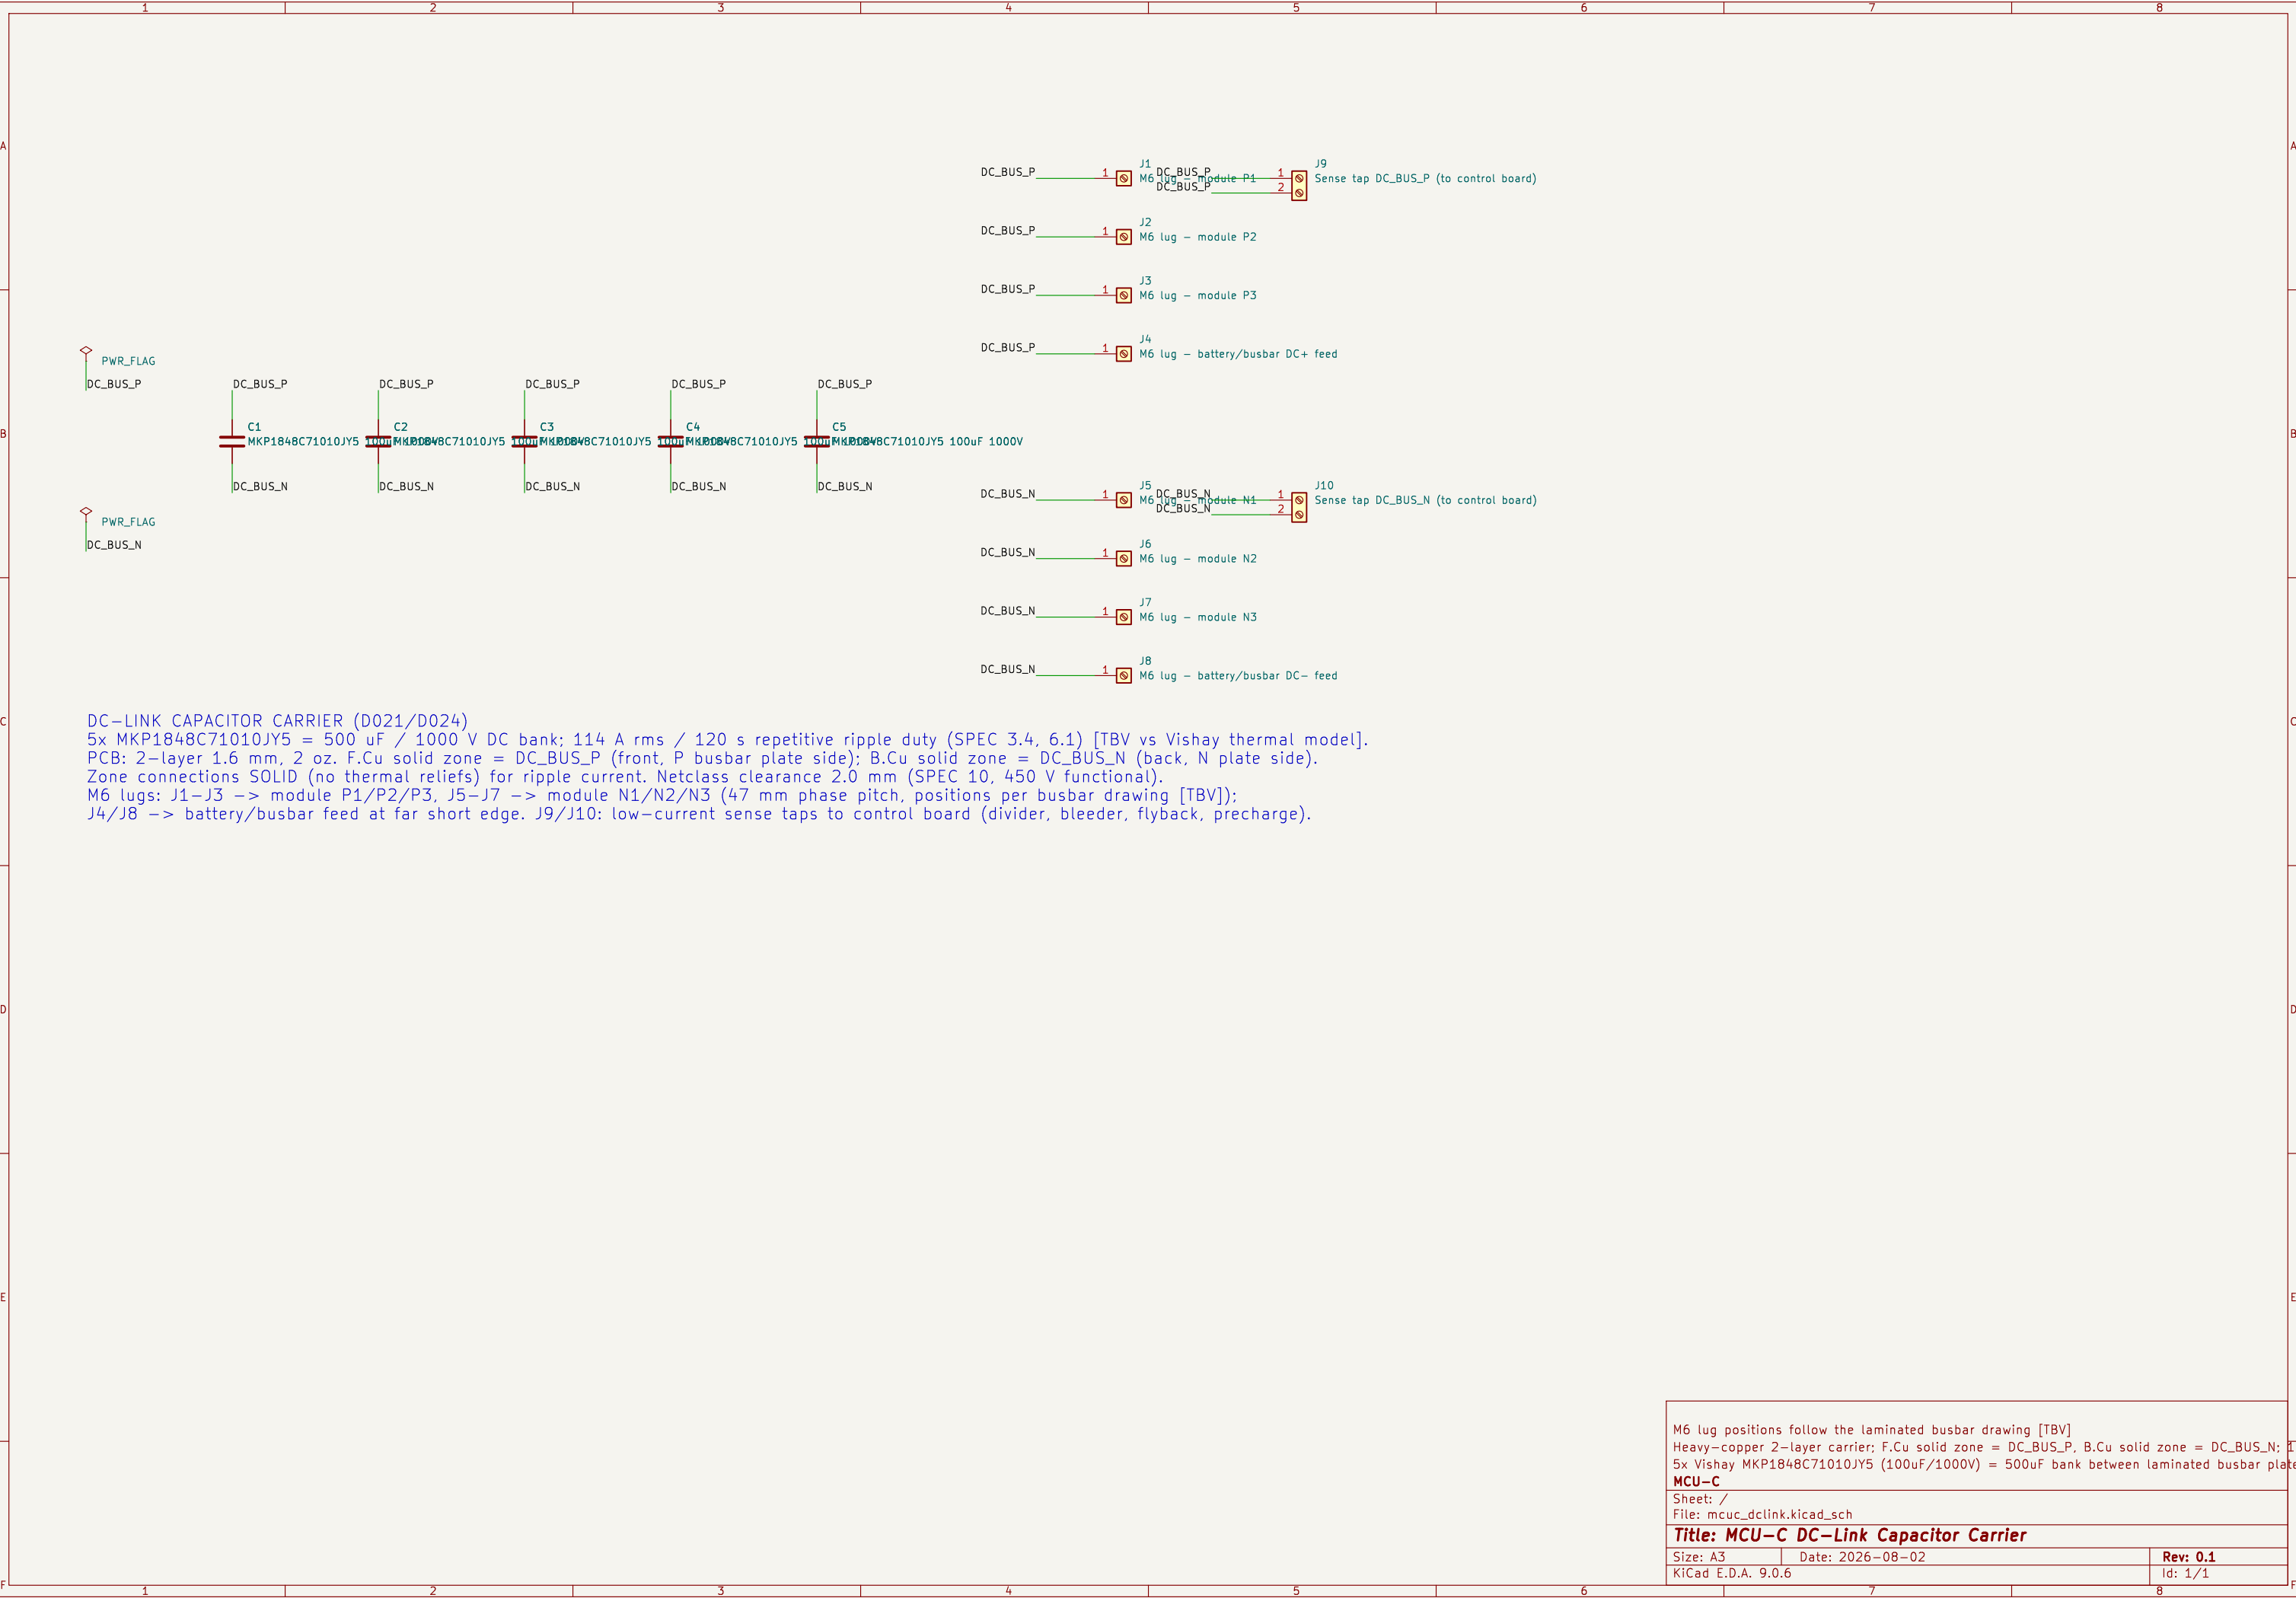

DC-LINK CAPACITOR CARRIER (D021/D024)
5x MKP1848C71010JY5 = 500 uF / 1000 V DC bank; 114 A rms / 120 s repetitive ripple duty (SPEC 3.4, 6.1) [TBV vs Vishay thermal model].
PCB: 2-layer 1.6 mm, 2 oz. F.Cu solid zone = DC_BUS_P (front, P busbar plate side); B.Cu solid zone = DC_BUS_N (back, N plate side).
Zone connections SOLID (no thermal reliefs) for ripple current. Netclass clearance 2.0 mm (SPEC 10, 450 V functional).
M6 lugs: J1-J3 -> module P1/P2/P3, J5-J7 -> module N1/N2/N3 (47 mm phase pitch, positions per busbar drawing [TBV]);
J4/J8 -> battery/busbar feed at far short edge. J9/J10: low-current sense taps to control board (divider, bleeder, flyback, precharge).

M6 lug positions follow the laminated busbar drawing [TBV]		
Heavy-copper 2-layer carrier; F.Cu solid zone = DC_BUS_P, B.Cu solid zone = DC_BUS_N; 114 A rms		
5x Vishay MKP1848C71010JY5 (100uF/1000V) = 500uF bank between laminated busbar plates (D021, D024)		
MCU-C		
Sheet: /		
File: mcuc_dclink.kicad_sch		
Title: MCU-C DC-Link Capacitor Carrier		
Size: A3	Date: 2026-08-02	Rev: 0.1
KiCad E.D.A. 9.0.6		Id: 1/1