

VCU pin out V2.3 / V2.4


24P connector on cable							
1	Out1	A3	PP	ENABLE	AC ON	PWM3	G4
9	Out2	A2	CAN L	BMS	CAN1L	PWM2	G0
17	Out3	A1	CAN H	Heater	CAN1H	PWM1	Cp
							12V

8
16
24

MPC2515 Pinout	
CS	G5
MISO	G19
MOSI	G23
SCK	G18
INT	G15

Function VCU		
PP	I39	Input
Enable	I35	Input
Heater	I36	Input
AC compressor	I32	Input
Out1	G26	Output
CANrx	G16	serial
CANtx	G17	serial
PWM1	G14	pwm
PWM2	G25	pwm
PWM3	G33	pwm
DCDC relay	G4	Output
Disable	G0	Output
Out2	D27	Output
Out3	D12	Output
Buzzer	D13	Output
Cp signal	G3	Input
Cp relay	G2	Output
Throttle1	AD1	Analog
Throttle2	AD2	Analog
Analog3	AD3	Analog
sense 12V	AD4	Analog

ESP32 DEVKIT V1 – DOIT version with 36 GPIOs

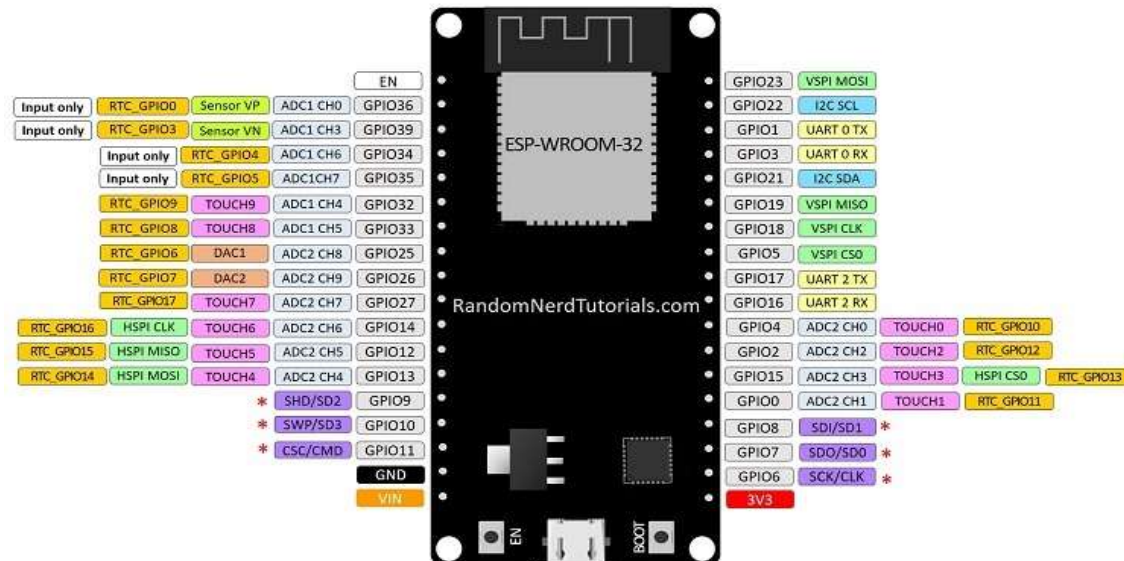

* Pins SCK/CLK, SDO/SD0, SDI/SD1, SHD/SD2, SWP/SD3 and SCS/CMD, namely, GPIO6 to GPIO11 are connected to the integrated SPI flash integrated on ESP-WROOM-32 and are not recommended for other uses.

