



Product catalogue

Coolant, Sump Cleaning & Filtration

Remove sludge, chips and swarf from machine coolant, separate tramp oil and keep coolant working longer. Sump cleaning, tramp oil separation and coolant filtration.



In this catalogue

1. Sump cleaner
2. How it works
3. Models and specifications
4. Tramp oil separator
5. Filtration range
6. Enquiry and contact

Products by

OILMAX · VGS & CO

Coolant / sump cleaning system

Improve product quality, reduce coolant expenses

The sump cleaner removes very fine dirt from coolant, down to 10 µm, using vacuum created in its tank. There are no consumables, so there is no recurring cost. Collected dirt is cleaned out and the unit is put straight back to use.

No filter element

No replacement cost

Improved product finish

Reduced coolant consumption

Extended coolant change period

Reduced machine downtime

Reduced pollution and environmental impact

Reduced storage and disposal cost of waste oil



Applications

CNC / VMC chips

Grinding

Glass grinding

Polymer quenching

Chips suction

Oil suction

Centralised coolant tank

Water filtration



How it works

Vacuum suction through a reusable mesh basket

The sump cleaner removes sludge, metal chips and swarf from coolant tanks and filters the coolant through a reusable stainless steel mesh basket.

A two-stage vacuum blower creates vacuum in the tank of the unit. This sucks in coolant, chips and swarf, which pass through the mesh basket. Contamination collects in the basket and clean coolant flows into the tank.

A centrifugal delivery pump returns the clean coolant to the machine.

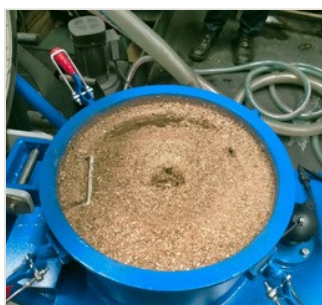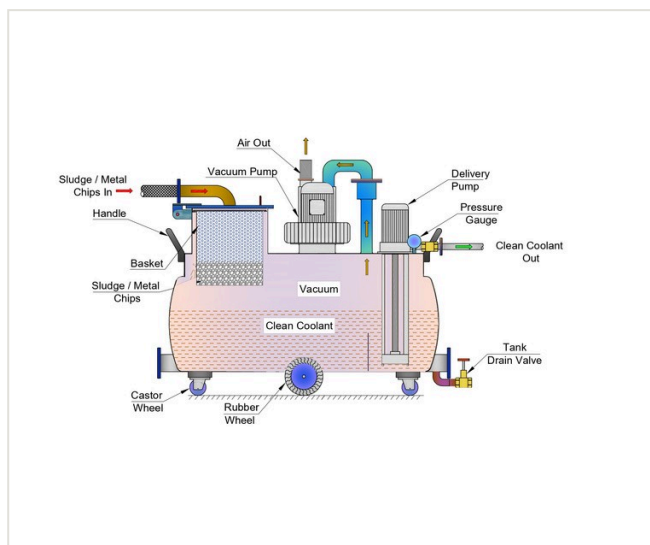

The mesh basket: before use, collecting fines, full of chips, and being emptied

Models and specifications

Sump cleaner range

Model	SC 50	SC 200	SC 300	SC 400	SC 500
Tank capacity (L)	50	200	300	400	500
Basket capacity (L)	10	18	25	25	25
Max. vacuum (mm Hg)	180	200	300	300	300
Vacuum pump motor (HP)	1	3	5	5	5
Dimensions L x W x H (in)	34 x 25 x 48	60 x 25 x 40	70 x 30 x 50	82 x 30 x 50	98 x 30 x 50



Sump cleaners in use on machine shop floors. One time installation, lifelong savings.

Tramp oil separator

Remove tramp oil from coolant



Tramp oil from slideways and hydraulics floats on the coolant, causing odour, skin irritation and short coolant life. The tramp oil separator removes it continuously.

- No replacement cost
- Improved EHS compliance
- Reduced machine downtime
- Extended coolant change period
- Disinfection and deodorisation of coolant
- Prevents bad odour and skin irritation
- Reduced pollution and environmental impact
- Reduced storage and disposal cost of waste coolant

Filtration range

Coolant and oil filtration systems

- Magnetic separator
- Rare earth magnetic separator
- Conventional paper band filter
- Paper band filter
- Hydrocyclone filter
- Oil skimmer
- Centrifugal filter



To quote quickly, send us

- ☐ Number of machines and sump capacity of each
- ☐ Coolant type: oil or emulsion
- ☐ Material machined and type of contamination
- ☐ Grinding, machining or another process
- ☐ Whether tramp oil is a problem
- ☐ Central tank or individual machines

Related SHK catalogues

Chip Conveyors

Conveyors matched to the chip and the machine

Chip Compactors

Briquetting of chips, swarf and grinding dust

Oil Mist Collection

Air Seiki mist collectors for machine tools

How we work

From selection to support

01

Select

We review the part, the machine and the problem, and recommend the right product.

02

Supply

Equipment from established manufacturers, configured for your machine.

03

Install

Support with mounting, integration and first use on your shop floor.

04

Support

Service, spares and help when production needs change.

Start with the problem

Tell us what the machine or the part needs. We work back from the problem to the product, not the other way round.

One partner around the machine

Workholding, tooling, probing, chip and coolant handling, and machine services from one engineering team.

Established manufacturers

Products from specialist manufacturers, selected and supported locally from Bengaluru.

Talk to an engineer

Send a drawing, a photo of the machine or a short description of the problem. We will come back with the right solution.

Contact

Shrinivas M
Director, Business
Development
+91 86600 36390 (call /
WhatsApp)
shktechservices@gmail.com

Visit

SHK Tech Services
No. 46, 2nd Floor, 14th Cross Road,
2nd Stage Peenya,
Opp. CLAAS Agricultural
Machinery Pvt. Ltd., Bengaluru
560058
arcanelinx-web-
studio.github.io/SHKTech