

WATER PURIFIER CATALOGUE

UPDATED VERSION IN MAY 2026



Guangdong OneMi Environmental Technology Co., Ltd.

Website: <http://www.yimiro.com> Company Telephone: 86-0769-81060128

Contact person: Anson WhatsApp: +8613729999191 WeChat: 13729999191

Address: 6/F, Bldg 2, Huihong Innovation Park, No.30 Fumin Nansan Rd, Baopo, Dalang, Dongguan, Guangdong 523770, China




Contents

01	Company Profile	54	T33 Specifications
02	Certificate Qualification	54	T33 / LED-UV Specifications
03	Quality and Culture	56 - 57	Snap filter Specifications
04	X1/X2 Characteristics and Functions	58	Full-Range Water Purification Accessories
05	Features of X1/X2 Series Products	59	10-inch filter bottle shell
06	X1/X2 Configuration List	60	20-inch filter bottle shell
07	X1/X2 Customized Configuration Detailed List	61 - 62	Membrane housing series
08	X1 Parameters - Tankless Water Filter	63	Automatic water storage kettle
09	X2A Parameters - Tankless Water Filter	64	Pressure Tank / PE water pipe Series
10	X2B Parameters - Tankless Water Filter	65	Other installation accessory series
11	H Series High-flow Water Filter	66	Fixed clamp series
12	F/E/H Series Configuration List	67	Filter bottle hanging plate series
13	F/E/H Series Customized Configuration Detailed List	68	Threaded joint series
14	F5-600 Parameters - Tankless Water Filter	69 - 72	I-Quick-Connect Straight Series
15	E5-600 Parameters - Tankless Water Filter	73 - 76	L-Quick-Connect Elbow Series
16	H5-600 Parameters - Tankless Water Filter	77 - 80	T-Quick-Connect Tee Fitting Series
17	X5 Water Purifier	81 - 82	Quick-Connect Ball Valve Series
18	X5 Configuration List	83	Check valve / Wastewater ratio Series
19	X5 Customized Configuration Detailed List	84	Water Leakage Protector Series
20	X5 Parameters - Tankless Water Filter		
21	X3 Clip-On Direct Water Filter		
22	X3 Characteristics and Functions		
23	X3 Parameters - Low-flow Water Filter		
24	V/F/E/H Series Water Filter		
25	V/F/E/H Series Configuration List		
26	V/F Series Customized Configuration Detailed List		
27	V5-75 Parameters - Low-flow Water Filter		
28	F5-75 Parameters - Low-flow Water Filter		
29	E5-75 Parameters - Low-flow Water Filter		
30	H5-75 Parameters - Low-flow Water Filter		
31	Non-electric RO System		
32	W5 Configuration List		
33	W5 Customized Configuration Detailed List		
34	W5 Parameters - Non-electric Water Filter		
35	Q-Series Kitchen Water Filter		
36	Configuration and Customization Table for the Q1/Q2/Q3		
37 - 39	Q1/Q2/Q3 Parameters - Kitchen water Filter		
40	Configuration and Customization Table for the Q5 Series		
41	Q5 Customized Configuration Detailed List		
42	Q5 Parameters - UF System Water Filter		
43	L Series Faucets, Shower Heads & Bathroom Pre-Filtration Systems		
44	L1 Parameters -Faucet Filter		
45	L2 Parameters - Shower Filter		
46	L3 Parameters - Pre-Filter		
47	Water Purifier Filter Cartridge Series		
48	PPF Specifications		
49	GAC Specifications		
50	CTO Specifications		
51	FSA Specifications		
52	Plug-in Filter Cartridge		
53	RO membrane (VONTRON/DUPONT)		

About Us

Guangdong OneMi Environmental Technology Co., Ltd., established in 2014, specializes in the environmental technology sector and is one of the few domestic enterprises with full industrial chain capabilities in water treatment solutions. The company integrates filter cartridge R&D, mold development, and complete machine manufacturing. Leveraging the manufacturing cluster advantages of the Pearl River Delta region, it has deployed a 9,000-square-meter smart manufacturing cluster in Dongguan, comprising a 6,000-square-meter semi-automated assembly workshop and a 3,000-square-meter precision injection molding center. Equipped with 18 professional machines including 120-ton to 800-ton injection molding machines and online spectral detectors, the company has established a vertical production system spanning from mold development to finished product assembly. With an annual production capacity exceeding 300,000 units, all processes strictly adhere to the ISO 9001:2015 quality management standard.

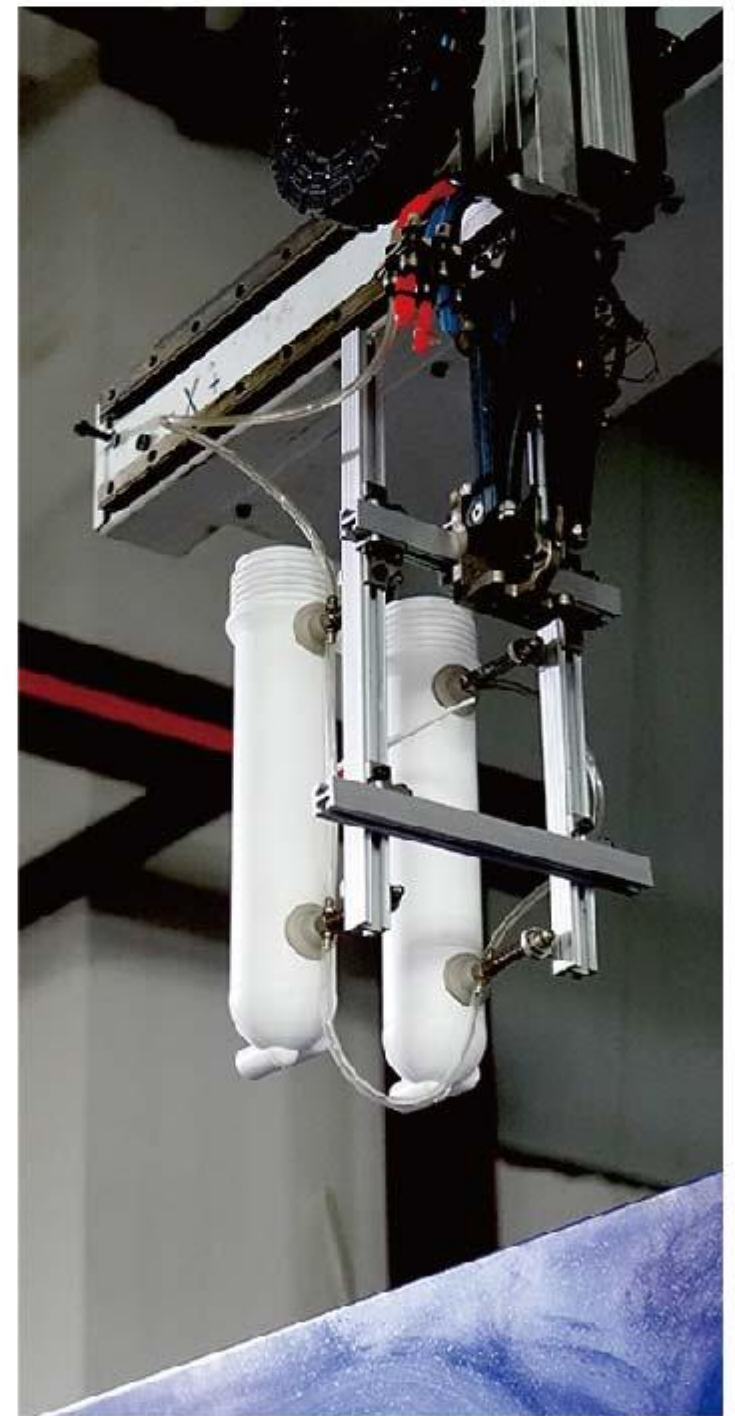

Technology-Driven, Intelligent Manufacturing Empowerment

The company focuses on innovating fundamental architectures for water purifiers, having accumulated over 30 national patents. Its flagship achievement, the "3rd-Generation Universal Filter Cartridge Integrated Waterway System", delivers groundbreaking advancements:

- **45° Quick-Release Cartridge:** Half-rotation cap design simplifies traditional filter replacement procedures.
- **Full-Size Compatibility:** Adapts to RO membranes from 1812 to 3213 dimensions without housing modification.
- **Patented Visual Alignment:** Instant confirmation of filter bottle tightness for operational safety.
- **External Anti-Loosening Lock:** Eliminates risks of bottle loosening and water leakage.
- **Buoyancy Leak Protection:** Electricity-free mechanism automatically shuts off water supply upon 1.7L leakage detection.
- **Gravity-Actuated Reservoir:** Power-free water storage via siphon-driven design.



兹证明

广东一米环境科技有限公司

为杜邦水处理解决方案

泰拜科™TapTec™家用反渗透膜元件

在中国广东地区销售推广合作伙伴

限定在中国大陆使用

有效期: 2025 年 1 月 1 日至 2025 年 12 月 31 日

本证明没有授权或暗示其拥有使用 DuPont™ TapTec™ 商标的许可。

在促销中使用这些商标须获得杜邦公司的商标使用许可。

本证明不构成也不应被理解为杜邦或其母公司、任何关联公司或任何第三方的承诺或保证，或为杜邦或其母公司、任何关联公司或任何第三方的责任或义务。被证明方不得从本证明内任何措辞推断出杜邦或其母公司、任何关联公司或任何第三方的责任或义务。杜邦或其母公司、任何关联公司或任何第三方的责任或义务，应由杜邦或其母公司、任何关联公司或任何第三方的法律文件予以规定。杜邦或其母公司、任何关联公司或任何第三方的责任或义务，不应因本证明而受到任何限制或修改。杜邦或其母公司、任何关联公司或任何第三方的责任或义务，应由杜邦或其母公司、任何关联公司或任何第三方的法律文件予以规定。杜邦或其母公司、任何关联公司或任何第三方的责任或义务，不应因本证明而受到任何限制或修改。

杜邦水处理解决方案 | DuPont Water Solutions

www.dupontwatersolutions.com

联系方式: 400-680-1888

©2022 杜邦水处理解决方案。杜邦、DuPont、以及所有其他名称均为杜邦或其母公司的注册商标。

Vertical Integration Full-Chain Intelligent Manufacturing

As the authorized China distributor for DuPont™ RO membranes (formerly Dow FilmTec) and Vontron RO membranes, we deliver vertically integrated solutions that comprehensively span from core materials to finished product manufacturing across the entire industrial chain.

品牌授权书

Letter of Authorization

兹授权

广东一米环境科技有限公司 为我公司线上合作伙伴，授权其在 天猫TMALL.COM

销售“VONTRON | 沃顿科技 | 沃通膜”品牌家用反渗透膜和纳滤膜产品。

销售区域: 仅限中国大陆地区 (不含港澳台)

授权期限: 2025年01月01日至2025年12月31日

店铺名称: 盛旗净水器配件滤芯商城

Intelligent Manufacturing Foundation & Quality Excellence

In production operations, the company employs MES intelligent manufacturing systems, with first-pass yield rates in critical manufacturing processes consistently maintained above 99.2%. Products undergo 20 rigorous quality validation protocols, including 72-hour salt spray corrosion testing and 100,000-cycle high-pressure water hammer impact simulations, ensuring decade-long operational reliability throughout their service life.



Working Atmosphere

We promote an open and inclusive work environment where employees are encouraged to share ideas and suggestions for personal and team development. We believe that a positive work environment stimulates creativity and drives the company forward.



Continuous Learning


We value the growth and development of our employees, providing training and learning opportunities to help them upgrade their skills, adapt to changes in the industry, and jointly meet the challenges of the future.

X1/X2 High Flow Rate Water Purifier

Pioneers "Pure Water Flush Technology" enabling first-cup drinkable water, prevents calcium/magnesium crystallization to extend RO membrane lifespan by 30%. Equipped with universal 10-inch filter cartridges and patented 45° quick-swap cartridge mechanism. Transparent inspection window enables visual status monitoring, buoyancy leak protection system automatically shuts off water supply upon 1.7L leakage detection. Integrated waterway panel reduces leakage points by 80% ($\leq 45\text{dB}$ quiet operation), compatible with 1812-3213 RO membranes without housing replacement, dual waterway system for separated drinking/living water supply.


Standing Water
Pure Water Flush, Pure from the First Glass



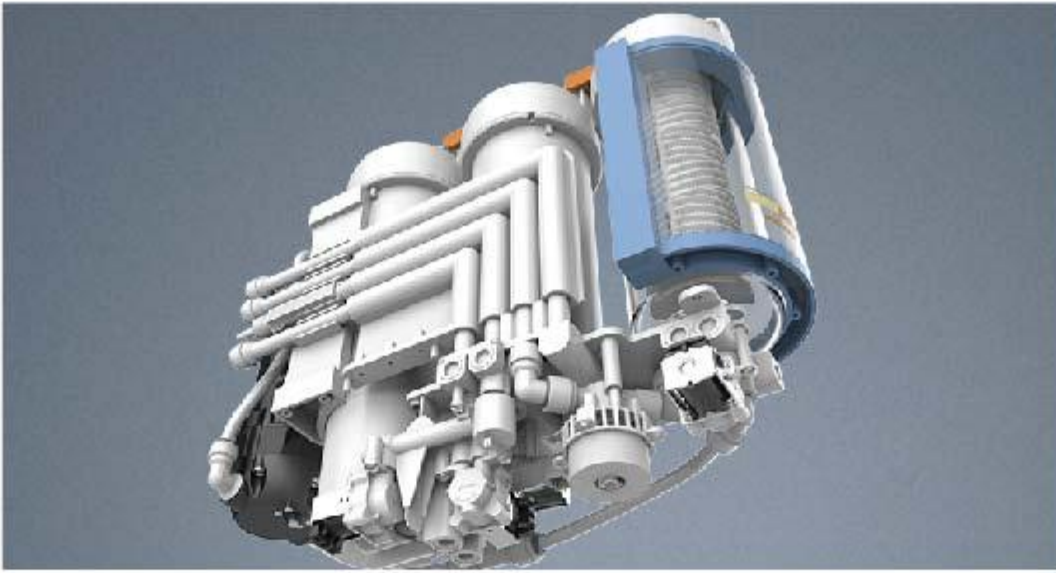


1. "0 standing water" Pure Water Replacement Design

Enables first-cup drinkable water, extends filter lifespan, and reduces replacement costs. Principle: Flushes membrane with purified water to prevent calcium/magnesium crystallization and clogging.

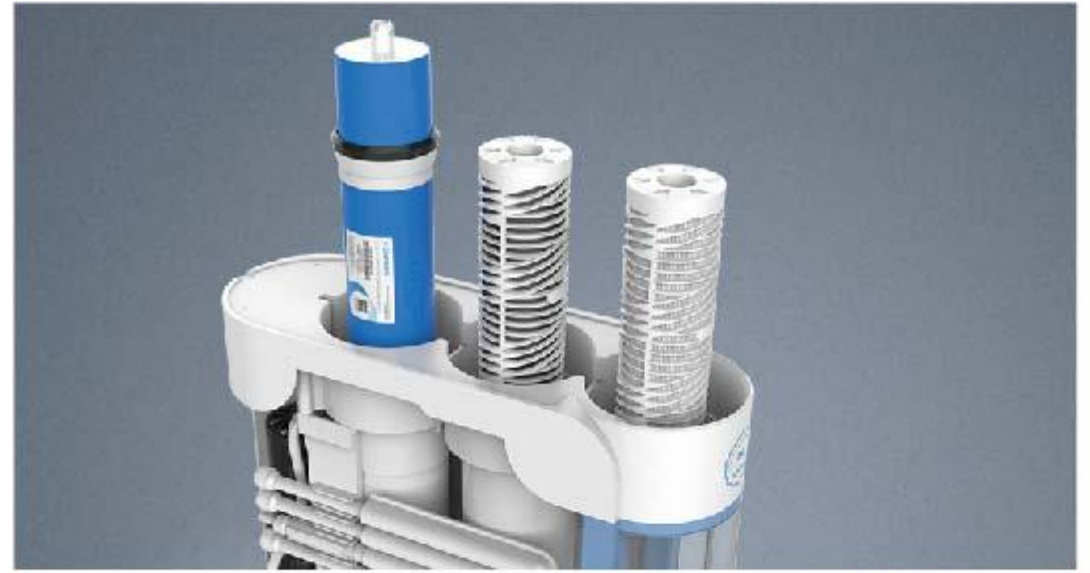

2. Universal Filters · Hassle-Free Replacement

Industry-standard 10-inch filter compatibility with no brand restrictions, 60% lower replacement costs vs proprietary filters.

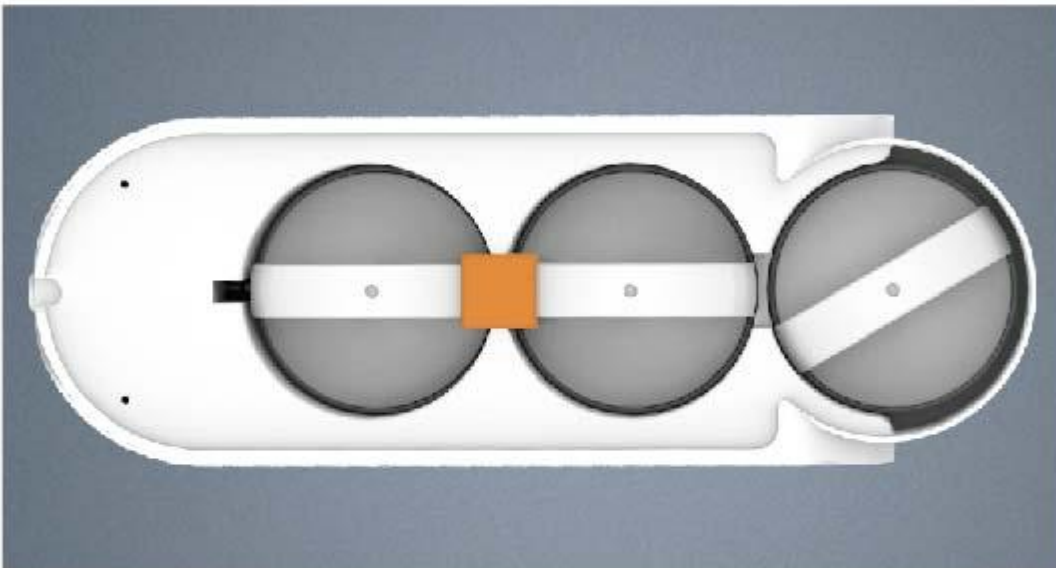


3. 45° Quick-Open Patent · Instant Filter Replacement

Self-developed half-rotation lid mechanism enables 3x faster filter changes than conventional universal systems, combining proprietary convenience with universal affordability.



4. Visual Monitoring · Self-Managed Maintenance

Transparent window allows direct filter status observation, physical markers enable manual replacement scheduling, eliminating total reliance on electronic reminders.

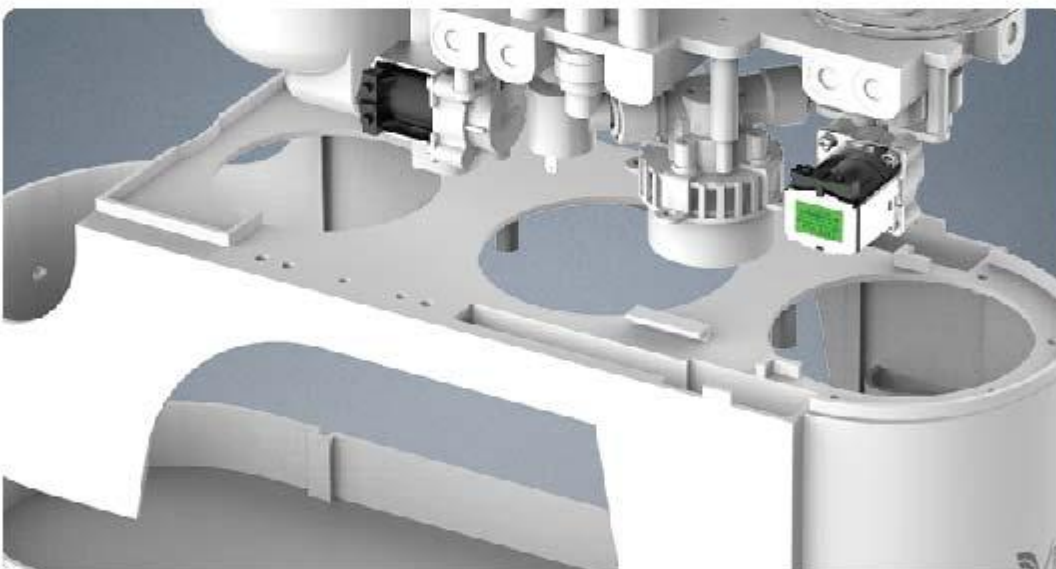

5. Active Leakproofing · Dual Safeguards

Buoyancy sensor triggers automatic water cutoff upon detecting 1.7L abnormal accumulation, establishing proactive flood prevention.



6. Integrated Waterway · Quiet & Reliable

Modular panel consolidates 23 traditional pipe connections, reducing leakage risks by 80% with ≤45dB operation noise (industry average: 55dB)



7. Reset-Enabled Filter Reminder

Mechanical lifespan indicator with manual cycle reset function for personalized maintenance.



8. Multi-Membrane Compatibility · Dual Output

Standard 3013 housing kit supports 1812-3213 full-size RO membranes, dual waterway design enables separate drinking/living water supply.

Filter 1		Stages 1-3: FSA 3-in-1 filter element / ≤25,000L total purified water capacity Replacement every ≤12 months 1. Folded PP Cotton Layer Intercepts ≥1μm sediment/rust and other large particles with 3D grooved structure, delivering 7× higher contaminant capacity than standard PP cotton to delay filter clogging. 2. Sintered Activated Carbon Layer (Dual-phase filtration) · ≥1050 Iodine Value · Scale inhibition rate ≥ 99% · Chemically removes residual chlorine, VOCs, pesticides and chloroform · Creates anti-corrosion barrier for RO membrane protection 3. Scale Inhibitor Layer Food-grade sustained-release technology suppresses 80%+ calcium/magnesium scaling, maintaining membrane system efficiency for 12,000L+ water output.
Filter 2		Stage 4 600G-OneMi RO Membrane Replacement every 24~60 months · Adsorbs residual chlorine in water and disinfection byproducts (such as chloroform), while removing partial heavy metals (e.g. lead, mercury) and abnormal colors and odors (e.g. musty smell and sulfides), improves water clarity. · High Flux and Strong Stability · Energy-saving Membrane
Filter 3		Stages 5-6: ACM 2-in-1 filter element Replacement every ≤12 months · ≥1050 Iodine Value · Sintering Process · Jacobi Coconut Shell Activated Carbon (NSF) Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥1-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.
Components		Stages 7:LED sterilization · Mercury-free Sterilization · Sterilization Rate ≥ 99.99%
Water Pump		E-CHEN Powerful Pump · Strong Torque · Low-frequency High-efficiency · High Tolerance · Quiet and Energy-saving
Filter Housing		ONEMI High Anti-explosion Positioning Filter Housing · Food-grade PP Material · Burst Pressure ≥4.2MPa
Circuit Valve		GVE High-quality Power Supply · Failure Rate of 0.02% · Top Manufacturer of Power Supplies for Water Purifiers
Waterway Valve		CNKB High Voltage Switch · ≥100,000 Times Life · Top Manufacturer of Electrical Control Accessories
Power Supply		CNKB Solenoid Valve · ≥100,000 Times Life · Top Manufacturer of Electrical Control Accessories
Faucet		Single Water Outlet · 0.0001 μm (Drinking Water) · 304 Stainless Steel · Weight ≤250g

Filter Element Customization Scheme



Filter 1 Customization

Frame-type FSA 3-in-1 composite filter element

· 1-micron filtration · ≥1050 Iodine Value · Scale inhibition rate ≥99%

* The 3-stage filter element is added with an outer frame design, which can eliminate the risk of "flat-mouth filter elements" failing to achieve filtering effects due to water channeling.

Upgrade Cost (USD) 0.7



Filter 2 Customization

600GPD EC Series Membrane

· High Anti-fouling High Flux
· High Desalination Rate

Upgrade Cost (USD) 10



Filter 3 Customization

Frame-type ACM Sintered Carbon

· ≥1050 Iodine Value · Sintering Process · Jacobi Coconut Shell Activated Carbon (NSF)

* The 3-stage filter element is added with an outer frame design, which can eliminate the risk of "flat-mouth filter elements" failing to achieve filtering effects due to water channeling.

Upgrade Cost (USD) 0.7



Filter 3 Advanced Customization

Upgraded to a 5-in-1 filter element featuring 1-micron filtration, 1050 iodine value adsorption, weak alkalization, mineralization, and strontium enrichment.

Upgrade Cost (USD) 3.5

Product Function Customization Scheme



Purification Mode Customization

The faucet is upgraded to a 304 stainless steel dual-outlet faucet, which can dispense 1-micron purified water and 0.0001-micron direct drinking water simultaneously.

Upgrade Cost (USD) 4



Product Specifications

Model	X1
Product Dimensions	465×161×410 (mm)
Filtration Principle	FSA + RO + ACM
Filtration Accuracy	0.0001 micron
Rated Power	4A/24V/96W (600 GPD) 5A/24V/120W (800 GPD / 1000 GPD)
Suitable Voltages	110~220V
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	635×220×470	0.066	14	420 pcs	840 pcs	1080 pcs

Standard Configuration Price (USD, EXW)

Flux / QTY	≤ 50 pcs	50-199 pcs	200-419 pcs	≥ 420 pcs
600 GPD	111	109	105	101
800 GPD (VONTRON)	130	128	123	118
1000 GPD (VONTRON)	134	132	128	123

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.
2. The total purchase volume of models X1/X2A/X2B can be combined.

0 pcs	50 pcs	200 pcs	420 pcs	840 pcs	1080 pcs
	●	●	●	●	●
	Logo customization	Logo customization Customized corrugated boxes Customized label laser printing	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes Product color customization



Product Specifications

Model	X2A-Real-time TDS level monitoring
Product Dimensions	478×161×410 (mm)
Filtration Principle	FSA + RO + ACM
Filtration Accuracy	0.0001 micron
Rated Power	4A/24V/96W (600 GPD) 5A/24V/120W (800 GPD / 1000 GPD)
Suitable Voltages	110~220V
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	635×220×470	0.066	14	420 pcs	840 pcs	1080 pcs

Standard Configuration Price (USD, EXW)

Flux / QTY	≤ 50 pcs	50-199 pcs	200-419 pcs	≥ 420 pcs
600 GPD	117	115	111	107
800 GPD (VONTRON)	135	133	128	123
1000 GPD (VONTRON)	139	137	132	127

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.
2. The total purchase volume of models X1/X2A/X2B can be combined.

0 pcs	50 pcs	200 pcs	420 pcs	840 pcs	1080 pcs
	●	●	●	●	●
	Logo customization	Logo customization Customized corrugated boxes Customized label laser printing	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes Product color customization



Product Specifications

Model	X2B
Product Dimensions	478×161×410 (mm)
Filtration Principle	FSA + RO + ACM
Filtration Accuracy	0.0001 micron
Rated Power	4A/24V/96W (600 GPD) 5A/24V/120W (800 GPD / 1000 GPD)
Suitable Voltages	110~220V
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	635×220×470	0.066	14	420 pcs	840 pcs	1080 pcs

Standard Configuration Price (USD, EXW)

Flux / QTY	≤ 50 pcs	50-199 pcs	200-419 pcs	≥ 420 pcs
600 GPD	113	111	107	103
800 GPD (VONTRON)	132	130	125	120
1000 GPD (VONTRON)	136	134	129	125

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.
2. The total purchase volume of models X1/X2A/X2B can be combined.

0 pcs	50 pcs	200 pcs	420 pcs	840 pcs	1080 pcs
	Logo customization	Logo customization Customized corrugated boxes Customized label laser printing	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes Product color customization

H5-600 High-flow Water Filter

Combining uncompromising quality with a 3.2MPa-rated burst-proof design, this system enables smart positioning and timer-guided cartridge replacement for easy maintenance, offering universal compatibility with leading water purifier brands



1-Stage		1-stage integrated purification - PP cotton filter element Replacement every ≤ 3 months - Weight 130g · Increase 20% Flow Rate 1-micron high-density fiber structure effectively intercepts visible impurities such as sediment, iron rust, colloids, and suspended solids.
2-Stage		2-stage adsorption purification - Granular activated carbon filter element Replacement every ≤ 6 months ≥350 Iodine Value · Coal-based Activated Carbon - Adsorbs residual chlorine in water and disinfection byproducts (such as chloroform), while removing partial heavy metals (e.g. lead, mercury) and abnormal colors and odors (e.g. musty smell and sulfides), improves water clarity.
3-Stage		3-stage deep purification - Sintered activated carbon filter element Replacement every ≤ 6 months ≥350 Iodine Value · Coal-based Activated Carbon - Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥1-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.
4-Stage		4-stage core purification - ONEMI RO Membrane Replacement every ≤ 24 months - High Flux and Strong Stability · Energy-saving Membrane 0.0001-micron filtration accuracy efficiently removes heavy metals (e.g. lead, arsenic, mercury, cadmium), inorganic salts (sodium, calcium, magnesium ions), nitrates, and other dissolved impurities, and completely blocks bacteria, viruses, and spores to ensure the biological safety of drinking water.
5-Stage		5-stage taste optimization Post-activated carbon Replacement every ≤ 12 months ≥1050 Iodine Value · Sintering Process - Jacobi Coconut Shell Activated Carbon (NSF Certified) - Deeply adsorbs residual odorous volatile organic compounds, improves water quality and taste.
Water Pump		Volian Powerful Pump Strong Torque · Low-frequency High-efficiency · High Tolerance · Quiet and Energy-saving
Filter Housing		ONEMI High Anti-Explosion Positioning Filter Housing Food-grade PP Material · Burst Pressure ≥4.2MPa
Circuit Valve		GVE High-quality Power Supply Failure Rate of 0.02% · Top Manufacturer of Power Supplies for Water Purifiers
Waterway Valve		CNKB High and Low Voltage Switch ≥100,000 Times Life · Top Manufacturer of Electrical Control Accessories
Power Supply		CNKB Solenoid Valve ≥100,000 Times Life · Top Manufacturer of Electrical Control Accessories
Faucet		Alloy Faucet Life ≥ 1 Year · Materials of Zinc Copper · Weight ≤100g

Filter Element Customization Scheme



1-Stage Filter Element Customization

Pinhole + Groove PP

- Weight 150g
- Increase 50% Flow Rate
- Replacement every ≤6 months

Upgrade Cost (USD) 0.17



3-Stage Filter Element Customization

CTO Sintered Carbon

- ≥1050 Iodine Value
- Sintering Process
- Jacobi Coconut Shell Activated Carbon (NSF)
- Replacement every ≤12 months

Upgrade Cost (USD) 2.2



Add Weak Alkalization Filter Element

- Total Water Purification Capacity 2000L
- Adjust the pH Value to Reach 7.5~9.0
- Replacement every ≤12 months

Upgrade Cost (USD) 4.3



Add LED UV Ultraviolet Sterilizer

- Bactericidal Rate up to 99%
- Service life: not less than 13 years (operating 2 hours daily)

Upgrade Cost (USD) 13



2-Stage Filter Element Customization

GAC Coconut AC

- ≥1050 Iodine Value
- Kuraray Japan Coconut Shell Activated Carbon(NSF)
- Replacement every ≤12 months

Upgrade Cost (USD) 1.6



4-Stage Filter Element Customization

VONTRON EC Series Membrane

- High Anti-fouling High Flux
- High Desalination Rate
- Replacement every 24~36 months

Upgrade Cost (USD) 10



Add Mineralization Filter Element

- Total Water Purification Capacity 2000L
- Add Mineralizing Elements Ca, Mg, K
- Replacement every ≤12 months

Upgrade Cost (USD) 4.3

Product Function Customization Scheme



Filter Bottle Color Customization

Change the white filter bottle to a transparent one; it is recommended that a water leak protector be installed after the change.

Upgrade Cost (USD) 0.5/pcs



Faucet Customization Scheme

304 Stainless Steel

- Life ≥ 5 Years
- 304 Stainless Steel
- Weight ≤250g

Upgrade Cost (USD) 2



Add Water Leakage Protector

Eliminate the Risk of Property Loss Caused by Water Leakage of Water Purifier

Upgrade Cost (USD) 1.3



Add a computer control box

Equipped with an LED display panel, it can detect the TDS values of raw water and purified water, making the working status clear at a glance.

Upgrade Cost (USD) 13



Product Specifications

Model	F5-600
Product Dimensions	395x185x465 (mm)
Purified Water Flow Rate	600 GPD (95L/H)
Filtration Principle	PPF + UDF + CTO + RO + T33
Filtration Accuracy	0.0001 microns
Suitable Voltages	110~220V
Rated Power	4A / 24V / 96W
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	440x420x310	0.058	13~15	455 pcs	945 pcs	1080 pcs


Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-454 pcs	≥ 455 pcs
F5-600	73	71	66	63

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

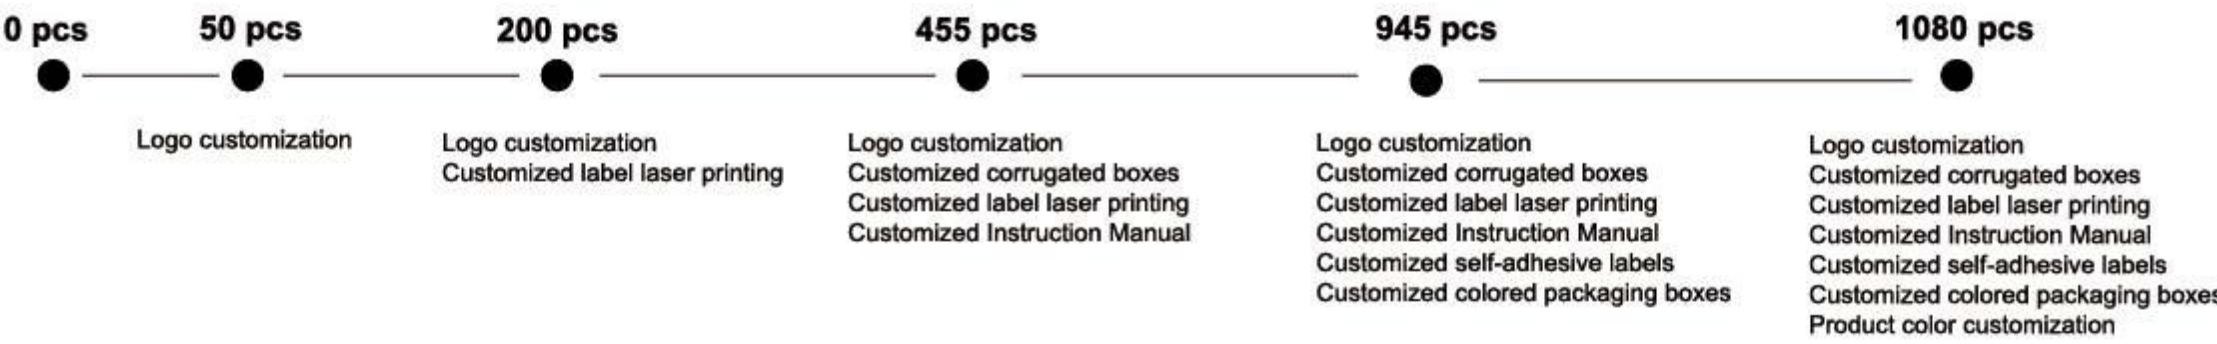



Product Specifications

Model	E5-600
Product Dimensions	380x208x440 (mm)
Purified Water Flow Rate	600 GPD (95L/H)
Filtration Principle	PPF + UDF + CTO + RO + T33
Filtration Accuracy	0.0001 microns
Suitable Voltages	110~220V
Rated Power	4A / 24V / 96W
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	400x240x500	0.048	13~15	580 pcs	1200 pcs	1400 pcs

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	10-199 pcs	200-579 pcs	≥ 580 pcs
E5-600	78	76	71	68

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

0 pcs	50 pcs	200 pcs	580 pcs	1200 pcs	1400 pcs
	●	●	●	●	●
	Logo customization	Logo customization Customized label laser printing	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes Product color customization



Product Specifications

Model	H5-600
Product Dimensions	380x205x410 (mm)
Purified Water Flow Rate	600 GPD (95L/H)
Filtration Principle	PPF + UDF + CTO + RO + T33
Filtration Accuracy	0.0001 microns
Suitable Voltages	110~220V
Rated Power	4A / 24V / 96W
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	400x240x500	0.048	13~15	580 pcs	1200 pcs	1400 pcs

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-579 pcs	≥ 580 pcs
H5-600	90	88	82	79

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

0 pcs	50 pcs	200 pcs	580 pcs	1200 pcs	1400 pcs
	●	●	●	●	●
	Logo customization	Logo customization Customized label laser printing	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes Product color customization


X5 Water Purifier

The X5 water purifier achieves five-stage filtration precision through an innovative triple-stage structure, utilizing composite filter technology to fundamentally address the inherent flaws of traditional five-stage purification systems. With 60% water reduction compared to conventional models and 1-2x longer filter lifespan, it redefines sustainable water solutions with high-efficiency and low-maintenance performance.



Filter 1		Stages 1-3: FSA 3-in-1 filter element / ≤25,000L total purified water capacity Replacement every ≤12 months 1. Folded PP Cotton Layer Intercepts ≥1μm sediment/rust and other large particles with 3D grooved structure, delivering 7× higher contaminant capacity than standard PP cotton to delay filter clogging. 2. Sintered Activated Carbon Layer (Dual-phase filtration) · ≥1050 Iodine Value · Scale inhibition rate ≥ 99% · Chemically removes residual chlorine, VOCs, pesticides and chloroform · Creates anti-corrosion barrier for RO membrane protection 3. Scale Inhibitor Layer Food-grade sustained-release technology suppresses 80%+ calcium/magnesium scaling, maintaining membrane system efficiency for 12,000L+ water output.
Filter 2		Stage 4 600G-OneMi RO Membrane Replacement every 24~60 months · Adsorbs residual chlorine in water and disinfection byproducts (such as chloroform), while removing partial heavy metals (e.g. lead, mercury) and abnormal colors and odors (e.g. musty smell and sulfides), improves water clarity. · High Flux and Strong Stability · Energy-saving Membrane
Filter 3		Stages 5-6: ACM 2-in-1 filter element Replacement every ≤12 months · ≥1050 Iodine Value · Sintering Process · Jacobi Coconut Shell Activated Carbon (NSF) Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥1-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.
Faucet		Alloy Faucet · Life ≥ 1 Years · Materials of Zinc Copper · Weight ≤100g
Water Pump		E-CHEN Powerful Pump · Strong Torque · Low-frequency High-efficiency · High Tolerance · Quiet and Energy-saving
Filter Housing		ONEMI High Anti-Explosion Positioning Filter Housing · Food-grade PP Material · Burst Pressure ≥4.2MPa
Circuit Valve		GVE High-quality Power Supply · Failure Rate of 0.02% · Top Manufacturer of Power Supplies for Water Purifiers
Waterway Valve		CNKB High Voltage Switch · ≥100,000 Times Life · Top Manufacturer of Electrical Control Accessories
Power Supply		CNKB Solenoid Valve · ≥100,000 Times Life · Top Manufacturer of Electrical Control Accessories

Filter Element Customization Scheme

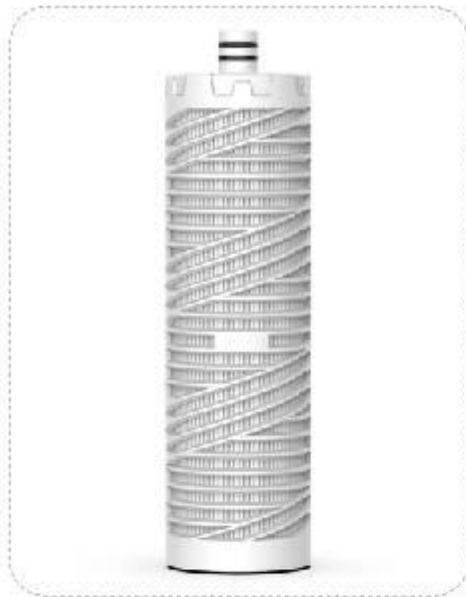

Filter 1 Customization

Frame-type FSA 3-in-1 composite filter element

- 1-micron filtration
- ≥ 1050 Iodine Value
- Scale inhibition rate $\geq 99\%$

* The 3-stage filter element is added with an outer frame design, which can eliminate the risk of "flat-mouth filter elements" failing to achieve filtering effects due to water channeling.

Upgrade Cost (USD) 0.7



Filter 2 Customization

600GPD EC Series Membrane

- High Anti-fouling High Flux
- High Desalination Rate

Upgrade Cost (USD) 10



Filter 3 Customization

Frame-type ACM Sintered Carbon

- ≥ 1050 Iodine Value
- Sintering Process
- Jacobi Coconut Shell Activated Carbon (NSF)

* The 3-stage filter element is added with an outer frame design, which can eliminate the risk of "flat-mouth filter elements" failing to achieve filtering effects due to water channeling.

Upgrade Cost (USD) 0.7



Filter 3 Advanced Customization

Upgraded to a 5-in-1 filter element featuring 1-micron filtration, 1050 iodine value adsorption, weak alkalization, mineralization, and strontium enrichment.

Upgrade Cost (USD) 3.5

Product Function Customization Scheme



Filter Bottle Color Customization

Change the white filter bottle to a transparent one; it is recommended that a water leak protector be installed after the change.

Upgrade Cost (USD) 0.5/pcs



Faucet Customization Scheme

304 Stainless Steel

- Life ≥ 5 Years
- 304 Stainless Steel
- Weight $\leq 250g$

Upgrade Cost (USD) 2



Add Water Leakage Protector

Eliminate the Risk of Property Loss Caused by Water Leakage of Water Purifier

Upgrade Cost (USD) 1.3



Product Specifications

Model	X5
Product Dimensions	395×185×395 (mm)
Filtration Principle	FSA + RO + ACM
Filtration Accuracy	0.0001 micron
Rated Power	4A/24V/96W (600G) 5A/24V/120W (800G/1000G)
Suitable Voltages	110~220V
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	550×255×470	0.066	10	440 pcs	930 pcs	1030 pcs

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-439 pcs	≥ 440 pcs
600 GPD	73	71	68	66
800 GPD (VONTRON)	91	89	86	83
1000 GPD (VONTRON)	96	94	91	87

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

0 pcs	50 pcs	200 pcs	440 pcs	930 pcs	1030 pcs
	Logo customization	Logo customization Customized corrugated boxes Customized label laser printing	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes Product color customization

X3 Clip-On Direct Water Filter

- Triple-Stage System Delivers Five-Stage Precision,
- Eliminating Legacy Flaws of Traditional 5-Stage Purifiers
(Excessive Wastewater/Frequent Filter Changes/Leak Risks)





123-Layer FSA 3-in-1 filter element ≤10,000L total purified water capacity

Replacement every ≤12 months

Combines folded PP cotton (intercepts sediment/rust), sintered activated carbon (adsorbs residual chlorine/pesticides/VOCs) and scale inhibitor (prevents scaling). Employs a triple-mechanism of physical-chemical-ion regulation to protect downstream membrane elements, extend their lifespan, and enhance purification efficiency.

4-Layer VONTRON RO Membrane

Replacement every 24~36 months

New membrane element structure and high-precision membrane sheet manufacturing process enable faster stabilization of desalination rate and shorten the activation cycle.

0.0001-micron filtration accuracy efficiently removes heavy metals (e.g. lead, arsenic, mercury, cadmium), inorganic salts (sodium, calcium, magnesium ions), nitrates, and other dissolved impurities, and completely blocks bacteria, viruses, and spores to ensure the biological safety of drinking water.



56-Layer ACM 2-in-1 filter element

Replacement every ≤12 months

Using 80-mesh Jacobi coconut shell activated carbon as raw material and formed through high-temperature sintering, it can effectively filter colloids, rust, and suspended particles ≥1 micron, and completely remove residual chlorine, volatile organic compounds (VOCs), pesticide residues, trichloromethane, and other harmful substances. Through a dual filtration mechanism, it deeply adsorbs residual odors and organic compounds, significantly improving water purity and taste.

X3 offers dual water storage configurations



Pressure Tank Storage - Traditional
Water storage capacity: ≤7L
Product Size: 350x240 (mm)



Automatic Self-Filling Water Storage Jug
Water storage capacity: 2.5L
Product Size: 268x66x286 (mm)

- Countertop-mounted water storage system replaces pressure tanks and faucets, solving low-flow water purifier storage needs.
- Non-electric, connects to water purifier with auto-fill and auto-shutoff
- Neutralizes pressure tank back-pressure effect to prevent shutdown delays



Product Specifications

Model	X3
Product Dimensions	435×125×390(mm)
Filtration Principle	FSA + RO (VONTRON) + ACM
Flow Rate	100 GPD (16 L/H)
Filtration Accuracy	0.0001 microns
Suitable Voltages	110~220V
Rated Power	2A / 24V / 48W
Operating Water Temperature	5-38°C
Operating Pressure	0.1-0.4MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	725x248x448	0.081	12	350 pcs	720 pcs	840 pcs


Standard Configuration Price (USD,EXW)

Model / QTY	≤ 50 pcs	10-199 pcs	200-349 pcs	≥ 350 pcs
Water Pitcher Version	67	65	61	58
Pressure Tank Version	70	68	64	61

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

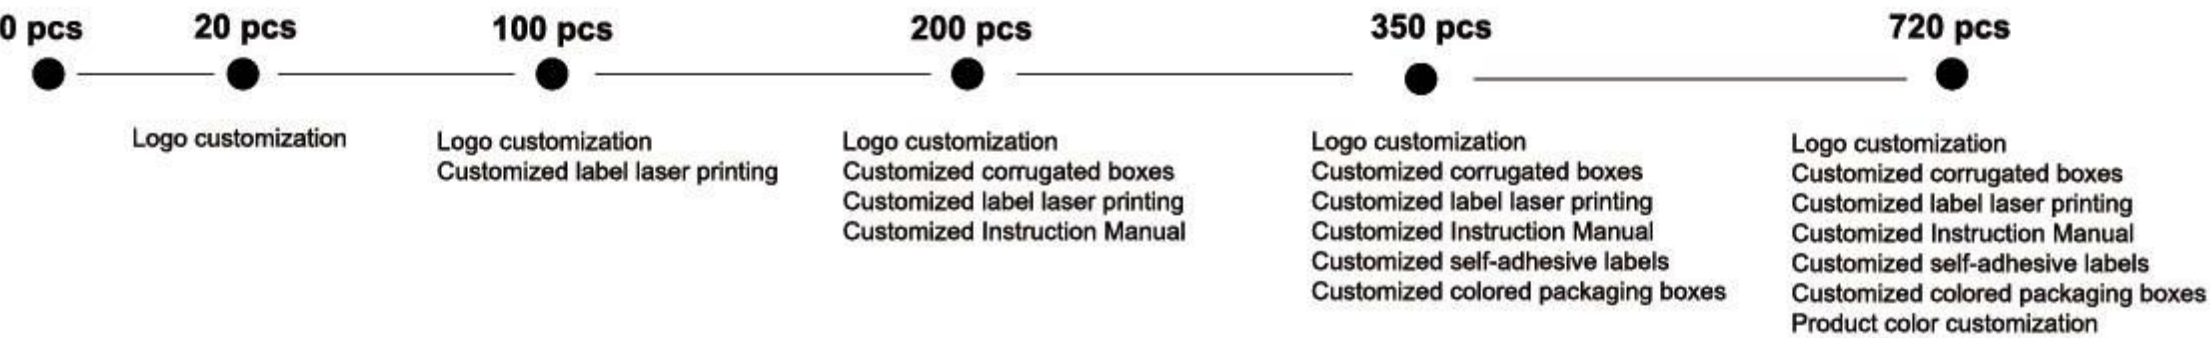

V/F/E/H Series Water Filter

Combining uncompromising quality with a 3.2MPa-rated burst-proof design, this system enables smart positioning and timer-guided cartridge replacement for easy maintenance, offering universal compatibility with leading water purifier brands



1-Stage		1-stage integrated purification - PP cotton filter element Replacement every ≤ 3 months - Weight 130g · Increase 20% Flow Rate 1-micron high-density fiber structure effectively intercepts visible impurities such as sediment, iron rust, colloids, and suspended solids.
2-Stage		2-stage adsorption purification - Granular activated carbon filter element Replacement every ≤ 6 months ≥ 350 Iodine Value · Coal-based Activated Carbon - Adsorbs residual chlorine in water and disinfection byproducts (such as chloroform), while removing partial heavy metals (e.g. lead, mercury) and abnormal colors and odors (e.g. musty smell and sulfides), improves water clarity.
3-Stage		3-stage deep purification - Sintered activated carbon filter element Replacement every ≤ 6 months ≥ 350 Iodine Value · Coal-based Activated Carbon - Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥ 1-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.
4-Stage		4-stage core purification - ONEMI RO Membrane Replacement every ≤ 24 months - High Flux and Strong Stability · Energy-saving Membrane 0.0001-micron filtration accuracy efficiently removes heavy metals (e.g. lead, arsenic, mercury, cadmium), inorganic salts (sodium, calcium, magnesium ions), nitrates, and other dissolved impurities, and completely blocks bacteria, viruses, and spores to ensure the biological safety of drinking water.
5-Stage		5-stage taste optimization Post-activated carbon Replacement every ≤ 12 months ≥ 1050 Iodine Value · Sintering Process - Jacobi Coconut Shell Activated Carbon (NSF Certified) - Deeply adsorbs residual odorous volatile organic compounds, improves water quality and taste.
Water Pump		Volian Powerful Pump Strong Torque · Low-frequency High-efficiency · High Tolerance · Quiet and Energy-saving
Filter Housing		ONEMI High Anti-explosion Positioning Filter Housing Food-grade PP Material · Burst Pressure ≥ 4.2MPa
Circuit Valve		GVE High-quality Power Supply Failure Rate of 0.02% · Top Manufacturer of Power Supplies for Water Purifiers
Waterway Valve		CNKB High and Low Voltage Switch $\geq 100,000$ Times Life · Top Manufacturer of Electrical Control Accessories
Power Supply		CNKB Solenoid Valve $\geq 100,000$ Times Life · Top Manufacturer of Electrical Control Accessories
Pressure Tank		Chongba Pressure Tank - Life ≤ 5 Years 3.2G Pressure Tank with Plastic Outer Shell and Iron
Faucet		Alloy Faucet Life ≥ 1 Year · Materials of Zinc Copper · Weight ≤ 100g

**1-Stage Filter Element Customization****Pinhole + Groove PP**

- Weight 150g
- Increase 50% Flow Rate
- Replacement every ≤6 months

Upgrade Cost (USD)

0.17

**2-Stage Filter Element Customization****GAC Coconut AC**

- ≥1050 Iodine Value
- Kuraray Japan Coconut Shell Activated Carbon(NSF)
- Replacement every ≤12 months

Upgrade Cost (USD)

1.6

**3-Stage Filter Element Customization****CTO Sintered Carbon**

- ≥1050 Iodine Value
- Sintering Process
- Jacobi Coconut Shell Activated Carbon (NSF)
- Replacement every ≤12 months

Upgrade Cost (USD)

2.2

**4-Stage Filter Element Customization****VONTRON EC Series Membrane**

- High Anti-fouling High Flux
- High Desalination Rate
- Replacement every 24~36 months

Upgrade Cost (USD)

3

**Add Weak Alkalization Filter Element**

- Total Water Purification Capacity 2000L
- Adjust the pH Value to Reach 7.5~9.0
- Replacement every ≤12 months

Upgrade Cost (USD)

4.3

**Add Mineralization Filter Element**

- Total Water Purification Capacity 2000L
- Add Mineralizing Elements Ca, Mg, K
- Replacement every ≤12 months

Upgrade Cost (USD)

4.3

**Add LED UV Ultraviolet Sterilizer**

- Bactericidal Rate up to 99%
- Service life: not less than 13 years (operating 2 hours daily)

Upgrade Cost (USD)

13

**Tank Customization Scheme****Guangyue Pressure Tank**

- Life ≥ 5 Years
- NSF Certified Manufacturer
- 3G High Anti-explosion PP Material

Upgrade Cost (USD)

3

**Filter Bottle Color Customization**

Change the white filter bottle to a transparent one; it is recommended that a water leak protector be installed after the change.

Upgrade Cost (USD)

0.5/pcs

**Faucet Customization Scheme****304 Stainless Steel**

- Life ≥ 5 Years
- 304 Stainless Steel
- Weight ≤250g

Upgrade Cost (USD)

2

**Add Water Leakage Protector**

Eliminate the Risk of Property Loss Caused by Water Leakage of Water Purifier

Upgrade Cost (USD)

1.1

**Add a computer control box**

Equipped with an LED display panel, it can detect the TDS values of raw water and purified water, making the working status clear at a glance.

Upgrade Cost (USD)

13



Product Specifications

Model	V5-75
Product Dimensions	395x178x450 (mm)
Purified Water Flow Rate	75 GPD (11.8L/H)
Filtration Principle	PPF + UDF + CTO + RO + T33
Filtration Accuracy	0.0001 microns
Pressure Tank Dimensions	350x240 (mm)
Pressure Tank Capacity	3.2G
Suitable Voltages	110~220V
Rated Power	1.75A / 24V / 42W
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	420x390x520	0.085	12	330 pcs	660 pcs	840 pcs


Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-329 pcs	≥ 330 pcs
V5-75(White)	59	57	53	51

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

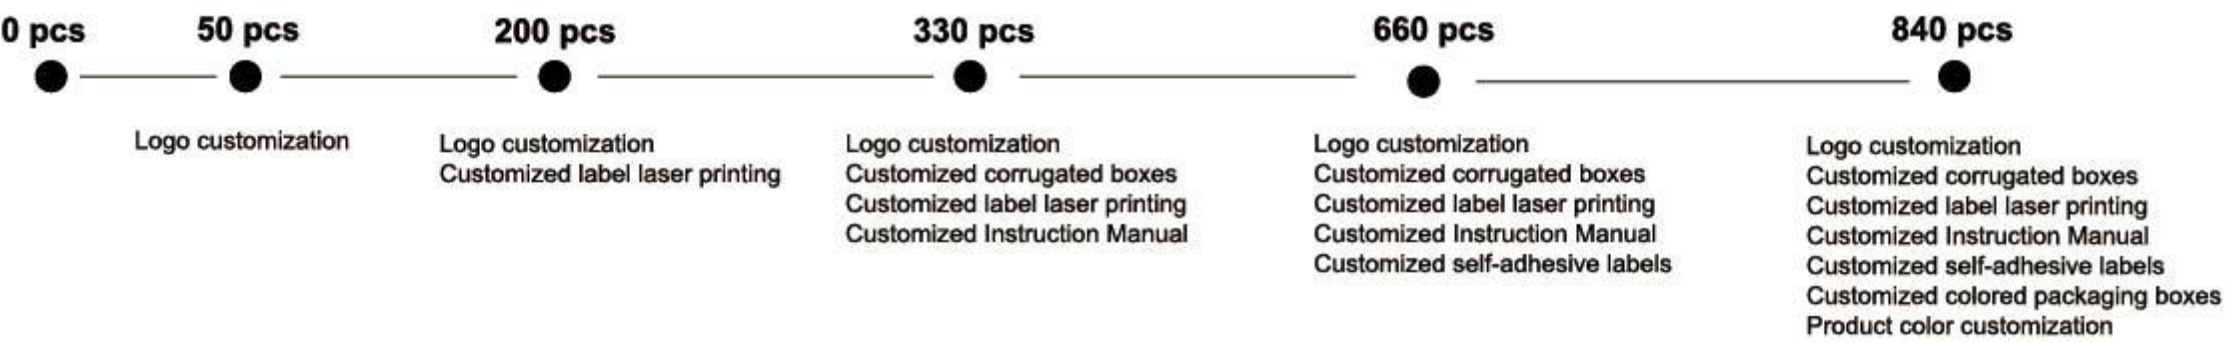



Product Specifications

Model	F5-75
Product Dimensions	395x185x460 (mm)
Purified Water Flow Rate	75 GPD (11.8L/H)
Filtration Principle	PPF + UDF + CTO + RO + T33
Filtration Accuracy	0.0001 microns
Pressure Tank Dimensions	350x240 (mm)
Pressure Tank Capacity	3.2G
Suitable Voltages	110~220V
Rated Power	1.75A / 24V / 42W
Applicable Water Temperature	5-38℃
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	420x390x520	0.085	12	330 pcs	660 pcs	840 pcs


Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-329 pcs	≥ 330 pcs
F5-75(White)	64	62	58	56

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

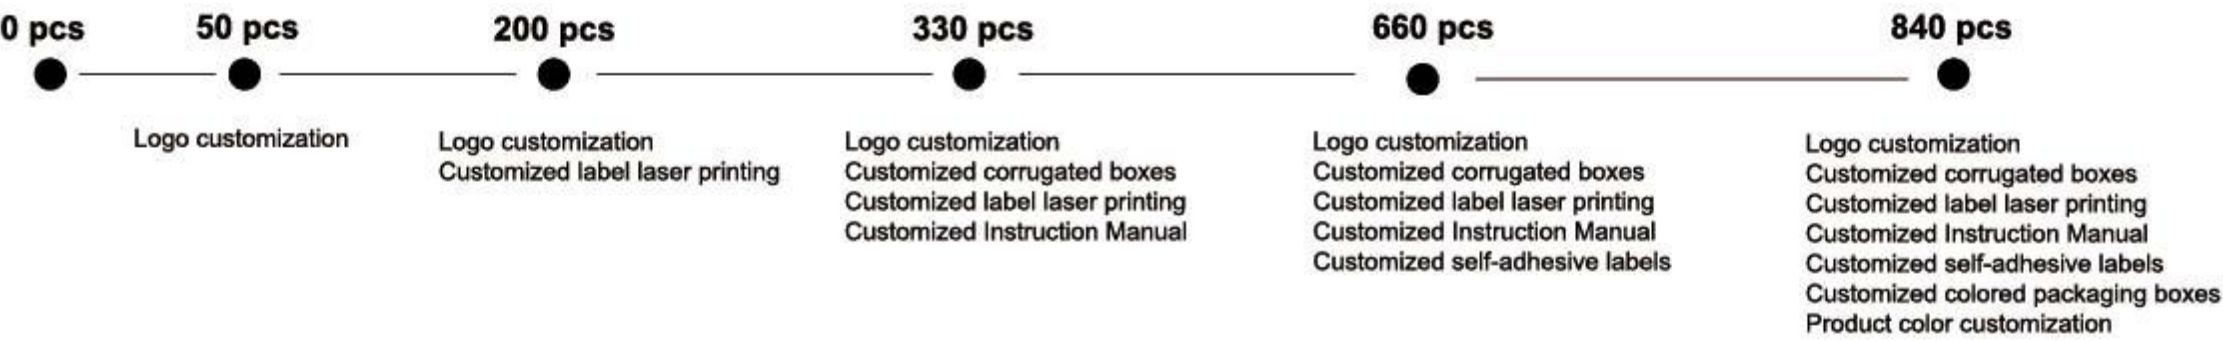



Product Specifications

Model	E5-75
Product Dimensions	380x208x440 (mm)
Purified Water Flow Rate	75 GPD (11.8L/H)
Filtration Principle	PPF + UDF + CTO + RO + T33
Filtration Accuracy	0.0001 microns
Pressure Tank Dimensions	350x240 (mm)
Pressure Tank Capacity	3.2G
Suitable Voltages	110~220V
Rated Power	1.75A / 24V / 42W
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	640x260x430	0.071	13~15	380 pcs	760 pcs	980 pcs


Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-379 pcs	≥ 380 pcs
E5-75(White)	69	67	63	61

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

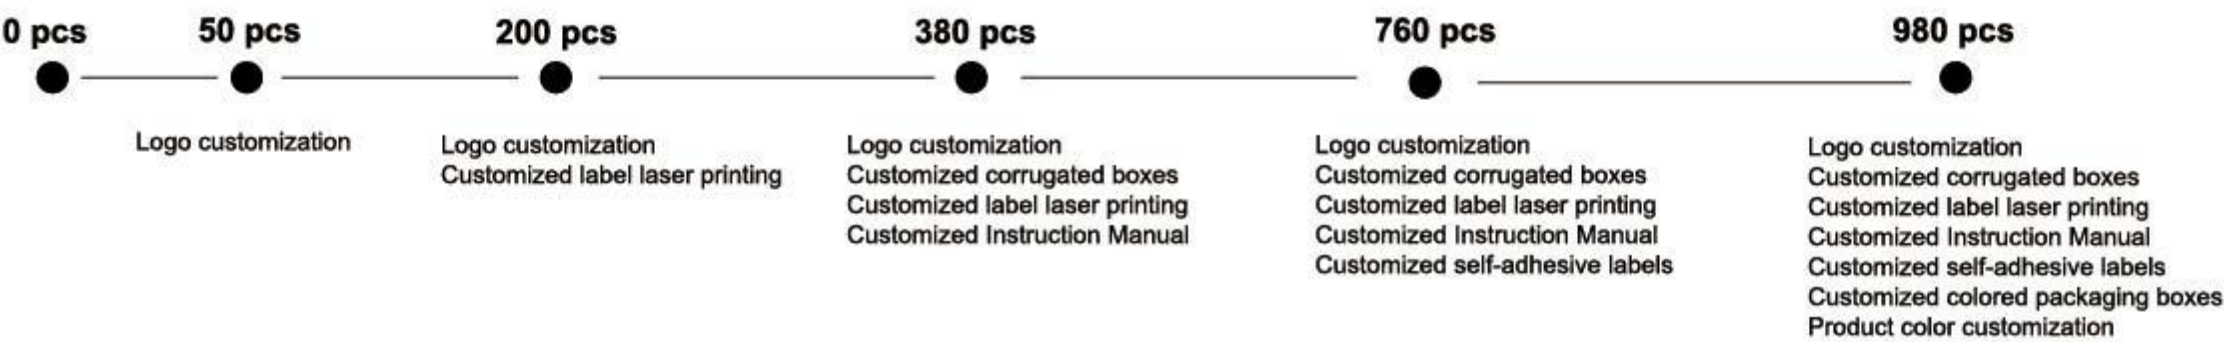



Product Specifications

Model	H5-75
Product Dimensions	380x205x410 (mm)
Purified Water Flow Rate	75 GPD (11.8L/H)
Filtration Principle	PPF + UDF + CTO + RO + T33
Filtration Accuracy	0.0001 microns
Pressure Tank Dimensions	350x240 (mm)
Pressure Tank Capacity	3.2G
Suitable Voltages	110~220V
Rated Power	1.75A / 24V / 42W
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4 MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	640x260x430	0.071	13~15	380 pcs	760 pcs	980 pcs


Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-379 pcs	≥ 380 pcs
H5-75(black)	80	78	74	72

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

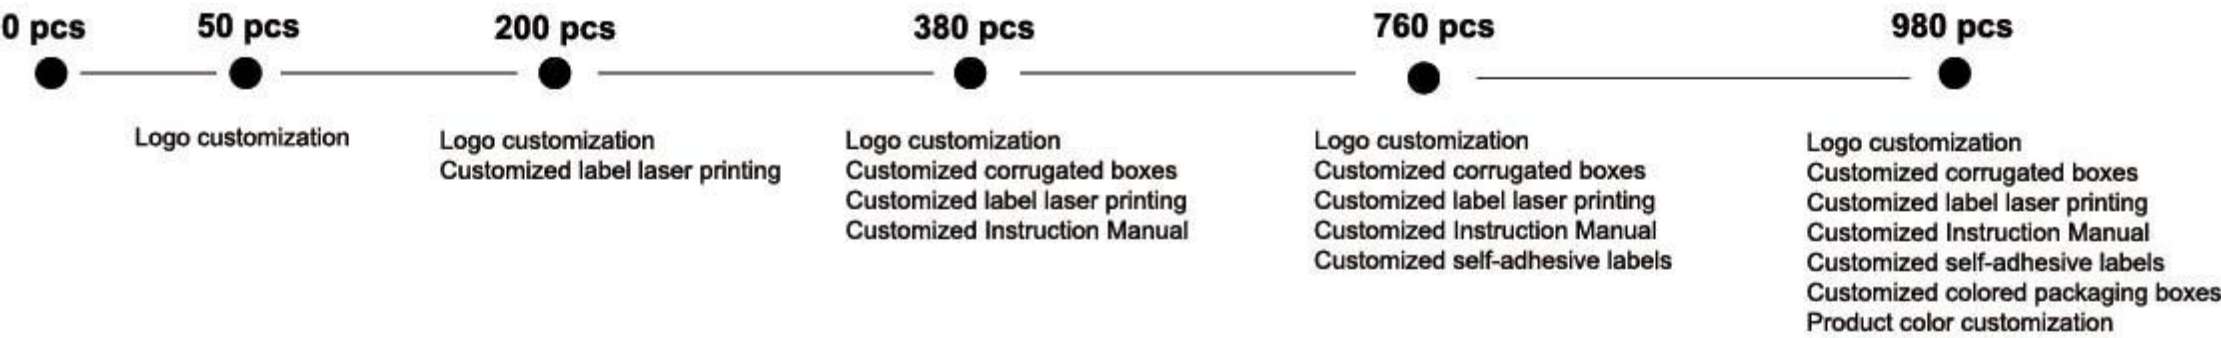

Non-electric RO System 400GPD Under-Sink 5-Stage

It can intercept visible impurities such as rust, sediment, colloids, and algae, while filtering out heavy metal ions, scale components (calcium/magnesium ions), bacteria and viruses, antibiotic/drug residues, harmful inorganic salts (fluorides, nitrates, nitrites, perchlorates), organophosphorus pesticides, herbicides, industrial solvents (e.g., chloroform, benzene compounds), and other contaminants.





1-Stage		1-stage integrated purification - PP cotton filter element Replacement every ≤ 3 months - Weight 130g · Increase 20% Flow Rate 1-micron high-density fiber structure effectively intercepts visible impurities such as sediment, iron rust, colloids, and suspended solids.
2-Stage		2-stage adsorption purification - Granular activated carbon filter element Replacement every ≤ 6 months ≥ 350 Iodine Value · Coal-based Activated Carbon - Adsorbs residual chlorine in water and disinfection byproducts (such as chloroform), while removing partial heavy metals (e.g. lead, mercury) and abnormal colors and odors (e.g. musty smell and sulfides), improves water clarity.
3-Stage		3-stage deep purification - Sintered activated carbon filter element Replacement every ≤ 6 months ≥ 350 Iodine Value · Coal-based Activated Carbon - Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥ 1-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.
4-Stage		4-stage core purification - ONEMI RO Membrane Replacement every ≤ 24 months - High Flux and Strong Stability · Energy-saving Membrane 0.0001-micron filtration accuracy efficiently removes heavy metals (e.g. lead, arsenic, mercury, cadmium), inorganic salts (sodium, calcium, magnesium ions), nitrates, and other dissolved impurities, and completely blocks bacteria, viruses, and spores to ensure the biological safety of drinking water.
5-Stage		5-stage taste optimization Post-activated carbon Replacement every ≤ 12 months ≥ 1050 Iodine Value · Sintering Process - Jacobi Coconut Shell Activated Carbon (NSF Certified) - Deeply adsorbs residual odorous volatile organic compounds, improves water quality and taste.
Faucet		Alloy Faucet Life ≥ 1 Year · Materials of Zinc Copper · Weight ≤ 100g
Pressure Tank		Chongba Pressure Tank - Life ≤ 5 Years 3.2G Pressure Tank with Plastic Outer Shell and Iron

Filter Element Customization Scheme



1-Stage Filter Element Customization

Pinhole + Groove PP

- Weight 150g
- Increase 50% Flow Rate
- Replacement every ≤6 months

Upgrade Cost (USD) 0.17



3-Stage Filter Element Customization

CTO Sintered Carbon

- ≥1050 Iodine Value
- Sintering Process
- Jacobi Coconut Shell Activated Carbon (NSF)
- Replacement every ≤12 months

Upgrade Cost (USD) 2.2



Add Mineralization Filter Element

- Total Water Purification Capacity 2000L
- Add Mineralizing Elements Ca, Mg, K
- Replacement every ≤12 months

Upgrade Cost (USD) 4.3



2-Stage Filter Element Customization

GAC Coconut AC

- ≥1050 Iodine Value
- Kuraray Japan Coconut Shell Activated Carbon(NSF)
- Replacement every ≤12 months

Upgrade Cost (USD) 1.6



Add Weak Alkalization Filter Element

- Total Water Purification Capacity 2000L
- Adjust the pH Value to Reach 7.5~9.0
- Replacement every ≤12 months

Upgrade Cost (USD) 4.3



Add Water Leakage Protector

Eliminate the Risk of Property Loss Caused by Water Leakage of Water Purifier

Upgrade Cost (USD) 1.3

Product Function Customization Scheme



Tank Customization Scheme

Guangyue Pressure Tank

- Life ≥ 5 Years
- NSF Certified Manufacturer
- 3G High Anti-explosion PP Material

Upgrade Cost (USD) 3



Faucet Customization Scheme

304 Stainless Steel

- Life ≥ 5 Years
- 304 Stainless Steel
- Weight ≤250g

Upgrade Cost (USD) 2

Customized Water Storage Solution

* Countertop-mounted water storage system replaces pressure tanks and faucets, solving low-flow water purifier storage needs.



Automatic Self-Filling Water Storage Jug

- Water storage capacity: 2.5L
- Product Size: 268x66x286 (mm)
- Non-electric, connects to water purifier with auto-fill and auto-shutoff
- Neutralizes pressure tank back-pressure effect to prevent shutdown delays

Upgrade Cost (USD) -2



Product Specifications

Model	W5-400
Product Dimensions	385x140x390 (mm)
Filtration Principle	PPF + UDF + CTO + RO + T33
Adopt RO membrane flow rate	400 GPD
Filtration Accuracy	0.0001 microns
Applicable Water Temperature	5-38°C
Applicable Pressure	0.2-0.4 MPa

W Series Water Purifier Filter Data Parameters Table

The following data was obtained under test conditions of feed water concentration at 250±25 ppm, recovery rate of 50±3%, and water temperature of 25℃.

Test Pressure (MPa / Bar / psi)	Product Water Concentration (PPM)	Product Water Flow (mL/min)	Concentrate Flow (mL/min)	Desalination Rate(%)	Flux (GPD)
0.2 / 2 / 29.01	18	410	420	93.17	156
0.3 / 3 / 43.51	14.42	610	600	94.53	231
0.4 / 4 / 58.02	12.83	710	720	95.13	269
0.5 / 5 / 72.52	10.97	930	960	95.84	352
0.6 / 6 / 87.02	10.21	1160	1150	96.12	439
0.7 / 7 / 101.53	9.29	1340	1360	96.47	507

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
1	520x395x295	0.061	10	430 pcs	930 pcs	1050 pcs

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-429 pcs	≥ 430 pcs
W5-400(White)	44	42	39	37

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

0 pcs	50 pcs	200 pcs	430 pcs	930 pcs	1050 pcs
	●	●	●	●	●
	Logo customization	Logo customization Customized label laser printing	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels	Logo customization Customized corrugated boxes Customized label laser printing Customized Instruction Manual Customized self-adhesive labels Customized colored packaging boxes Product color customization

Q-Series Kitchen Water Purifiers

This high-performance water purification system integrates exceptional quality with a 3.2MPa burst-proof structural design, featuring positioning cartridge replacement and a cartridge replacement logger for effortless maintenance. Universally compatible with leading water purifier brands, its 1-micron high-precision filter core effectively intercepts iron rust, sediment, suspended solids, and contaminants exceeding 1 micron (including bacteria and insect eggs). Constructed with food-grade materials to eliminate secondary contamination, the system ensures kitchen water safety while maintaining structural integrity under pressure.



1-Stage		1-stage integrated purification - PP cotton filter element Replacement every ≤ 3 months - Weight 130g · Increase 20% Flow Rate 1-micron high-density fiber structure effectively intercepts visible impurities such as sediment, iron rust, colloids, and suspended solids.
2-Stage		2-stage adsorption purification - Granular activated carbon filter element Replacement every ≤ 6 months ≥ 350 Iodine Value · Coal-based Activated Carbon - Adsorbs residual chlorine in water and disinfection byproducts (such as chloroform), while removing partial heavy metals (e.g. lead, mercury) and abnormal colors and odors (e.g. musty smell and sulfides), improves water clarity.
3-Stage		3-stage deep purification - Sintered activated carbon filter element Replacement every ≤ 6 months ≥ 350 Iodine Value · Coal-based Activated Carbon - Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥ 1-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.
Port		Plastic Port

Filter Element Customization Scheme

	1-Stage Filter Element Customization Pinhole + Groove PP - Weight 150g - Increase 50% Flow Rate - Replacement every ≤ 6 months Upgrade Cost (USD) 0.17		2-Stage Filter Element Customization GAC Coconut AC ≥ 1050 Iodine Value - Kuraray Japan Coconut Shell Activated Carbon(NSF) - Replacement every ≤ 12 months Upgrade Cost (USD) 1.6
	3-Stage Filter Element Customization CTO Sintered Carbon ≥ 1050 Iodine Value - Sintering Process - Jacobi Coconut Shell Activated Carbon (NSF) - Replacement every ≤ 12 months Upgrade Cost (USD) 2.2		Filter Bottle Color Customization Change the white filter bottle to a transparent one; it is recommended that a water leak protector be installed after the change. Upgrade Cost (USD) 0.5/pcs
	Pressure Gauge Retrofit Scheme Note: Only a maximum of 1 pressure gauge can be installed on one filter bottle, and the upgrade cost is calculated separately based on each filter bottle with an additional pressure gauge. Upgrade Cost (USD) 3/pcs		Port Customization Scheme The port is made of copper material. (The countertop non-installation water purifier does not have a scheme to upgrade to a copper port.) Upgrade Cost (USD) 0.8



Product Specifications

Model	Q1
Product Dimensions	108x114x333 (mm)
Interface size	1/2-inch
Flow Rate	≥12 L/min
Filtration Principle	PPF
Filtration Accuracy	1 Microns
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa
PCS Dim	128x128x338(mm)
Net Wt	1.2KG

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
9	400x400x365	0.059	11~12	420 box	900 box	1080 box

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-299 pcs	300-599 pcs	≥ 600 pcs
Q1(White)	6	5.6	5.2	5



Product Specifications

Model	Q2
Product Dimensions	226x114x333 (mm)
Interface size	1/2-inch
Flow Rate	≥12 L/min
Filtration Principle	PPF+CTO
Filtration Accuracy	1 Microns
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa
PCS Dim	240x123x345(mm)
Net Wt	2.8KG

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
6	510x480x380	0.094	16.5	300 box	620 box	725 box

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-299 pcs	300-599 pcs	≥ 600 pcs
Q2(White)	12	11	10	9

Product Specifications



Model	Q3
Product Dimensions	340x114x333 (mm)
Interface size	1/2-inch
Flow Rate	≥12 L/min
Filtration Principle	PPF+GAC+CTO
Filtration Accuracy	1 Microns
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa
PCS Dim	355x123x345(mm)
Net Wt	3.8 KG

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
5	660x375x375	0.093	20	290 box	640 box	750 box

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-299 pcs	300-599 pcs	≥ 600pcs
Q3(White)	17	16	15	14

Product Specifications



Model	TQ1
Product Dimensions	155x122x300 (mm)
Interface size	1/4-inch
Flow Rate	≥2L/min
Filtration Principle	PPF
Filtration Accuracy	1 Microns
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa
PCS Dim	128x128x338(mm)
Net Wt	1.5KG

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
9	400x400x365	0.059	15	420 box	900 box	1080 box

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-299 pcs	300-599 pcs	≥ 600 pcs
TQ1(White)	12	11	10.5	10

Product Specifications



Model	TQ2
Product Dimensions	280x122x300 (mm)
Interface size	1/4-inch
Flow Rate	≥2 L/min
Filtration Principle	PPF+CTO
Filtration Accuracy	1 Microns
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa
PCS Dim	240x123x345(mm)
Net Wt	4KG

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
6	480x370x350	0.063	25~27	300 box	620 box	725 box

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-299 pcs	300-599 pcs	≥ 600 pcs
TQ2(White)	19	18	17	16

Product Specifications



Model	TQ3
Product Dimensions	410x122x300 (mm)
Interface size	1/2-inch
Flow Rate	≥12 L/min
Filtration Principle	PPF+GAC+CTO
Filtration Accuracy	1 Microns
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa
PCS Dim	355x123x345(mm)
Net Wt	5KG

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
5	657x365x375	0.09	27~29	290 box	640 box	750 box

Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-299 pcs	300-599 pcs	≥ 600 pcs
TQ3(White)	26	25	23	21



1-Stage	 1-stage integrated purification - PP cotton filter element Replacement every ≤ 3 months - Weight 130g · Increase 20% Flow Rate 1-micron high-density fiber structure effectively intercepts visible impurities such as sediment, iron rust, colloids, and suspended solids.
2-Stage	 2-stage adsorption purification - Granular activated carbon filter element Replacement every ≤ 6 months ≥ 350 Iodine Value · Coal-based Activated Carbon - Adsorbs residual chlorine in water and disinfection byproducts (such as chloroform), while removing partial heavy metals (e.g. lead, mercury) and abnormal colors and odors (e.g. musty smell and sulfides), improves water clarity.
3-Stage	 3-stage deep purification - Sintered activated carbon filter element Replacement every ≤ 6 months ≥ 350 Iodine Value · Coal-based Activated Carbon - Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥ 1-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.
4-Stage	 4-stage core purification - UF Membrane Replacement every ≤ 24 months With 0.01-micron filtration precision, it efficiently intercepts contaminants like suspended solids, bacteria, and colloids through physical sieving mechanisms, while retaining beneficial minerals such as calcium and magnesium essential for human health.
5-Stage	 5-stage taste optimization Post-activated carbon Replacement every ≤ 12 months ≥ 1050 Iodine Value · Sintering Process - Jacobi Coconut Shell Activated Carbon (NSF Certified) - Deeply adsorbs residual odorous volatile organic compounds, improves water quality and taste.
Faucet	 Alloy Faucet Life ≥ 1 Years · Materials of Zinc Copper · Weight ≤ 100g

Filter Element Customization Scheme



1-Stage Filter Element Customization

Pinhole + Groove PP

- Weight 150g
- Increase 50% Flow Rate
- Replacement every ≤6 months

Upgrade Cost (USD) 0.17



3-Stage Filter Element Customization

CTO Sintered Carbon

- ≥1050 Iodine Value
- Sintering Process
- Jacobi Coconut Shell Activated Carbon (NSF)
- Replacement every ≤12 months

Upgrade Cost (USD) 2.2



Add Mineralization Filter Element

- Total Water Purification Capacity 2000L
- Add Mineralizing Elements Ca, Mg, K
- Replacement every ≤12 months

Upgrade Cost (USD) 4



2-Stage Filter Element Customization

GAC Coconut AC

- ≥1050 Iodine Value
- Kuraray Japan Coconut Shell Activated Carbon(NSF)
- Replacement every ≤12 months

Upgrade Cost (USD) 1.6



Add Weak Alkalization Filter Element

- Total Water Purification Capacity 2000L
- Adjust the pH Value to Reach 7.5~9.0
- Replacement every ≤12 months

Upgrade Cost (USD) 4

Product Function Customization Scheme



Filter Bottle Color Customization

Change the white filter bottle to a transparent one; it is recommended that a water leak protector be installed after the change.

Upgrade Cost (USD) 0.4/pcs



Faucet Customization Scheme

304 Stainless Steel

- Life ≥ 5 Years
- 304 Stainless Steel
- Weight ≤250g

Upgrade Cost (USD) 2



Add Water Leakage Protector

Eliminate the Risk of Property Loss Caused by Water Leakage of Water Purifier

Upgrade Cost (USD) 1.1



Product Specifications

Model	Q5
Product Dimensions	385x140x410 (mm)
Purified Water Flow Rate	≥1.5 L/min
Filtration Principle	PPF + UDF + CTO + UF + T33
Filtration Accuracy	0.01 Microns
Applicable Water Temperature	5-38°C
Applicable Pressure	0.1-0.4MPa
PCS Dim	425x210x410(mm)
Net Wt	7.5KG

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20ft Container	40ft Container	40HQ Container
4	860x440x430	0.163	31~32	145 box	310 box	370 box


Standard Configuration Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-199 pcs	200-579 pcs	≥ 580 pcs
Q5(White)	31	29	27	26

Unit price and value-added services depend on order quantity; no MOQ applies.

OEM Customization Benefits

1. Different models of products in the same series can be combined for calculating the total purchase volume to enjoy the corresponding OEM customization benefits.

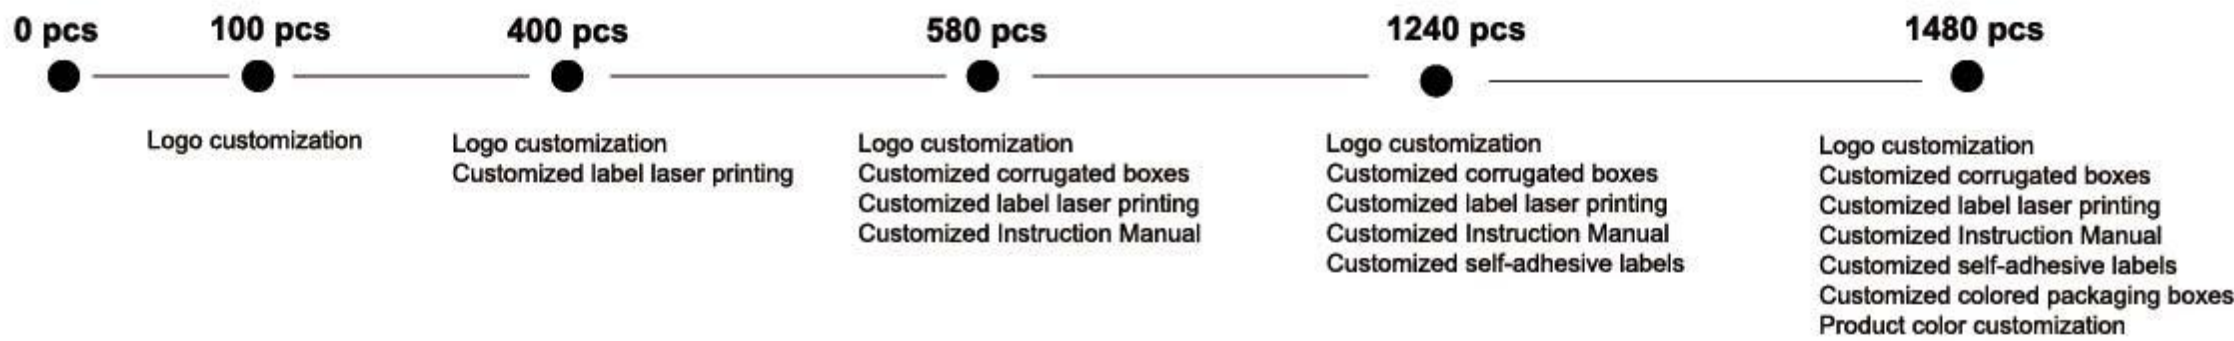

L Series Faucets, Shower Heads & Bathroom Pre-Filtration Systems

Designed specifically for kitchen water use, it is directly mounted on the faucet. It deeply adsorbs residual chlorine and organic substances through multiple composite filter elements, removes peculiar smells and odors, while retaining beneficial minerals. The filtered water can be directly used for washing rice, vegetables, and making soup, making daily diet healthier. Equipped with a convenient filter replacement design, it easily maintains fresh water quality and safeguards the drinking water safety of family members.



Product Specifications



Model	L1-C
Product Dimensions	140x63x110 (mm)
Flow Rate	≥2 L/min
Filtration Principle	Ceramic+Coconut shell GAC
Filtration Accuracy	0.5 Microns
Iodine Adsorption Value	1050mg/g
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa
Filter element packaging	1 machine 2 filters
PCS Dim	240x188x72(mm)
Net Wt	440g

Package Dimensions

QTY (pcs)	CTN Dim (mm)	CBM (m³)	GW (kg)	20" CONTAINER (box)	40" CONTAINER (box)
20	500x380x395	0.075	10	370	750

Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-399 pcs	400-599 pcs	≥ 600 pcs
L1-C	6.6	5.6	5.2	4.8

Unit price and value-added services depend on order quantity; no MOQ applies.

Product Specifications



Model	L1-S
Product Dimensions	140x63x110 (mm)
Flow Rate	≥2 L/min
Filtration Principle	Sintered activated carbon filter element
Filtration Accuracy	1 Microns
Iodine Adsorption Value	1050mg/g
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa
Filter element packaging	1 machine 2 filters
PCS Dim	240x188x72(mm)
Net Wt	440g

Package Dimensions

QTY (pcs)	CTN Dim (mm)	CBM (m³)	GW (kg)	20" CONTAINER (box)	40" CONTAINER (box)
20	500x380x395	0.075	10	370	750

Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-399 pcs	400-599 pcs	≥ 600 pcs
L1-S	6.9	5.9	5.5	5.1

Unit price and value-added services depend on order quantity; no MOQ applies.



Product Specifications

Model	L2-W
Product Dimensions	87x78x266 (mm)
Interface size	1/2-inch
Shell Material	ABS/AS
Flow Rate	≥4.5 L/min
Filtration Principle	PP Melt-Blown Cartridge + Calcium Sulfite
Filtration Accuracy	1 Microns
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20" CONTAINER (box)	40" CONTAINER (box)
40	580x360x480	0.1	16	275	550

Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-399 pcs	400-599 pcs	≥ 600 pcs
L1-S	9.6	8.6	7.5	6

Unit price and value-added services depend on order quantity; no MOQ applies.



Product Specifications

Model	L2-B
Product Dimensions	87x78x266 (mm)
Interface size	1/2-inch
Shell Material	ABS/AS
Flow Rate	≥4.5 L/min
Filtration Principle	PP Melt-Blown Cartridge + Calcium Sulfite
Filtration Accuracy	1 Microns
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20" CONTAINER (box)	40" CONTAINER (box)
40	580x360x480	0.1	16	275	550

Price (USD, EXW)

Model / QTY	≤ 50 pcs	50-399 pcs	400-599 pcs	≥ 600 pcs
L1-S	9.6	8.6	7.5	6

Unit price and value-added services depend on order quantity; no MOQ applies.

Product Specifications



Model	L3-10
Product Dimensions	120x104x330 (mm)
Interface size	1/2-inch
Shell Material	ABS/AS
Flow Rate	≥6 L/min
Filtration Principle	3-in-1 composite filter cartridge
Filtration Accuracy	5 Microns
Iodine Adsorption Value	1050mg/g
Chlorine Removal Capacity	≥90%
Total Water Purification Capacity	30000L
Applicable Water Source	Municipal Tap Water
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa

Package Dimensions

QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20" CONTAINER (box)	40" CONTAINER (box)
12	450x450x360	0.092	23	300	600

Price (USD, EXW) Unit price and value-added services depend on order quantity; no MOQ applies.

Model / QTY	≤ 50 pcs	50-399 pcs	400-599 pcs	≥ 600 pcs
L3-10	17	16	15	14

Product Specifications



Model	L3-15
Product Dimensions	120x104x440 (mm)
Interface size	1/2-inch
Shell Material	ABS/AS
Flow Rate	≥6 L/min
Filtration Principle	3-in-1 composite filter cartridge
Filtration Accuracy	5 Microns
Iodine Adsorption Value	1050mg/g
Chlorine Removal Capacity	≥90%
Total Water Purification Capacity	50000L
Applicable Water Source	Municipal Tap Water
Temperature Range	5-38°C
Applicable water pressure	0.1-0.4MPa

Package Dimensions


QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	20" CONTAINER (box)	40" CONTAINER (box)
9	450x450x450	0.092	23	300	600

Price (USD, EXW) Unit price and value-added services depend on order quantity; no MOQ applies.

Model / QTY	≤ 50 pcs	50-399 pcs	400-599 pcs	≥ 600 pcs
L3-15	24	23	22	21

Water Purifier Filter Cartridge Series

As a professional water treatment equipment manufacturer, we possess full-range filter cartridge customization capabilities, offering standard 10-inch and 20-inch specifications, Korean-style quick-connect filter cartridges, and snap-fit integrated filter cartridges. These products are universally compatible with household, commercial, and industrial applications. Utilizing food-grade polypropylene (PP) housing materials combined with ultrasonic seamless welding technology, we achieve IP67 protection rating. Our ODM deep-development services support customization of 22 critical parameters including flow rate, interface standards (NPT/BSPT), and filtration accuracy (0.1-50 μ m), comprehensively fulfilling diverse water purification product requirements.

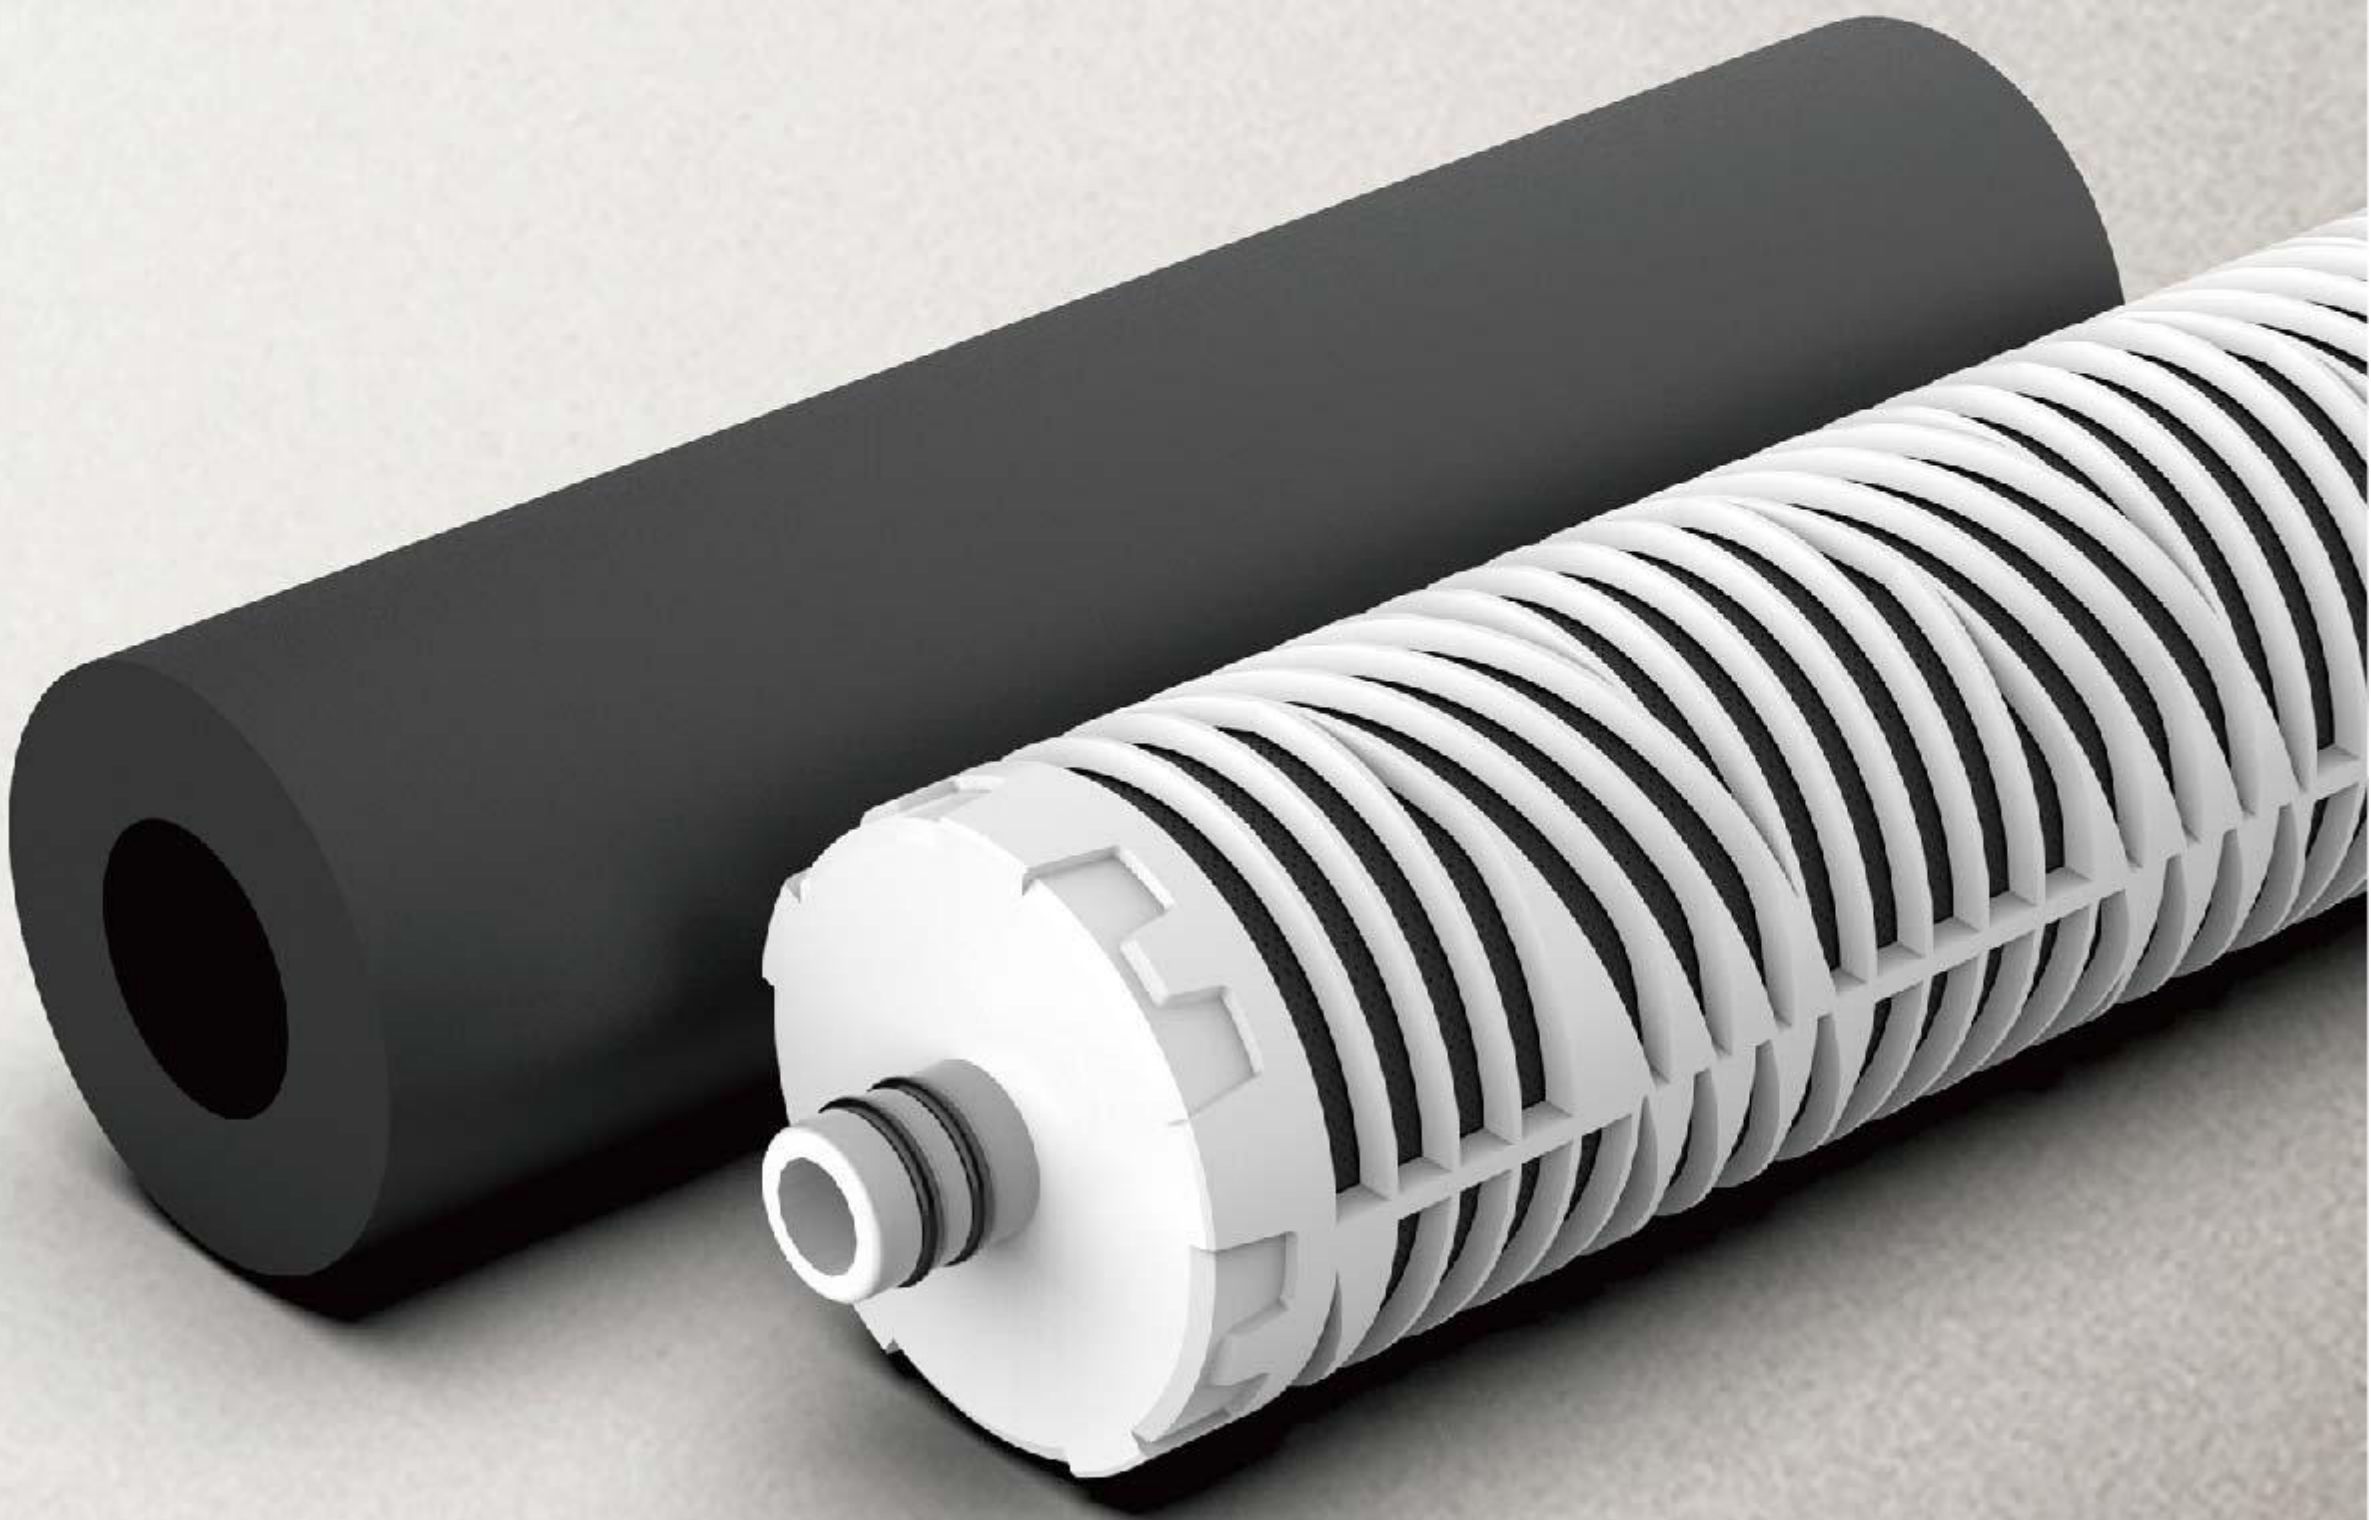

Filter Cartridge Functionality

1-micron high-density fiber structure effectively intercepts visible impurities such as sediment, iron rust, colloids, and suspended solids.



Product Specifications

Model	PPF-01
Processing Dimensions	252x62 (mm)
Filter Cartridge Inner Diameter	28(mm)
Material	Polypropylene (PP)
Surface Finishing	Surface Needle Punching
Manufacturing Process	Triple-Spray Thermal Fusion Process
Filtration Accuracy	1 Microns
Applicable Water Temperature	5–38°C
Filter Cartridge Weight	≤130 g
QTY	100 pcs
DIMS	660x335x550(mm)
CBM	0.122(m³)
GW	13.9 (kg)
Price (USD, EXW)	0.43




Product Specifications

Model	PPF-02
Processing Dimensions	252x63 (mm)
Filter Cartridge Inner Diameter	28(mm)
Material	Polypropylene (PP)
Surface Finishing	Hybrid Needle Punching & Grooving Technology
Manufacturing Process	Triple-Spray Thermal Fusion Process
Filtration Accuracy	1 Microns
Applicable Water Temperature	5–38°C
Filter Cartridge Weight	≤150 g
QTY	100 pcs
DIMS	660x335x550(mm)
CBM	0.122(m³)
GW	16.3 (kg)
Price (USD, EXW)	0.6

Filter Cartridge Functionality

Adsorbs residual chlorine in water and disinfection byproducts (such as chloroform), while removing partial heavy metals (e.g. lead, mercury) and abnormal colors and odors (e.g. musty smell and sulfides), improves water clarity.

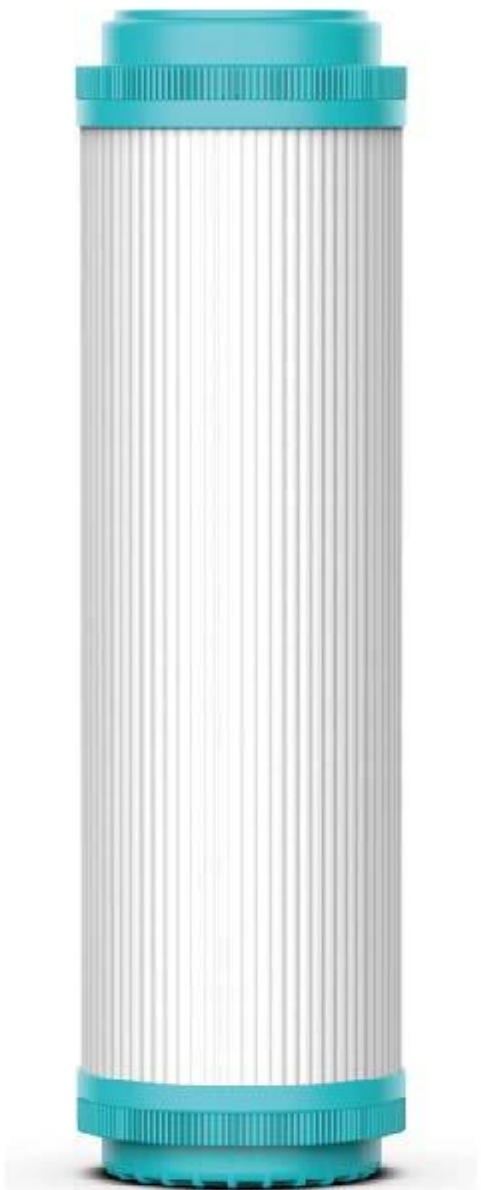

Product Specifications

Model	GAC-P1
Processing Dimensions	250x70 (mm)
Filter Cartridge Inner Diameter	28 (mm)
Housing Material	Polypropylene (PP)
Gasket Material	Nitrile Rubber (NBR)
Filter Media Replacement	Not Supported
Internal Filter Media	Coal-based Activated Carbon
Particle Size	8×15 mesh
Adsorption Iodine Value	≤350 mg/g
CTC Adsorption	<50%
Applicable Water Temperature	5–38°C
QTY	25 pcs
DIMS	380x380x270(mm)
CBM	0.039(m³)
GW	11.5 (kg)
Price (USD, EXW)	0.7

Product Specifications

Model	GAC-P2
Processing Dimensions	251x67(mm)
Filter Cartridge Inner Diameter	28(mm)
Housing Material	Food-Grade PP
Gasket Material	Nitrile Rubber (NBR)
Filter Media Replacement	Supported
Internal Filter Media	Coconut Shell Activated Carbon(Kuraray, Japan)
Particle Size	12×24 mesh
Adsorption Iodine Value	≥1050 mg/g
CTC Adsorption	≥70%
Applicable Water Temperature	5–38°C
QTY	25 pcs
DIMS	364x364x260(mm)
CBM	0.035(m³)
GW	9 (kg)
Price (USD, EXW)	2.2



Filter Cartridge Functionality


Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥5-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.

Product Specifications



Model	CTO-P1
Processing Dimensions	250x65 (mm)
Filter Cartridge Inner Diameter	28 (mm)
Filtration Accuracy	5 Microns
Gasket Material	Nitrile Rubber (NBR)
Manufacturing Process	Compression Molding
Internal Filter Media	Coal-based Activated Carbon
Particle Size	8×15 mesh
Adsorption Iodine Value	≤350 mg/g
CTC Adsorption	<50%
Applicable Water Temperature	5–38°C
QTY	25 pcs
DIMS	390x380x270(mm)
CBM	0.04(m³)
GW	11 (kg)
Price (USD, EXW)	0.7

Product Specifications

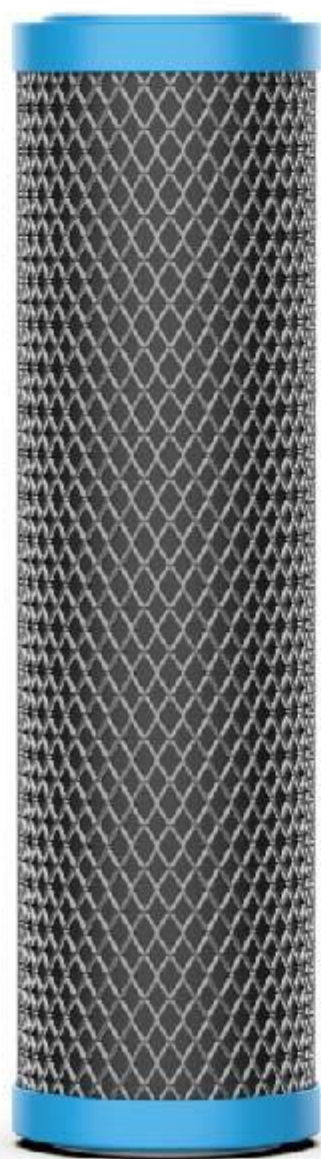

Model	CTO-P2
Processing Dimensions	252x65(mm)
Filter Cartridge Inner Diameter	27(mm)
Filtration Accuracy	1 Microns
Gasket Material	Nitrile Rubber (NBR)
Manufacturing Process	Sintered Activated Carbon
Internal Filter Media	Coconut Shell Activated Carbon
Particle Size	≥80 mesh
Adsorption Iodine Value	≥1050 mg/g
CTC Adsorption	≥99%
Applicable Water Temperature	5–38°C
QTY	25 pcs
DIMS	364x364x260(mm)
CBM	0.035(m³)
GW	9(kg)
Price (USD, EXW)	2.2

Filter Cartridge Functionality

Combines folded PP cotton (intercepts sediment/rust), sintered activated carbon (adsorbs residual chlorine/pesticides/VOCs) and scale inhibitor (prevents scaling). Employs a triple-mechanism of physical-chemical-ion regulation to protect downstream membrane elements, extend their lifespan, and enhance purification efficiency.

Product Specifications



Model	FSA-P1
Dimensions	252x65(mm)
Filter Cartridge Inner Diameter	27(mm)
Internal Filter Media	3-in-1 combo filter
PP Filter Manufacturing Process	Pleated PP Cartridge
Filtration Accuracy	1 Micron
Carbon Block Process	Sintered Activated Carbon
Activated Carbon Raw Material	Coconut Shell Activated Carbon
Iodine Adsorption Value	≥1050 mg/g
CTC Adsorption	≥99%
Anti-Scale Media	Silicate
Applicable Water Temperature	5–38°C
QTY	25 pcs
DIMS	375x375x290(mm)
CBM	0.041(m³)
GW	8 (kg)
Price (USD, EXW)	2.9

Product Specifications



Model	FSA-C1
Dimensions	256x67(mm)
Filter Cartridge Outer Diameter	19(mm)
Internal Filter Media	3-in-1 combo filter
PP Filter Manufacturing Process	Pleated PP Cartridge
Filtration Accuracy	1 Micron
Carbon Block Process	Sintered Activated Carbon
Activated Carbon Raw Material	Coconut Shell Activated Carbon
Iodine Adsorption Value	≥1050 mg/g
CTC Adsorption	≥99%
Anti-Scale Media	Silicate
Applicable Water Temperature	5–38°C
QTY	25 pcs
DIMS	371x371x280(mm)
CBM	0.039(m³)
GW	9 (kg)
Price (USD, EXW)	3.6



Product Specifications

Model	GAC-C1
Processing Dimensions	254x67(mm)
Interface Inner Diameter	19(mm)
Housing Material	Food-Grade PP
Gasket Material	Nitrile Rubber (NBR)
Filter Media Replacement	Supported
Internal Filter Media	Coconut Shell Activated Carbon(Kuraray, Japan)
Particle Size	12×24 mesh
Adsorption Iodine Value	≥1050 mg/g
CTC Adsorption	≥70%
Applicable Water Temperature	5–38℃
QTY	25 pcs
DIMS	380x380x280(mm)
CBM	0.041(m³)
GW	9 (kg)
Price (USD, EXW)	2.3



Product Specifications

Model	CTO-C1
Dimensions	256x67(mm)
Interface Outer Diameter	19(mm)
Filtration Accuracy	1 Micron
Gasket Material	Nitrile Rubber (NBR)
Manufacturing Process	Sintered Activated Carbon
Internal Filter Media	Coconut Shell Activated Carbon
Particle Size	≥80 mesh
Adsorption Iodine Value	≥1050 mg/g
CTC Adsorption	≥99%
Applicable Water Temperature	5–38℃
QTY	25 pcs
DIMS	380x380x280(mm)
CBM	0.041(m³)
GW	9.5 (kg)
Price (USD, EXW)	2.9

VONTRON Reverse Osmosis Membrane (MADE IN CHINA)

Model	QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	Price (USD, EXW)
EC-1812-75	50	700×350×350	0.086	12	5
EC-2012-100	25	350×350×350	0.043	7	6.5
EC-2012-125	25	350×350×350	0.043	8	7
EC-3012-400	25	525×525×365	0.1	16.5	13
EC-3013-400	25	525×525×365	0.1	15.5	13
EC-3012-600	25	525×525×365	0.1	18	15
EC-3013-600	25	525×525×365	0.1	17	15
EC-3013-800	25	525×525×365	0.1	21	18
EC-3213-1000	25	525×525×365	0.1	21	21

Important Notes:

1. For stand-alone purchases of VONTRON membranes, confirm whether an authorized VONTRON agent exists in the destination country. If an agent is present, we cannot ship directly.
2. After order confirmation, allow 7 days for shipment as we must complete export reporting to VONTRON.
3. For complete systems exported with VONTRON membranes installed, no export reporting is required. Shipments may be sent worldwide without restrictions.

DuPont-TapTec Reverse Osmosis Membrane (MADE IN CHINA)

Model	QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	Price (USD, EXW)
TT-1812-75	25	365×365×328	0.044	7	6
TT-1812-100	25	365×365×328	0.044	7	7
TT-3012-400	16	365×365×328	0.044	9.5	13
TT-3013-400	16	365×365×348	0.046	8.5	15.5
TT-3012-600	16	365×365×348	0.046	11	28
TT-3013-800	16	360×360×353	0.046	12	42

DuPont-Filmtec Reverse Osmosis Membrane (MADE IN USA)

Model	QTY (pcs)	DIMS (mm)	CBM (m³)	GW (kg)	Price (USD, EXW)
TW30-1812-50HR	25	362×362×384	0.05	7	14
BW60-1812-75	25	362×362×384	0.05	7	18
TW30-1812-100HR	25	362×362×384	0.05	7	24.5
AQUALAST 1812-HR	25	362×362×384	0.05	7	19
TW30-3012-500	16	365×365×348	0.05	11	56

Important Notes:

The export of DuPont membranes to Iran and Russia is prohibited, while exports to other countries are unrestricted.

Product Specifications



Filter Cartridge Functionality	Deeply adsorbs residual odorous volatile organic compounds, improves water quality and taste.
Model	T33
Dimensions	250 x 49 (mm)
Port Size	1/4-inch
Housing Material	Food-Grade PP
Internal Filter Media	Sintered Activated Carbon
Filtration Accuracy	1 Micron
Particle Size	≥80 mesh
Adsorption Iodine Value	≥1050 mg/g
CTC Adsorption	≥99%
Purification Flux	≥2L/MIN
Applicable Pressure	0.1-0.6 MPa
Applicable Water Temperature	5–38°C
QTY	49
DIMS	371x371x280(mm)
CBM	0.039(m ³)
GW	11.5 (kg)
Price (USD, EXW)	2

Product Specifications



Filter Cartridge Functionality	Alkaline Composite Sintered Carbon Block - Combining deep purification with health benefits. While highly effective in adsorbing residual chlorine and odors, the embedded alkaline media balances water pH to a healthy, weakly alkaline level, enriching your water with essential minerals for daily hydration.
Model	MFC
Dimensions	250 x 49 (mm)
Port Size	1/4-inch
Housing Material	Food-Grade PP
Internal Filter Media	Sintered Activated Carbon + Weak-Alkaline Filter Media
weakly alkaline range (PH)	7.5~9
Total Purification Capacity	2000L
Filtration Accuracy	1 Micron
Particle Size	≥80 mesh
Adsorption Iodine Value	≥1050 mg/g
CTC Adsorption	≥99%
Purification Flux	≥2L/MIN
Applicable Pressure	0.1-0.6 MPa
Applicable Water Temperature	5–38°C
QTY	49
DIMS	371x371x280(mm)
CBM	0.039(m ³)
GW	12 (kg)
Price (USD, EXW)	4

Product Specifications



Filter Cartridge Functionality	The perfect combination of deep purification and healthy mineralization. The premium sintered carbon effectively removes residual chlorine, colors, odors, and organics. Meanwhile, the built-in natural strontium media continuously releases beneficial Strontium ions—the "gold in water"—along with other trace minerals. Enjoy natural spring-quality mineral water right at home, supporting bone and cardiovascular health for the whole family.
Model	ZSK
Dimensions	250 x 49 (mm)
Port Size	1/4-inch
Housing Material	Food-Grade PP
Internal Filter Media	Strontium Mineralization + Weak-Alkaline Filter Media
Total Purification Capacity	2000L
Filtration Accuracy	1 Micron
Particle Size	≥80 mesh
Adsorption Iodine Value	≥1050 mg/g
CTC Adsorption	≥99%
Purification Flux	≥2L/MIN
Applicable Pressure	0.1-0.6 MPa
Applicable Water Temperature	5–38°C
QTY	49
DIMS	371x371x280(mm)
CBM	0.039(m³)
GW	12 (kg)
Price (USD, EXW)	4

Product Specifications




Filter Cartridge Functionality	Powered by next-generation mercury-free semiconductor technology, it achieves instant-on, cold-state sterilization. With its ultra-long lifespan and ultimate energy efficiency, it provides you with absolutely safe, maternal-and-infant-grade fresh drinking water.
Model	LED-UVC
Dimensions	178 x 49 (mm)
Port Size	1/4-inch
Operation Mode	Auto-stop when full, flow-activated start
LED Lifespan	10,000 hours
Power	3.5W
Purification Flux	≥2L/MIN
Applicable Pressure	0.1-0.6 MPa
Applicable Water Temperature	5–65°C
QTY	50
DIMS	280x280x280(mm)
CBM	0.022(m³)
GW	12 (kg)
Price (USD, EXW)	13

This product is default configured as an X3-specific filter cartridge.

For unique specifications:
Both cartridge end cap and matching water inlet end require mold redesign.

With existing inlet components:
Only cartridge end cap requires new mold development.

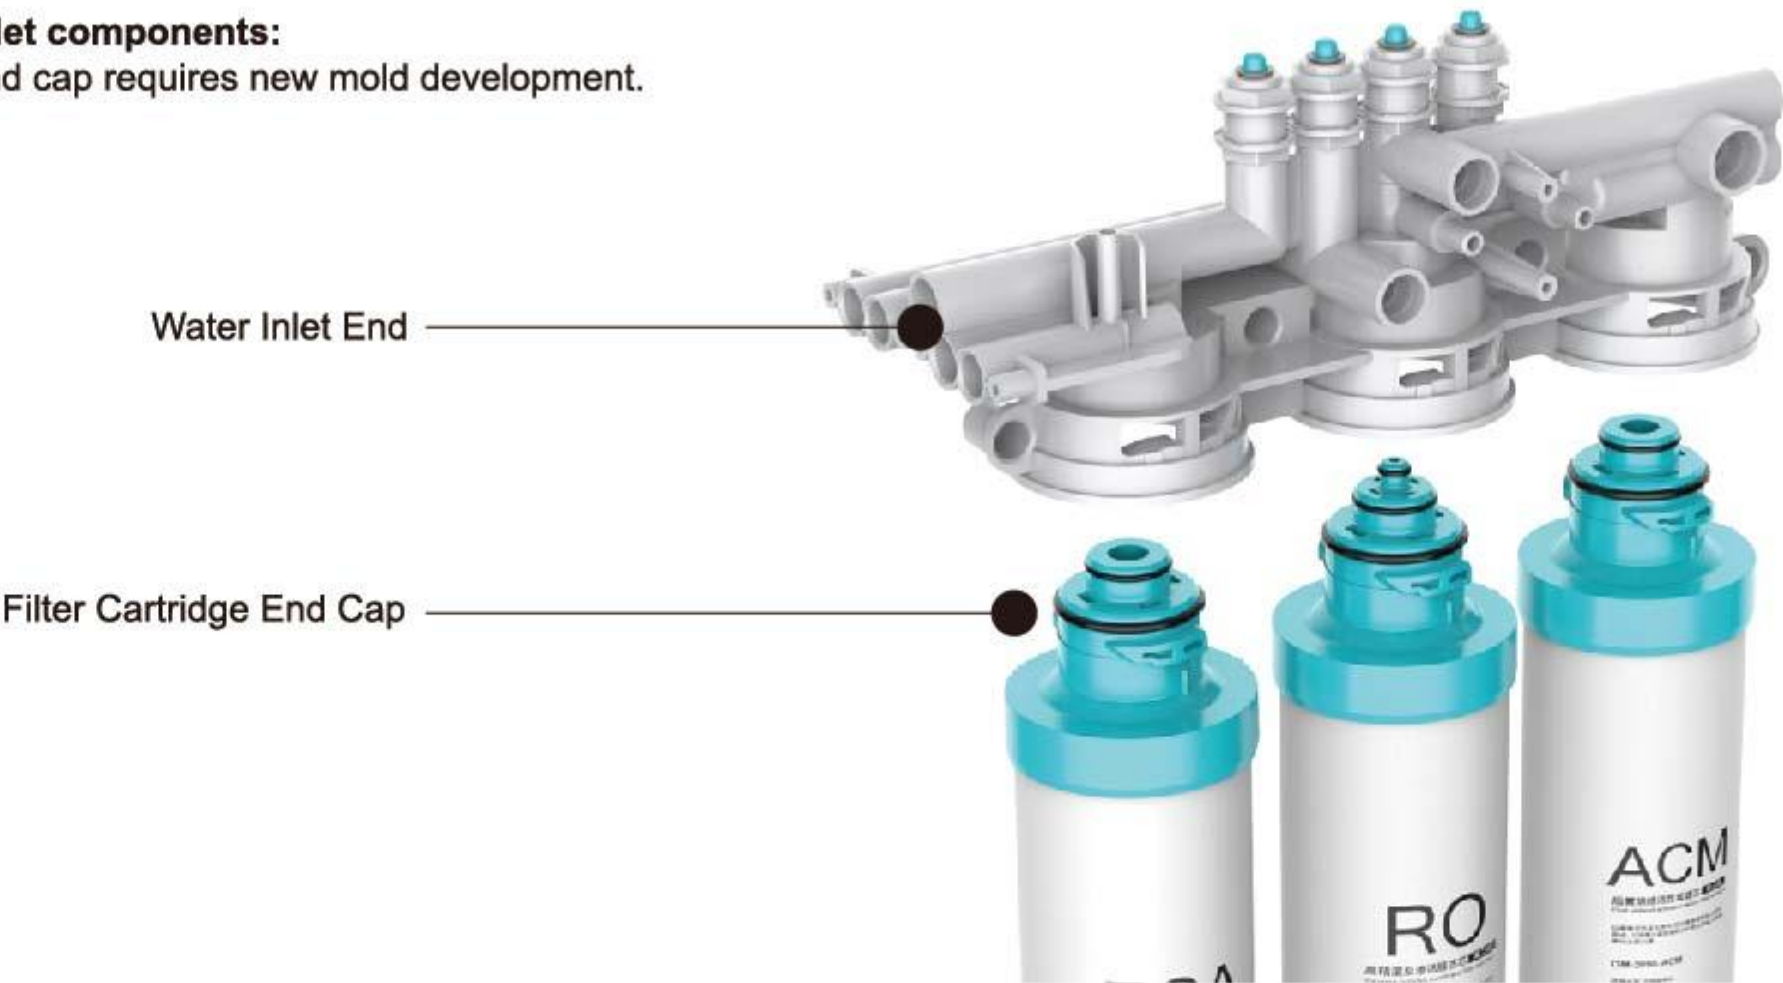

Product Specifications



Filter Cartridge Functionality	Dual purification deeply removes residual chlorine, volatile organic compounds (VOCs), pesticide residues, and harmful substances such as chloroform. Its dense structure filters ≥ 1-micron colloids, micro rust, and fine suspended solids, protecting rear-end precision membrane elements from particle erosion and chemical corrosion.
Model	KJ-PSA
Dimensions	256x67(mm)
Housing Material	Food-Grade PP
Internal Filter Media	3-in-1 combo filter
PP Filter Manufacturing Process	Pleated PP Cartridge
Filtration Accuracy	1 Micron
Carbon Block Process	Sintered Activated Carbon
Activated Carbon Raw Material	Coconut Shell Activated Carbon
Iodine Adsorption Value	≥1050 mg/g
CTC Adsorption	≥99%
Anti-Scale Media	Phosphate
Applicable Pressure	0.1-0.6 MPa
Applicable Water Temperature	5–38°C
QTY	50
DIMS	345x310x340(mm)
CBM	0.036(m³)
GW	10kg
Price (USD, EXW)	4.2



Product Specifications

Filter Cartridge Functionality	0.0001-micron filtration accuracy efficiently removes heavy metals (e.g. lead, arsenic, mercury, cadmium), inorganic salts (sodium, calcium, magnesium ions), nitrates, and other dissolved impurities, and completely blocks bacteria, viruses, and spores to ensure the biological safety of drinking water.
Model	KJ-RO
Dimensions	256x67(mm)
Housing Material	Food-Grade PP
Internal Filter Media	150G reverse osmosis membrane
Purification Flux	24L/H
Filtration Accuracy	0.0001 Micron
Applicable Pressure	0.1-0.6 MPa
Applicable Water Temperature	5–38°C
QTY	50
DIMS	345x310x340(mm)
CBM	0.036(m³)
GW	12kg
Price (USD, EXW)	8



Product Specifications

Filter Cartridge Functionality	Deeply adsorbs residual odorous volatile organic compounds, improves water quality and taste.
Model	KJ-ACM
Dimensions	256x67(mm)
Housing Material	Food-Grade PP
Internal Filter Media	Coconut Shell Activated Carbon
Particle Size	15×30 mesh
Adsorption Iodine Value	≥1200 mg/g
CTC Adsorption	≥70%
Applicable Pressure	0.1-0.6 MPa
Applicable Water Temperature	5–38°C
QTY	50
DIMS	345x310x340(mm)
CBM	0.036(m³)
GW	9kg
Price (USD, EXW)	2.6

Full-Range Water Purification Accessories: R&D and Production

We specialize in the R&D and production of comprehensive water purification accessories, covering core components including quick-connect fittings, filter cartridge assemblies, and composite water pipes. The quick-connect fittings are compatible with 1/4"-3/8" tubing diameters, supporting a 2.5 GPM flow rate and 1.6 MPa pressure resistance; the filter cartridges utilize PET/PP materials and pass 2.5 MPa high-intensity burst pressure testing; the composite pipes feature a triple-layer composite structure with a temperature resistance range of -20°C to 90°C. Leveraging in-house mold development capabilities, we customize interface dimensions, thread specifications, and exterior designs. Our solutions are provided to leading brands and widely implemented in residential and commercial water purification systems.





Product Specifications

Model	LP-A
Dimensions	300x106x112 (mm)
End Cap Material	Food-Grade PP
Body Material	Food-Grade PP
Applicable Pressure	≤0.4MPa
Pressure retention test	2.3Mpa/15 minutes
Burst pressure	≥3.2Mpa
Water Hammer Test	1.04Mpa/ 100,000 times
Applicable Water Temperature	5-38°C

Procurement Price

Model	Port Size	Port Material	QTY(pcs)	DIMS(mm)	CBM(m³)	GW(kg)	Price (USD, EXW)
LP-A2	1/4-inch	Plastic	15	575x350x320	0.065	11.5	3.2
LP-A4	1/2-inch	Plastic	15	575x350x320	0.065	11.5	3.2
LP-A4T	1/2-inch	Brass	15	575x350x320	0.065	12	3.6



Product Specifications

Model	LP-AT
Dimensions	300x106x112 (mm)
End Cap Material	Food-Grade PP
Body Material	Food-Grade PET
Applicable Pressure	≤0.4MPa
Pressure retention test	2.3Mpa/15 minutes
Burst pressure	≥3.2Mpa
Water Hammer Test	1.04Mpa/ 100,000 times
Applicable Water Temperature	5-38°C

Procurement Price

Model	Port Size	Port Material	QTY(pcs)	DIMS(mm)	CBM(m³)	GW(kg)	Price (USD, EXW)
LP-AT2	1/4-inch	Plastic	15	575x350x320	0.065	13.5	3.9
LP-AT4	1/2-inch	Plastic	15	575x350x320	0.065	13.5	3.9
LP-AT4T	1/2-inch	Brass	15	575x350x320	0.065	14	4.3



Product Specifications

Model	LP-C
Dimensions	575x130x130 (mm)
End Cap Material	Food-Grade PP
Body Material	Food-Grade PP
Applicable Pressure	≤0.3MPa
Pressure retention test	2.3Mpa/15 minutes
Burst pressure	≥2.8Mpa
Water Hammer Test	1.04Mpa/ 100,000 times
Applicable Water Temperature	5-38°C

Procurement Price

Model	Port Size	Port Material	QTY(pcs)	DIMS(mm)	CBM(m³)	GW(kg)	Price (USD, EXW)
LP-C20/4	1/2-inch	Brass	6	600x400x400	0.1	12	11.5
LP-C20/6	3/4-inch	Brass	6	600x400x400	0.1	12	11.5
LP-C20/8	1-inch	Brass	6	600x400x400	0.1	12	11.5



Product Specifications

Model	LP-D
Port Material	Brass
End Cap Material	Food-Grade PP
Body Material	Food-Grade PP
Applicable Pressure	≤0.3MPa
Pressure retention test	2.3Mpa/15 minutes
Burst pressure	≥2.8Mpa
Water Hammer Test	1.04Mpa/ 100,000 times
Applicable Water Temperature	5-38°C

Procurement Price

Model	Port Size	Dimensions(mm)	QTY(pcs)	DIMS(mm)	CBM(m³)	GW(kg)	Price (USD, EXW)
LP-D10/4	1/2-inch	370x180x180	6	380x550x550	0.15	18	18
LP-D10/6	3/4-inch	370x180x180	6	380x550x550	0.15	18	18
LP-D10/8	1-inch	370x180x180	6	380x550x550	0.15	18	18
LP-D20/4	1/2-inch	610x180x180	4	620x370x370	0.085	24	22
LP-D20/6	3/4-inch	610x180x180	4	620x370x370	0.085	24	22
LP-D20/8	1-inch	610x180x180	4	620x370x370	0.085	24	22

Product Specifications

Model	PJ-1812MK
Dimensions	340x77x77 (mm)
Connection Type	Quick-Connect
Inlet size(OD)	1/4"=6.5(mm)
Filtering port size(OD)	1/4"=6.5(mm)
Drain outlet size(OD)	1/4"=6.5(mm)
Housing Material	Food-Grade PP
Applicable Pressure	≤1.2MPa
Pressure retention test	2.3Mpa/15 minutes
Burst pressure	≥3.2Mpa
Water Hammer Test	1.04Mpa/ 100,000 times
Applicable Water Temperature	5-38°C
QTY	28
DIMS	493x370x315(mm)
CBM	0.058(m³)
GW	13.5(kg)
Price (USD, EXW)	1.9




Product Specifications

Model	PJ-3012MK
Dimensions	340x114x114 (mm)
Connection Type	Threaded
Inlet size(OD)	3/8"=16(mm)
Filtering port size(OD)	1/4"=12(mm)
Drain outlet size(OD)	1/4"=12(mm)
Housing Material	Food-Grade PP
Applicable Pressure	≤0.8MPa
Pressure retention test	2.3Mpa/15 minutes
Burst pressure	≥3.2Mpa
Water Hammer Test	1.04Mpa/ 100,000 times
Applicable Water Temperature	5-38°C
QTY	12
DIMS	510x380x355(mm)
CBM	0.069(m³)
GW	11(kg)
Price (USD, EXW)	3.2



Product Specifications

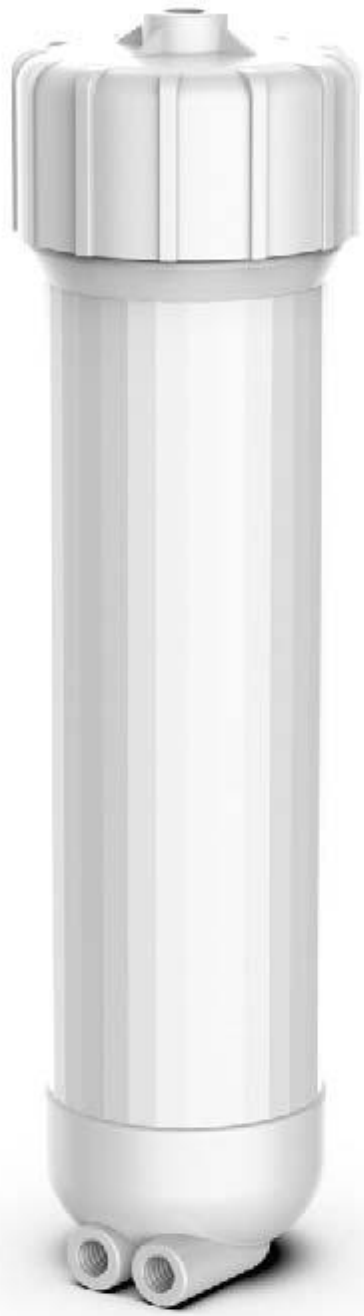

Model	PJ-3013MK
Dimensions	365x99x99 (mm)
Connection Type	Threaded
Inlet size(OD)	1/4"=12(mm)
Filtering port size(OD)	1/4"=12(mm)
Drain outlet size(OD)	1/4"=12(mm)
Housing Material	Food-Grade PP
Applicable Pressure	≤0.8MPa
Pressure retention test	2.3Mpa/15 minutes
Burst pressure	≥3.2Mpa
Water Hammer Test	1.04Mpa/ 100,000 times
Applicable Water Temperature	5-38°C
QTY	16
DIMS	400x400x380(mm)
CBM	0.061(m³)
GW	13(kg)
Price (USD, EXW)	4.3

Product Specifications



Model	PJ-32 13MK
Dimensions	366x119x119 (mm)
Connection Type	Threaded
Inlet size(OD)	3/8"=16(mm)
Filtering port size(OD)	1/4"=12(mm)
Drain outlet size(OD)	1/4"=12(mm)
Housing Material	Food-Grade PP
Applicable Pressure	≤0.8MPa
Pressure retention test	2.3Mpa/15 minutes
Burst pressure	≥3.2Mpa
Water Hammer Test	1.04Mpa/ 100,000 times
Applicable Water Temperature	5-38°C
QTY	15
DIMS	400x400x380(mm)
CBM	0.061(m³)
GW	13(kg)
Price (USD, EXW)	4.3

- **Multi-functional Replacement:** Can replace both faucets and pressure tanks, achieving water storage and dispensing functions, effectively reducing water purifier manufacturing costs.
 - **Electricity-Free Operation:** Utilizes a pure gravity-fed mechanism requiring no power, enabling automatic water replenishment when empty and auto-shutoff when full.
 - **Problem-Solving Efficiency:** Resolves issues of slow system shutdown and excessive wastewater production caused by air bladder pressure in non-electric water purifiers paired with pressure tanks.
 - **Flow Rate Enhancement:** For households with low-output existing water purifiers that cannot meet daily demands, adding this unit significantly increases instantaneous water flow rate.
- Technical Accuracy Verification:



Product Specifications

Model	PJ-XSB
Dimensions	268x66x286 (mm)
Capacity	2~3.5L
Connection Dimensions	1/4-inch
Mounting hole position	12~44mm
Pot Material	Food-grade PET materials
Base material	Food-grade PP materials
Applicable Water Temperature	5-38°C
Applicable Pressure	≤0.35Mpa
Suitable Water Source	Purify water source
Cleaning Cycle	Clean the pot body in 15~30 days
QTY	10
DIMS	680x310x630(mm)
CBM	0.133(m³)
GW	14(kg)
Price (USD, EXW)	8.8



Product Specifications

Connection Dimensions	1/4-inch
Housing Material	Food-Grade PP
Applicable Water Temperature	5-38°C

Procurement Price

Model	Volume	Dimensions(mm)	QTY(pcs)	CBM(m³)	GW(kg)	Price (USD, EXW)
HYRO-1.5	1.5G (≤1.2 L)	282x142	6	0.061	7.5	7.8
HYRO-3	3G (≤7 L)	350x240	4	0.09	11.5	10.5
HYRO-4	4G (≤10.5 L)	403x270	4	0.138	14.5	20
HYRO-10	10G (≤21 L)	510x350	4	0.27	31	52



Product Specifications

Main Material: PE Temperature Range: 5~38°C

Model	Size	Inner Diameter(mm)	Wall Thickness(mm)	Applicable Pressure(MPa)
PE-02	1/4-inch (6.5mm)	4	1.2	≤6.0
PE-25	5/16-inch (8.3mm)	5.4	1.3	≤6.0
PE-03	3/8-inch (9.5mm)	6.4	1.6	≤5.5
PE-04	1/2-inch (13mm)	8.7	2	≤5.0

Procurement Price

Model	Packaged Length(m)	QTY(pcs)	DIMS(mm)	CBM(m³)	GW(kg)	Price (USD, EXW)
PE-02	100	10	480x250x630	0.076	17	4.2
PE-25	100	6	640x350x400	0.09	19	7.5
PE-03	100	6	680x340x390	0.09	22	10.5
PE-04	50	6	680x340x390	0.09	26	12

Product Specifications

Model	GJ-01
Dimensions	84x24x32 (mm)
Main material	Food grade PET material
Blade material	stainless steel blade
Clipping range	16.5mm
Application Scope	1/4"~3/8" PE/PU flexible pipe
QTY	480
DIMS	370x270x415(mm)
CBM	0.042(m³)
GW	16(kg)
Price (USD, EXW)	0.25



Product Specifications

Model	GP-01
Dimensions	62x58x62 (mm)
Material	Food grade PET material
Single hole diameter	24mm
Variable hole diameter	36x13mm/24x13mm
Product thickness	3mm
Weight	≤27g
Bearing weight	≥10kg
QTY	450
DIMS	620x620x620(mm)
CBM	0.24(m³)
GW	14(kg)
Price (USD, EXW)	0.1





Product Specifications

Main Material: PP Stretchable Width: 120%

Model	Product Name	Dimensions (mm)	Applicable Diameter (mm)	QTY(pcs)	Price (USD, EXW)
JZ-1812XDJ	1812 Mini Single Clip	55x11x57	45	1000	0.04
JZ-1812DDJ	1812 Large Single Clip	60x11x65	56	1000	0.04
JZ-3012DDJ	3012 Large Single Clip	87x18x95	81	200	0.12
JZ-1812ZMJ	1812 Mother-Child Clip	65x11x102	45/56	500	0.05
JZ-1812DSJ	1812 Large Dual Clip	65x11x107	56	500	0.05
JZ-3012ZMJ	3012 Mother-Child Clip	96x18x127	41/81	200	0.22

Product Specifications

Model	GP-P01
Dimensions	104x111x60 (mm)
Applicable Filter Bottles	10-Inch Specification
Product material	Food-grade PP material
Product Thickness	4(mm)
QTY	240
DIMS	624x670x360(mm)
CBM	0.15(m³)
GW	26(kg)
Price (USD, EXW)	0.4



Product Specifications

Model	GP-P02
Dimensions	226x111x66(mm)
Applicable Filter Bottles	10-Inch Specification
Product material	ABS material
Product Thickness	4(mm)
QTY	70
DIMS	624x670x360(mm)
CBM	0.15(m³)
GW	12(kg)
Price (USD, EXW)	1



Product Specifications

Model	GP-P03
Dimensions	340x111x66(mm)
Applicable Filter Bottles	10-Inch Specification
Product material	ABS material
Product Thickness	4(mm)
QTY	33
DIMS	624x670x360(mm)
CBM	0.15(m³)
GW	9(kg)
Price (USD, EXW)	1.3






Product Specifications

Main Material: PP Temperature Range: 5~38℃ Applicable Pressure: ≥ 4.5MPa

Model	Port Size	Port Size	Diameter(mm)	QTY(pcs)	Price (USD, EXW)
M22-O	1/4-inch	1/4-inch	56x18	500	0.12
M44-O	1/2-inch	1/2-inch	40x26	200	0.15
M44T-O	1/2-inch	1/2-inch	50x26	200	0.18
M44S-O	1/2-inch	1/2-inch	60X26	200	0.14
M64	3/4-inch	1/2-inch	36x48	100	0.16
M66	3/4-inch	3/4-inch	36x53	100	0.24
M86	1-inch	3/4-inch	48x61	100	0.2
M88	1-inch	1-inch	48X67	100	0.3

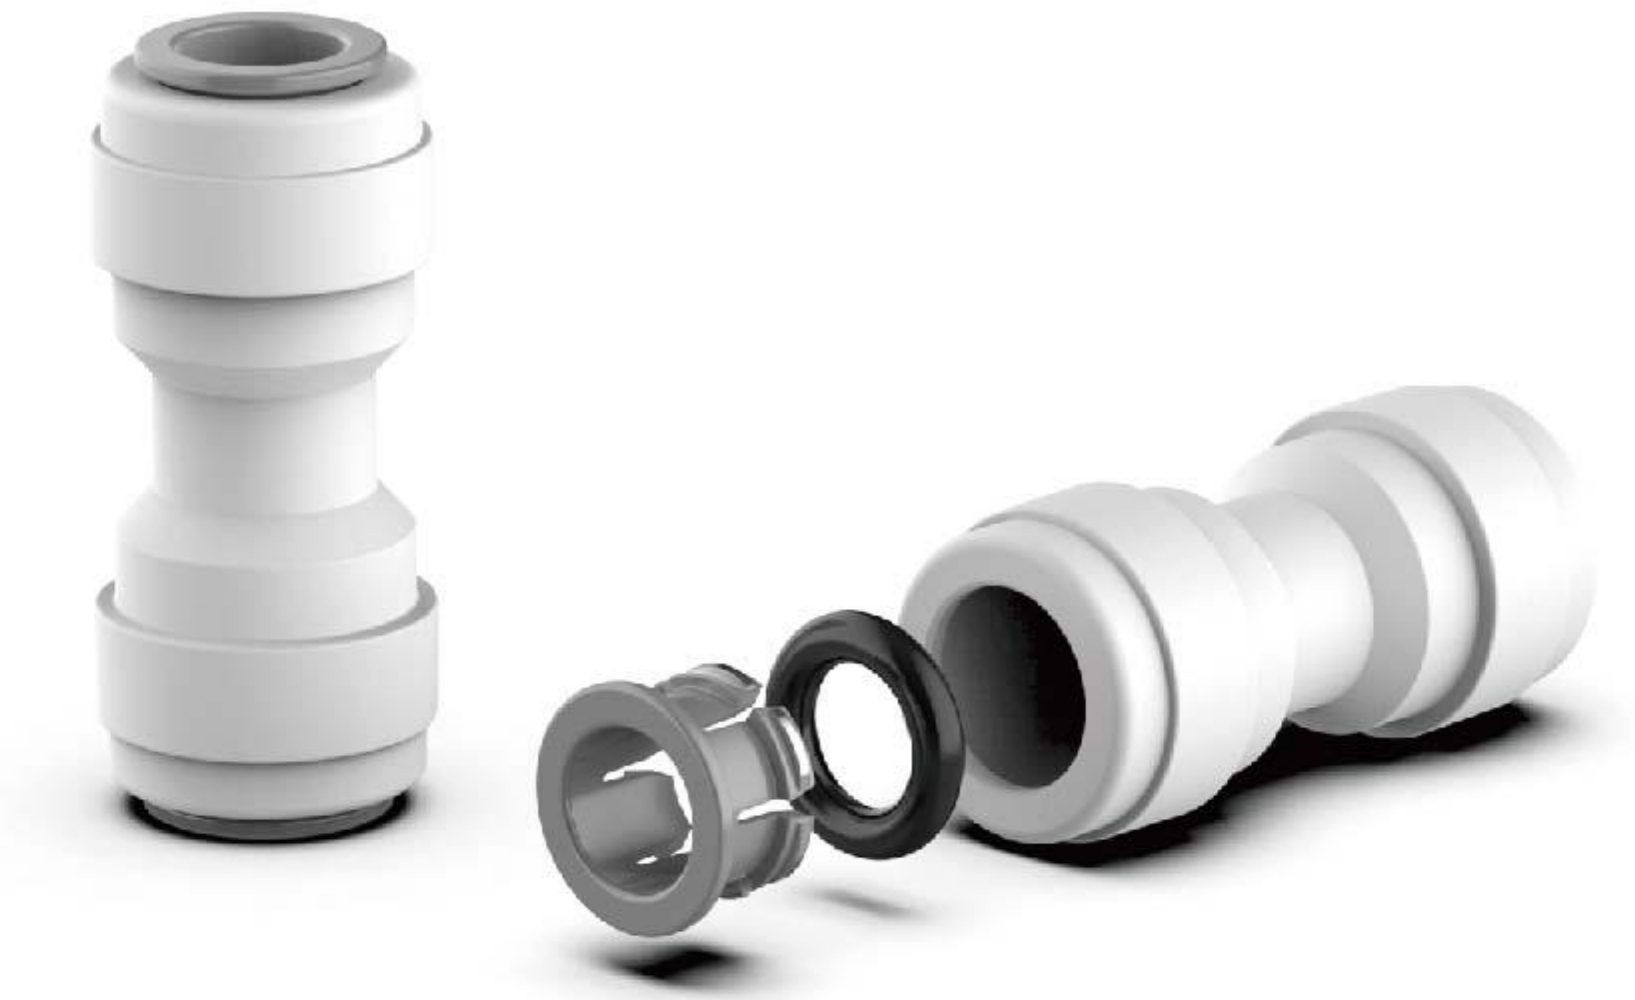

Product Specifications

Main Material: POM Temperature Range: 5~38°C Applicable Pressure: $\geq 4.5\text{MPa}$

Model	Left OD Size (inch)	Right OD Size (inch)	QTY(pcs)	Price (USD, EXW)
154	1/4	1/4	200	0.07
156	3/8	3/8	200	0.14
1564	3/8	1/4	200	0.14
155	5/16	5/16	200	0.14
1554	5/16	1/4	200	0.15
1565	3/8	5/16	200	0.15
1584	1/2	1/4	100	0.35
1586	1/2	3/8	100	0.35
1588	1/2	1/2	100	0.35

**Product Specifications**

Main Material: POM

Temperature Range: 5~38°C

Applicable Pressure: $\geq 4.5\text{MPa}$

Model	NPT Size (inch)	OD Size (inch)	QTY(pcs)	Price (USD, EXW)
1N2	1/8	1/4	200	0.05
2N2	1/4	1/4	200	0.07
2N3	1/4	3/8	200	0.15
3N2	3/8	1/4	200	0.1
3N3	3/8	3/8	200	0.14
3N4	3/8	1/2	200	0.3
4N2	1/2	1/4	100	0.14
4N3	1/2	3/8	100	0.16
4N4	1/2	1/2	100	0.33
6N2	3/4	1/4	100	0.21
6N3	3/4	3/8	100	0.24



Product Specifications

Main Material: POM Temperature Range: 5~38°C Applicable Pressure: $\geq 4.5\text{MPa}$

Model	NPT Size (inch)	OD Size (inch)	QTY(pcs)	Price (USD, EXW)
12N	1/8	1/4	200	0.14
13N	1/8	3/8	200	0.14
22N	1/4	1/4	200	0.14
23N	1/4	3/8	200	0.2
42N	1/2	1/4	100	0.17
425N	1/2	5/16	100	0.2
43N	1/2	3/8	100	0.2
44N	1/2	1/2	100	0.35
52N	5/8	1/4	100	0.36
525N	5/8	5/16	100	0.41
53N	5/8	3/8	100	0.41
62N	3/4	1/4	100	0.41
63N	3/4	3/8	100	0.45

**Product Specifications**

Main Material: POM

Temperature Range: 5~38°C

Applicable Pressure: $\geq 4.5\text{MPa}$

Model	Left OD Size (inch)	Right OD Size (inch)	Total Thread Length(mm)	QTY(pcs)	Price (USD, EXW)
014	1/4	1/4	12	100	0.2
016	3/8	1/4	23	100	0.3
018	1/2	1/2	27	50	0.58

**Product Specifications****Main Material: POM Temperature Range: 5~38°C Applicable Pressure: $\geq 4.5\text{MPa}$**

Model	Left OD Size (inch)	Right OD Size (inch)	QTY(pcs)	Price (USD, EXW)
4040	1/4	1/4	200	0.07
5040	1/4	5/16	200	0.14
6040	1/4	3/8	200	0.14
8040	1/4	1/2	200	0.35
5050	5/16	5/16	200	0.15
6050	5/16	3/8	200	0.15
6060	3/8	3/8	100	0.15
8060	3/8	1/2	100	0.35
8080	1/2	1/2	100	0.35



Product Specifications

Main Material: POM Temperature Range: 5~38℃ Applicable Pressure: ≥ 4.5MPa


Model	NPT Size (inch)	OD Size (inch)	QTY(pcs)	Price (USD, EXW)
4042	1/8	1/4	200	0.07
4044	1/4	1/4	200	0.07
4046	3/8	1/4	200	0.08
4048	1/2	1/4	200	0.12
5056	3/8	5/16	200	0.14
4064	1/4	3/8	200	0.13
4066	3/8	3/8	200	0.14
4068	1/2	3/8	200	0.19
4086	3/4	1/2	100	0.35
4088	1/2	1/2	100	0.35



Product Specifications

Main Material: POM Temperature Range: 5~38℃ Applicable Pressure: ≥ 4.5MPa

Model	NPT Size (inch)	OD Size (inch)	QTY(pcs)	Price (USD, EXW)
22NL	1/4	1/4	200	0.14
33NL	3/8	3/8	200	0.17
42NL	1/2	1/4	200	0.2
43NL	1/2	3/8	100	0.22
44NL	1/2	1/2	100	0.39

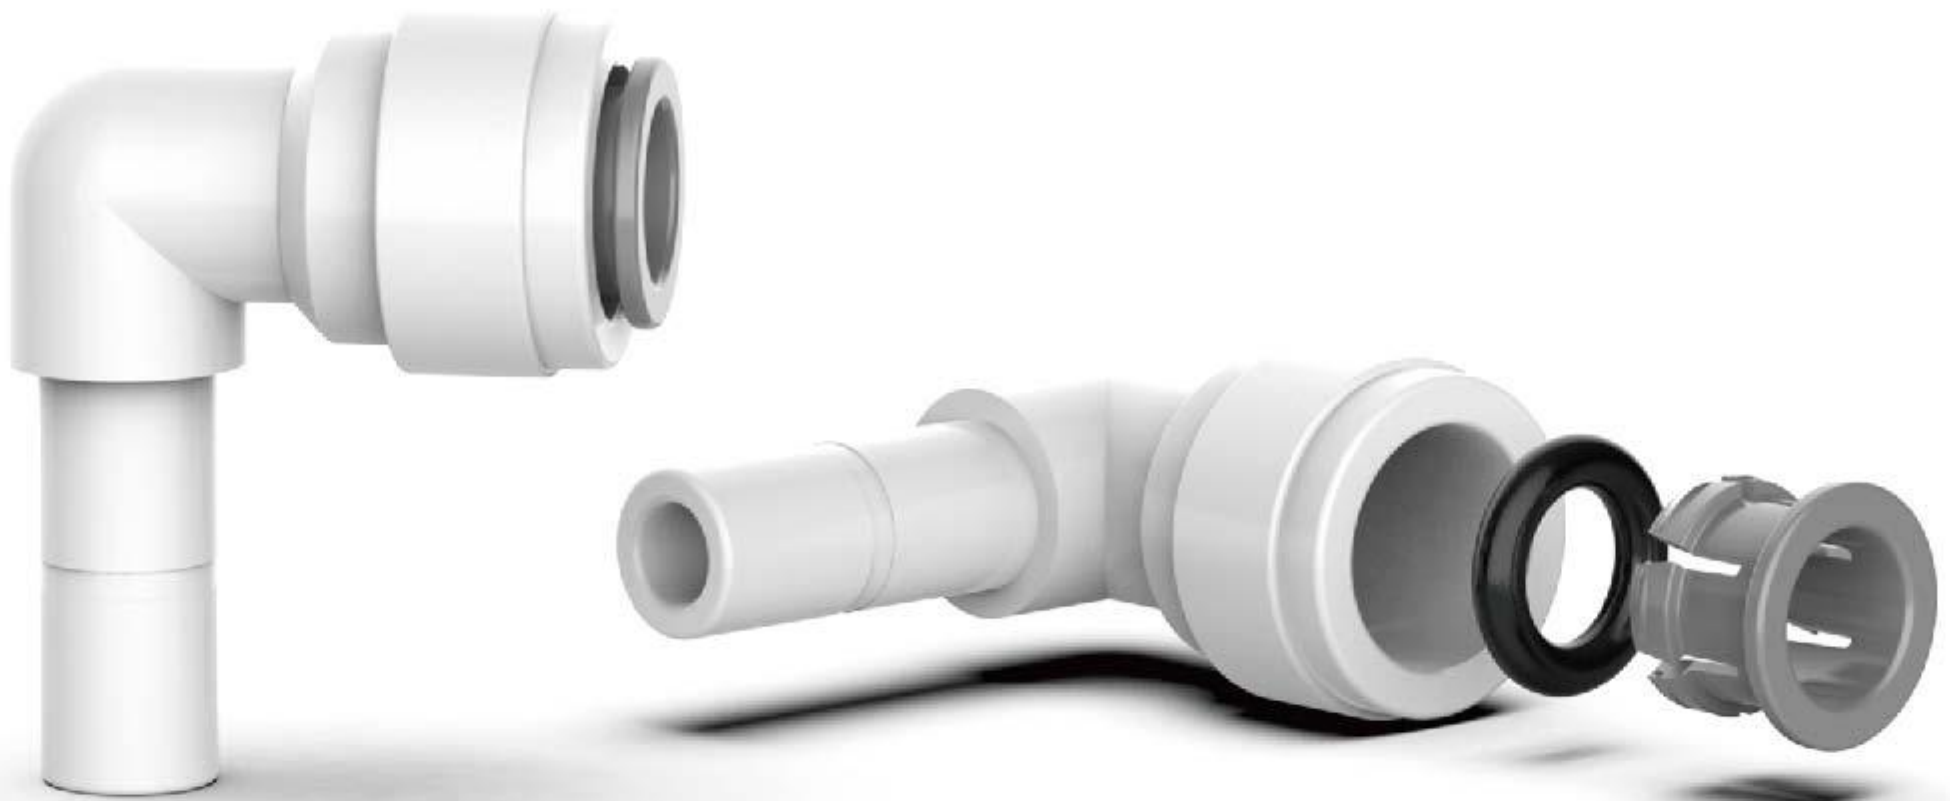
**Product Specifications**

Main Material: POM

Temperature Range: 5~38°C

Applicable Pressure: $\geq 4.5\text{MPa}$

Model	IR Size (inch)	OD Size (inch)	QTY(pcs)	Price (USD, EXW)
1144	1/4	1/4	200	0.07
1155	5/16	5/16	200	0.13
1166	3/8	3/8	200	0.13
1188	1/2	1/2	100	0.33

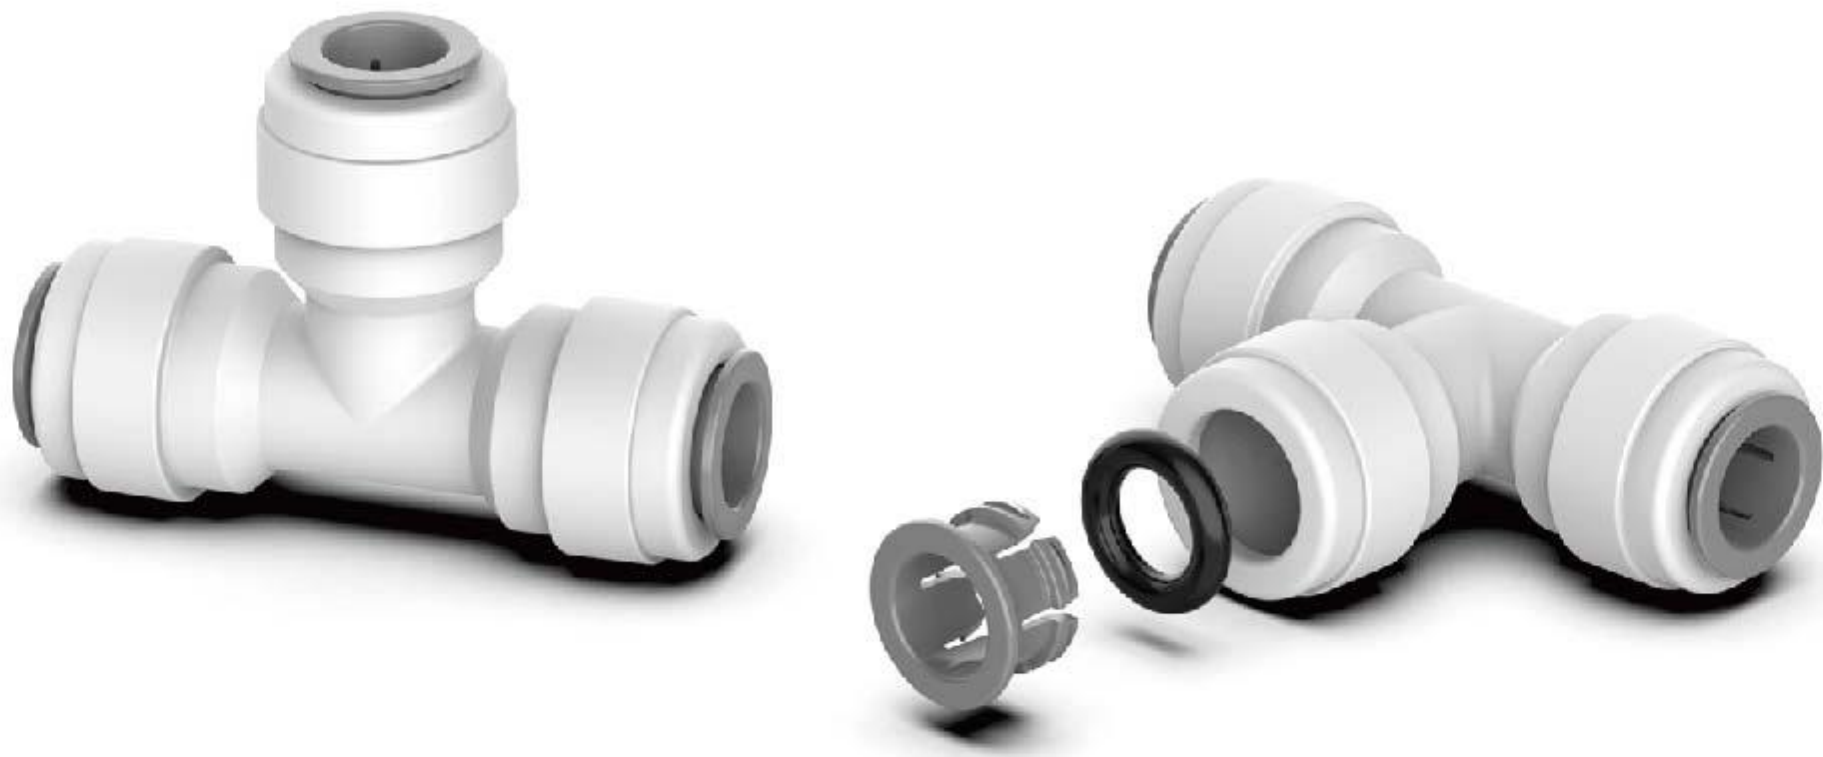

Product Specifications

Main Material: POM

Temperature Range: 5~38°C

Applicable Pressure: $\geq 4.5\text{MPa}$

Model	Left Size (inch)	Middle Size (inch)	Right Size (inch)	QTY(pcs)	Price (USD, EXW)
702	1/4	1/4	1/4	200	0.16
705	5/16	5/16	5/16	100	0.18
706	3/8	3/8	3/8	100	0.2
708	1/2	1/2	1/2	100	0.54
7026	1/4	1/4	3/8	100	0.2
6144	1/4	3/8	1/4	100	0.2
7054	5/16	1/4	5/16	100	0.18
7045	5/16	5/16	1/4	100	0.18
7062	3/8	1/4	3/8	100	0.2
7024	3/8	3/8	1/4	100	0.2
7084	1/2	1/4	1/2	100	0.54
7086	1/2	3/8	1/2	100	0.54
7068	1/2	1/2	3/8	100	0.54

**Product Specifications**

Main Material: POM

Temperature Range: 5~38°C

Applicable Pressure: $\geq 4.5\text{MPa}$

Model	Left Size (inch)	Middle Size (inch)	Right Size (inch)	QTY(pcs)	Price (USD, EXW)
7544	1/4(NPT)	1/4(OD)	1/4(OD)	200	0.16
7546	1/4(NPT)	1/4(OD)	3/8(OD)	100	0.18
7564	1/4(NPT)	3/8(OD)	1/4(OD)	100	0.18
7566	1/4(NPT)	3/8(OD)	3/8(OD)	100	0.19
6044	1/4(OD)	1/4(NPT)	1/4(OD)	100	0.16
6066	3/8(OD)	1/4(NPT)	3/8(OD)	100	0.19


**Product Specifications**

Main Material: POM

Temperature Range: 5~38°C

Applicable Pressure: $\geq 4.5\text{MPa}$

Model	Left Size (inch)	Middle Size (inch)	Right Size (inch)	QTY(pcs)	Price (USD, EXW)
7011	1/4(CP)	1/4(OD)	1/4(OD)	200	0.16
7012	1/4(OD)	1/4(CP)	1/4(OD)	200	0.16
7013	3/8(CP)	3/8(OD)	3/8(OD)	100	0.19
7014	3/8(OD)	3/8(CP)	3/8(OD)	100	0.19

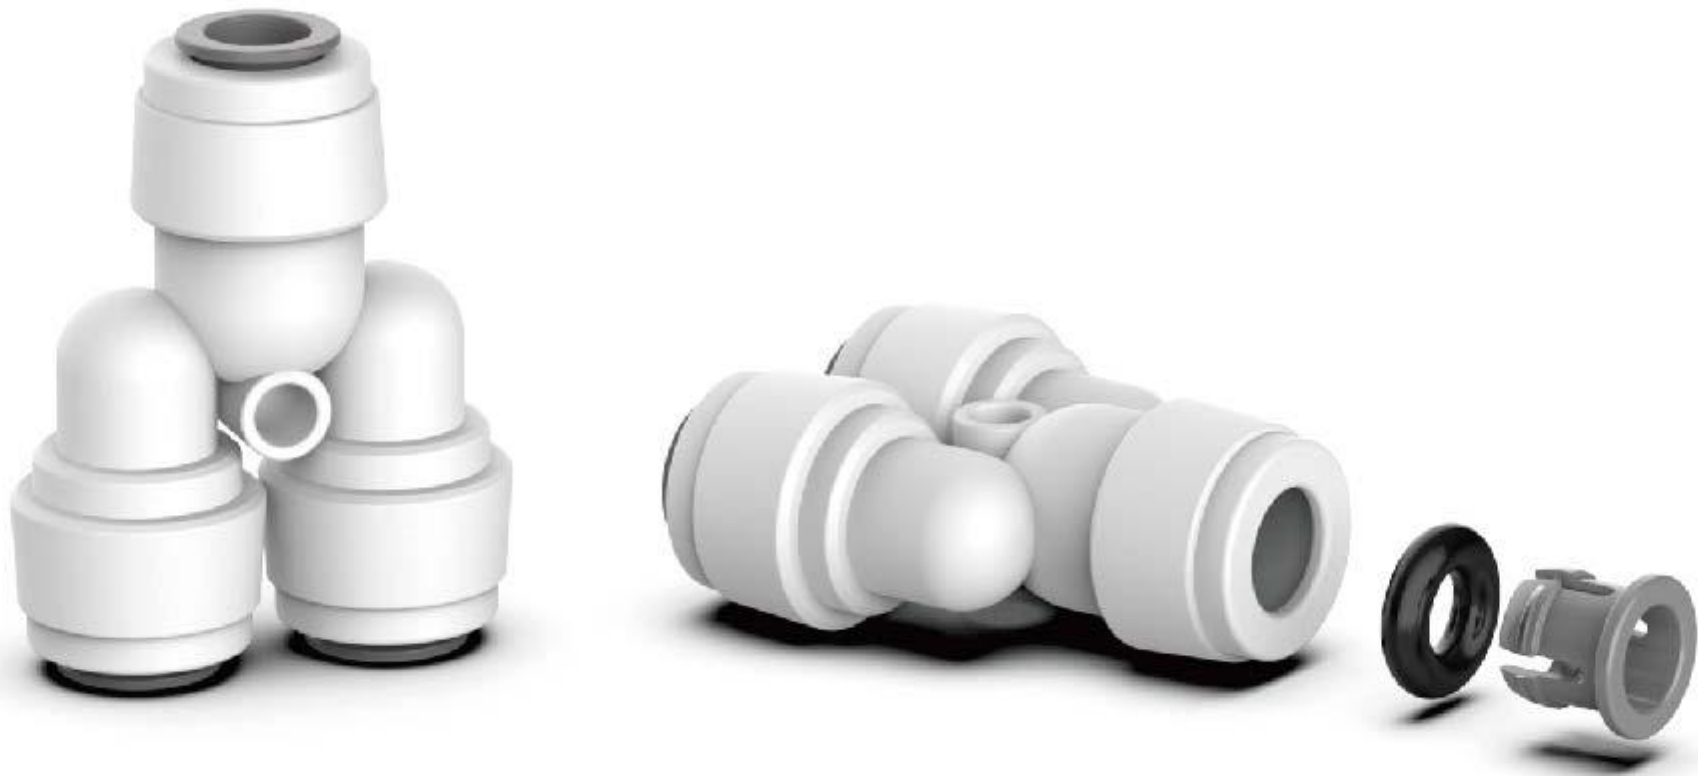**Product Specifications****Main Material:** POM **Temperature Range:** 5~38°C **Applicable Pressure:** ≥ 4.5MPa

Model	Left Size (inch)	Middle Size (inch)	Right Size (inch)	QTY(pcs)	Price (USD, EXW)
Y444	1/4	1/4	1/4	200	0.16
Y666	3/8	3/8	3/8	100	0.26
Y888	1/2	1/2	1/2	100	0.54



Product Specifications

Main Material: POM Temperature Range: 5~38°C Applicable Pressure: ≥ 4.5MPa

Model	Left OD Size (inch)	Right OD Size (inch)	QTY(pcs)	Price (USD, EXW)
1414	1/4	1/4	100	0.4
1616	3/8	3/8	100	0.5
1818	1/2	1/2	50	0.7



Product Specifications

Main Material: POM Temperature Range: 5~38°C Applicable Pressure: ≥ 4.5MPa

Model	NPT Size (inch)	OD Size (inch)	QTY(pcs)	Price (USD, EXW)
1414M	1/4	1/4	100	0.4
1418M	1/2	1/4	100	0.5
1618M	1/2	3/8	50	0.6
1818M	1/2	1/2	50	0.7



Product Specifications

Main Material: POM Temperature Range: 5~38℃ Applicable Pressure: ≥ 4.5MPa

Model	NPT Size (inch)	OD Size (inch)	QTY(pcs)	Price (USD, EXW)
1418FM	1/2	1/4	100	0.6
1618FM	1/2	3/8	50	0.7
1818FM	1/2	1/2	50	0.7



Product Specifications

Main Material: POM Temperature Range: 5~38℃ Applicable Pressure: ≥ 4.5MPa

Model	NPT Size (inch)	OD Size (inch)	QTY(pcs)	Price (USD, EXW)
T22	1/4	1/4	100	0.4
T225	1/4	5/16	100	0.5
T23	1/4	3/8	100	0.6
T62	3/4	1/4	50	0.7
T63	3/4	3/8	50	0.8



Product Specifications

Main Material: POM Temperature Range: 5~38°C Applicable Pressure: $\geq 4.5\text{MPa}$

Model	Left OD Size (inch)	Right OD Size (inch)	QTY(pcs)	Price (USD, EXW)
I-154	1/4	1/4	100	0.25
L-4040	1/4	1/4	100	0.2



Product Specifications


Model	JT-FSB
Main material	POM material
Product size	65x16 (mm)
Port Size(OD)	1/4" =6.5 (mm)
Port Size(OD)	1/4" =6.5 (mm)
Applicable water pressure	0~4.5MPa
Temperature Range	5~38°C

Procurement Price

Waste Water Flow Rate	Volume	Corresponding Purifier Flow Rate	QTY(pcs)	Price (USD, EXW)
300CC	1.5G ($\leq 1.2\text{ L}$)	50~150 G	100	0.35
800CC	3G ($\leq 7\text{ L}$)	200~400 G	100	0.54
1000CC	4G ($\leq 10.5\text{ L}$)	400~600 G	100	0.54
1500CC	10G ($\leq 21\text{ L}$)	600~1000 G	100	0.54

Threaded Tee Fitting

- This fitting can be used at the water purifier's outlet or inlet ends to achieve pipeline branching, supporting the division of 1/4-inch or 3/8-inch pipelines.

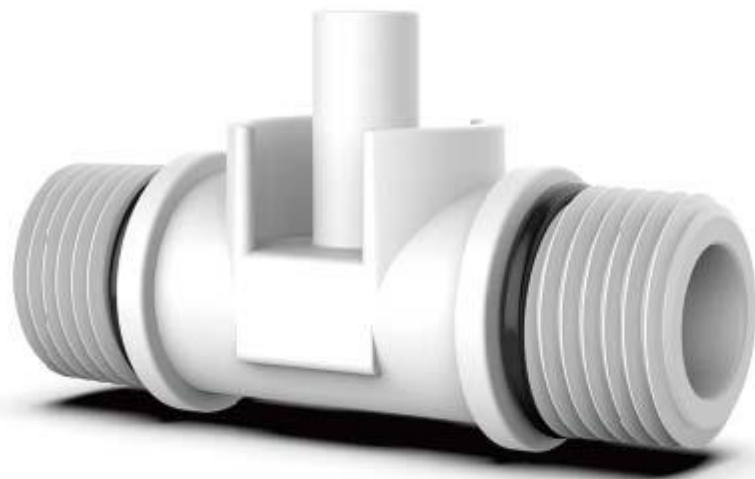

Product Specifications

Model	PJ-CSST
Product name	Water purifier outlet three-links
Main material	Food grade PP material
Product size	68x24.5x37.5 (mm)
Inserted rod diameter	3/8"=9.5mm
Port Size(NPT)	1/2"=20mm
Applicable water pressure	0~4.5MPa
Temperature Range	5~38°C
QTY	100
Price (USD, EXW)	0.15

Water Leakage Protector

- This device operates without external power, installed at water purifier's intake port. When water leakage occurs, internal expansion material rapidly expands upon water contact, mechanically driving valve closure to terminate water flow. This mechanism effectively prevents leakage accidents and protects property safety.



Product Specifications

Main material	POM
Expansion cotton size	11x18 (mm)
Suitable water pressure	60 PSI
Pressure retention test	150 PSI/100,000 times
Blasting pressure	464 PSI
Static pressure measurement	310 PSI (10 minutes)
Temperature Range	5~38°C

Procurement Price

Model	Port Size	Dimensions(mm)	QTY(pcs)	Price (USD, EXW)
LSBHQ-2	1/4-inch	71x31x58	100	1.3
LSBHQ-3	3/8-inch	71x31x58	100	1.4