

Life Cycle Analysis of an Adaptive Solar Facade

P. Jayathissa ^{☆a,**}, M. Jansen ^{☆a}, N. Heeren ^b, Z. Nagy ^a, S. Hellweg ^b, A. Schlueter ^{a,*}

^a*Architecture and Building Systems, Institute of Technology in Architecture,
ETH Zurich, Switzerland*

^b*Ecological System Design, Institute of Environmental Engineering,
ETH Zurich, Switzerland*

Abstract

Text

Keywords: Adaptive Solar Facade, Life Cycle Analysis, Multi Functional Envelope

1. Introduction

Buildings are at the heart of society and currently account for 32% of global final energy consumption and 19% of energy related greenhouse gas emissions [1]. Nevertheless the building sector has a 50-90% emission reduction potential using existing technologies, and widespread implementation could see energy use in buildings stabilise or even fall by 2050. Within this strategy, building integrated photovoltaics (BIPV) has the potential of providing a substantial segment of a buildings energy needs without the loss of valuable land space [2]. It has even been identified as one of four key factors for the future success of the PV industry [3].

The current PV industry is currently dominated by crystalline silicon photovoltaic cells due to their high efficiency and low processing costs [4]. However these technologies are often demoted as pre fabricated eco-spoilers that

[☆]This document is a collaborative effort.

^{*}Corresponding author

^{**}Principal corresponding author

Email addresses: jayathissa@arch.ethz.ch (P. Jayathissa [☆]),
heeren@ifu.baug.ethz.ch (N. Heeren), schlueter@arch.ethz.ch (A. Schlueter)

ruin the architectural integrity of a building [5]. This combined with their intrinsic weight restricts their large scale implementation to roofs where they are out of sight. In the last decade however, we have seen an interesting development of second generation thin film technologies [6]. In particular, Cu(In,Ga)Se₂ (CIGS) which has is reaching competitive levels of efficiencies [7], and manufacturing costs [8] [9].

This development has brought new design BIPV design possibilities. Their light weight nature and customisable shapes allows for easier and more aesthetically pleasing integration into the building envelope. Furthermore, this technology allows for the design of adaptive building envelopes [10], which has gained interest in recent years [11]. From an energetic perspective, the envelope acts as a buffer between the interior and exterior environments [Add Figure from nagy et al]. An adaptive building envelope can mediate solar isolation on the building, thereby offering reductions in heating/cooling loads and improvement of daylight distribution [10]. Interestingly the mechanics that actuate such systems couples seamlessly with the mechanics required for facade integrated PV solar tracking. The balance of electricity production, and adaptive shading can in some cases offset the entire energy demand of an office space behind this adaptive envelope [12].

The design of these systems, which we define as an Adaptive Solar Facade (ASF) comes at an added cost. The additional electronics, actuators, and supporting structure adds further embodied CO₂ to the Balance of Systems (BOS). In this paper we will discuss the ASF from a life cycle perspective thus analysing whether the increase in operational savings offsets the increased embodied carbon. The remainder of the paper is organised as follows. In the next section we describe the inventory of an ASF, the operational emissions and LCA methodology used in this analysis. In Section 3 we will present the results from the LCA and look at the embodied and operational global warming potential (GWP). In Section 4 we compare the results of the LCA with other technologies and the effects in different regions. In Section 5 we discuss the results and possible implications this will have on the future design of Adaptive Facades.

2. Methodology

2.1. Embodied Energy Inventory and Assumptions

The main topic of the present analysis is the production, operation and disposal of an Adaptive Solar Facade (ASF). The ASF is composed of six sub-product systems described in Figure 1. This consists of a CIGS PV panels mounted on an actuator, supported by a cantilever that offsets it from a cable net supporting structure 2.

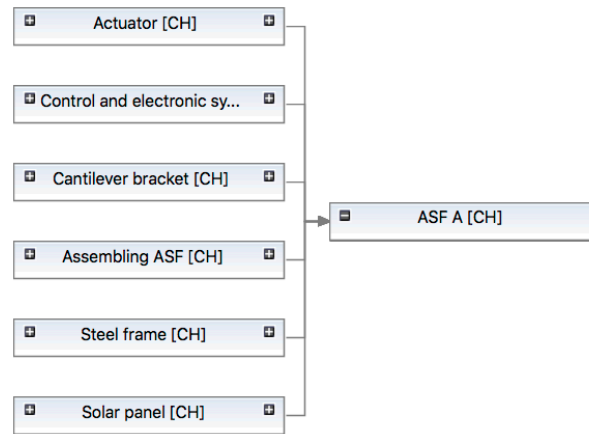


Figure 1: Breakdown of the ASF into six sub-product systems (Note change Steel frame to Supporting Structure, and Assembling ASF to Assembly. Also redraw this chart so it matches the subsubsections below)

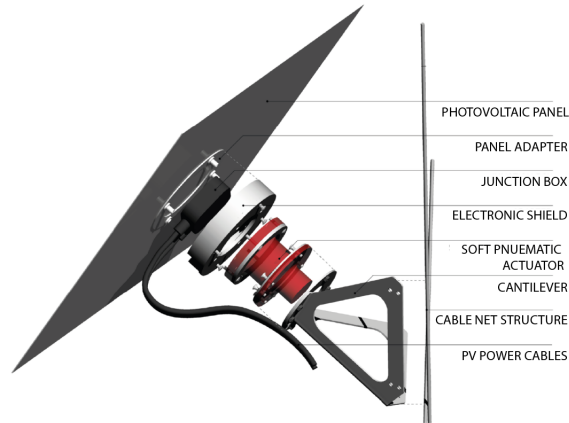


Figure 2: Exploded view of an ASF module mounted on a cable net supporting structure

PV Panel

A CIGS PV panel was selected as the thin film panel of choice due to its high efficiency, low cost, and ability to be mounted on a polymer or aluminium substrate [13].

The nominal conversion efficiencies are XX% for teh CIGS panels based off [reference required]

[Also make a note about where the PV data comes from, maybe also analyse a-Si?]

[Add Inventory Analysis of PV panels here]

Actuator

Traditionally photovoltaic actuation is done through the use of servo motors. Servo motors however become a limiting factor for adaptive facades due to their high upfront costs, and instability to heavy winds. Soft robotic actuators on the other hand are cheaper and more resilient to environmental conditions[14]. For the purpose of this analysis we will analyse both servo motors and soft robotic actuators.

[Add Inventory Analysis of actuators here, note I would move the air compressor to the actuator section]

Cantilever

The cantilever is a steel connection point between the PV panel and the supporting structure.

[Add Inventory Analysis of cantilever here]

Supporting Structure

The supporting structure is the connection point between the array of photovoltaic modules and the building itself. The design currently in use consists of a steel cable-net that spans a steel supporting frame. The steel frame is then attached to the building itself.

[Add Inventory Analysis of supporting structure here]

Controls and Electronic System

The control system is required for the actuation of panels and the regulation of photovoltaic electricity production.

[Add Inventory Analysis of control system here]

Installation

The installation of the ASF to the building requires a hydraulic hoist which needs to be in operation for eight hours based off our construction experience [12].

[Add Inventory analysis of installtion]

2.2. Operational Emissions and Assumptions

The potential savings are based off previously completed numerical simulation [12]. The simulation was conducted on a south facing office room. The room xx meters in length, xx meters wide and xx meters high was modeled using Rhinoceros 3D CAD Package [15], shown in Figure XX. Grasshopper [16] was used to model the dynamic aspects of the ASF which consists of an array of 400mm CIGS solar panels. The geometrical input is imported to

Energy Plus [17] through the DIVA [18] interface. A single zone thermal analysis was conducted for each possible geometrical configuration of the ASF for each hour of the year. The results were then post processed in Python [19] with the NumPy [20], and pandas [21] plug-ins.

Based on the assumption of XX full openings and closings per day, we approximate the energy requirement to actuate the ASF to be YY kWh in its lifetime.

[Table of simulation parameters, and render of Rhino model]

2.3. Analysis of Reference Cases

There are two reference cases used for technological comparisons. Firstly the....

2.4. LCA Methodology

- The analysis is performed according to ISO 14040, ISO 14044 and ISO 15804.
- The impact category, which will be evaluated, is the global warming potential (GWP). This is described as the emissions of CO₂ – eq in kilograms divided by the functional unit.
- The functional unit used is twofold and based on the function of the adaptive building envelope. For the comparison with other shading systems facade area in m² is used, while comparison with other photovoltaic systems is done using electricity produced in kWh. According to the guidelines of the International Energy Agency (IEA), the calculation of kWh produced needs to be based for consistency on conversion efficiency η , performance ratio PR, irradiation I, lifetime LT and area A of the module. Equation 1 gives the exact formulation:

$$G = \frac{\text{GWP}}{I \cdot \eta \cdot \text{PR} \cdot \text{LT} \cdot A} \quad (1)$$

- The LCI inventory was obtained through...
- The scope of the LCA comprises the embodied, operational and disposal global warming impact of the respective system. Figure 3 illustrates the system boundaries of the process flows. The supporting

structures are also included in the system boundaries. The reason for this is that technologies within the building envelope also change the design of the supporting structures. The supporting structure of solar panels is referred to as balance of systems (BOS).

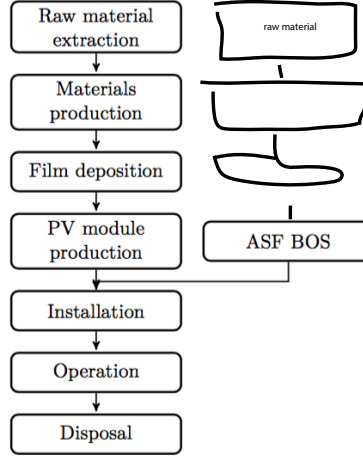


Figure 3: Thin-film incl. BOS system boundaries

- The cut-off approach is used for recycling and landfill. This means that recycling does not generate any credit for the product and resulting benefits are not taken into account. Furthermore the use of recycled products do not bear the burden of processes higher up the chain.
- The recipe midpoint (H) allocation method allows for an accurate evaluation of the GWP based on human impact factors.

3. Results

3.1. LCA of the Adaptive Solar Facade

A breakdown of the embodied carbon emissions can be found in Figure 4. It can be seen that the largest embodied global warming potential (GWP) contribution in the ASF comes from the solar panels, the electronics and the steel frame.

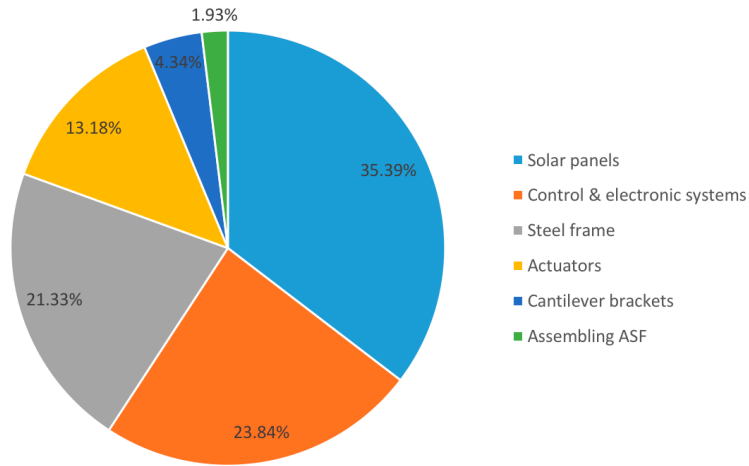


Figure 4: Breakdown of the embodied carbon emissions, it can be seen that xxxx has the greatest GWP contribution

It is interesting to note that the choice of actuation system for an ASF can have a significant / minimal impact on the embodied emissions. [Elaborate further when results come in]

The operational energy consumption of the office space behind the ASF was compared to a case with a static louvered based shading system at 45 and a case with no shading at all. We calculated a total energy saving of 25% compared to louvers at 45 and 56% compared to a case with no facade shading [12]. These results are summarised in Figure 5. Note that this figure does not include on sight electricity generation.

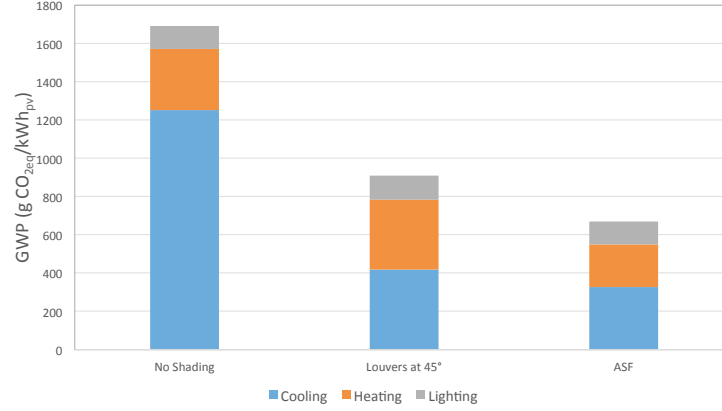


Figure 5: Breakdown of the operational carbon emissions, we can see a added savings of 24% compared to a static louvered shading system and 56% compared to no shading system at all

The total GWP of the ASF can be built up using a waterfall chart, Figure 6. To calculate the emission factor (gCO₂eq/kWh) we subtract the total embodied energy by the savings through our shading algorithm. We then add the GWP values for maintenance and disposal to achieve a total GWP over the 20 year life time of the ASF. This total is then used to calculate the emission factor of electricity produced by the ASF (126.8gCO₂/kWh).

It can be seen that the embodied GWP of the ASF is greater than a classical PV installation, however most of that initial investment is offset through the reduction of heating, cooling and lighting loads. Maintenance and disposal takes up roughly 10% of all total carbon emissions.

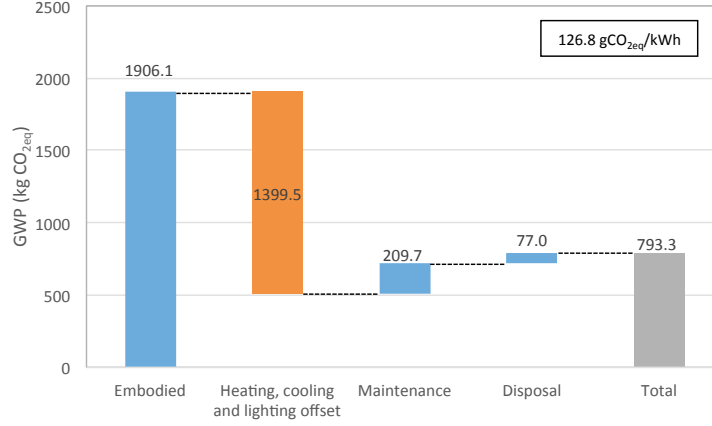


Figure 6: Waterfall diagram of GWP of the ASF. The far left column details the embodied carbon emissions. The second bar details the emission reduction of the building through the smart shading algorithms of the ASF. The third column shows an increase of emissions through maintenance. The fourth column shows an increase in emissions in the disposal. This leaves us with a final emissions value. When we apply this value to Equation 1 we obtain an emission factor per kWh of 126.8gCO₂/kWh.

3.2. Global Distribution of GWP and Terrestrial Acidification

The global distribution of embodied GWP emissions is focused in Europe, specifically Germany and Switzerland as most of the manufacturing is done in this region. It can be seen however that emissions occur globally due to the sourcing of primary materials from many locations around the world. Terrestrial acidification however is more interesting as it has a local impact compared to carbon emissions. It is interesting to note that China carries the greatest burden of terrestrial acidification from the ASF production.

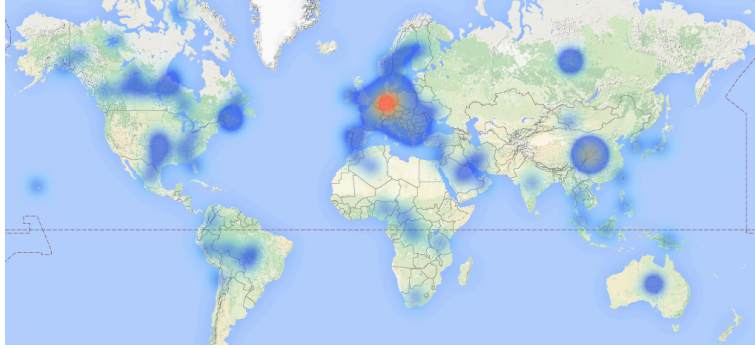


Figure 7: Global distribution of embodied GWP emissions

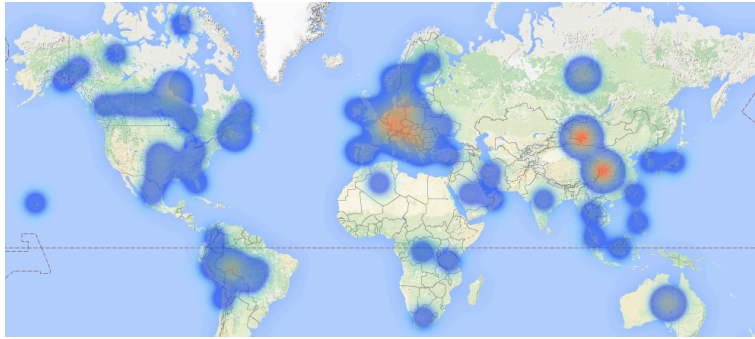


Figure 8: Global distribution of terrestrial acidification

3.3. Sensitivity Analysis

Changing the assumptions can have a significant impact on the LCA result. Three assumptions were evaluated in the sensitivity analysis: Operation location, efficiency of PV panels, and the room size. The inputs are summarised in Table 1 with the results shown in Figure 9. It can be seen that the operation location has a significant impact on the carbon saving potential. This is because the emission factor of the electricity grid is roughly five times higher in Germany compared to Switzerland [citation needed]. This is further discussed in Section 4.1.

| | Min | Max |
|---------------------|-------------|---------|
| Operation Location | Switzerland | Germany |
| PV Panel Efficiency | 14% | 18% |
| Room Size | 10sqm | 30sqm |

Table 1: Inputs to the Sensitivity Analysis Conducted

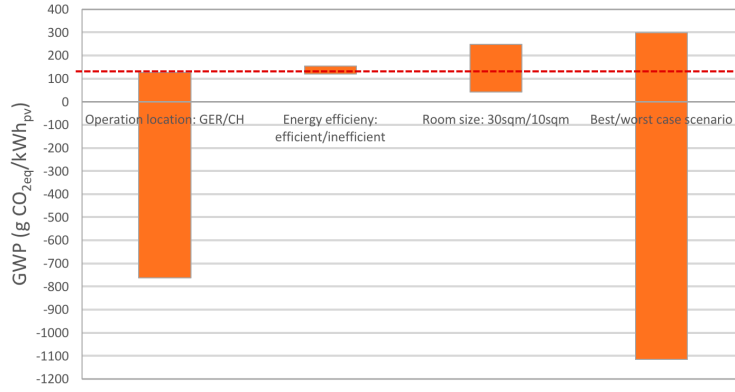


Figure 9: Sensitivity analysis of the emission factor based on location of use, panel efficiency, and room size

4. Comparison

4.1. Comparison to the Electricity Mix

Comparing the emission factor with the emission factors of the electricity mix of other countries enables us to identify where technologies like the ASF would be best suited. In Switzerland where the simulation was run, we see a 6% reduction compared to the average electricity mix. This is because the Swiss electricity mix is dominated by Hydro and Nuclear which has a very low GWP potential. In Germany on the other hand, the ASF has a 81% reduction in carbon emissions.

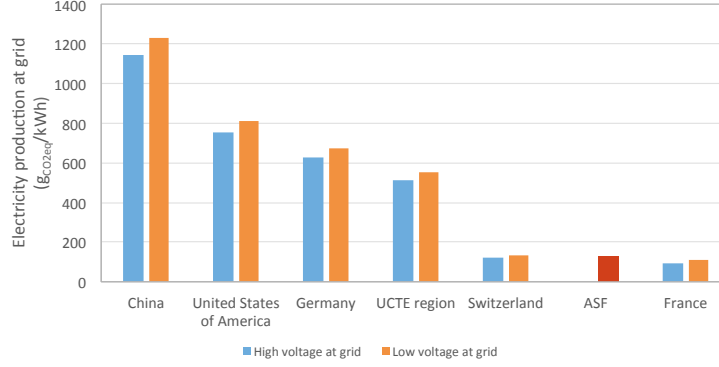


Figure 10: Comparison of the ASF when in operated in Switzerland when compared to other countries in the world that have similar climate conditions. Note that the data will have to change because we can't really compare (ASF in Switzerland) with Germany. We should be comparing the ASF in Germany with Germany

4.2. Comparison to other technologies

Comparison of the ASF to other PV technologies and the UCTE electricity mix is highlighted in Figure 11. We can see in this figure that the ASF without shading benefits is inferior to all other technologies. It is only with the added shading benefits that we really see the advantages of the adaptive system. We can also see that the utilisation of the ASF in an area where the electricity mix has low GWP intensity such as Switzerland also has disadvantages. It is capable of out performing Silicone based technologies but is still inferior to simply mounted CIGS panels. Note that even the panels themselves of the ASF, without the BOS, is still lower than the CIGS installation. This is due to the added inefficiencies as the panels are not always at the optimum position to the sun.

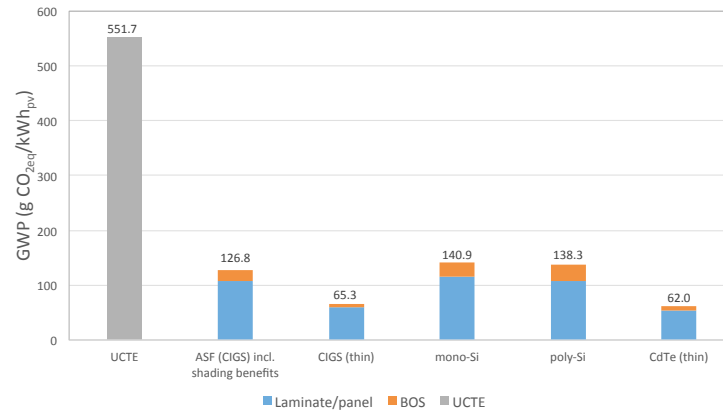


Figure 11: Comparison of thin-film and BOS to other PV technologies. I would add some extra columns, one without shading, one with the ASF in Switzerland, one with the ASF in Europe

The comparison of the ASF to a simple shading system shows...

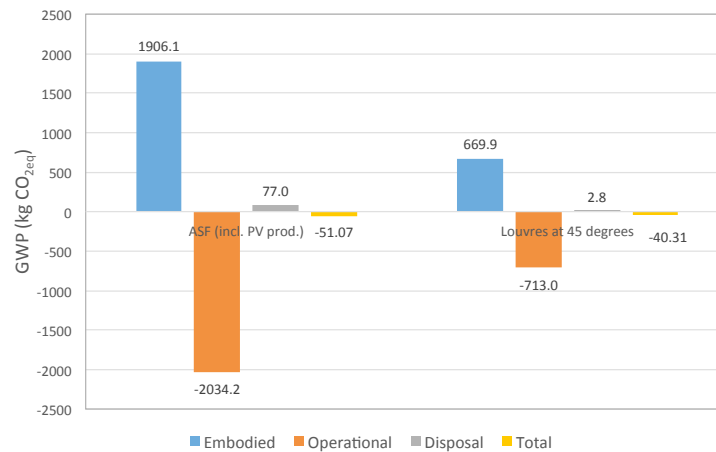


Figure 12: The comparison of the ASF with a static louvered shading system. Staked bar plots may be better

5. Discussion

- When is the ASF advantages, when is it not

- Limitations of the study
- Nuclear power in France and Switzerland
- What should designers of adaptive solar facades keep in mind
- Other advantages of the ASF that are not clear in the LCA analysis, such as daylighting and user centered control

6. Conclusion

- xxx% of Embodied emissions of the photovoltaic BOS can be offset through smart shading
- This multi functionality brings about new advantages/disadvantages for solar as it has a reduced/increased the emissions per kWh by xxx%
- Higher embodied CO2 compared to a classic photovoltaic retrofit. However reduction can be made through x y and z
- Results are highly sensitive to x y and z

7. Acknowledgments

...

References

- [1] Fifth assessment report, mitigation of climate change, Intergovernmental Panel on Climate Change 674–738.
- [2] S. T. et al., 14th Euro Conf. Photovoltaic Solar Energy Conversion.
- [3] M. Raugei, P. Frankl, Life cycle impacts and costs of photovoltaic systems: current state of the art and future outlooks, *Energy* 34 (3) (2009) 392–399.
- [4] T. Saga, Advances in crystalline silicon solar cell technology for industrial mass production, *npg asia materials* 2 (3) (2010) 96–102.
- [5] C. Lueling, *Energising Architecture*, Jovis, 2009.
- [6] G. Wilson, NREL cell efficiency records, National Center for Photovoltaics.

- [7] K. Kushiya, Cis-based thin-film pv technology in solar frontier kk, *Solar Energy Materials and Solar Cells* 122 (2014) 309–313.
- [8] M. Kaelin, D. Rudmann, A. Tiwari, Low cost processing of cigs thin film solar cells, *Solar Energy* 77 (6) (2004) 749–756.
- [9] B. P. Jelle, C. Breivik, H. D. Røkenes, Building integrated photovoltaic products: A state-of-the-art review and future research opportunities, *Solar Energy Materials and Solar Cells* 100 (2012) 69–96.
- [10] D. Rossi, Z. Nagy, A. Schlueter, Adaptive distributed robotics for environmental performance, occupant comfort and architectural expression, *International Journal of Architectural Computing* 10 (3) (2012) 341–360.
- [11] R. Loonen, M. Trčka, D. Cóstola, J. Hensen, Climate adaptive building shells: State-of-the-art and future challenges, *Renewable and Sustainable Energy Reviews* 25 (2013) 483–493.
- [12] P. Jayathissa, Z. Nagy, N. Offedu, A. Schlueter, Numerical simulation of energy performance and construction of the adaptive solar facade, *Advanced Building Skins*, TU Graz 2.
- [13] A. Chirilă, S. Buecheler, F. Pianezzi, P. Bloesch, C. Gretener, A. R. Uhl, C. Fella, L. Kranz, J. Perrenoud, S. Seyrling, et al., Highly efficient cu (in, ga) se2 solar cells grown on flexible polymer films, *Nature materials* 10 (11) (2011) 857–861.
- [14] B. Svetozarevic, Z. Nagy, D. Rossi, A. Schlueter, Experimental Characterization of a 2-DOF Soft Robotic Platform for Architectural Applications, *Robotics: Science and Systems, Workshop on Advances on Soft Robotics* (2014) 2–6.
- [15] Rhinoceros v5 (2015).
URL <https://www.rhino3d.com/>
- [16] Grasshopper - algorithmic modeling for rhino (2015).
URL <http://www.grasshopper3d.com/>
- [17] B. T. Office, Energy plus.
URL <http://apps1.eere.energy.gov/buildings/energyplus/>

- [18] Diva for rhino.
URL <http://diva4rhino.com/>
- [19] Python.
URL <https://www.python.org/>
- [20] Numpy.
URL <http://www.numpy.org/>
- [21] pandas.
URL <http://pandas.pydata.org/>