



Urban and building multiscale co-simulation: case study implementations on two university campuses

Journal:	<i>Journal of Building Performance Simulation</i>
Manuscript ID	TBPS-2016-0244.R3
Manuscript Type:	Original Article
Keywords:	EnergyPlus, Co-simulation, Building-scale simulation, Calibrated energy models, CitySim, Urban-scale simulation

SCHOLARONE™
Manuscripts

1
2
3
4
5 Dear Dr. Beausoleil-Morrison and Dr. Hensen:
6
7
8

9
10
11
12
13
14 July 5, 2017
15
16
17
18
19

20
21
22
23 July 5, 2017
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60


4 Architecture Drive
Singapore
Phone: +65 81602452
Email: clayton@nus.edu.sg

Ian Beausoleil-Morrison
Jan Hensen
Co-Editors
Journal of Building Performance Simulation

Please find our responses to the follow-up comments made by one of the referees. Overall, we believe that we have fully addressed each issue individually in a way that satisfies the requirements of the journal review process.

Please contact me with any further comments or concerns regarding this resubmission.

Kind Regards,



Dr. Clayton Miller

Review Comment Responses to Journal of Building Performance Simulation Second Submission

Paper Title: Urban and building multiscale co-simulation: case study implementations on two university campuses

July 5, 2017

1 Review Comments

a) p. 13, line 69. we week to co-simulate is incorrect. Please consider we co-simulate.

Fixed – thanks for catching that!

b) p. 12, lines 90-93. The correction the authors made in response to a reviewer comment needs further modification. My comment was Please note that Bueno et al. 2013 generated urban weather with a nodal model and did not directly couple EnergyPlus to a nodal representation of the urban canopy layer. The accuracy of this approach depends on how faithfully users and the model represent the buildings that will later be simulated in detail in EnergyPlus with the modified weather file. This applies to Bueno et al. 2013 and NOT Bueno et al. 2011, in which TEB and EnergyPlus are coupled. In short, one of Buenos papers employed coupling and the other did not; the authors should distinguish them or refer to the single method of their choice.

Very good point - apologies for misunderstanding that point. The Bueno 2013 paper has been removed as it does not utilize coupling.

c) p. 14, line 149. Please delete the redundant per hour after timesteps.

Fixed.

d) P. 15, lines 176-177. In two places, the l in long-wave should be capitalized.

1
2
3
4 Good catch - good example of why "find and replace" needs to be performed before
5 final proofreading.
6
7
8 e) P. 16, line 189. Please hyphenate urban scale.
9
10
11 This instance has been hyphenated as well as several others in the manuscript
12
13
14 f) p. 17, line 217. Please replace simulation results of the co-simulation with results of the
15 co-simulation.
16
17
18 Fixed.
19
20
21 g) p. 18, line 221. Please replace actualized with actual. In line 224, please replace measured
22 and simulated with measurement and simulation.
23
24
25 Fixed.
26
27
28 h) p. 20, line 283. Please replace co- simulation with co-simulation by removing the extra-
29 neous space after the hyphen.
30
31
32 Fixed.
33
34
35 i) p. 21, Figures 10 and 11. The authors have usefully improved these figures. Is it
36 necessary to retain the absolute change in energy consumption, to four significant figures,
37 as well as the percentage change? This reviewer suggests that the absolute change be
38 removed because it suggests more precision than the process merits and because the
39 percentages are more meaningful.
40
41
42 We agree with this and have changed to figures to only represent the percentage change.
43
44
45 j) p. 21, section 3.5. The new reference to the Minergie standard should be placed after
46 Minergie building or at the end of that sentence, and not at the end of the paragraph.
47
48
49
50 Fixed.
51
52
53 k) p. 19, line 260. Online sources use plug load rather than plug-load. Either is better than
54 plug- load (with both a hyphen and a space), as used in the text.
55
56
57
58
59
60

1
2
3
4 Fixed.
5
6

- 7 1) p. 24, lines 348-353. The new discussion section includes two redundancies. In the first
8 sentence, please consider deleting on two real-world case studies, given the reference to
9 case studies at the beginning of the sentence. The third sentence could be ended with
10 ...unique to this case study....
11
12

13 The first redundancy was fixed. For the second one, we removed "in this particular
14 instance", but kept the "unique to this case study" were it is
15
16

- 17 m) p. 25, lines 368-375. In line 372, please hyphenate case-study (when used as a modifier
18 for campuses). In line 373, please remove the space after the hyphen in co- simulation.
19
20

21 Fixed
22
23

- 24 n) p. 25, lines 376-379. The text identifies practical implementation of retrofit scenarios
25 and retrofit analysis as future applications. How do these applications differ?
26
27

28 We removed the second reference to retrofits and, instead, changed it to refer to general
29 "systems analysis"
30
31

- 32 o) p. 26, line 416. Only the K in KAEMPF should be capitalized.
33
34

35 Fixed.
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

To appear in the *Journal of Building Performance Simulation*
Vol. 00, No. 00, Month 20XX, 1–17

Research Article

Urban and building multiscale co-simulation: case study implementations on two university campuses

(Received 00 Month 20XX; final version received 00 Month 20XX)

The co-simulation of both urban and building-level models leverages the advantages of both platforms. It better accounts for the localized effects of surrounding buildings, geography and climate conditions while maintaining high-fidelity building systems representation. This paper describes the co-simulation process of the building and urban-scale models of two university campuses in Switzerland using EnergyPlus and CitySim. In the first case study, on-site measured performance data is compared to the co-simulation results. The second case study examines the results of the two engines. The results show that coupling of EnergyPlus with CitySim resulted in a -15.5% and -7.5% impact on cooling consumption and a +6.5% and +4.8% impact on heating use as compared to solo simulations. The co-simulation process was able to better model realistic conditions for heating, but not cooling in one case study. It was able to substantially reduce the discrepancies in prediction between the engines in the other study.

Keywords: Building-scale simulation, Calibrated energy models, CitySim, Co-simulation, EnergyPlus, Urban-scale simulation

1. Introduction

Urban-scale building performance simulation is a process that empowers the analysis and optimization of cities. Urban populations are growing around the world at an unprecedented rate. A transition from urban to rural is underway and 2.5 billion people are expected to join cities throughout the world by the year 2050 (United Nations 2014). Expansions of entire districts and even cities is not an uncommon phenomenon, especially in East Asia and Africa. Urban-scale modeling is in the midst of an intense focus on the research community with six key areas of practice: technology design, building design, urban climate, systems design, policy assessment, and land use and transportation (Keirstead, Jennings, and Sivakumar 2012). The ability to simulate the interaction between large collections of buildings enables the development and testing of optimization and planning scenarios for this new development (Dorer et al. 2013).

The CitySim simulation engine is an example of such a program designed and optimized for urban-scale simulation. CitySim is an urban performance simulation engine that comprises a solver module as well as a graphical user interface. It focuses on the energy flows of multiple simplified building models and their interdependent relationship with their urban climate (Robinson et al. 2009). CitySim includes building thermal, urban radiation, occupant behavior, and plant/equipment models integrated as a single simulation engine. CitySim simulates multiple buildings up to city scale using simplified models to achieve a good compromise between modeling accuracy, computational overheads, and data availability. Each building's thermal behavior is based on an electrical analogy using a two node resistor-capacitor network. The internal lighting, people, and miscellaneous loads are modeled using a simplified occupancy-based approximation. The heating, ventilation, and air-conditioning (HVAC) systems are modeled using a set of equations that approximates the total mass flow rate required to meet the sensible and latent loads of each building as a whole. Each of these simplifying approximations empowers the urban-scale simulation to have reasonable execution times on the number of buildings being simulated.

Building performance simulation is a mature domain of research relative to urban-scale efforts.

The use of whole building simulation engines originated in the 1960's with the US government's development of the BLAST and DOE-2 hourly energy simulation programs (Lawrie et al. 2001). In 1996, development on a new simulation engine, EnergyPlus, began in order to combine the advantages of previous efforts in a single, modular program. EnergyPlus, as a result, has become a popular choice in detailed whole-building performance simulation due to the breadth of mechanical, renewable, and electrical systems that can be modeled. EnergyPlus specifically excels in its ability to model unique mechanical system types such as decoupled centralized cooling (Miller and Sekhar 2010). Additionally, EnergyPlus is designed to provide a high resolution in which internal loads and natural ventilation technologies can be modeled in detail at the building level. EnergyPlus is also extensively used within the research community and has new features that enable it to couple with other simulation programs.

Both building and urban-scale simulation domains have rightfully chosen boundary conditions that reflect their key goals while seeking to minimize the input parameters necessary and run-times of the engines themselves. This focus results in certain deficiencies concerning modeling various phenomena. For example, urban-scale simulation highly simplifies the building systems and internal load models, thus making a retrofit analysis at the systems level difficult. And whole building simulation in EnergyPlus neglects many of the various contextual consideration of the urban environment such as long-wave radiation exchange with adjacent surfaces and localized urban weather effects (Lawrie et al. 2001).

The current effort seeks to couple building and urban-scale simulation to address the deficiencies of the individual engines. The research in this paper is part of a larger coupling effort in which various engines are connected and co-simulated to create a more comprehensive analysis of the urban-scale (Dorer et al. 2013; Allegrini, Dorer, and Carmeliet 2012). The target is the computational interface between the building energy model, using EnergyPlus, and the urban energy model using CitySim. An overview of the larger scope is shown in Figure 1 and the context of the coupling task appears as the interface between the City Energy Simulation (CES) model and the Building Energy Simulation (BES) model. The scales and models contained in the urban environment context include the Urban-Scale Model (UC Model), the Urban Microclimate (UMC) model using OpenFoam, and the Meteorological Meso-scale (MM model) using Climate Limited-Area Modeling (COSMO-CLM). On the database side, Revit, Global Information Systems (GIS), and building information systems (BIS) are utilized.

The coupling and co-simulation process is implemented on two case studies in Switzerland. The first case study is the ETH Zürich Hoenggerberg campus in Zürich, Switzerland. It was modeled in the CitySim simulation engine and co-simulated using work-flow automation. The target of this case study is to evaluate the differences between the coupled and solo EnergyPlus simulations based on the variables exchanged. This scenario includes the use of measured data for heating and cooling within their respective seasons to compare to the simulation results. The second case study is the EPFL campus in Lausanne, Switzerland. The objective of this scenario is to evaluate the differences between coupled and uncoupled versions of the CitySim simulation engine.

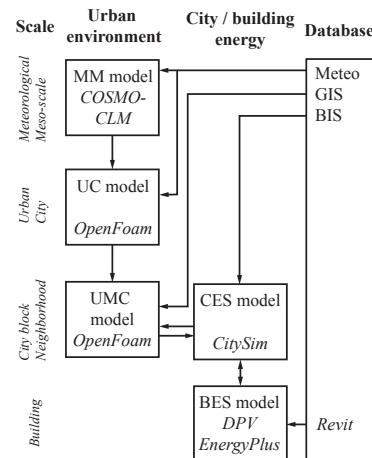


Figure 1. EnergyPlus and CitySim coupling are part of the wider context. Each block in the diagram represents an environment, with the tool/engine name in italics ((Thomas et al. 2014), adapted from (Dorer et al. 2013))

This paper describes the achievement of several objectives. The first is to automate the process of simultaneous meta-data extraction from a Building Information Model (BIM) for the creation of both building and urban-scale performance models for a real-world campus of buildings. Next, we co-simulate the urban and building scale models through concurrent information exchange. Finally, we implement a simplified calibration procedure for the first scenario by reconciling the co-simulation output results for a target building using measured energy performance data from the campus energy information system (EIS)

The first two objectives have been demonstrated in a simplified context in previous literature (Thomas and Schlueter 2012; Miller et al. 2015). The innovation in the current publication is an extension of this research through the modeling and co-simulation of real-world case studies. With respect to the third contribution, to the best of the authors' knowledge, no previous study has compared the results of a building and urban-scale co-simulation procedure to measured data from a real-world campus.


1.1. Previous multi-scale coupling studies

Previous attempts of information exchange have been implemented between simulation engines at various scales. Much of the initial co-simulation work in the literature is done at the subsystem and building-scale. Previous studies have analyzed strong and loose coupling of engines at this scale (Wetter 2011; Trčka, Hensen, and Wetter 2010). Coupling of building-scale simulation with urban-scale computational fluid dynamics (CFD) is attempted for modeling natural ventilation (Zhang et al. 2013) and to improve energy prediction (Bouyer, Inard, and Musy 2011). A comprehensive review of energy and airflow modeling of neighborhoods and university campuses was published that includes strategic aspects of coupling different types of models (Srebric, Heidarnejad, and Liu 2015). EnergyPlus has been coupled with ENVI-met, a micro-climate computational fluid dynamics (CFD) program (Yang et al. 2012). It was also coupled with simplified lumped parameter models to facilitate comparison with measured sensor data (Martin et al. 2015). While not directly coupled, EnergyPlus and the TEP Urban Canopy Model program were connected through a modified weather file to quantify the influences of urban localized weather effects on whole building simulation (Bueno et al. 2011).

1
2
3
4 **2. Methodology**
5
6 **2.1. Coupling process**
7

8 The coupling process of a simplified single zone model and contextual surrounding buildings is
9 described in previous studies (Thomas et al. 2014), which forms the basis for the methodology
10 in the current effort. This process utilizes the Design Performance Viewer (DPV) and associated
11 workflow. The DPV is a tool written to extract and simulate an EnergyPlus input data file (IDF)
12 from an Autodesk™ Revit™ BIM (Schlueter and Thesseling 2009). The central philosophy behind
13 the tool is the rapid simulation of the building information model from the earliest design possible
14 that can be used throughout the life-cycle of the building including retrofit analysis (Miller et al.
15 2014). This process is achieved by augmenting the information in the BIM with default values and
16 abstracting information not relevant for energy simulation. The tool already has a simplified notion
17 of surrounding buildings, which are modeled in the BIM as simple mass objects without further
18 information and are exported as shading surfaces to EnergyPlus. This functionality is used for
19 creating the CitySim mass scene and leads to a crude model of the urban context of the building.
20 The current DPV philosophy of allowing the designer to iterate rapidly on early design decisions
21 based on feedback about the performance of the design remains. This approach includes streamlining
22 the process where running a simulation requires no effort from the designer due to automatic creation
23 of input files, execution, and analysis of the results.
24

25 The coupling process of EnergyPlus and CitySim is shown in Figure 2. The solid lines depict the
26 co-simulation of EnergyPlus and CitySim, and the dotted lines illustrate solo simulations of either
27 EnergyPlus or CitySim. First, the DPV is used to extract an EnergyPlus simulation model from the
28 BIM. The DPV utilizes the Revit API to extract geometrical information about the building and
29 the physical properties of walls, windows, doors, roofs, and floors. This information is encoded in
30 the BIM model as wall types, roof types, floor types as well as window and door families. Wherever
31 possible, the tool uses the layering and materials of the construction types, enhancing them with
32 physical attributes relevant to EnergyPlus. Where not defined, it assumes default values.
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50

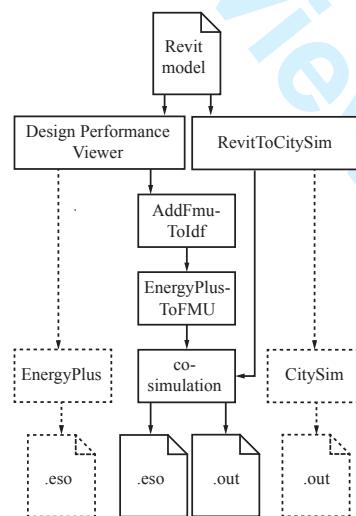

51 Figure 2. Overview diagram of the coupling process including tools and outputs (Thomas et al. 2014)
52
53
54
55
56
57
58
59
60

53 Next, geometry is created to be used in both the CitySim and EnergyPlus models as buildings
54 and surfaces surrounding the building targeted in the IDF. This feature of the DPV is used for
55 including shading surfaces in the EnergyPlus simulation model: it uses so-called *mass objects* in the
56 BIM model as surrounding buildings. The DPV model views these buildings as a series of shading
57 surfaces. A transformation is added to the DPV model that produces an input file for the CitySim
58
59
60

1

2


3

4 solver. This file uses an XML format describing the buildings in a scene for simulation, including
 5 their construction types, geometry, and systems for heating and cooling. The main BIM is extracted
 6 to the CitySim scene as one of the buildings to be simulated, with the properties of the construction
 7 types matching those in the DPV model. The glazing ratio is calculated based on the window and
 8 wall areas of the DPV model. Shading surfaces are grouped into buildings based on the mass object
 9 from which they were extracted. These adjacent buildings use default construction properties for
 10 walls and roofs, and we assign them a default glazing ratio. These defaults can be overridden by
 11 custom properties applied to the mass objects in the BIM much in the same way as the model
 12 elements of the main building are enriched with DPV information.

13 As of version 8.1.0, EnergyPlus supports exporting a simulation model as a Functional Mock-up
 14 Unit (FMU) (Nouidui, Wetter, and Zuo 2014). This feature introduces new IDF objects to specify
 15 the interface such an FMU exposes. These objects define which output variables are exported by
 16 the FMU and which variables are imported. The FMU export functionality is closely linked to the
 17 Energy Management System (EMS) of EnergyPlus. Co-simulation exchange variables either mimic
 18 an EnergyPlus schedule, an EMS variable or drive an EMS actuator. Since the model used by
 19 CitySim to simulate a building is more abstract than the model used by EnergyPlus, the EMS is
 20 used to aggregate certain values. CitySim does not model windows separately. Therefore, a weighted
 21 average of window and wall surface temperatures is calculated with EMS subroutines.

22 The FMU creation process is the basis for coupling the two models at each timestep in the sim-
 23 ulation. Figure 3 illustrates this process from both the EnergyPlus and CitySim perspective. The
 24 augmented IDF file is fed to the *EnergyPlusToFMI* script (Nouidui and Wetter 2014). Once config-
 25 ured, this script produces an FMU file based on the augmented IDF file and the weather file to be
 26 used as well as a DLL file implementing the Functional Mock-up Interface that can load the IDF
 27 file, locate EnergyPlus and run the simulation.

28 The number of timesteps for both CitySim and EnergyPlus is set to one per hour. The frequency of
 29 data exchanges is set to once per timestep. No data averaging over time is performed. Data exported
 30 from one simulation engine overwrites the corresponding data in the other simulation engine at each
 31 timestep. Each simulation is performed for a whole year.

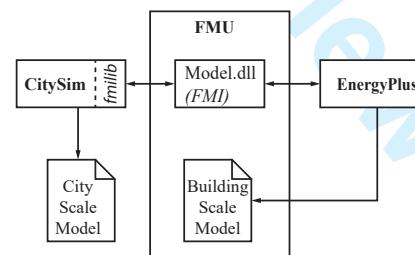

43 Figure 3. Simulation information exchange between CitySim and EnergyPlus using FMI (Thomas et al. 2014)

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

153 2.2. Coupled variables

154 Several key urban-scale weather variables are sent to EnergyPlus from CitySim to account better
 155 for the localized effects of surrounding buildings, geography and climate conditions. These variables
 156 are outlined in Table 1. They include various outdoor air conditions such as dry bulb and wet bulb
 157 temperatures, dew-point, humidity, wind speed and direction, and direct and diffuse solar radiation.
 158 These variables overwrite the input weather variables that EnergyPlus obtains from its weather file
 159 input. CitySim is designed to account for physical phenomenon inherent to urban environments,
 160 which are often neglected in building-scale simulation environments (Robinson and Stone 2004;
 161 Robinson et al. 2009). CitySim can be connected to a simplified micro-climate airflow model that
 162 can predict local climatic conditions around each building. Long-wave radiation exchange between
 163 the simulated building and its surroundings is sent to EnergyPlus; this process is described in detail

1
2
3
4 164 in Section 2.3. Finally, CitySim shares its calculated occupancy schedules as it can use a deterministic
5 or stochastic occupant behavior model, whereas EnergyPlus models are solely a deterministic models
6 (Haldi and Robinson 2011).
7
8

Table 1. Values sent to EnergyPlus from CitySim by the FMU

Object	Variable Name	Description
Outdoor	Outdoor Drybulb	The outdoor dry-bulb temperature in °C
	Outdoor Dewpoint	The outdoor dewpoint temperature in °C
	Outdoor Relative Humidity	The outdoor relative humidity expressed in percent.
	Diffuse Solar	Diffuse horizontal irradiance in W/m ²
	Direct Solar	Beam normal irradiance in W/m ²
	Wind Speed	The outdoor wind speed in m/s
Long-Wave Radiation	Wind Direction	The wind direction in degrees (N=0, E=90, S=180, W=270)
	Environmental Radiant Temp.	Calculated T_{env} from the sky, ground, and surrounding surfaces
Zone	Environmental Radiant Heat	Calculated h_{env} from the sky, ground, and surrounding surfaces
	Gain Coefficient	
Zone	Occupation	Fraction of the maximum occupation (0.0-1.0) overrides the EnergyPlus occupation schedule with the CitySim stochastic schedule.

23
24 167 Variables sent to CitySim by EnergyPlus at each time step include several variables related to
25 the calculation of heating and cooling loads of a targeted building. Table 2 outlines this list of
26 exchanged variables. These variables are transferred due to the ability of EnergyPlus to model more
27 detailed building systems, schedules, ventilation and internal load types than CitySim. For example,
28 EnergyPlus is flexible enough to model a detailed radiant heating and cooling system that would
29 be impossible in CitySim. EnergyPlus is an engine optimized to accurately model building-scale
30 systems. Thus, CitySim can take advantage of these models through coupling and co-simulation.
31 EnergyPlus sends the heating and cooling loads, the surface temperatures of the exterior surfaces
32 and the ventilation flow rates to CitySim.
33
34

Table 2. Values sent to CitySim from EnergyPlus by the FMU

Object	Variable Name	Description
Wall, Roof	Outside Surface Temperature	The temperature on the outside of the surface in °C
	Average Outside Surface Temperature	The (weighted) average temperature of the surface on the outside in °C.
Zone	Total Heating Energy	The heating energy in Joules used in this timestep.
	Total Cooling Energy	The cooling energy in Joules used in this timestep.
	Zone Mean Air Temperature	The mean air temperature in the zone in °C
	Ventilation Volume Flow Rate	The flow rate in m ³ /s (standard density)

44 176 2.3. Long-wave radiation exchange

45
46 177 Long-wave radiation exchange in the urban-scale environment is coupled in the co-simulation process.
47 It requires the development of a set of approximations to reduce the number of coupled variables
48 between the engines and to account for differences in the methods by which each engine calculates this
49 value. A detailed description of Long-wave Radiation (LWR) variable exchange and approximation
50 is found in a previously published study (Miller et al. 2015) on a simplified theoretical case.

51 In EnergyPlus, LWR exchange for a surface is calculated through the summation of radiation gain
52 from the ground, sky, and air as seen in Equation 1 and Figure 4a (United States Department of
53 Energy (DOE) 2015). The radiant heat transfer coefficient for each of these environmental variables
54 is calculated according to Equation 2 with σ as the Stefan-Boltzmann constant, ϵ as the emissivity
55 and $F_{variable}$ being the view factor to the variable that can be sky, grd (ground) or air. A major
56 assumption of this approach is that the modeled building's surfaces and those of adjacent buildings
57 are at a uniform temperature and the LWR radiation exchange is negligible; a situation that is an
58
59
60

1
2
3
4 189 oversimplification in an urban scale domain (Evins, Dorer, and Carmeliet 2014).
5
6

$$Q_{LWR,EnergyPlus} = h_{r,grd}(T_{surf} - T_{grd}) + h_{r,sky}(T_{surf} - T_{sky}) + h_{r,air}(T_{surf} - T_{air}) \quad (1)$$

190

$$h_{r,variable} = \frac{\epsilon\sigma F_{variable}(T_{surf}^4 - T_{variable}^4)}{T_{surf} - T_{variable}} \quad (2)$$


12
13 In comparison, CitySim calculates LWR exchange by calculating an aggregated equivalent tem-
14 perature, T_{env} , and radiative heat transfer coefficient, $h_{r,env}$, from surrounding urban surfaces in
15 addition to ground, sky, and air (Robinson et al. 2009). The calculation for T_{env} is expressed in
16 Equation 3 with the F values being view factors of the surrounding environment including adjacent
17 surfaces $i = 1..n$. $h_{r,env}$ is based on a first order Taylor development of the numerator of Equation 2
18 around $(T_{surf} + T_{variable})/2$ and therefore $Q_{LWR,CitySim}$ is calculated using Equation 4.
19
20

$$\sigma T_{env}^4 = \sigma F_{sky} T_{sky}^4 + \sigma F_{grd} T_{grd}^4 + \sum_{i=1}^n \epsilon_i \sigma F_i T_i^4 \quad (3)$$

197

$$Q_{LWR,CitySim} = h_{r,env}(T_{surf} - T_{env}) \quad (4)$$

25
26 In the coupled simulation, EnergyPlus uses the CitySim supplied equivalent $h_{r,env}$ and T_{env} to
27 calculate weighted $h_{r,sky}$, $h_{r,grd}$, and $h_{r,air}$ values using the view factors and the sky-to-air split
28 ratio. Figure 4 illustrates the schematic differences between the solo and coupled simulations on
29 a theoretical example of a target building with two adjacent buildings with surfaces available for
30 radiation exchange.
31
32

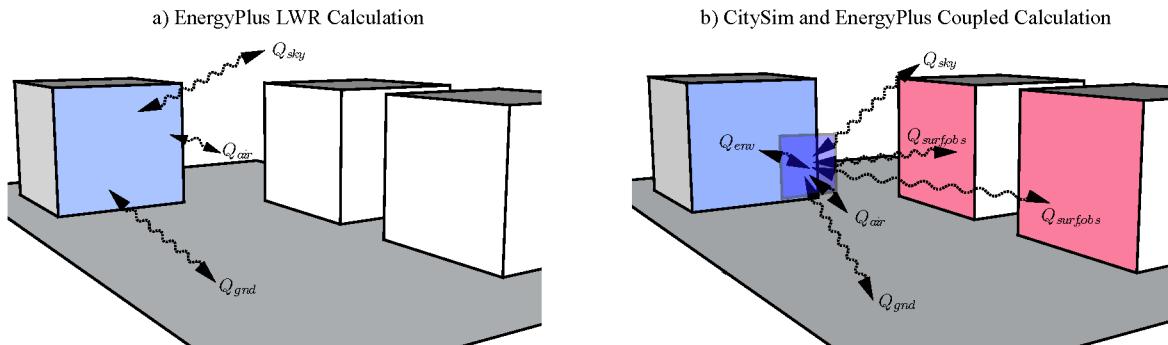

46 Figure 4. Comparison of the LWR components between a) Solo EnergyPlus and b) Coupled CitySim/EnergyPlus configuration
(Miller et al. 2015)
47

50 2.4. Work flow automation

51 The coupling, simulation and co-simulation process is completely managed within a program called
52 VisTrails (Freire et al. 2014). The implementation of this type of workflow is outlined in previous
53 work focused on automating DPV using the Kepler platform (Thomas and Schlueter 2012). This
54 process reduces the effort expended by a designer down to pressing a single button. This functionality
55 allows an iterative design informed by readily available simulation results. An automated workflow
56 ties the various steps together and maintains the effortless iterative design process. VisTrails enables
57 the coupling of various workflow subprocesses script initializations, executions of the engines, and
58 210

the compilation of the outputs. This tool empowers the coupling of multiple executable files and their connecting scripts in graphical diagrams that enhance reproducibility and process automation (Freire et al. 2014). The VisTrails workflow diagram for the first case study in this paper is seen in Figure 5.

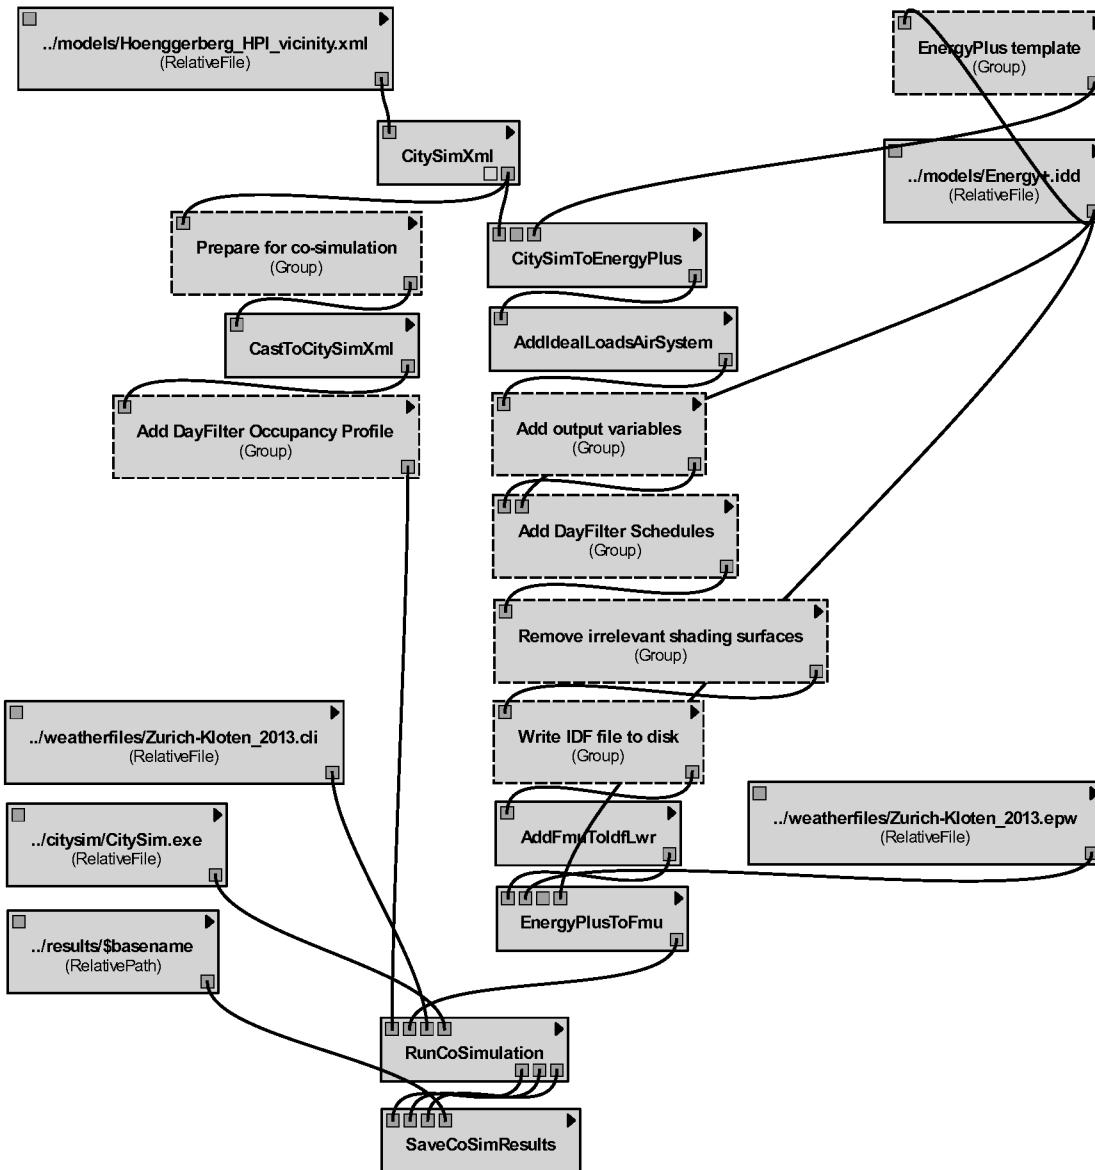


Figure 5. Workflow in VizTrails

2.5. Simplified calibration

In the first case study, one aspect of this analysis is the comparison of the actual measured performance of the target building on campus with the results of the co-simulation. A simplified calibration

1
2
3
4 218 procedure is adapted from previous research to compare the measured heating and cooling data avail-
5 219 able on campus with various simulation scenarios (Samuelson, Ghorayshi, and Reinhart 2015). This
6 220 calibration procedure was utilized in the performance reconciliation of 18 buildings that were built
7 221 according to the LEED Canada protocol and were under review of actual performance. This protocol
8 222 is unique in its analysis process to uncover design model deficiencies in a step-wise manner, utilizing
9 223 the most readily available knowledge first and working towards equilibrium between measurement
10 224 and simulation. There is an appropriate balance between the effort of implementation and value
11 225 generated through the calibration process.
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

226 3. Implementation

227 The co-simulation process is implemented on two case studies in Switzerland. The first is the ETH
228 Zürich Hoenggerberg campus in Zürich, Switzerland. The focus of this case study is to quantify
229 the impact of the information exchange through co-simulation within the EnergyPlus engine. The
230 intent on this campus was to develop techniques for retrofit analysis using EnergyPlus. The targeted
231 building on this campus is the HPI Building. Raw measured data is available for many of the
232 buildings on campus, thus a simplified calibration procedure is used to reconcile the simulation
233 results.

234 The second case study is the EPFL campus in Lausanne, Switzerland. The targeted building, in
235 this instance, was the Quartier Nord complex. The focus of this study was to compare the solo
236 and co-simulation output results of CitySim. Reliable measured data for calibration is not currently
237 available for this building.

239 3.1. *Campus case study 1: ETHZ Hoenggerberg Campus*

240 The ETH Zürich Hoenggerberg campus includes 32 higher education facilities with spaces allocated
241 to laboratories, office space, lecture halls, cafeterias, data centers and other types of similar areas.
242 The campus has a centralized energy management system (EMS) that contains 807 energy and water
243 measurement points from heating, cooling, electricity, city gas, domestic hot water, gray water, and
244 general water consumption.

245 The focus of the co-simulation process is that the performance of a targeted building is evaluated
246 through solo and coupled methods. The HPI building on campus was chosen in this case study due
247 to the amount and quality of measured data available from the EMS for this building. HPI is a 2,610
248 square meter building that is made up mostly of office space and classrooms. It also includes 400
249 m² convenience store and coffee shop. The building is indicated on a campus map shown in Figure
250 6 and is shaded red.


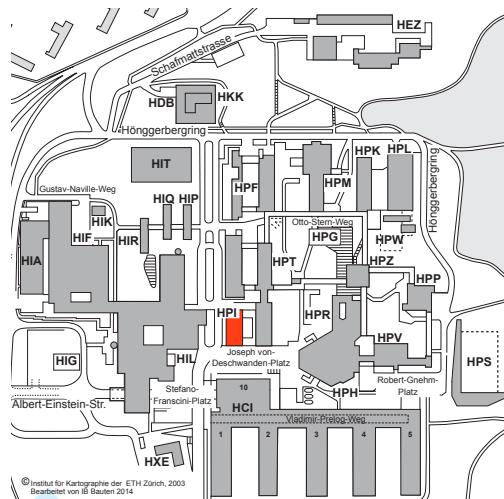


Figure 6. ETH Hönggerberg campus map with the HPI building shaded red

251 3.2. Model development

252 In order to perform a co-simulation of the targeted buildings, initially a CitySim model of the
 253 campus was developed. Through the workflow automation process, this geometry was converted into
 254 an EnergyPlus input file as seen in Figure 7. The EnergyPlus input file was then used as an input to
 255 execute EnergyPlus solo and co-simulation processes for the purpose of simplified calibration, and
 256 then to understand the magnitude of the difference between these simulation scenarios.

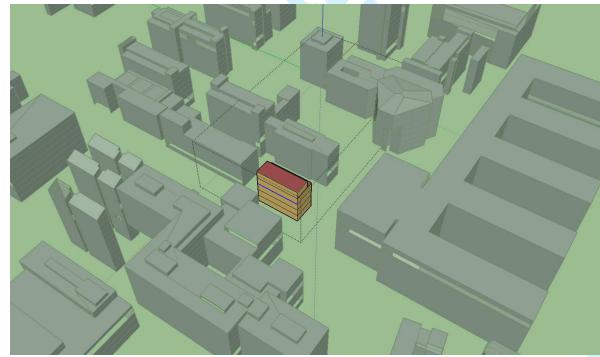


44 Figure 7. The HPI building EnergyPlus model extracted from the CitySim model. The HPI building is seen as the light
 45 and dark brown building in the center surrounded by gray masses that represent other buildings on campus. The graphic is
 46 illustrated with OpenStudio for Sketch-up.

48 3.3. Measured data collection and calibration


50 Energy data from the HPI building was collected and analyzed in the context of the simplified
 51 calibration procedures. The measured datasets were screened and aggregated into typical usage
 52 profiles to be used for the lighting, plug loads, and HVAC equipment availability schedules and power
 53 densities. Figure 8 illustrates the aggregation examples of electrical energy for the HPI building. This
 54 profile was created through a filtering and clustering process known as *DayFilter* (Miller, Nagy, and
 55 Schlueter 2015). Cluster 0 represents the typical energy profile for Sunday, while Cluster 1 dominates
 56 the Saturdays of the data set. Clusters 2 and 3 make up most of the weekdays of the data set with
 57 Cluster 3 being more common in non-summer months. These profiles are used to set the availability

4 schedules as inputs into the EnergyPlus simulation to emulate the way occupants inhabit the building
 5 and how the building management system (BMS) controls the lighting and HVAC systems.
 6

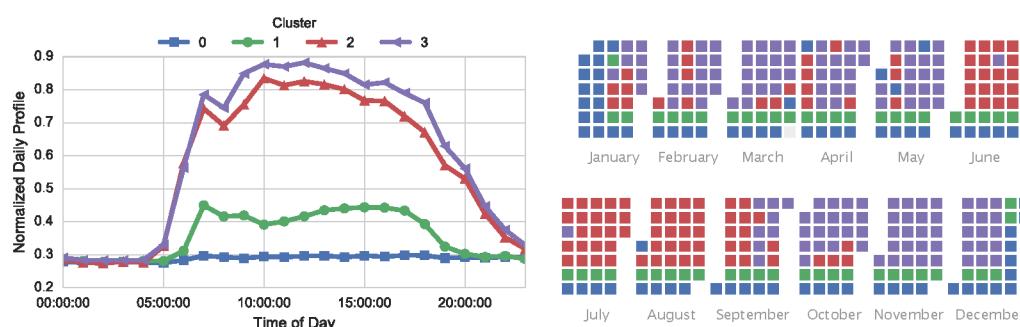

18 Figure 8. Typical measured data electricity profiles of (left) average daily electrical consumption for each cluster and (right)
 19 color-coded calendar of which days fall within each cluster. The diagram on the right is each month of the year with each row
 20 corresponding with a day of the week (starting with Monday) and each column corresponding to a week of the month.

22 The measured and simulated data from both the co-simulation and EnergyPlus solo simulation
 23 were analyzed in order to understand how both the solo and co-simulations compare to real, mea-
 24 sured data. The calibration process was undertaken through a series of steps such as including local
 25 weather conditions for the simulation period and adding custom lighting schedules and power den-
 26 sities extracted from the measured data. The models were calibrated to the summer season (May-
 27 September) for cooling and the winter season (Jan-April and October to December) for heating.
 28 Figure 9 illustrates a comparison of the measured data with the simulations after the tuning process.
 29 The final calibrated EnergyPlus solo model had a normalized mean bias error (NMBE) of -9.36%
 30 and a coefficient of variation of root mean square error (CVRMSE) of 21.7% for cooling and 5.02%
 31 and 29.4% for heating. These metrics fall within the +/-10% NMBE and +/-30% CVRSME used in
 32 this case study for calibration. A total of 37 calibration iterations were undertaken to modulate the
 33 simulation results to within these criteria. The goal of calibration, in this case, is to just bring the
 34 models to within a reasonable range of reality in order to bring more confidence to analysis of the
 35 discrepancies between the solo and co-simulation scenarios.
 36

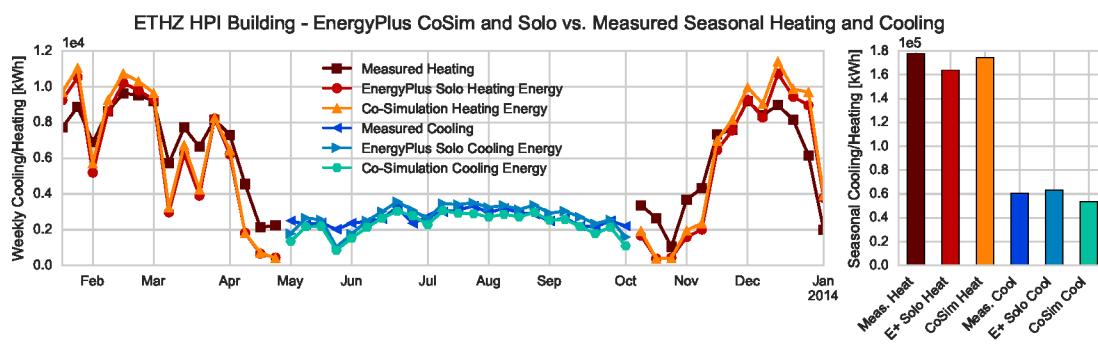

50 Figure 9. HPI Measured vs. Co-Simulation and EnergyPlus Solo for Heating and Cooling Seasons
 51
 52

53 3.4. EnergyPlus co-simulation results

54 For cooling, a discrepancy can be seen between co-simulation and solo EnergyPlus. Co-simulation
 55 decreases the predicted cooling energy by 15.5%, as seen in Figure 10. Figure 11 illustrates the
 56 difference in predicted heating energy consumption across the test year. A consistent offset exists
 57 across the time frame of days in January, the peak of the heating season. A more varied discrepancy
 58
 59
 60

across the heating months is noticed resulting an overall increase of heating prediction of 6.5% due to co-simulation. The exchange of long-wave radiation for this particular site is substantial due to the proximity of surrounding buildings.

When comparing the solo and co-simulated models to the measured data, it is noticed that cooling energy is over-predicted by the solo simulation by 4%, while co-simulation under-predicted by 11.1%. This discrepancy is likely due to a loss in long-wave radiation in the co-simulation to the surrounding buildings, thus reducing the overall cooling load.

For heating energy, co-simulation was able to bring the predicted value to within 2% of the measured value for the year, an improvement as compared to the solo simulation, which was 8.5% less than the measured value. This situation is also likely due to the long-wave radiation loss to surrounding buildings, thus increasing the overall heating load.

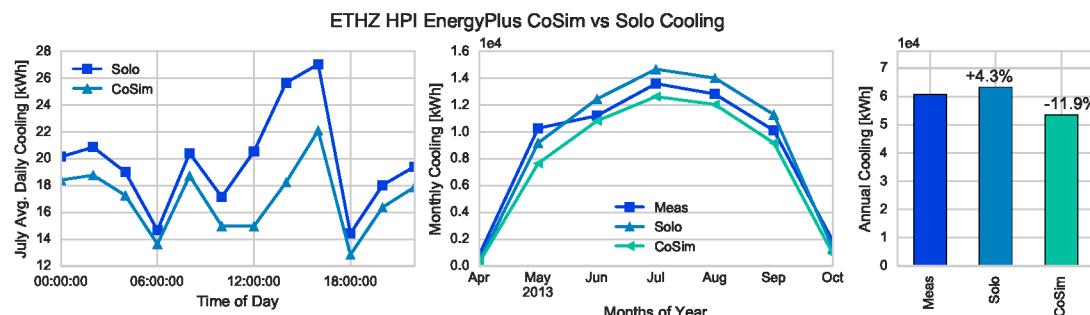


Figure 10. HPI Co-Simulation vs. EnergyPlus Solo for Cooling

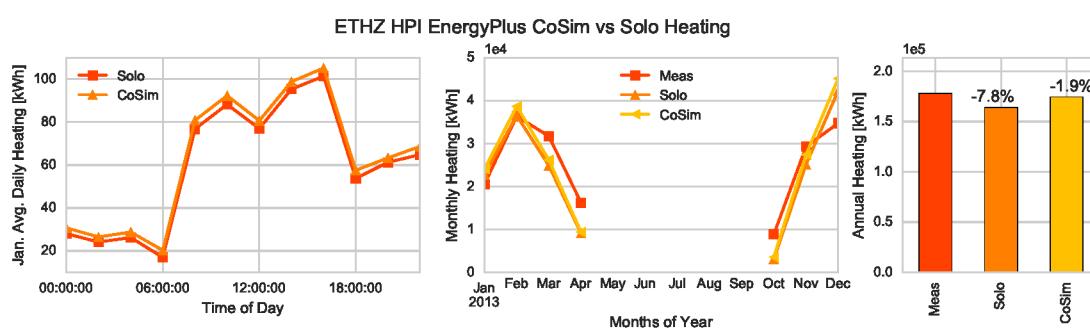


Figure 11. HPI Co-Simulation vs. EnergyPlus Solo for Heating

3.5. Campus case study 2: EPFL Quartier Nord

Quartier Nord is a whole new quarter of the École Polytechnique Fédérale de Lausanne (EPFL) campus located at its northwest corner. This complex includes a Convention Centre with an auditorium with a maximum capacity of 3000 (seated) people, housing for 516 students, retail and service areas and a hotel. As a public space, this ensemble is organized around the central plaza as seen in Figure 12. With a particularly strong visual and formal identity, the SwissTech Convention Centre (STCC) is clearly the key protagonist. Designed as a Minergie building, it includes modern energy conversion technologies to reduce its energy consumption (Beyeler, Beglinger, and Roder 2009). The focus of the co-simulation is realized on the STCC, simulated with the nearby buildings for housing, retail and service areas.

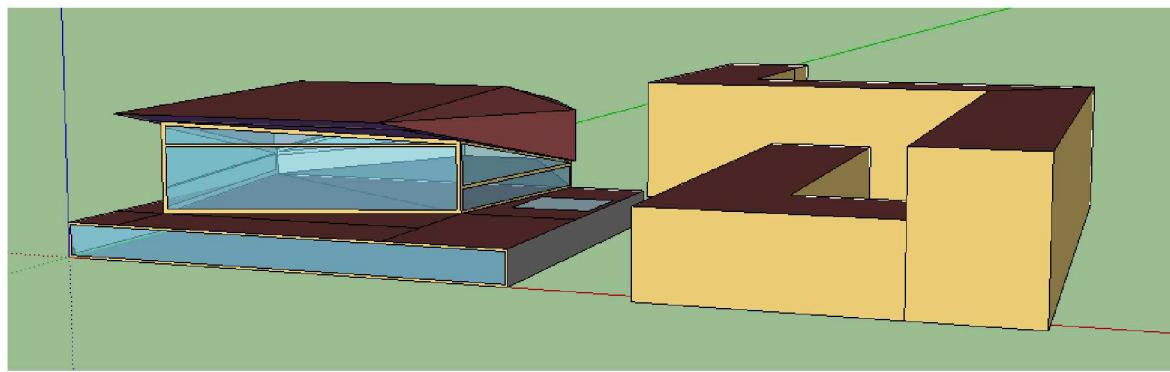


Figure 12. The Quartier Nord at EPFL in Lausanne

3.6. Model development

The information required in the simulation mainly comprises three parts: physical, geometrical and operational data. The geometry information including the shape, dimension, structure and materials was obtained from the Real Estate and Infrastructure Department of École Polytechnique Fédérale de Lausanne (EPFL), which was responsible for carrying out the project from call to tender to construction. However, since the documents provided were conflicting with what has been installed, the task to realize a precise model of the buildings itself is rather tedious. Besides, it is even more challenging to get the operational data (daily occupancy, lighting, and electrical equipment usage level and ventilation rate) as the building has only recently been set in operation mode and as engineers and technicians have been working on improving the controls. Therefore, due to unreliable monitoring data, the calibration step of the model was not undertaken.


Considering the lack of detailed information about the building, a so-called detailed reference case was modeled with EnergyPlus (Mauree et al. 2015) in which regulation standards applied in the design phase from the local building code norms were used to complete the missing information. A rendering of this model is seen in Figure 13.

Figure 13. The Quartier Nord modeled with OpenStudio for Sketchup². The STCC on the left is the main focus of the study and is represented by two thermal zones.


The corresponding CitySim model was created by exporting a DXF file from EnergyPlus for the whole of Quartier Nord, and importing it into the Graphical User Interface of CitySim. Physical characteristics of the building were added to complete the CitySim model. Finally, the same script as described in Section 2 was used to export the model from CitySim to EnergyPlus, giving a simplified EnergyPlus model.

330 **3.7. Comparison of EnergyPlus and CitySim**

331 Both the CitySim and EnergyPlus engines are utilized in this case study. The first comparison
 332 to observe is the differences between the two engines when focused on the STCC building. When
 333 simulated in isolation, the CitySim engine predicts a 28.6% increase in heating load and a 44.4%
 334 increase in cooling load as compared to EnergyPlus. This phenomenon is due to the differences
 335 in the way each of these engines calculates heating and cooling loads. CitySim has a much more
 336 simplified model of building occupants, lighting, and plug loads. CitySim also includes long-wave
 337 radiation exchange calculations that can greatly influence the heating and cooling load calculations
 338 as well. Use of the co-simulation process brings the engines to within 5.4%. Figure 14 illustrates
 339 these differences for cooling and Figure 15 for heating.

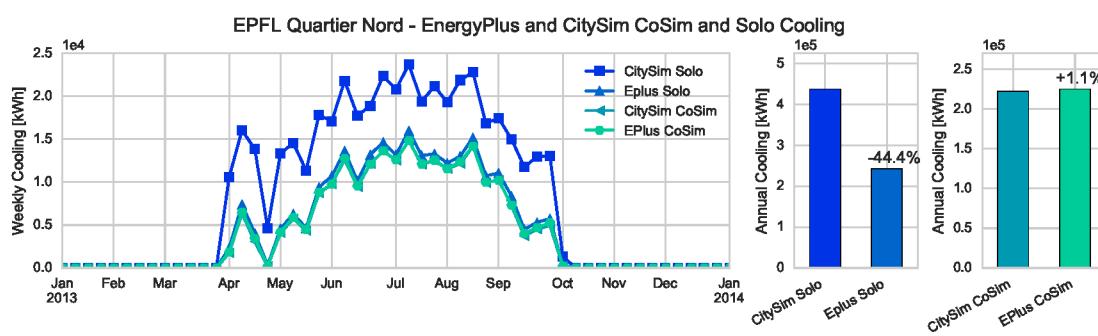

29 Figure 14. STCC CitySim vs. EnergyPlus Solo for Cooling

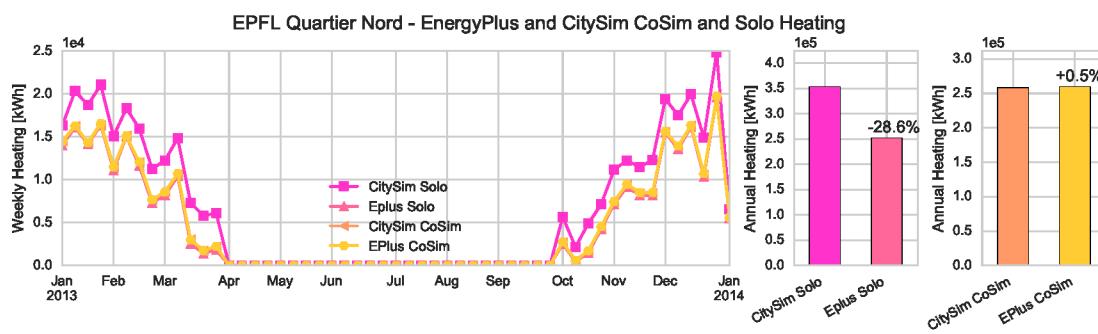

47 Figure 15. STCC CitySim vs. EnergyPlus Solo for Heating

51 **3.8. EnergyPlus co-simulation results**

52 The STCC building is also simulated within the solo and co-simulation environments. When focusing
 53 on the EnergyPlus results, a 7.5% decrease in cooling energy is observed, as seen in Figure 16. A 2.8%
 54 increase in heating energy is observed, as seen in Figure 17. These differences are less pronounced
 55 than the HPI and theoretical case studies due to the number and proximity of surrounding buildings
 56 is not as large. long-wave radiation exchange in this situation doesn't have as large of an impact on
 57 the heating and cooling calculations.

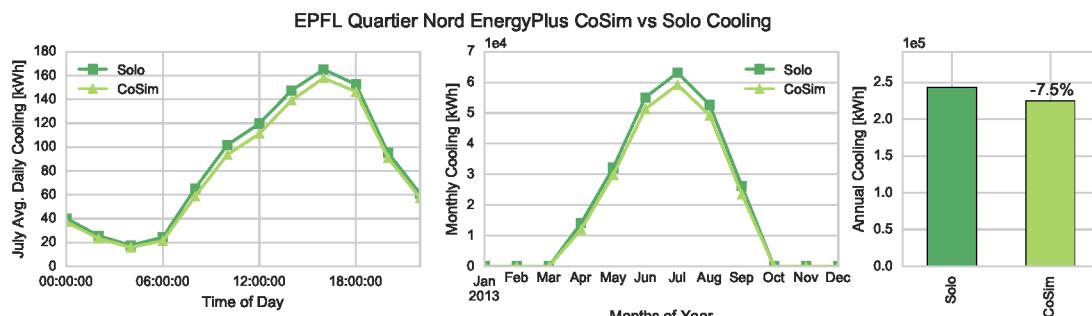


Figure 16. Quartier Nord EnergyPlus Co-Simulation vs. Solo for Cooling

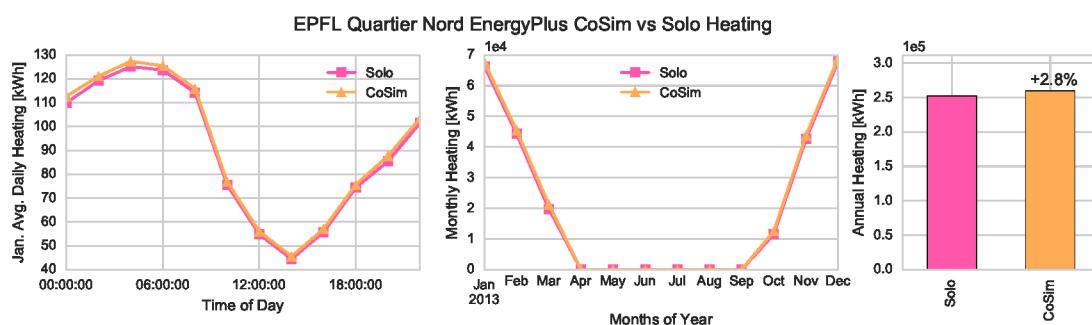


Figure 17. Quartier Nord EnergyPlus Co-Simulation vs. Solo for Heating

347 4. Discussion

348 Two campus case studies were presented in this paper to showcase a unique process of extracting
 349 model meta-data, conversion of those data into input files for two separate simulation engines, and
 350 the solo and co-simulation process of those engines. The analysis of the results shows that for the first
 351 case study, co-simulation can achieve values closer to measured reality for heating, but not cooling.
 352 These results are unique to this case study and simply show that the co-simulation process may be
 353 helpful for heating only. A limitation of this study is that we only analyze a single building against
 354 measured data in this context. In the second case study, significant discrepancies are found between
 355 the CitySim and EnergyPlus engines which were corrected using the co-simulation process.

356 One of the key insights in this work is that each of the engines is enabled to account for the various
 357 physical phenomenon in their simulation process that were previously impossible. For example,
 358 through co-simulation, EnergyPlus was able to utilize the long-wave radiation exchange capabilities
 359 of CitySim. The ability to couple and leverage the best aspects of multiple simulation engines can
 360 enhance the modeling of large-scale urban agglomerations.

361 Disadvantages of the co-simulation process are mainly centered upon the increase in computing
 362 time and power needed for the FMI to coordinate data exchange between the two simulation engines.
 363 After calibration, a comparison of the run-times of the co-simulation and solo EnergyPlus simulations
 364 show that the execution time for the solo EnergyPlus simulation was 1 minute and 49 seconds
 365 compared to 28 minutes and 10 seconds for the co-simulation.

366 5. Conclusion

367 This paper outlines the implementation of a fully automated work flow process that extracts geometry
368 information at the urban-scale, creates the necessary input information, executes each engine with
369 information exchange at each time step of targeted variables, and accumulates the results of the
370 analysis. The process has been implemented on simplified theoretical scenarios in the past, and
371 the key innovation with this work is in implementation on actual case-study campuses and targeted
372 buildings. The results illustrate that the differences between the co-simulation and solo environments
373 are within range of previous theoretical models. More reliable results of the magnitude of differences
374 between the simulation techniques can be extracted from these real-world scenarios.

375 Future work in using co-simulation models for buildings and campuses would more intensively
376 utilize the model results in a practical implementation of retrofit scenarios or urban-scale energy
377 systems research. More implementations would also test the feasibility of using co-simulation for
378 systems analysis, urban planning studies, and cooling and heating system optimization.

379 References

- 380 Allegrini, Jonas, Viktor Dorer, and Jan Carmeliet. 2012. "Influence of the urban microclimate in street
381 canyons on the energy demand for space cooling and heating of buildings." *Energy and Buildings* 55:
382 823–832.
- 383 Beyeler, Franz, Nick Beglinger, and Ursina Roder. 2009. "Minergie: The Swiss sustainable building standard." *Innovations* 4 (4): 241–244.
- 384 Bouyer, Julien, Christian Inard, and Marjorie Musy. 2011. "Microclimatic coupling as a solution to improve
385 building energy simulation in an urban context." *Energy and Buildings* 43 (7): 1549–1559.
- 386 Bueno, Bruno, Leslie K Norford, Grégoire Pigeon, and Rex Britter. 2011. "Combining a Detailed Building
387 Energy Model with a Physically-Based Urban Canopy Model." *Boundary-Layer Meteorology* 140 (3):
388 471–489.
- 389 Dorer, Viktor, Jonas Allegrini, Kristina Orehouning, Peter Moonen, Govinda Upadhyay, Jérôme Kämpf, and
390 Jan Carmeliet. 2013. "Modelling the urban microclimate and its impact on the energy demand of buildings
391 and building clusters." In *Proceedings of BS2013: 13th Conference of International Building Performance
392 Simulation Association*, 3483–3489. Chambéry, France: International Building Performance Simulation
393 Association. Aug.
- 394 Evins, Ralph, Viktor Dorer, and Jan Carmeliet. 2014. "Simulating external longwave radiation exchange for
395 buildings." *Energy and Buildings* 75: 472–482.
- 396 Freire, Juliana, David Koop, Fernando Seabra Chirigati, and Cláudio T Silva. 2014. "Reproducibility using
397 VisTrails." *Implementing Reproducible Research* 33.
- 398 Haldi, Frédéric, and D Robinson. 2011. "The impact of occupants' behaviour on building energy demand." *Journal of Building Performance Simulation* 4 (4): 323–338.
- 399 Keirstead, James, Mark Jennings, and Aruna Sivakumar. 2012. "A review of urban energy system models:
400 Approaches, challenges and opportunities." *Renewable and Sustainable Energy Reviews* 16 (6): 3847–3866.
- 401 Lawrie, L K, Fred C Winkelmann, Fred Buhl, and Joe J Huang. 2001. "EnergyPlus: creating a new-generation
402 building energy simulation program." *Energy and Buildings* 33 (4): 319–331.
- 403 Martin, Miguel, Afshin Afshari, Peter R Armstrong, and Leslie K Norford. 2015. "Estimation of urban
404 temperature and humidity using a lumped parameter model coupled with an EnergyPlus model." *Energy
405 and Buildings* 96: 221–235.
- 406 Mauree, D, Y Yao, J Kaempf, and J L Scartezzini. 2015. "Evaluation and Optimization of Renewable Energy
407 in the "Quartier Nord": Objective Zero-Power." *CISBAT 2015*.
- 408 Miller, Clayton, Zoltán Nagy, and Arno Schlueter. 2015. "Automated daily pattern fil-
409 tering of measured building performance data." *Automation in Construction* 49: 1–17.
410 <http://www.sciencedirect.com/science/article/pii/S0926580514002015>.
- 411 Miller, Clayton, and Chandra Sekhar. 2010. "Modeling of the Single Coil, Twin Fan Air-Conditioning System
412 in EnergyPlus." In *SimBuild 2010: Fourth National Conference of IBPSA-USA*, 201–206. New York, NY.
413 Aug..
- 414 Miller, Clayton, Daren Thomas, Silvia Domingo Irigoyen, Christian Hersberger, Zoltan Nagy, Dino Rossi, and
415

- 1
2
3
4 417 Arno Schlueter. 2014. "BIM-extracted EnergyPlus model calibration for retrofit analysis of a historically
5 listed building in Switzerland." In *In Proceedings of SimBuild 2014: 2014 ASHRAE/IBPSA-USA Building
6 Simulation Conference*, Atlanta, GA, USA. Sep..
7 420 Miller, Clayton, Daren Thomas, Jérôme Kämpf, and Arno Schlueter. 2015. "Long Wave Radiation Exchange
8 for Urban Scale Modeling within a Co-Simulation Environment." In *CISBAT*, Lausanne, Switzerland. Sep..
9 422 Nouidui, Thierry, Michael Wetter, and Wangda Zuo. 2014. "Functional mock-up unit for co-simulation
10 import in EnergyPlus." *Journal of Building Performance Simulation* 7 (3): 192–202.
11 424 Nouidui, Thierry Stephane, and Michael Wetter. 2014. "Tool coupling for the design and operation of
12 building energy and control systems based on the Functional Mock-up Interface standard." In *the 10th
13 International Modelica Conference, March 10-12, 2014, Lund, Sweden*, 311–320. Linköping University
14 Electronic Press. Mar..
15 428 Robinson, D, Frédéric Haldi, J Kämpf, Philippe Leroux, Diane Perez, Adil Rasheed, and Urs Wilke. 2009.
16 "CitySim: Comprehensive micro-simulation of resource flows for sustainable urban planning." In *Proceed-
17 ings of BS2009: 11th International Building Performance Simulation Association Conference*, Glasgow,
18 Scotland. Jul..
19 432 Robinson, D, and Andrew Stone. 2004. "Solar radiation modelling in the urban context." *Solar Energy* 77
20 (3): 295–309.
21 434 Samuelson, Holly W, Arash Ghorayshi, and Christoph F Reinhart. 2015. "Analysis of a simplified calibration
22 procedure for 18 design-phase building energy models." *Journal of Building Performance Simulation* 1–13.
23 436 Schlueter, Arno, and Frank Thesseling. 2009. "Building information model based energy/exergy performance
24 assessment in early design stages." *Automation in Construction* 18 (2): 153–163.
25 438 Srebric, Jelena, Mohammad Heidarnejad, and Jiying Liu. 2015. "Building neighborhood emerging properties
26 and their impacts on multi-scale modeling of building energy and airflows." *Building and Environment* 91
440 (C): 246–262.
27 441 Thomas, D, C Miller, J Kämpf, and Arno Schlueter. 2014. "Multiscale co-simulation of EnergyPlus and
28 CitySim models derived from a building information model." *BauSIM 2014: Fifth German-Austrian
29 IBPSA Conference*.
30 444 Thomas, Daren, and Arno Schlueter. 2012. "Customizable continuous building simulation using the de-
31 sign performance toolkit and Kepler scientific workflows." In *Proceedings of ECPPM 2012: eWork and
32 eBusiness in Architecture, Engineering and Construction*, 17–22. Reykjavik, Iceland: CRC Press.
33 447 Trčka, M, Jan Hensen, and M Wetter. 2010. "Co-simulation for performance prediction of integrated building
34 and HVAC systems—An analysis of solution characteristics using a two-body system." *Simulation Modelling
35 Practice and Theory* 18: 957–970.
36 450 United Nations. 2014. "World Urbanization Prospects: 2014 Update." 1–32.
37 451 United States Department of Energy (DOE). 2015. "EnergyPlus Engineering Reference Version 8.2: The
38 Reference to EnergyPlus Calculations." *The Reference to EnergyPlus Calculations*.
39 453 Wetter, Michael. 2011. "Co-simulation of building energy and control systems with the Building Controls
40 Virtual Test Bed." *Journal of Building Performance Simulation* 4 (3): 185–203.
41 455 Yang, Xiaoshan, Lihua Zhao, Michael Bruse, and Qinglin Meng. 2012. "An integrated simulation method
42 for building energy performance assessment in urban environments." *Energy and Buildings* 54: 243–251.
43 457 Zhang, Rui, Khee Poh Lam, Shi-chune Yao, and Yongjie Zhang. 2013. "Coupled EnergyPlus and com-
44 putational fluid dynamics simulation for natural ventilation." *Building and Environment* 68: 100–113.
45 459 <http://www.sciencedirect.com/science/article/pii/S0360132313001029>.
- 46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

To appear in the *Journal of Building Performance Simulation*
Vol. 00, No. 00, Month 20XX, 1–17

Research Article

Urban and building multiscale co-simulation: case study implementations on two university campuses

(Received 00 Month 20XX; final version received 00 Month 20XX)

The co-simulation of both urban and building-level models leverages the advantages of both platforms. It better accounts for the localized effects of surrounding buildings, geography and climate conditions while maintaining high-fidelity building systems representation. This paper describes the co-simulation process of the building and ~~urban-scale~~-urban-scale models of two university campuses in Switzerland using EnergyPlus and CitySim. In the first case study, on-site measured performance data is compared to the co-simulation results. The second case study examines the results of the two engines. The results show that coupling of EnergyPlus with CitySim resulted in a -15.5% and -7.5% impact on cooling consumption and a +6.5% and +4.8% impact on heating use as compared to solo simulations. The co-simulation process was able to better model realistic conditions for heating, but not cooling in one case study. It was able to substantially reduce the discrepancies in prediction between the engines in the other study.

Keywords: Building-scale simulation, Calibrated energy models, CitySim, Co-simulation, EnergyPlus, Urban-scale simulation

1. Introduction

2 ~~Urban-scale~~-Urban-scale building performance simulation is a process that empowers the analysis and optimization of cities. Urban populations are growing around the world at an unprecedented rate. A transition from urban to rural is underway and 2.5 billion people are expected to join cities throughout the world by the year 2050 (United Nations 2014). Expansions of entire districts and even cities is not an uncommon phenomenon, especially in East Asia and Africa. ~~Urban-scale~~ **7** Urban-scale modeling is in the midst of an intense focus on the research community with six key areas of practice: technology design, building design, urban climate, systems design, policy assessment, and land use and transportation (Keirstead, Jennings, and Sivakumar 2012). The ability to simulate the interaction between large collections of buildings enables the development and testing of optimization and planning scenarios for this new development (Dorer et al. 2013).

12 The CitySim simulation engine is an example of such a program designed and optimized for urban-scale simulation. CitySim is an urban performance simulation engine that comprises a solver module as well as a graphical user interface. It focuses on the energy flows of multiple simplified building models and their interdependent relationship with their urban climate (Robinson et al. 2009). CitySim includes building thermal, urban radiation, occupant behavior, and plant/equipment models integrated as a single simulation engine. CitySim simulates multiple buildings up to city scale using simplified models to achieve a good compromise between modeling accuracy, computational overheads, and data availability. Each building's thermal behavior is based on an electrical analogy using a two node resistor-capacitor network. The internal lighting, people, and miscellaneous loads are modeled using a simplified occupancy-based approximation. The heating, ventilation, and air-conditioning (HVAC) systems are modeled using a set of equations that approximates the total mass flow rate required to meet the sensible and latent loads of each building as a whole. Each of these simplifying approximations empowers the urban-scale simulation to have reasonable execution times on the number of buildings being simulated.

26 Building performance simulation is a mature domain of research relative to ~~urban-scale~~-urban-scale

efforts. The use of whole building simulation engines originated in the 1960's with the US government's development of the BLAST and DOE-2 hourly energy simulation programs (Lawrie et al. 2001). In 1996, development on a new simulation engine, EnergyPlus, began in order to combine the advantages of previous efforts in a single, modular program. EnergyPlus, as a result, has become a popular choice in detailed whole-building performance simulation due to the breadth of mechanical, renewable, and electrical systems that can be modeled. EnergyPlus specifically excels in its ability to model unique mechanical system types such as decoupled centralized cooling (Miller and Sekhar 2010). Additionally, EnergyPlus is designed to provide a high resolution in which internal loads and natural ventilation technologies can be modeled in detail at the building level. EnergyPlus is also extensively used within the research community and has new features that enable it to couple with other simulation programs.

Both building and urban-scale simulation domains have rightfully chosen boundary conditions that reflect their key goals while seeking to minimize the input parameters necessary and run-times of the engines themselves. This focus results in certain deficiencies concerning modeling various phenomena. For example, ~~urban scale~~urban-scale simulation highly simplifies the building systems and internal load models, thus making a retrofit analysis at the systems level difficult. And whole building simulation in EnergyPlus neglects many of the various contextual consideration of the urban environment such as long-wave radiation exchange with adjacent surfaces and localized urban weather effects (Lawrie et al. 2001).

The current effort seeks to couple building and ~~urban scale~~urban-scale simulation to address the deficiencies of the individual engines. The research in this paper is part of a larger coupling effort in which various engines are connected and co-simulated to create a more comprehensive analysis of the ~~urban seale~~urban-scale (Dorer et al. 2013; Allegrini, Dorer, and Carmeliet 2012). The target is the computational interface between the building energy model, using EnergyPlus, and the urban energy model using CitySim. An overview of the larger scope is shown in Figure 1 and the context of the coupling task appears as the interface between the City Energy Simulation (CES) model and the Building Energy Simulation (BES) model. The scales and models contained in the urban environment context include the Urban-Scale Model (UC Model), the Urban Microclimate (UMC) model using OpenFoam, and the Meteorological Meso-scale (MM model) using Climate Limited-Area Modeling (COSMO-CLM). On the database side, Revit, Global Information Systems (GIS), and building information systems (BIS) are utilized.

The coupling and co-simulation process is implemented on two case studies in Switzerland. The first case study is the ETH Zürich Hoenggerberg campus in Zürich, Switzerland. It was modeled in the CitySim simulation engine and co-simulated using work-flow automation. The target of this case study is to evaluate the differences between the coupled and solo EnergyPlus simulations based on the variables exchanged. This scenario includes the use of measured data for heating and cooling within their respective seasons to compare to the simulation results. The second case study is the EPFL campus in Lausanne, Switzerland. The objective of this scenario is to evaluate the differences between coupled and uncoupled versions of the CitySim simulation engine.

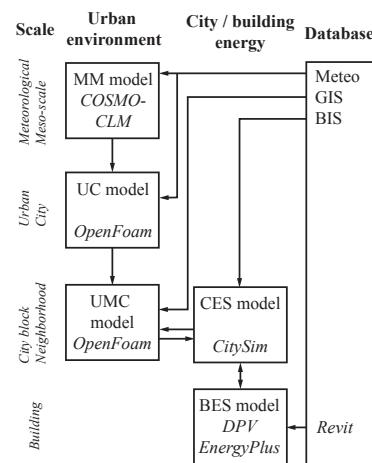


Figure 1. EnergyPlus and CitySim coupling are part of the wider context. Each block in the diagram represents an environment, with the tool/engine name in italics ((Thomas et al. 2014), adapted from (Dorer et al. 2013))

This paper describes the achievement of several objectives. The first is to automate the process of simultaneous meta-data extraction from a Building Information Model (BIM) for the creation of both building and urban-scale performance models for a real-world campus of buildings. Next, we ~~week to~~ co-simulate the urban and building scale models through concurrent information exchange. Finally, we implement a simplified calibration procedure for the first scenario by reconciling the co-simulation output results for a target building using measured energy performance data from the campus energy information system (EIS)

The first two objectives have been demonstrated in a simplified context in previous literature (Thomas and Schlueter 2012; Miller et al. 2015). The innovation in the current publication is an extension of this research through the modeling and co-simulation of real-world case studies. With respect to the third contribution, to the best of the authors' knowledge, no previous study has compared the results of a building and urban-scale co-simulation procedure to measured data from a real-world campus.


1.1. Previous multi-scale coupling studies

Previous attempts of information exchange have been implemented between simulation engines at various scales. Much of the initial co-simulation work in the literature is done at the subsystem and building-scale. Previous studies have analyzed strong and loose coupling of engines at this scale (Wetter 2011; Trčka, Hensen, and Wetter 2010). Coupling of building-scale simulation with urban-scale computational fluid dynamics (CFD) is attempted for modeling natural ventilation (Zhang et al. 2013) and to improve energy prediction (Bouyer, Inard, and Musy 2011). A comprehensive review of energy and airflow modeling of neighborhoods and university campuses was published that includes strategic aspects of coupling different types of models (Srebric, Heidarnejad, and Liu 2015). EnergyPlus has been coupled with ENVI-met, a micro-climate computational fluid dynamics (CFD) program (Yang et al. 2012). It was also coupled with simplified lumped parameter models to facilitate comparison with measured sensor data (Martin et al. 2015). While not directly coupled, EnergyPlus and the TEP Urban Canopy Model program were connected through a modified weather file to quantify the influences of urban localized weather effects on whole building simulation (Bueno et al. 2011) and urban weather generation (Bueno et al. 2013).

1
2
3
4 **2. Methodology**
5
6 **2.1. Coupling process**

7
8 The coupling process of a simplified single zone model and contextual surrounding buildings is
9 described in previous studies (Thomas et al. 2014), which forms the basis for the methodology
10 in the current effort. This process utilizes the Design Performance Viewer (DPV) and associated
11 workflow. The DPV is a tool written to extract and simulate an EnergyPlus input data file (IDF)
12 from an Autodesk™ Revit™ BIM (Schlueter and Thesseling 2009). The central philosophy behind
13 the tool is the rapid simulation of the building information model from the earliest design possible
14 that can be used throughout the life-cycle of the building including retrofit analysis (Miller et al.
15 2014). This process is achieved by augmenting the information in the BIM with default values and
16 abstracting information not relevant for energy simulation. The tool already has a simplified notion
17 of surrounding buildings, which are modeled in the BIM as simple mass objects without further
18 information and are exported as shading surfaces to EnergyPlus. This functionality is used for
19 creating the CitySim mass scene and leads to a crude model of the urban context of the building.
20 The current DPV philosophy of allowing the designer to iterate rapidly on early design decisions
21 based on feedback about the performance of the design remains. This approach includes streamlining
22 the process where running a simulation requires no effort from the designer due to automatic creation
23 of input files, execution, and analysis of the results.

24
25 The coupling process of EnergyPlus and CitySim is shown in Figure 2. The solid lines depict the
26 co-simulation of EnergyPlus and CitySim, and the dotted lines illustrate solo simulations of either
27 EnergyPlus or CitySim. First, the DPV is used to extract an EnergyPlus simulation model from the
28 BIM. The DPV utilizes the Revit API to extract geometrical information about the building and
29 the physical properties of walls, windows, doors, roofs, and floors. This information is encoded in
30 the BIM model as wall types, roof types, floor types as well as window and door families. Wherever
31 possible, the tool uses the layering and materials of the construction types, enhancing them with
32 physical attributes relevant to EnergyPlus. Where not defined, it assumes default values.

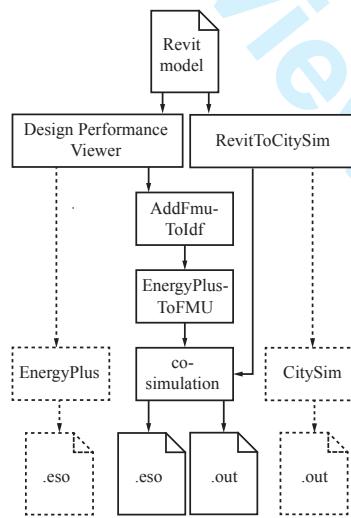

53 Figure 2. Overview diagram of the coupling process including tools and outputs (Thomas et al. 2014)


54
55 Next, geometry is created to be used in both the CitySim and EnergyPlus models as buildings
56 and surfaces surrounding the building targeted in the IDF. This feature of the DPV is used for
57 including shading surfaces in the EnergyPlus simulation model: it uses so-called *mass objects* in the
58 BIM model as surrounding buildings. The DPV model views these buildings as a series of shading
59 surfaces. A transformation is added to the DPV model that produces an input file for the CitySim

1
2
3
4 solver. This file uses an XML format describing the buildings in a scene for simulation, including
5 their construction types, geometry, and systems for heating and cooling. The main BIM is extracted
6 to the CitySim scene as one of the buildings to be simulated, with the properties of the construction
7 types matching those in the DPV model. The glazing ratio is calculated based on the window and
8 wall areas of the DPV model. Shading surfaces are grouped into buildings based on the mass object
9 from which they were extracted. These adjacent buildings use default construction properties for
10 walls and roofs, and we assign them a default glazing ratio. These defaults can be overridden by
11 custom properties applied to the mass objects in the BIM much in the same way as the model
12 elements of the main building are enriched with DPV information.
13

14 As of version 8.1.0, EnergyPlus supports exporting a simulation model as a Functional Mock-up
15 Unit (FMU) (Nouidui, Wetter, and Zuo 2014). This feature introduces new IDF objects to specify
16 the interface such an FMU exposes. These objects define which output variables are exported by
17 the FMU and which variables are imported. The FMU export functionality is closely linked to the
18 Energy Management System (EMS) of EnergyPlus. Co-simulation exchange variables either mimic
19 an EnergyPlus schedule, an EMS variable or drive an EMS actuator. Since the model used by
20 CitySim to simulate a building is more abstract than the model used by EnergyPlus, the EMS is
21 used to aggregate certain values. CitySim does not model windows separately. Therefore, a weighted
22 average of window and wall surface temperatures is calculated with EMS subroutines.
23

24 The FMU creation process is the basis for coupling the two models at each timestep in the sim-
25 ulation. Figure 3 illustrates this process from both the EnergyPlus and CitySim perspective. The
26 augmented IDF file is fed to the *EnergyPlusToFMI* script (Nouidui and Wetter 2014). Once config-
27 ured, this script produces an FMU file based on the augmented IDF file and the weather file to be
28 used as well as a DLL file implementing the Functional Mock-up Interface that can load the IDF
29 file, locate EnergyPlus and run the simulation.
30

31 The number of timesteps per hour for both CitySim and EnergyPlus is set to one per hour. The
32 frequency of data exchanges is set to once per timestep. No data averaging over time is performed.
33 Data exported from one simulation engine overwrites the corresponding data in the other simulation
34 engine at each timestep. Each simulation is performed for a whole year.
35

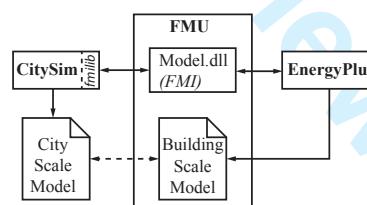

42 Figure 3. Simulation information exchange between CitySim and EnergyPlus using FMI (Thomas et al. 2014)
43
44

45 2.2. Coupled variables

46 Several key urban-scale weather variables are sent to EnergyPlus from CitySim to account better
47 for the localized effects of surrounding buildings, geography and climate conditions. These variables
48 are outlined in Table 1. They include various outdoor air conditions such as dry bulb and wet bulb
49 temperatures, dew-point, humidity, wind speed and direction, and direct and diffuse solar radiation.
50 These variables overwrite the input weather variables that EnergyPlus obtains from its weather file
51 input. CitySim is designed to account for physical phenomenon inherent to urban environments,
52 which are often neglected in building-scale simulation environments (Robinson and Stone 2004;
53 Robinson et al. 2009). CitySim can be connected to a simplified micro-climate airflow model that
54 can predict local climatic conditions around each building. Long-wave radiation exchange between
55 the simulated building and its surroundings is sent to EnergyPlus; this process is described in detail
56 in Section 2.3. Finally, CitySim shares its calculated occupancy schedules as it can use a deterministic
57
58
59
60

4 or stochastic occupant behavior model, whereas EnergyPlus models are solely a deterministic models
 5 (Haldi and Robinson 2011).

7 Table 1. Values sent to EnergyPlus from CitySim by the FMU

Object	Variable Name	Description
Outdoor	Outdoor Drybulb	The outdoor dry-bulb temperature in °C
	Outdoor Dewpoint	The outdoor dewpoint temperature in °C
	Outdoor Relative Humidity	The outdoor relative humidity expressed in percent.
	Diffuse Solar	Diffuse horizontal irradiance in W/m ²
	Direct Solar	Beam normal irradiance in W/m ²
	Wind Speed	The outdoor wind speed in m/s
	Wind Direction	The wind direction in degrees (N=0, E=90, S=180, W=270)
Long-Wave Radiation	Environmental Radiant Temp.	Calculated T_{env} from the sky, ground, and surrounding surfaces
	Environmental Radiant Heat	Calculated h_{env} from the sky, ground, and surrounding surfaces
	Gain Coefficient	
Zone	Occupation	Fraction of the maximum occupation (0.0-1.0) overrides the EnergyPlus occupation schedule with the CitySim stochastic schedule.

22 Variables sent to CitySim by EnergyPlus at each time step include several variables related to
 23 the calculation of heating and cooling loads of a targeted building. Table 2 outlines this list of
 24 exchanged variables. These variables are transferred due to the ability of EnergyPlus to model more
 25 detailed building systems, schedules, ventilation and internal load types than CitySim. For example,
 26 EnergyPlus is flexible enough to model a detailed radiant heating and cooling system that would
 27 be impossible in CiytSim. EnergyPlus is an engine optimized to accurately model building-scale
 28 systems. Thus, CitySim can take advantage of these models through coupling and co-simulation.
 29 EnergyPlus sends the heating and cooling loads, the surface temperatures of the exterior surfaces
 30 and the ventilation flow rates to CitySim.

32 Table 2. Values sent to CitySim from EnergyPlus by the FMU

Object	Variable Name	Description
Wall, Roof	Outside Surface Temperature	The temperature on the outside of the surface in °C
	Average Outside Surface Temperature	The (weighted) average temperature of the surface on the outside in °C.
Zone	Total Heating Energy	The heating energy in Joules used in this timestep.
	Total Cooling Energy	The cooling energy in Joules used in this timestep.
	Zone Mean Air Temperature	The mean air temperature in the zone in °C
	Ventilation Volume Flow Rate	The flow rate in m ³ /s (standard density)

43 2.3. long-wave-Long-wave radiation exchange

44 176 long-wave-Long-wave radiation exchange in the urban scale-urban-scale environment is coupled in the
 45 co-simulation process. It requires the development of a set of approximations to reduce the number
 46 of coupled variables between the engines and to account for differences in the methods by which
 47 each engine calculates this value. A detailed description of long-wave-Long-wave Radiation (LWR)
 48 variable exchange and approximation is found in a previously published study (Miller et al. 2015)
 49 on a simplified theoretical case.

50 In EnergyPlus, LWR exchange for a surface is calculated through the summation of radiation gain
 51 from the ground, sky, and air as seen in Equation 1 and Figure 4a (United States Department of
 52 Energy (DOE) 2015). The radiant heat transfer coefficient for each of these environmental variables
 53 is calculated according to Equation 2 with σ as the Stefan-Boltzmann constant, ϵ as the emissivity
 54 and $F_{variable}$ being the view factor to the variable that can be sky, grd (ground) or air. A major
 55 assumption of this approach is that the modeled building's surfaces and those of adjacent buildings
 56 are at a uniform temperature and the LWR radiation exchange is negligible; a situation that is an
 57 58 59 60

1
2
3
4 190 oversimplification in an urban scale domain (Evins, Dorer, and Carmeliet 2014).
5
6

$$Q_{LWR,EnergyPlus} = h_{r,grd}(T_{surf} - T_{grd}) + h_{r,sky}(T_{surf} - T_{sky}) + h_{r,air}(T_{surf} - T_{air}) \quad (1)$$

7
8
9
10
11
12
13
14
15
16
17
18
19
20
191

$$h_{r,variable} = \frac{\epsilon\sigma F_{variable}(T_{surf}^4 - T_{variable}^4)}{T_{surf} - T_{variable}} \quad (2)$$


192 In comparison, CitySim calculates LWR exchange by calculating an aggregated equivalent tem-
193 perature, T_{env} , and radiative heat transfer coefficient, $h_{r,env}$, from surrounding urban surfaces in
194 addition to ground, sky, and air (Robinson et al. 2009). The calculation for T_{env} is expressed in
195 Equation 3 with the F values being view factors of the surrounding environment including adjacent
196 surfaces $i = 1..n$. $h_{r,env}$ is based on a first order Taylor development of the numerator of Equation 2
197 around $(T_{surf} + T_{variable})/2$ and therefore $Q_{LWR,CitySim}$ is calculated using Equation 4.

$$\sigma T_{env}^4 = \sigma F_{sky} T_{sky}^4 + \sigma F_{grd} T_{grd}^4 + \sum_{i=1}^n \epsilon_i \sigma F_i T_i^4 \quad (3)$$

21
22
23
24
25
26
27
198

$$Q_{LWR,CitySim} = h_{r,env}(T_{surf} - T_{env}) \quad (4)$$

28 199 In the coupled simulation, EnergyPlus uses the CitySim supplied equivalent $h_{r,env}$ and T_{env} to
200 calculate weighted $h_{r,sky}$, $h_{r,grd}$, and $h_{r,air}$ values using the view factors and the sky-to-air split
201 ratio. Figure 4 illustrates the schematic differences between the solo and coupled simulations on
202 a theoretical example of a target building with two adjacent buildings with surfaces available for
203 radiation exchange.

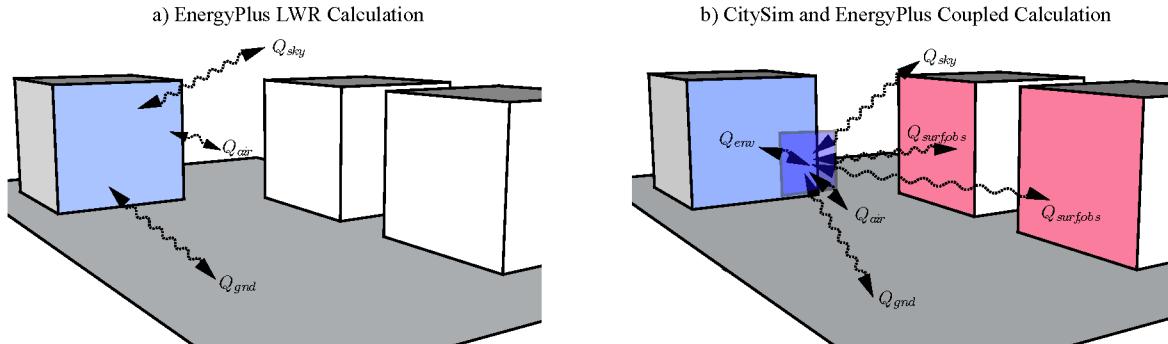


46 Figure 4. Comparison of the LWR components between a) Solo EnergyPlus and b) Coupled CitySim/EnergyPlus configuration
(Miller et al. 2015)
47

50 2.4. Work flow automation

51 205 The coupling, simulation and co-simulation process is completely managed within a program called
52 VisTrails (Freire et al. 2014). The implementation of this type of workflow is outlined in previous
53 work focused on automating DPV using the Kepler platform (Thomas and Schlueter 2012). This
54 process reduces the effort expended by a designer down to pressing a single button. This functionality
55 allows an iterative design informed by readily available simulation results. An automated workflow
56 ties the various steps together and maintains the effortless iterative design process. VisTrails enables
57 the coupling of various workflow subprocesses script initializations, executions of the engines, and
58 211

1
2
3
4 212 the compilation of the outputs. This tool empowers the coupling of multiple executable files and
5 their connecting scripts in graphical diagrams that enhance reproducibility and process automation
6 (Freire et al. 2014). The VisTrails workflow diagram for the first case study in this paper is seen in
7 Figure 5.
8
9
10
11

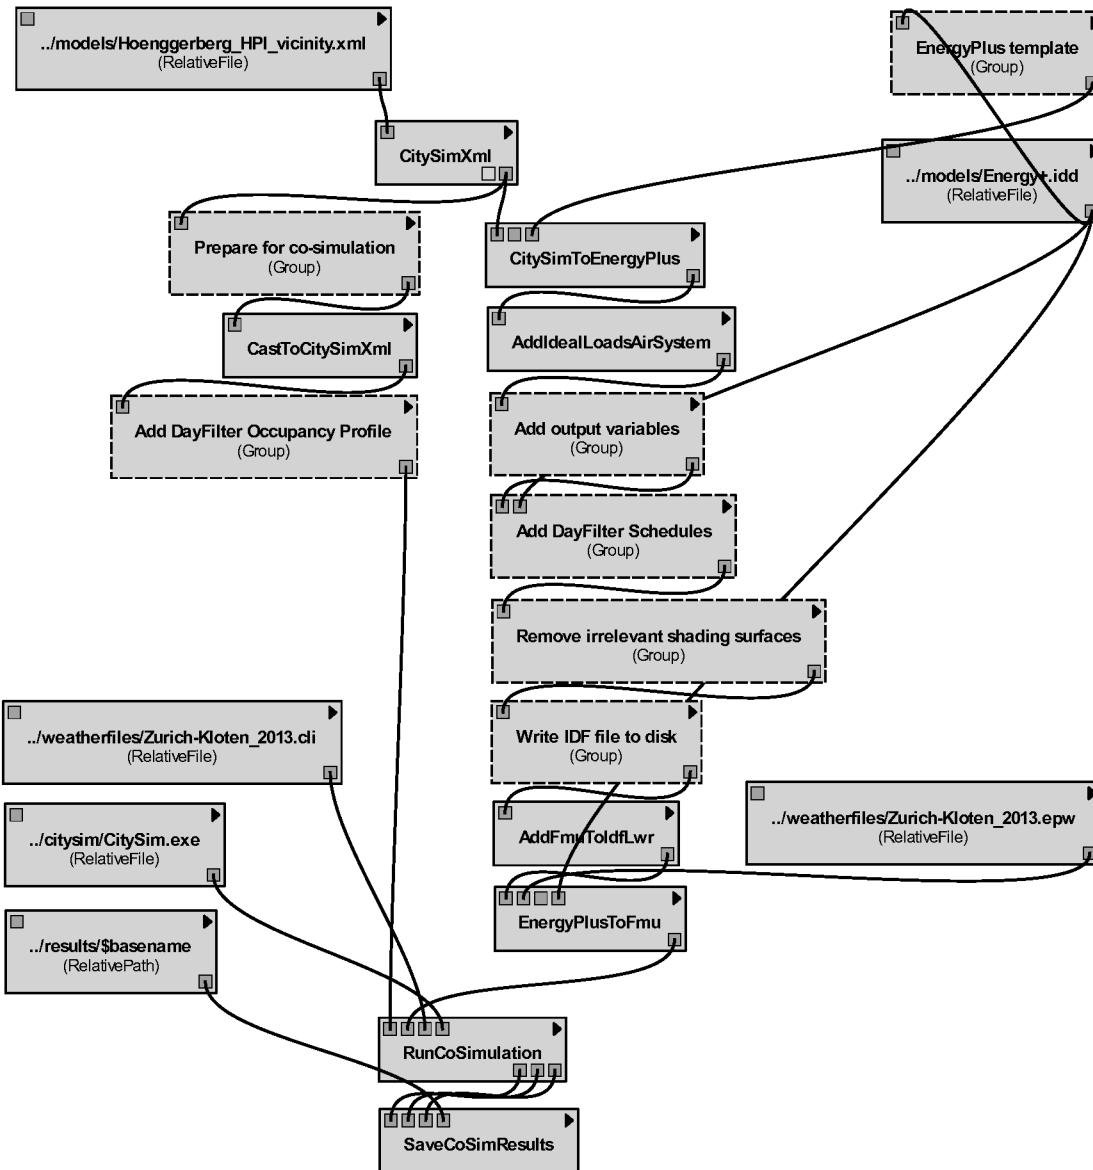

52 Figure 5. Workflow in VizTrails
53
54

55 2.5. Simplified calibration 56

57 216 In the first case study, one aspect of this analysis is the comparison of the actual measured perfor-
58 mance of the target building on campus with the simulation results of the co-simulation. A simplified
59

1
2
3
4 calibration procedure is adapted from previous research to compare the measured heating and cool-
5 ing data available on campus with various simulation scenarios (Samuelson, Ghorayshi, and Reinhart
6 2015). This calibration procedure was utilized in the performance reconciliation of 18 buildings that
7 were built according to the LEED Canada protocol and were under review of ~~actualized~~actual per-
8 formance. This protocol is unique in its analysis process to uncover design model deficiencies in a
9 step-wise manner, utilizing the most readily available knowledge first and working towards equilib-
10 rium between ~~measured and simulated~~measurement and simulation. There is an appropriate balance
11 between the effort of implementation and value generated through the calibration process.
12

227 3. Implementation

228 The co-simulation process is implemented on two case studies in Switzerland. The first is the ETH
229 Zürich Hoenggerberg campus in Zürich, Switzerland. The focus of this case study is to quantify
230 the impact of the information exchange through co-simulation within the EnergyPlus engine. The
231 intent on this campus was to develop techniques for retrofit analysis using EnergyPlus. The targeted
232 building on this campus is the HPI Building. Raw measured data is available for many of the
233 buildings on campus, thus a simplified calibration procedure is used to reconcile the simulation
234 results.

235 The second case study is the EPFL campus in Lausanne, Switzerland. The targeted building, in
236 this instance, was the Quartier Nord complex. The focus of this study was to compare the solo
237 and co-simulation output results of CitySim. Reliable measured data for calibration is not currently
238 available for this building.

45 240 3.1. Campus case study 1: ETHZ Hoenggerberg Campus

47 241 The ETH Zürich Hoenggerberg campus includes 32 higher education facilities with spaces allocated
48 to laboratories, office space, lecture halls, cafeterias, data centers and other types of similar areas.
49 The campus has a centralized energy management system (EMS) that contains 807 energy and water
50 measurement points from heating, cooling, electricity, city gas, domestic hot water, gray water, and
51 general water consumption.

52 246 The focus of the co-simulation process is that the performance of a targeted building is evaluated
53 through solo and coupled methods. The HPI building on campus was chosen in this case study due
54 to the amount and quality of measured data available from the EMS for this building. HPI is a 2,610
55 square meter building that is made up mostly of office space and classrooms. It also includes 400
56 m^2 convenience store and coffee shop. The building is indicated on a campus map shown in Figure
57 6 and is shaded red.
58
59
60

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60


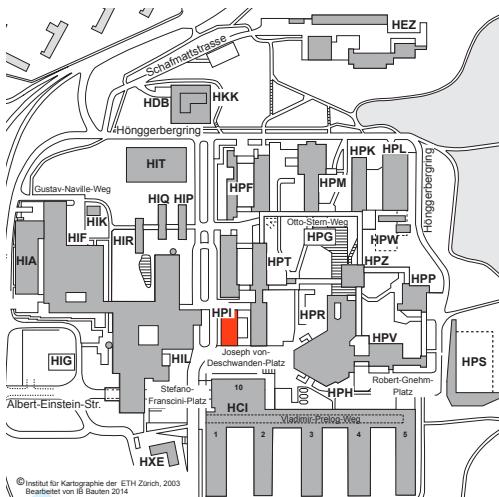


Figure 6. ETH Hoenggerberg campus map with the HPI building shaded red

252 3.2. Model development

253 In order to perform a co-simulation of the targeted buildings, initially a CitySim model of the
 254 campus was developed. Through the workflow automation process, this geometry was converted into
 255 an EnergyPlus input file as seen in Figure 7. The EnergyPlus input file was then used as an input to
 256 execute EnergyPlus solo and co-simulation processes for the purpose of simplified calibration, and
 257 then to understand the magnitude of the difference between these simulation scenarios.

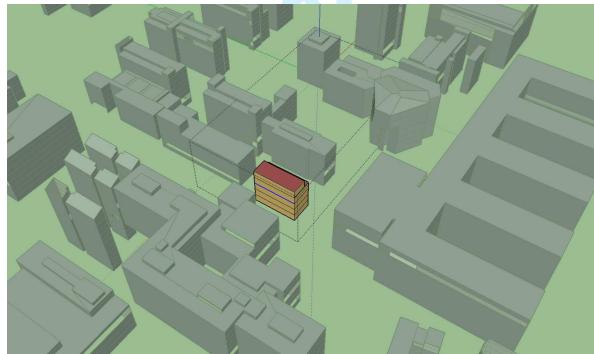


43 Figure 7. The HPI building EnergyPlus model extracted from the CitySim model. The HPI building is seen as the light
 44 and dark brown building in the center surrounded by gray masses that represent other buildings on campus. The graphic is
 45 illustrated with OpenStudio for Sketch-up.

258 3.3. Measured data collection and calibration


259 Energy data from the HPI building was collected and analyzed in the context of the simplified
 260 calibration procedures. The measured datasets were screened and aggregated into typical usage
 261 profiles to be used for the lighting, plug-load, and HVAC equipment availability schedules
 262 and power densities. Figure 8 illustrates the aggregation examples of electrical energy for the HPI
 263 building. This profile was created through a filtering and clustering process known as *DayFilter*
 264 (Miller, Nagy, and Schlueter 2015). Cluster 0 represents the typical energy profile for Sunday, while
 265 Cluster 1 dominates the Saturdays of the data set. Clusters 2 and 3 make up most of the weekdays
 266 of the data set with Cluster 3 being more common in non-summer months. These profiles are used to
 267 set the availability schedules as inputs into the EnergyPlus simulation to emulate the way occupants

1
2
3
4 268 inhabit the building and how the building management system (BMS) controls the lighting and
5 HVAC systems.
6
7
8
9
10
11
12
13
14
15
16
17

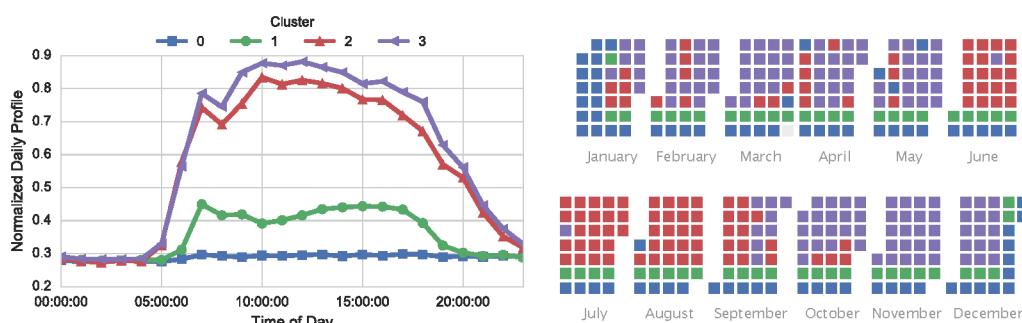

18 Figure 8. Typical measured data electricity profiles of (left) average daily electrical consumption for each cluster and (right)
19 color-coded calendar of which days fall within each cluster. The diagram on the right is each month of the year with each row
20 corresponding with a day of the week (starting with Monday) and each column corresponding to a week of the month.
21

22 The measured and simulated data from both the co-simulation and EnergyPlus solo simulation
23 were analyzed in order to understand how both the solo and co-simulations compare to real, mea-
24 sured data. The calibration process was undertaken through a series of steps such as including local
25 weather conditions for the simulation period and adding custom lighting schedules and power den-
26 sities extracted from the measured data. The models were calibrated to the summer season (May-
27 September) for cooling and the winter season (Jan-April and October to December) for heating.
28 Figure 9 illustrates a comparison of the measured data with the simulations after the tuning process.
29 The final calibrated EnergyPlus solo model had a normalized mean bias error (NMBE) of -9.36%
30 and a coefficient of variation of root mean square error (CVRMSE) of 21.7% for cooling and 5.02%
31 and 29.4% for heating. These metrics fall within the +/-10% NMBE and +/-30% CVRSME used in
32 this case study for calibration. A total of 37 calibration iterations were undertaken to modulate the
33 simulation results to within these criteria. The goal of calibration, in this case, is to just bring the
34 models to within a reasonable range of reality in order to bring more confidence to analysis of the
35 discrepancies between the solo and co-simulation scenarios.
36

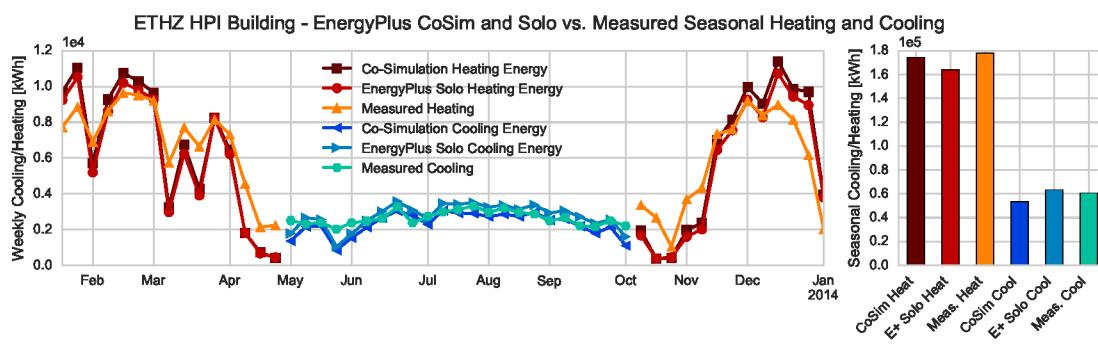

49 Figure 9. HPI Measured vs. Co-Simulation and EnergyPlus Solo for Heating and Cooling Seasons
50
51
52
53

284 3.4. EnergyPlus co-simulation results

54 For cooling, a discrepancy can be seen between ~~co-simulation~~ and solo EnergyPlus.
55 Co-simulation decreases the predicted cooling energy by 15.5%, as seen in Figure 10. Figure 11
56 illustrates the difference in predicted heating energy consumption across the test year. A consistent
57 offset exists across the time frame of days in January, the peak of the heating season. A more varied
58
59
60

discrepancy across the heating months is noticed resulting an overall increase of heating prediction of 6.5% due to co-simulation. The exchange of long-wave radiation for this particular site is substantial due to the proximity of surrounding buildings.

When comparing the solo and co-simulated models to the measured data, it is noticed that cooling energy is over-predicted by the solo simulation by 4%, while co-simulation under-predicted by 11.1%. This discrepancy is likely due to a loss in long-wave radiation in the co-simulation to the surrounding buildings, thus reducing the overall cooling load.

For heating energy, co-simulation was able to bring the predicted value to within 2% of the measured value for the year, an improvement as compared to the solo simulation, which was 8.5% less than the measured value. This situation is also likely due to the long-wave radiation loss to surrounding buildings, thus increasing the overall heating load.

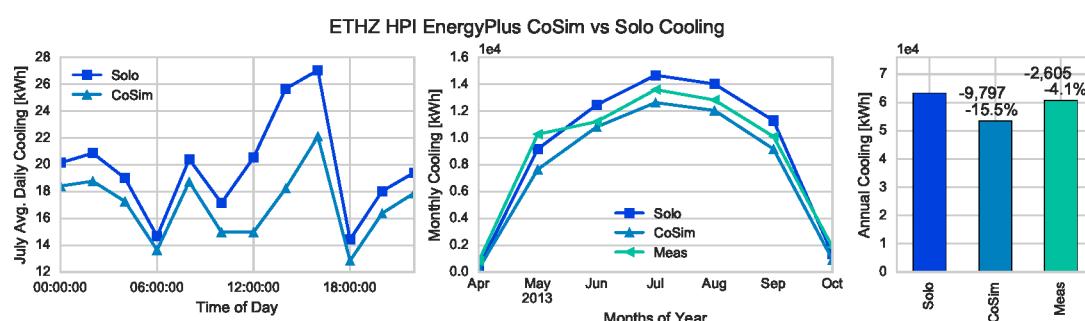


Figure 10. HPI Co-Simulation vs. EnergyPlus Solo for Cooling

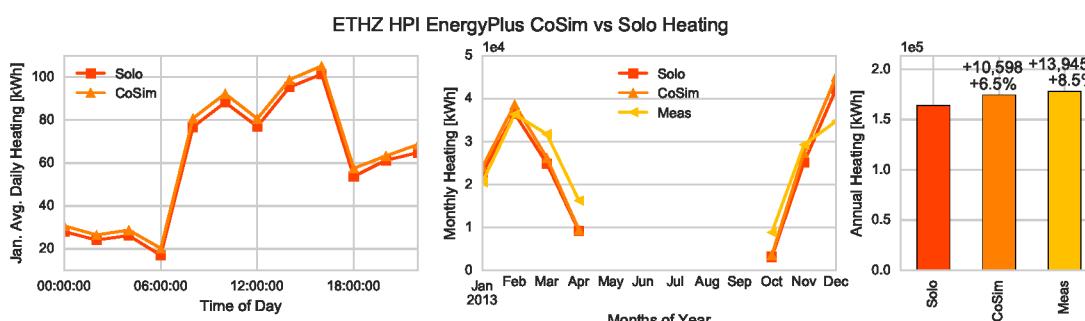


Figure 11. HPI Co-Simulation vs. EnergyPlus Solo for Heating

3.5. Campus case study 2: EPFL Quartier Nord

Quartier Nord is a whole new quarter of the École Polytechnique Fédérale de Lausanne (EPFL) campus located at its northwest corner. This complex includes a Convention Centre with an auditorium with a maximum capacity of 3000 (seated) people, housing for 516 students, retail and service areas and a hotel. As a public space, this ensemble is organized around the central plaza as seen in Figure 12. With a particularly strong visual and formal identity, the SwissTech Convention Centre (STCC) is clearly the key protagonist. Designed as a Minergie building, it includes modern energy conversion technologies to reduce its energy consumption (Beyeler, Beglinger, and Roder 2009). The focus of the co-simulation is realized on the STCC, simulated with the nearby buildings for housing, retail and service areas (Beyeler, Beglinger, and Roder 2009).

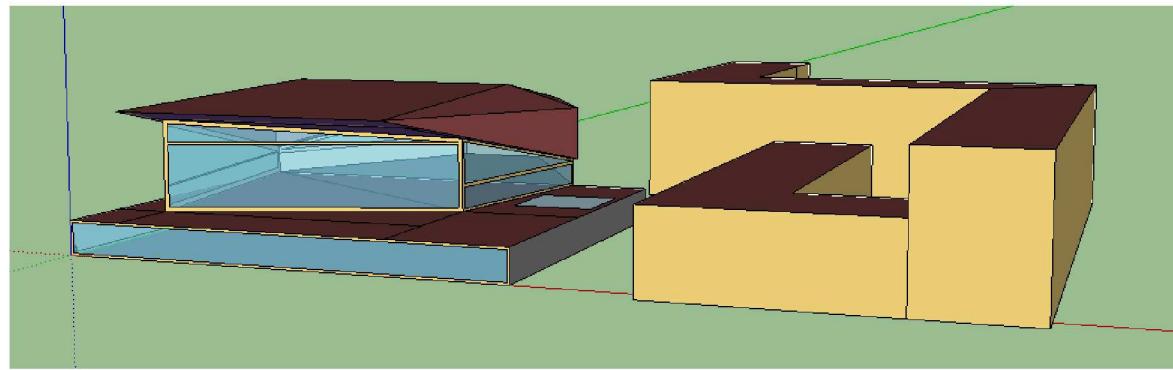


Figure 12. The Quartier Nord at EPFL in Lausanne

310 3.6. Model development

311 The information required in the simulation mainly comprises three parts: physical, geometrical and
312 operational data. The geometry information including the shape, dimension, structure and materials
313 was obtained from the Real Estate and Infrastructure Department of École Polytechnique Fédérale
314 de Lausanne (EPFL), which was responsible for carrying out the project from call to tender to
315 construction. However, since the documents provided were conflicting with what has been installed,
316 the task to realize a precise model of the buildings itself is rather tedious. Besides, it is even more
317 challenging to get the operational data (daily occupancy, lighting, and electrical equipment usage
318 level and ventilation rate) as the building has only recently been set in operation mode and as
319 engineers and technicians have been working on improving the controls. Therefore, due to unreliable
320 monitoring data, the calibration step of the model was not undertaken.

321
322 Considering the lack of detailed information about the building, a so-called detailed reference case
323 was modeled with EnergyPlus (Mauree et al. 2015) in which regulation standards applied in the
324 design phase from the local building code norms were used to complete the missing information. A
325 rendering of this model is seen in Figure 13.

Figure 13. The Quartier Nord modeled with OpenStudio for Sketchup². The STCC on the left is the main focus of the study and is represented by two thermal zones.

51
52 The corresponding CitySim model was created by exporting a DXF file from EnergyPlus for the
53 whole of Quartier Nord, and importing it into the Graphical User Interface of CitySim. Physical
54 characteristics of the building were added to complete the CitySim model. Finally, the same script
55 as described in Section 2 was used to export the model from CitySim to EnergyPlus, giving a
56 simplified EnergyPlus model.
57
58
59
60

3.7. Comparison of EnergyPlus and CitySim

Both the CitySim and EnergyPlus engines are utilized in this case study. The first comparison to observe is the differences between the two engines when focused on the STCC building. When simulated in isolation, the CitySim engine predicts a 28.6% increase in heating load and a 44.4% increase in cooling load as compared to EnergyPlus. This phenomenon is due to the differences in the way each of these engines calculates heating and cooling loads. CitySim has a much more simplified model of building occupants, lighting, and plug loads. CitySim also includes long-wave radiation exchange calculations that can greatly influence the heating and cooling load calculations as well. Use of the co-simulation process brings the engines to within 5.4%. Figure 14 illustrates these differences for cooling and Figure 15 for heating.

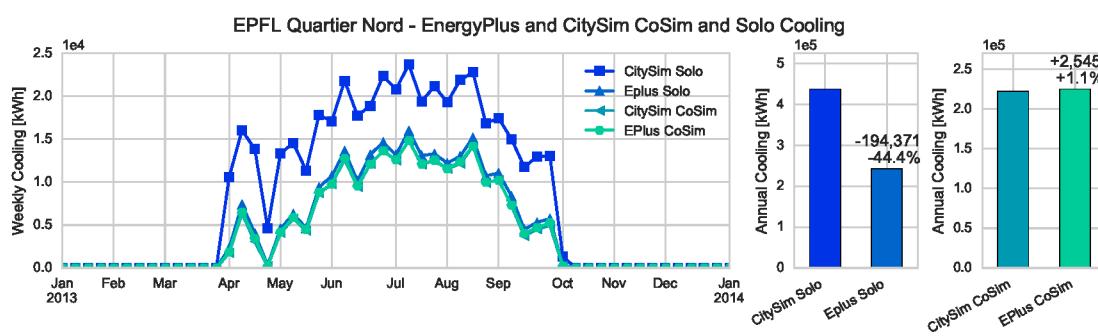


Figure 14. STCC CitySim vs. EnergyPlus Solo for Cooling

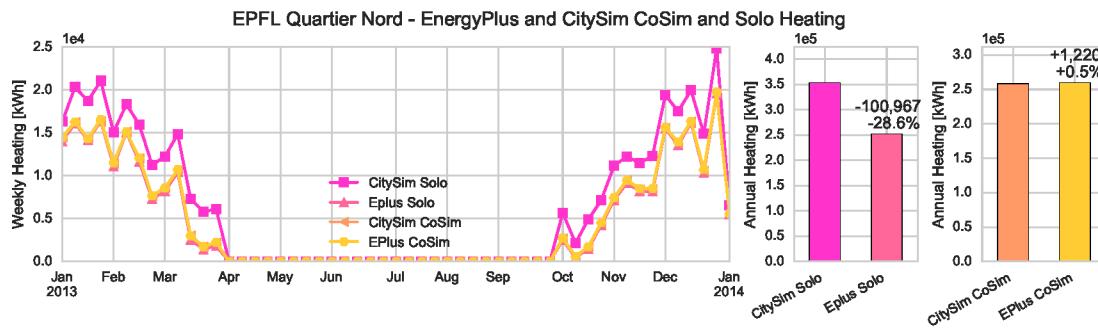


Figure 15. STCC CitySim vs. EnergyPlus Solo for Heating

3.8. EnergyPlus co-simulation results

The STCC building is also simulated within the solo and co-simulation environments. When focusing on the EnergyPlus results, a 7.5% decrease in cooling energy is observed, as seen in Figure 16. A 2.8% increase in heating energy is observed, as seen in Figure 17. These differences are less pronounced than the HPI and theoretical case studies due to the number and proximity of surrounding buildings is not as large. long-wave radiation exchange in this situation doesn't have as large of an impact on the heating and cooling calculations.

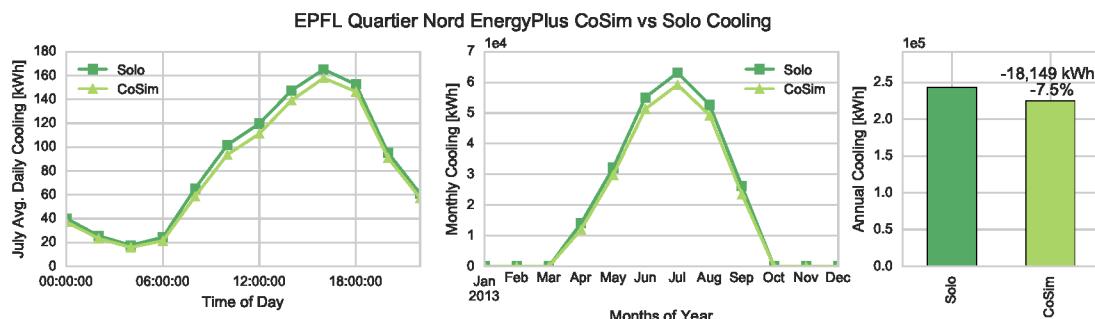


Figure 16. Quartier Nord EnergyPlus Co-Simulation vs. Solo for Cooling

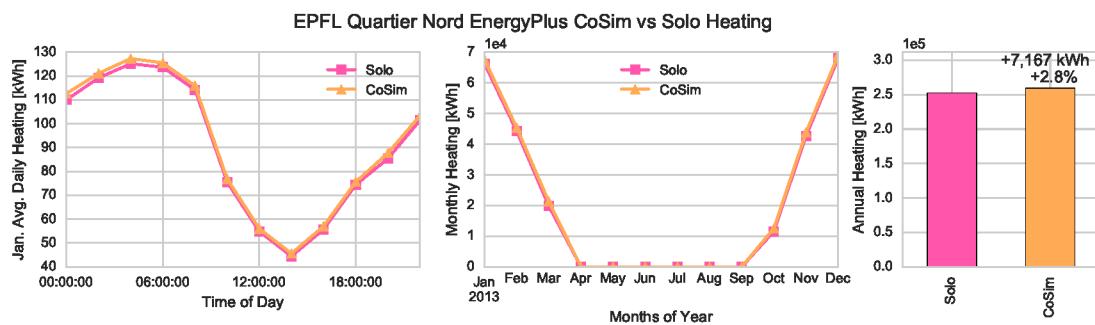


Figure 17. Quartier Nord EnergyPlus Co-Simulation vs. Solo for Heating

349 4. Discussion

350 Two campus case studies were presented in this paper to showcase a unique process of extracting
 351 model meta-data, conversion of those data into input files for two separate simulation engines, and
 352 the solo and co-simulation process of those engines ~~on two real-world case studies~~. The analysis of
 353 the results shows that for the first case study, co-simulation can achieve values closer to measured
 354 reality for heating, but not cooling. These results are unique to this case study and simply show that
 355 the co-simulation process may be helpful for heating only ~~in this particular instance~~. A limitation of
 356 this study is that we only analyze a single building against measured data in this context. In the
 357 second case study, significant discrepancies are found between the CitySim and EnergyPlus engines
 358 which were corrected using the co-simulation process.

359 One of the key insights in this work is that each of the engines is enabled to account for the various
 360 physical phenomenon in their simulation process that were previously impossible. For example,
 361 through co-simulation, EnergyPlus was able to utilize the long-wave radiation exchange capabilities
 362 of CitySim. The ability to couple and leverage the best aspects of multiple simulation engines can
 363 enhance the modeling of large-scale urban agglomerations.

364 Disadvantages of the co-simulation process are mainly centered upon the increase in computing
 365 time and power needed for the FMI to coordinate data exchange between the two simulation engines.
 366 After calibration, a comparison of the run-times of the co-simulation and solo EnergyPlus simulations
 367 show that the execution time for the solo EnergyPlus simulation was 1 minute and 49 seconds
 368 compared to 28 minutes and 10 seconds for the co-simulation.

369 5. Conclusion

370 This paper outlines the implementation of a fully automated ~~workflow~~work flow process that extracts
371 geometry information at the urban-scale, creates the necessary input information, executes each
372 engine with information exchange at each time step of targeted variables, and accumulates the
373 results of the analysis. The process has been implemented on simplified theoretical scenarios in the
374 past, and the key innovation with this work is in implementation on actual ~~case-study~~case-study
375 campuses and targeted buildings. The results illustrate that the differences between the ~~co-simulation~~
376 co-simulation and solo environments are within range of previous theoretical models. More reliable
377 results of the magnitude of differences between the simulation techniques can be extracted from
378 these real-world scenarios.

379 Future work in using co-simulation models for buildings and campuses would more intensively
380 utilize the model results in a practical implementation of retrofit scenarios or urban-scale energy
381 systems research. More implementations would also test the feasibility of using co-simulation for
382 ~~retrofit~~systems analysis, urban planning studies, and cooling and heating system optimization.

383 References

- 384 Allegrini, Jonas, Viktor Dorer, and Jan Carmeliet. 2012. "Influence of the urban microclimate in street
385 canyons on the energy demand for space cooling and heating of buildings." *Energy and Buildings* 55:
386 823–832.
- 387 Beyeler, Franz, Nick Beglinger, and Ursina Roder. 2009. "Minergie: The Swiss sustainable building standard." *Innovations* 4 (4): 241–244.
- 388 Bouyer, Julien, Christian Inard, and Marjorie Musy. 2011. "Microclimatic coupling as a solution to improve
389 building energy simulation in an urban context." *Energy and Buildings* 43 (7): 1549–1559.
- 390 Bueno, Bruno, Leslie K Norford, Julia Hidalgo, and Grégoire Pigeon. 2013. "The urban weather generator." *Journal of Building Performance Simulation* 6 (4): 269–281.
- 391 Bueno, Bruno, Leslie K Norford, Grégoire Pigeon, and Rex Britter. 2011. "Combining a Detailed Building
392 Energy Model with a Physically-Based Urban Canopy Model." *Boundary-Layer Meteorology* 140 (3):
393 471–489.
- 394 Dorer, Viktor, Jonas Allegrini, Kristina Orehounig, Peter Moonen, Govinda Upadhyay, Jérôme Kämpf, and
395 Jan Carmeliet. 2013. "Modelling the urban microclimate and its impact on the energy demand of buildings
396 and building clusters." In *Proceedings of BS2013: 13th Conference of International Building Performance
397 Simulation Association*, 3483–3489. Chambéry, France: International Building Performance Simulation
398 Association. Aug..
- 399 Evans, Ralph, Viktor Dorer, and Jan Carmeliet. 2014. "Simulating external longwave radiation exchange for
400 buildings." *Energy and Buildings* 75: 472–482.
- 401 Freire, Juliana, David Koop, Fernando Seabra Chirigati, and Cláudio T Silva. 2014. "Reproducibility using
402 VisTrails." *Implementing Reproducible Research* 33.
- 403 Haldi, Frédéric, and D Robinson. 2011. "The impact of occupants' behaviour on building energy demand." *Journal of Building Performance Simulation* 4 (4): 323–338.
- 404 Keirstead, James, Mark Jennings, and Aruna Sivakumar. 2012. "A review of urban energy system models:
405 Approaches, challenges and opportunities." *Renewable and Sustainable Energy Reviews* 16 (6): 3847–3866.
- 406 Lawrie, L K, Fred C Winkelmann, Fred Buhl, and Joe J Huang. 2001. "EnergyPlus: creating a new-generation
407 building energy simulation program." *Energy and Buildings* 33 (4): 319–331.
- 408 Martin, Miguel, Afshin Afshari, Peter R Armstrong, and Leslie K Norford. 2015. "Estimation of urban
409 temperature and humidity using a lumped parameter model coupled with an EnergyPlus model." *Energy
410 and Buildings* 96: 221–235.
- 411 Mauree, D, Y Yao, J KAEMPF, and J L Scartezzini. 2015. "Evaluation and Optimization of Renewable
412 Energy in the "Quartier Nord": Objective Zero-Power." *CISBAT 2015*.
- 413 Miller, Clayton, Zoltán Nagy, and Arno Schlueter. 2015. "Automated daily pattern fil-
414 tering of measured building performance data." *Automation in Construction* 49: 1–17.
415 http://www.sciencedirect.com/science/article/pii/S0926580514002015.
- 416 Miller, Clayton, and Chandra Sekhar. 2010. "Modeling of the Single Coil, Twin Fan Air-Conditioning System

- 1
2
3
4 in EnergyPlus." In *SimBuild 2010: Fourth National Conference of IBPSA-USA*, 201–206. New York, NY.
5 Aug..
6 Miller, Clayton, Daren Thomas, Silvia Domingo Irigoyen, Christian Hersberger, Zoltan Nagy, Dino Rossi, and
7 Arno Schlueter. 2014. "BIM-extracted EnergyPlus model calibration for retrofit analysis of a historically
8 listed building in Switzerland." In *In Proceedings of SimBuild 2014: 2014 ASHRAE/IBPSA-USA Building
9 Simulation Conference*, Atlanta, GA, USA. Sep..
10 Miller, Clayton, Daren Thomas, Jérôme Kämpf, and Arno Schlueter. 2015. "Long Wave Radiation Exchange
11 for Urban Scale Modeling within a Co-Simulation Environment." In *CISBAT*, Lausanne, Switzerland. Sep..
12 Nouidui, Thierry, Michael Wetter, and Wangda Zuo. 2014. "Functional mock-up unit for co-simulation
13 import in EnergyPlus." *Journal of Building Performance Simulation* 7 (3): 192–202.
14 Nouidui, Thierry Stephane, and Michael Wetter. 2014. "Tool coupling for the design and operation of
15 building energy and control systems based on the Functional Mock-up Interface standard." In *the 10th
16 International Modelica Conference, March 10-12, 2014, Lund, Sweden*, 311–320. Linköping University
17 Electronic Press. Mar..
18 Robinson, D, Frédéric Haldi, J Kämpf, Philippe Leroux, Diane Perez, Adil Rasheed, and Urs Wilke. 2009.
19 "CitySim: Comprehensive micro-simulation of resource flows for sustainable urban planning." In *Proceed-
20 ings of BS2009: 11th International Building Performance Simulation Association Conference*, Glasgow,
21 Scotland. Jul..
22 Robinson, D, and Andrew Stone. 2004. "Solar radiation modelling in the urban context." *Solar Energy* 77
23 (3): 295–309.
24 Samuelson, Holly W, Arash Ghorayshi, and Christoph F Reinhart. 2015. "Analysis of a simplified calibration
25 procedure for 18 design-phase building energy models." *Journal of Building Performance Simulation* 1–13.
26 Schlueter, Arno, and Frank Thesseling. 2009. "Building information model based energy/exergy performance
27 assessment in early design stages." *Automation in Construction* 18 (2): 153–163.
28 Srebric, Jelena, Mohammad Heidarinejad, and Jiying Liu. 2015. "Building neighborhood emerging properties
29 and their impacts on multi-scale modeling of building energy and airflows." *Building and Environment* 91
30 (C): 246–262.
31 Thomas, D, C Miller, J Kämpf, and Arno Schlueter. 2014. "Multiscale co-simulation of EnergyPlus and
32 CitySim models derived from a building information model." *BauSIM 2014: Fifth German-Austrian
33 IBPSA Conference*.
34 Thomas, Daren, and Arno Schlueter. 2012. "Customizable continuous building simulation using the de-
35 sign performance toolkit and Kepler scientific workflows." In *Proceedings of ECPPM 2012: eWork and
36 eBusiness in Architecture, Engineering and Construction*, 17–22. Reykjavik, Iceland: CRC Press.
37 Trčka, M, Jan Hensen, and M Wetter. 2010. "Co-simulation for performance prediction of integrated building
38 and HVAC systems—An analysis of solution characteristics using a two-body system." *Simulation Modelling
39 Practice and Theory* 18: 957–970.
40 United Nations. 2014. "World Urbanization Prospects: 2014 Update." 1–32.
41 United States Department of Energy (DOE). 2015. "EnergyPlus Engineering Reference Version 8.2: The
42 Reference to EnergyPlus Calculations." *The Reference to EnergyPlus Calculations*.
43 Wetter, Michael. 2011. "Co-simulation of building energy and control systems with the Building Controls
44 Virtual Test Bed." *Journal of Building Performance Simulation* 4 (3): 185–203.
45 Yang, Xiaoshan, Lihua Zhao, Michael Bruse, and Qinglin Meng. 2012. "An integrated simulation method
46 for building energy performance assessment in urban environments." *Energy and Buildings* 54: 243–251.
47 Zhang, Rui, Khee Poh Lam, Shi-chune Yao, and Yongjie Zhang. 2013. "Coupled EnergyPlus and com-
48 putational fluid dynamics simulation for natural ventilation." *Building and Environment* 68: 100–113.
49 http://www.sciencedirect.com/science/article/pii/S0360132313001029.
50
51
52
53
54
55
56
57
58
59
60

Review Comment Responses to Journal of Building Performance Simulation Submission

Paper Title: Urban and building multiscale co-simulation: case study implementations on two university campuses

June 9, 2017

1 Review 1

1.1 General comments from reviewer

This is a valuable paper that pinpoints the differences in estimated energy consumption between simulations of solo building and buildings modeled in an urban context. The paper relies on an emerging simulation workflow and extends its application to two real-building scenarios. Work by the authors and others is amply referenced; together the text and the references provide excellent explanation of the linkages between building and city simulations.

The paper can be improved in a large number of small ways, as indicated in specific comments. In particular, the central figures. 10, 11, 14 and 15 and accompanying text need attention to improve clarity and correct inconsistencies between text and images. The suggested improvements should be straightforward.

1.2 Response to general comments

Thank you for the comments on the importance and value of the paper and we welcome the comments and feedback to be covered in this review.

1.3 Revision items

- a) 1. p. 1. Abstract. The abstract quantifies percentage impacts of co-simulation of heating and cooling consumption but does not establish a reference: percentage change relative to what base case? The abstract promises a discussion of strengths and weaknesses of the developed process but the paper does not include a discussion section and the conclusion does not summarize strengths and weaknesses.

The abstract has been updated to reflect that the baseline of these comparison metrics are the EnergyPlus solo simulations of each of the engines.

A discussion section has been added to address the strengths and weaknesses mentioned in the abstract – advantages are related to the enhancement of each of the engines and disadvantages related to the increase in computing power needed to undertake the process.

- b) 2. p. 1. Introduction. Lines 3-5 state that 2.5 billion people are expected to join cities throughout the world. What is the associated time frame i.e., by what year?

The United Nations World Urbanization prospectus projected that figure by 2050 – this fact has been updated in the introduction

- c) 3. p. 1, line 13. Please consider a lower-case S for solver.

Lower-case "S" has been used.

- d) 4. p. 1, lines 21-23. The text states that a single equation approximates the total mass flow rate required to meet the sensible and latent loads of each building. In this reviewer's experience, there are separate mass-conservation equations for air and water vapor as well as an energy-balance equation. Perhaps the authors could succinctly amplify their statement.

This observation is correct – "The heating, ventilation, and air-conditioning (HVAC) systems are modeled using a single equation set of equations that approximates the total mass flow rate required to meet the sensible and latent loads of each building as a whole." is a mis-statement. This sentence has been changed to a "set of equations"

- e) 5. p. 2, line 40. Please replace phenomenon with the plural phenomena.

Correction made.

- f) 6. p. 2, line 60. The text appears to limit the second case study to CitySim simulation output but the abstract and, later, line 224, include analysis of EnergyPlus output.

The reference to the EnergyPlus simulation for this case study was removed.

- g) 7. p. 3. Figure 1 includes acronyms not defined in the text or caption.

Explanation of the acronyms is now included in the text.

h) 8. p. 3, lines 62-68. For grammatical consistency, the achievements should all start with verbs (automate, co-simulate, implement) or nouns (automation, co-simulation, implementation). The third achievement should specify what simulation model is being calibrated.

Points were revised to all be verbs and the second scenario was indicated as the model being calibrated.

i) 9. p. 3, lines 88-89. Please note that Bueno et al. 2013 generated urban weather with a nodal model and did not directly couple EnergyPlus to a nodal representation of the urban canopy layer. The accuracy of this approach depends on how faithfully users and the model represent the buildings that will later be simulated in detail in EnergyPlus with the modified weather file.

It was noted that this study doesn't directly couple the simulation engines, but only connects them through a modified weather file.

j) 10. p. 4, line 97. Please consider earliest design possible and it can be used or earliest design possible that can be used.

Change made to the latter suggestion

k) 11. p. 4, Figure 2. The test explains the paths associated with the dotted vertical lines and solid lines. Presumably the use of the latter is intended to show the co-simulation path but the use of the dashed line in the related Figure 3 is not clear. Further, Figure 3 is quite small; at minimum, the CItySIm block with its italicized vertical text, fmilib, could be modestly larger.

It is correct that the dotted line is meant to show the co-simulation path in Figure 2. Therefore the dotted lines have been removed from Figure 3 for consistency sake and the text has been modified to be more readable.

l) 12. p. 5, lines 145-154. The text states that several key urban-scale weather variables are send to EnergyPlus from CitySim but does not succinctly state how CItySIm calculates these variables. The text might indicate why the authors consider the CitySim occupancy model to be more robust. Finally, as a minor point of English grammar, please consider removing the comma after urban environments in line 150 or replacing that with which.

The next now explains how CitySim has simplified micro-climate airflow model that can predict local climatic conditions around each building. It also further describes how CitySim shares its calculated occupancy schedules as it can use a deterministic or stochastic occupant behavior model, whereas EnergyPlus models are solely a deterministic models. Grammar changes have been noted.

- 1
2
3
4
5
6
7
8
9
10
11 m) 13. p. 6. The text on this page (or, apparently, any other) does not refer to Tables 1 and 2.

12
13
14
15 References for Table 1 and 2 are now included in the text pertaining to those variables.

- 16
17 n) 14. p. 7, line 178. Equation 2 lacks a view factor, as is included in Evins et al., Equation 18
19 9 and in the EnergyPlus Engineering Reference.

20
21
22 That is correct – a view factor has been added to Equation 2.

- 23
24 o) 15. p. 7, lines 195-196. The sentence beginning with An automated workflow lacks a 25
26 verb. Please consider replacing to tie with ties.

27
28 Correction made.

- 29
30 p) 16. p. 9, line 215. Please consider replacing compare with quantify, given that the 31
32 sentence does not establish the basis of comparison (compare what with what)).

33
34 Correction made.

- 35
36 q) 17. p. 10. Section 3.2. The text states that the campus geometry was converted into an 37
38 EnergyPlus input file as seen in Figure 7. However, this figure does not clearly indicate 39
40 what geometry was included in the IDF and the caption states that the HPI building 41
42 was modeled in Open Studio.

43
44
45 The caption for Figure 7 has been updated to clarify the situation in which the HPI 46
47 building was extracted from the CiytSim model, however it is illustrated using Open- 48
49 Studio due to that software's rendering capabilities. The caption also clearly states 50
51 which building is being simulated.

- 52
53 r) 18. p. 10, lines 246-248. Please consider replacing are screened with were screened and 54
55 removing the hyphen after plug.

1
2
3
4 Correction made.
5
6

- 7 s) 19. p. 10, section 3.3. Either the text (lines 245-252) or the caption for Figure 8 should
8 say a bit more (a sentence would be adequate) about the clustering process. For example,
9 the caption could note that the rows for each month refer to days of the week (if this is
10 true) and could name (describe) each of the clusters (i.e., clusters that nominally align
11 with weekdays, Saturdays and Sundays/school holidays).
12
13

14 The caption for Figure 8 was revised significantly to describe what the reader is seeing
15 in the typical average profiles on the left and the days corresponding with each cluster
16 on the right. Text was added in the preceding paragraphs that briefly describe the
17 significance of each of the clusters.
18
19

- 20 t) 20. p. 10., lines 253-259. Please rewrite the sentence to avoid compared to create
21 scenario for comparison. What is meant by measurements were deemed most accurate
22 during the appropriate seasons?
23
24

25 The first sentence of that paragraph was rewritten to avoid the use of "comared" and
26 "create a scenario for comparison". The sentence pertaining to the seasonal nature of
27 the data analysis was removed as it didn't add any information to the fact that only
28 heating and cooling seasonal data was used for each calibration.
29
30
31

- 32 u) 21. p. 11, lines 261-262. The NMBe for heating and cooling are exactly the same and
33 the NMBe for cooling is not in accord with the bar charts in Figure 9.
34
35

36 The NMBe for heating is actually 5.02, thus the repetition of the -9.36 value is a type.
37 This has been corrected in the text.
38
39

- 40 v) 22. p. 11, section 3.4. Please see the following comments for the two associated figures.
41 In addition, the presentation of results from the study of Miller et al. is not clear. Does
42 the Miller study compare solo and co-simulation results? If so, which results are the
43 reference for the percentage changes? Should the reader conclude that the differences
44 between Miller and this study are comparable (which is comforting) or that deviations
45 are significant, in which case they should be explained.
46
47

48 The Miller study does compare solo and co-simulation results, but in an entirely differ-
49 ent context. It is difficult to compare the difference between the two sets of simulations
50 as the buildings tested are different, thus, the discrepancies between co-simulation and
51 solo could be wildly different or very similar either one. Due to this, reference to this
52 study and its comparison to the results of the campus co-simulation have been removed.
53
54
55
56
57
58
59
60

w) 24. p. 12, Figure 11. The text states Figure 11 shows differences in predicted heating consumption and notes there is a consistent offset across days in January. Figure 11 shows hourly variations for presumably averaged days and single points for each month; in short, variations across days cannot be discerned. Are these variations important to the comparison? The order of the bars matches Figure 10 but disagrees with Figure 9. The text compares co-simulation with measurement (using the latter as the reference, which seems appropriate) and shows 2% annual difference but the numbers over the bars appear to compare co-simulation and measurement with solo simulation and show 6.5% difference. As in Figure 11, the numbers (not percentages) over the bars are not explained.

For Figure 11, we believe the variations are important to show at the daily, monthly and annual levels because even if they have small offsets and little variation at those scales, that information itself is insightful. For example in the monthly chart, March and April have a larger offset than Jan and Feb for heating. The order of the bars in all of the charts has been made consistent. The measured data has been made the baseline for the percentages, thus making it more clear how the solo and co-simulation perform as compared to the measured data.

x) 25. p. 12, section 3.5. The text should include a reference to the Minergie standard and the caption or image in Figure 12 should identify the STCC building.

Minergie Standard added.

y) 26. p. 13, line 308. Please explain SIA and/or provide an appropriate reference.

The term SIA was replaced with local energy code standard.

z) 27. p. 13, lines 310-313. The text states that the CItySIm model was created from a DXF file from EnergyPlus. Was this export used solely for the STCC building or was the remainder of the Quartier Nord as shown in Figure 13 designed in Open Studio?

No, the export from EnergyPlus included both buildings – this fact has been clarified in the text.

) 28. P. 13, lines 316-322. The reference in the text for percentage changes is the Energy-Plus simulation but Figures 14 and 15 place the percentages (with opposite sign) about the solo simulations. The text states that discrepancies between solo and co-simulations are due to differences in calculation of heating and cooling loads. Please elaborate.

An explanation of how the different engines calculate heating and cooling loads was added.

-) 29. P. 14, section 3.8. The text states that the Quartier Nord building was also simulated. This is a bit confusing because Quartier Nord previously referred to the complex. Does the building refer to the building on the right in Figures 12 and 13 i.e., everything except the STCC? The text also states that differences between solo and co-simulations are small because the surroundings are sparse. If this is the case, would one expect better agreement between solo and co-simulations for the neighboring STCC? Also, please consider replacing due to with because in line 327.

It is not the 'Quartier Nord Building' that is being simulated – it is the STCC. The text has been fixed to clarify this confusion.

-) 30. p. 15. Conclusion. There is no summary of strengths and weakness of the process presented in the paper and the future work is limited only to more practical implementation. Is there nothing to improve?

A discussion section was added with advantages and disadvantages as well as future research directions.

-) 31. p. 16. The first and last references, by Miller et al. and Zhang et al., lack volume and page numbers. Throughout the reference section, the authors should consider consistency in use of initials versus given names.

References are updated based on the feedback.

2 Review 2

2.1 General comments from reviewer

This is a nice study in a series of studies that use institutional buildings for demonstration of different co-simulation strategies for modeling of urban environments and building energy consumption. Here are several review comments that are mostly focused on the fact that actual execution of co-simulation was not discussed in details; the study mostly presented the co-simulation workflow and results.

2.2 Response to general comments

Thank you for taking time to perform this review and for the in-depth comments related to discussing the execution of the actual co-simulation.

2.3 Revision items

-) (1) At the top of page 2, the paper describes advantages of EnergyPlus. However, it is not clear why this simulation engine is used when several others could perform the presented analyses. It is important to know what technical aspects of the co-simulation procedure specifically drove the authors to use EnergyPlus.

It wasn't necessarily the technical aspects of EnergyPlus that were the basis for choosing it in this study. The more relevant factor for us was familiarity and knowledge of using the engine and its ability to use FMI to interface with another program. Content has been added to emphasize these points.

-) (2) The actual co-simulation, which is the main contribution of this study is not well discussed. Specifically, the paper needs to describe: (a) frequency of data exchanges, (b) whether any data averaging took place, (c) whether the numerical scheme is stable and grid independent, (d) what is the time step for each engine?, (e) what is the simulation time?, (f) are these annual, monthly, or daily simulations?, (g) what convergence criterion was used?

Content was added in this section which touches upon each of these points.

-) (3) Figure 3, Section 2.3, and Figure 4 are the same or similar to authors previous publication. A citation would be sufficient.

We chose to replicate these figures in this publication to clarify the bigger picture of the scope of the study. We believe these figures help to put the current study in context in a better way.

-) (4) In Section 3.3, the paper needs many more details on the calibration process, including the specification of all calibration steps undertaken, rather than just cursory listing some of the steps.

A total of 37 calibration steps were undertaken to tune the model – it would be extremely tedious and lengthy to specify each of these steps and their motivations in the calibration process, especially since the goal is simplified calibration. Content has been added about the number of iteration steps and their impact on the calibration process.

-) (5) Please, discuss results in Figure 10. What are the numerical or physical reasons for the solo case to underperform?

Figure 10-17 have content added to help further explain discrepancies and significant content has been added in the new Discussion section into why these discrepancies are relevant.

-) (6) The conclusions need content on co-simulation execution challenges and how they were overcome during the course of that this study.

The new Discussion section now also details the challenges, advantages and disadvantages of the study.

To appear in the *Journal of Building Performance Simulation*
Vol. 00, No. 00, Month 20XX, 1–17

Research Article

Urban and building multiscale co-simulation: case study implementations on two university campuses

(Received 00 Month 20XX; final version received 00 Month 20XX)

The co-simulation of both urban and building-level models leverages the advantages of both platforms. It better accounts for the localized effects of surrounding buildings, geography and climate conditions while maintaining high-fidelity building systems representation. This paper describes the co-simulation process of the building and urban scale models of two university campuses in Switzerland using EnergyPlus and CitySim. In the first case study, on-site measured performance data is compared to the co-simulation results. The second case study examines the results of the two engines. The results show that coupling of EnergyPlus with CitySim resulted in a -15.5% and -7.5% impact on cooling consumption and a +6.5% and +4.8% impact on heating use as compared to solo simulations. The co-simulation process was able to better model realistic conditions for heating, but not cooling in one case study. It was able to substantially reduce the discrepancies in prediction between the engines in the other study.

Keywords: Building-scale simulation, Calibrated energy models, CitySim, Co-simulation, EnergyPlus, Urban-scale simulation

1. Introduction

Urban scale building performance simulation is a process that empowers the analysis and optimization of cities. Urban populations are growing around the world at an unprecedented rate. A transition from urban to rural is underway and 2.5 billion people are expected to join cities throughout the world by the year 2050 (United Nations 2014). Expansions of entire districts and even cities is not an uncommon phenomenon, especially in East Asia and Africa. Urban scale modeling is in the midst of an intense focus on the research community with six key areas of practice: technology design, building design, urban climate, systems design, policy assessment, and land use and transportation (Keirstead, Jennings, and Sivakumar 2012). The ability to simulate the interaction between large collections of buildings enables the development and testing of optimization and planning scenarios for this new development (Dorer et al. 2013).

The CitySim simulation engine is an example of such a program designed and optimized for urban-scale simulation. CitySim is an urban performance simulation engine that comprises a solver module as well as a graphical user interface. It focuses on the energy flows of multiple simplified building models and their interdependent relationship with their urban climate (Robinson et al. 2009). CitySim includes building thermal, urban radiation, occupant behavior, and plant/equipment models integrated as a single simulation engine. CitySim simulates multiple buildings up to city scale using simplified models to achieve a good compromise between modeling accuracy, computational overheads, and data availability. Each building's thermal behavior is based on an electrical analogy using a two node resistor-capacitor network. The internal lighting, people, and miscellaneous loads are modeled using a simplified occupancy-based approximation. The heating, ventilation, and air-conditioning (HVAC) systems are modeled using a set of equations that approximates the total mass flow rate required to meet the sensible and latent loads of each building as a whole. Each of these simplifying approximations empowers the urban-scale simulation to have reasonable execution times on the number of buildings being simulated.

Building performance simulation is a mature domain of research relative to urban scale efforts.

1
2
3
4 27 The use of whole building simulation engines originated in the 1960's with the US government's
5 development of the BLAST and DOE-2 hourly energy simulation programs (Lawrie et al. 2001).
6 In 1996, development on a new simulation engine, EnergyPlus, began in order to combine the ad-
7 vantages of previous efforts in a single, modular program. EnergyPlus, as a result, has become a
8 popular choice in detailed whole-building performance simulation due to the breadth of mechanical,
9 renewable, and electrical systems that can be modeled. EnergyPlus specifically excels in its ability
10 to model unique mechanical system types such as decoupled centralized cooling (Miller and Sekhar
11 2010). Additionally, EnergyPlus is designed to provide a high resolution in which internal loads and
12 natural ventilation technologies can be modeled in detail at the building level. EnergyPlus is also
13 extensively used within the research community and has new features that enable it to couple with
14 other simulation programs.
15

16 38 Both building and urban-scale simulation domains have rightfully chosen boundary conditions that
17 reflect their key goals while seeking to minimize the input parameters necessary and run-times of the
18 engines themselves. This focus results in certain deficiencies concerning modeling various phenomena.
19 For example, urban scale simulation highly simplifies the building systems and internal load models,
20 thus making a retrofit analysis at the systems level difficult. And whole building simulation in
21 EnergyPlus neglects many of the various contextual consideration of the urban environment such
22 as long-wave radiation exchange with adjacent surfaces and localized urban weather effects (Lawrie
23 et al. 2001).

24 46 The current effort seeks to couple building and urban scale simulation to address the deficiencies
25 of the individual engines. The research in this paper is part of a larger coupling effort in which
26 various engines are connected and co-simulated to create a more comprehensive analysis of the
27 urban scale (Dorer et al. 2013; Allegrini, Dorer, and Carmeliet 2012). The target is the computational
28 interface between the building energy model, using EnergyPlus, and the urban energy model using
29 CitySim. An overview of the larger scope is shown in Figure 1 and the context of the coupling task
30 appears as the interface between the City Energy Simulation (CES) model and the Building Energy
31 Simulation (BES) model. The scales and models contained in the urban environment context include
32 the Urban-Scale Model (UC Model), the Urban Microclimate (UMC) model using OpenFoam, and
33 the Meteorological Meso-scale (MM model) using Climate Limited-Area Modeling (COSMO-CLM).
34 On the database side, Revit, Global Information Systems (GIS), and building information systems
35 (BIS) are utilized.
36

37 58 The coupling and co-simulation process is implemented on two case studies in Switzerland. The
38 first case study is the ETH Zürich Hoenggerberg campus in Zürich, Switzerland. It was modeled in
39 the CitySim simulation engine and co-simulated using work-flow automation. The target of this case
40 study is to evaluate the differences between the coupled and solo EnergyPlus simulations based on
41 the variables exchanged. This scenario includes the use of measured data for heating and cooling
42 within their respective seasons to compare to the simulation results. The second case study is the
43 EPFL campus in Lausanne, Switzerland. The objective of this scenario is to evaluate the differences
44 between coupled and uncoupled versions of the CitySim simulation engine.
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

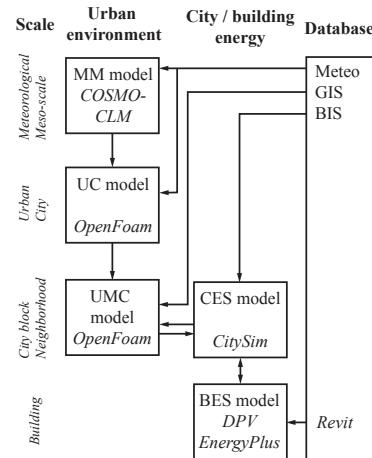


Figure 1. EnergyPlus and CitySim coupling are part of the wider context. Each block in the diagram represents an environment, with the tool/engine name in italics ((Thomas et al. 2014), adapted from (Dorer et al. 2013))

This paper describes the achievement of several objectives. The first is to automate the process of simultaneous meta-data extraction from a Building Information Model (BIM) for the creation of both building and urban-scale performance models for a real-world campus of buildings. Next, we seek to co-simulate the urban and building scale models through concurrent information exchange. Finally, we implement a simplified calibration procedure for the first scenario by reconciling the co-simulation output results for a target building using measured energy performance data from the campus energy information system (EIS)

The first two objectives have been demonstrated in a simplified context in previous literature (Thomas and Schlueter 2012; Miller et al. 2015). The innovation in the current publication is an extension of this research through the modeling and co-simulation of real-world case studies. With respect to the third contribution, to the best of the authors' knowledge, no previous study has compared the results of a building and urban-scale co-simulation procedure to measured data from a real-world campus.


1.1. Previous multi-scale coupling studies

Previous attempts of information exchange have been implemented between simulation engines at various scales. Much of the initial co-simulation work in the literature is done at the subsystem and building-scale. Previous studies have analyzed strong and loose coupling of engines at this scale (Wetter 2011; Trčka, Hensen, and Wetter 2010). Coupling of building-scale simulation with urban-scale computational fluid dynamics (CFD) is attempted for modeling natural ventilation (Zhang et al. 2013) and to improve energy prediction (Bouyer, Inard, and Musy 2011). A comprehensive review of energy and airflow modeling of neighborhoods and university campuses was published that includes strategic aspects of coupling different types of models (Srebric, Heidarnejad, and Liu 2015). EnergyPlus has been coupled with ENVI-met, a micro-climate computational fluid dynamics (CFD) program (Yang et al. 2012). It was also coupled with simplified lumped parameter models to facilitate comparison with measured sensor data (Martin et al. 2015). While not directly coupled, EnergyPlus and the TEP Urban Canopy Model program were connected through a modified weather file to quantify the influences of urban localized weather effects on whole building simulation (Bueno et al. 2011) and urban weather generation (Bueno et al. 2013).

1
2
3
4 **2. Methodology**
5
6 **2.1. Coupling process**

7
8 The coupling process of a simplified single zone model and contextual surrounding buildings is
9 described in previous studies (Thomas et al. 2014), which forms the basis for the methodology
10 in the current effort. This process utilizes the Design Performance Viewer (DPV) and associated
11 workflow. The DPV is a tool written to extract and simulate an EnergyPlus input data file (IDF)
12 from an Autodesk™ Revit™ BIM (Schlueter and Thesseling 2009). The central philosophy behind
13 the tool is the rapid simulation of the building information model from the earliest design possible
14 that can be used throughout the life-cycle of the building including retrofit analysis (Miller et al.
15 2014). This process is achieved by augmenting the information in the BIM with default values and
16 abstracting information not relevant for energy simulation. The tool already has a simplified notion
17 of surrounding buildings, which are modeled in the BIM as simple mass objects without further
18 information and are exported as shading surfaces to EnergyPlus. This functionality is used for
19 creating the CitySim mass scene and leads to a crude model of the urban context of the building.
20 The current DPV philosophy of allowing the designer to iterate rapidly on early design decisions
21 based on feedback about the performance of the design remains. This approach includes streamlining
22 the process where running a simulation requires no effort from the designer due to automatic creation
23 of input files, execution, and analysis of the results.

24 The coupling process of EnergyPlus and CitySim is shown in Figure 2. The solid lines depict the
25 co-simulation of EnergyPlus and CitySim, and the dotted lines illustrate solo simulations of either
26 EnergyPlus or CitySim. First, the DPV is used to extract an EnergyPlus simulation model from the
27 BIM. The DPV utilizes the Revit API to extract geometrical information about the building and
28 the physical properties of walls, windows, doors, roofs, and floors. This information is encoded in
29 the BIM model as wall types, roof types, floor types as well as window and door families. Wherever
30 possible, the tool uses the layering and materials of the construction types, enhancing them with
31 physical attributes relevant to EnergyPlus. Where not defined, it assumes default values.

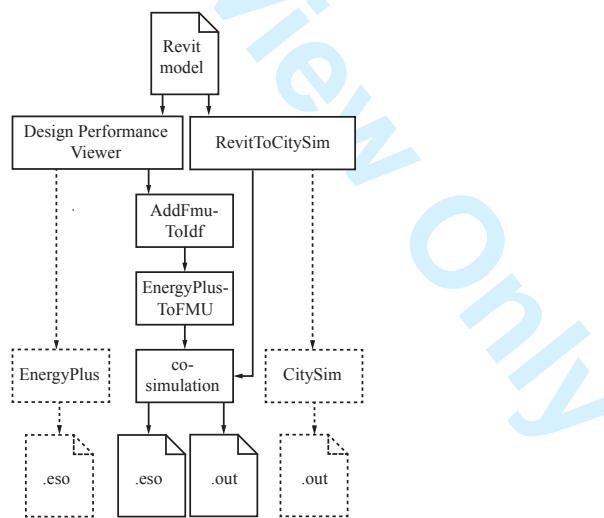

51 Figure 2. Overview diagram of the coupling process including tools and outputs (Thomas et al. 2014)


52
53 Next, geometry is created to be used in both the CitySim and EnergyPlus models as buildings
54 and surfaces surrounding the building targeted in the IDF. This feature of the DPV is used for
55 including shading surfaces in the EnergyPlus simulation model: it uses so-called *mass objects* in the
56 BIM model as surrounding buildings. The DPV model views these buildings as a series of shading
57 surfaces. A transformation is added to the DPV model that produces an input file for the CitySim

1
2
3
4 125 solver. This file uses an XML format describing the buildings in a scene for simulation, including
5 their construction types, geometry, and systems for heating and cooling. The main BIM is extracted
6 to the CitySim scene as one of the buildings to be simulated, with the properties of the construction
7 types matching those in the DPV model. The glazing ratio is calculated based on the window and
8 wall areas of the DPV model. Shading surfaces are grouped into buildings based on the mass object
9 from which they were extracted. These adjacent buildings use default construction properties for
10 walls and roofs, and we assign them a default glazing ratio. These defaults can be overridden by
11 custom properties applied to the mass objects in the BIM much in the same way as the model
12 elements of the main building are enriched with DPV information.
13

14 As of version 8.1.0, EnergyPlus supports exporting a simulation model as a Functional Mock-up
15 Unit (FMU) (Nouidui, Wetter, and Zuo 2014). This feature introduces new IDF objects to specify
16 the interface such an FMU exposes. These objects define which output variables are exported by
17 the FMU and which variables are imported. The FMU export functionality is closely linked to the
18 Energy Management System (EMS) of EnergyPlus. Co-simulation exchange variables either mimic
19 an EnergyPlus schedule, an EMS variable or drive an EMS actuator. Since the model used by
20 CitySim to simulate a building is more abstract than the model used by EnergyPlus, the EMS is
21 used to aggregate certain values. CitySim does not model windows separately. Therefore, a weighted
22 average of window and wall surface temperatures is calculated with EMS subroutines.
23

24 The FMU creation process is the basis for coupling the two models at each timestep in the sim-
25 ulation. Figure 3 illustrates this process from both the EnergyPlus and CitySim perspective. The
26 augmented IDF file is fed to the *EnergyPlusToFMI* script (Nouidui and Wetter 2014). Once config-
27 ured, this script produces an FMU file based on the augmented IDF file and the weather file to be
28 used as well as a DLL file implementing the Functional Mock-up Interface that can load the IDF
29 file, locate EnergyPlus and run the simulation.
30

31 The number of timesteps per hour for both CitySim and EnergyPlus is set to one per hour. The
32 frequency of data exchanges is set to once per timestep. No data averaging over time is performed.
33 Data exported from one simulation engine overwrites the corresponding data in the other simulation
34 engine at each timestep. Each simulation is performed for a whole year.
35

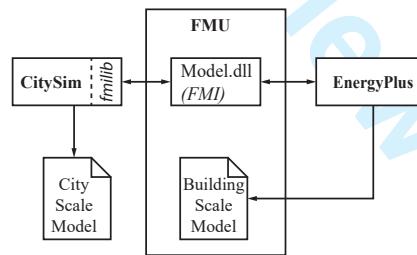

43 Figure 3. Simulation information exchange between CitySim and EnergyPlus using FMI (Thomas et al. 2014)
44

46 2.2. Coupled variables 47

48 Several key urban-scale weather variables are sent to EnergyPlus from CitySim to account better
49 for the localized effects of surrounding buildings, geography and climate conditions. These variables
50 are outlined in Table 1. They include various outdoor air conditions such as dry bulb and wet bulb
51 temperatures, dew-point, humidity, wind speed and direction, and direct and diffuse solar radiation.
52 These variables overwrite the input weather variables that EnergyPlus obtains from its weather file
53 input. CitySim is designed to account for physical phenomenon inherent to urban environments,
54 which are often neglected in building-scale simulation environments (Robinson and Stone 2004;
55 Robinson et al. 2009). CitySim can be connected to a simplified micro-climate airflow model that
56 can predict local climatic conditions around each building. Long-wave radiation exchange between
57 the simulated building and its surroundings is sent to EnergyPlus; this process is described in detail
58
59
60

in Section 2.3. Finally, CitySim shares its calculated occupancy schedules as it can use a deterministic or stochastic occupant behavior model, whereas EnergyPlus models are solely a deterministic models (Haldi and Robinson 2011).

Table 1. Values sent to EnergyPlus from CitySim by the FMU

Object	Variable Name	Description
Outdoor	Outdoor Drybulb	The outdoor dry-bulb temperature in °C
	Outdoor Dewpoint	The outdoor dewpoint temperature in °C
	Outdoor Relative Humidity	The outdoor relative humidity expressed in percent.
	Diffuse Solar	Diffuse horizontal irradiance in W/m ²
	Direct Solar	Beam normal irradiance in W/m ²
	Wind Speed	The outdoor wind speed in m/s
Long-Wave Radiation	Wind Direction	The wind direction in degrees (N=0, E=90, S=180, W=270)
	Environmental Radiant Temp.	Calculated T_{env} from the sky, ground, and surrounding surfaces
Zone	Environmental Radiant Heat	Calculated h_{env} from the sky, ground, and surrounding surfaces
	Gain Coefficient	
Zone	Occupation	Fraction of the maximum occupation (0.0-1.0) overrides the EnergyPlus occupation schedule with the CitySim stochastic schedule.

Variables sent to CitySim by EnergyPlus at each time step include several variables related to the calculation of heating and cooling loads of a targeted building. Table 2 outlines this list of exchanged variables. These variables are transferred due to the ability of EnergyPlus to model more detailed building systems, schedules, ventilation and internal load types than CitySim. For example, EnergyPlus is flexible enough to model a detailed radiant heating and cooling system that would be impossible in CitySim. EnergyPlus is an engine optimized to accurately model building-scale systems. Thus, CitySim can take advantage of these models through coupling and co-simulation. EnergyPlus sends the heating and cooling loads, the surface temperatures of the exterior surfaces and the ventilation flow rates to CitySim.

Table 2. Values sent to CitySim from EnergyPlus by the FMU

Object	Variable Name	Description
Wall, Roof	Outside Surface Temperature	The temperature on the outside of the surface in °C
	Average Outside Surface Temperature	The (weighted) average temperature of the surface on the outside in °C.
Zone	Total Heating Energy	The heating energy in Joules used in this timestep.
	Total Cooling Energy	The cooling energy in Joules used in this timestep.
	Zone Mean Air Temperature	The mean air temperature in the zone in °C
	Ventilation Volume Flow Rate	The flow rate in m ³ /s (standard density)

2.3. long-wave radiation exchange

long-wave radiation exchange in the urban scale environment is coupled in the co-simulation process. It requires the development of a set of approximations to reduce the number of coupled variables between the engines and to account for differences in the methods by which each engine calculates this value. A detailed description of long-wave Radiation (LWR) variable exchange and approximation is found in a previously published study (Miller et al. 2015) on a simplified theoretical case.

In EnergyPlus, LWR exchange for a surface is calculated through the summation of radiation gain from the ground, sky, and air as seen in Equation 1 and Figure 4a (United States Department of Energy (DOE) 2015). The radiant heat transfer coefficient for each of these environmental variables is calculated according to Equation 2 with σ as the Stefan-Boltzmann constant, ϵ as the emissivity and $F_{variable}$ being the view factor to the variable that can be sky, grd (ground) or air. A major assumption of this approach is that the modeled building's surfaces and those of adjacent buildings are at a uniform temperature and the LWR radiation exchange is negligible; a situation that is an

1
2
3
4 189 oversimplification in an urban scale domain (Evins, Dorer, and Carmeliet 2014).
5
6

$$Q_{LWR,EnergyPlus} = h_{r,grd}(T_{surf} - T_{grd}) + h_{r,sky}(T_{surf} - T_{sky}) + h_{r,air}(T_{surf} - T_{air}) \quad (1)$$

7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

$$h_{r,variable} = \frac{\epsilon\sigma F_{variable}(T_{surf}^4 - T_{variable}^4)}{T_{surf} - T_{variable}} \quad (2)$$

In comparison, CitySim calculates LWR exchange by calculating an aggregated equivalent temperature, T_{env} , and radiative heat transfer coefficient, $h_{r,env}$, from surrounding urban surfaces in addition to ground, sky, and air (Robinson et al. 2009). The calculation for T_{env} is expressed in Equation 3 with the F values being view factors of the surrounding environment including adjacent surfaces $i = 1..n$. $h_{r,env}$ is based on a first order Taylor development of the numerator of Equation 2 around $(T_{surf} + T_{variable})/2$ and therefore $Q_{LWR,CitySim}$ is calculated using Equation 4.

$$\sigma T_{env}^4 = \sigma F_{sky} T_{sky}^4 + \sigma F_{grd} T_{grd}^4 + \sum_{i=1}^n \epsilon_i \sigma F_i T_i^4 \quad (3)$$

$$Q_{LWR,CitySim} = h_{r,env}(T_{surf} - T_{env}) \quad (4)$$

In the coupled simulation, EnergyPlus uses the CitySim supplied equivalent $h_{r,env}$ and T_{env} to calculate weighted $h_{r,sky}$, $h_{r,grd}$, and $h_{r,air}$ values using the view factors and the sky-to-air split ratio. Figure 4 illustrates the schematic differences between the solo and coupled simulations on a theoretical example of a target building with two adjacent buildings with surfaces available for radiation exchange.

Figure 4. Comparison of the LWR components between a) Solo EnergyPlus and b) Coupled CitySim/EnergyPlus configuration (Miller et al. 2015)

2.4. Work flow automation

The coupling, simulation and co-simulation process is completely managed within a program called VisTrails (Freire et al. 2014). The implementation of this type of workflow is outlined in previous work focused on automating DPV using the Kepler platform (Thomas and Schlueter 2012). This process reduces the effort expended by a designer down to pressing a single button. This functionality allows an iterative design informed by readily available simulation results. An automated workflow ties the various steps together and maintains the effortless iterative design process. VisTrails enables the coupling of various workflow subprocesses script initializations, executions of the engines, and

URL: <http://mc.manuscriptcentral.com/tbps>

the compilation of the outputs. This tool empowers the coupling of multiple executable files and their connecting scripts in graphical diagrams that enhance reproducibility and process automation (Freire et al. 2014). The VisTrails workflow diagram for the first case study in this paper is seen in Figure 5.

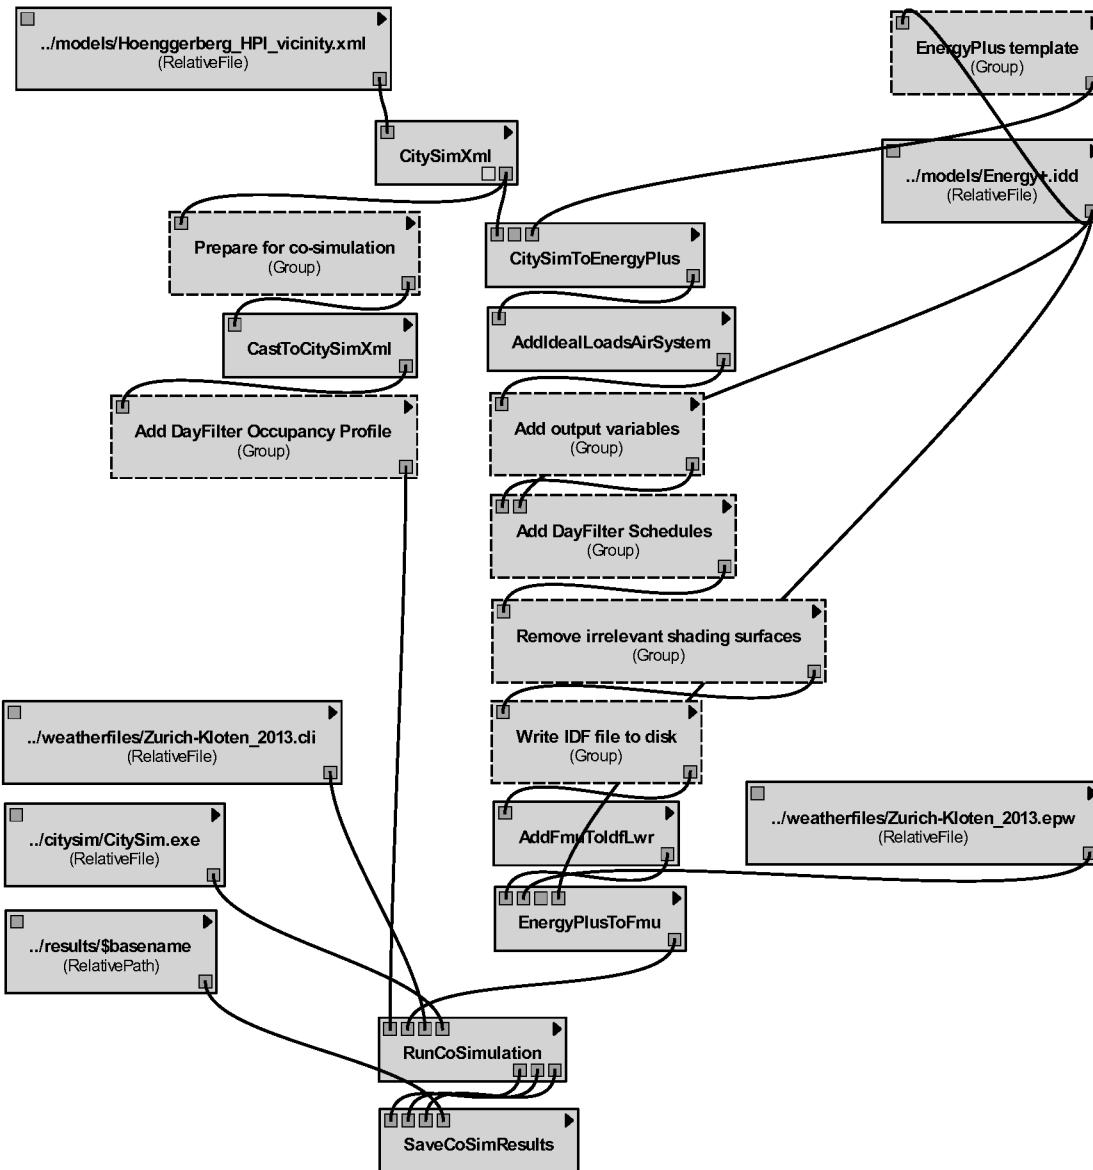


Figure 5. Workflow in VizTrails

2.5. Simplified calibration

In the first case study, one aspect of this analysis is the comparison of the actual measured performance of the target building on campus with the simulation results of the co-simulation. A simplified

1
2
3
4 218 calibration procedure is adapted from previous research to compare the measured heating and cool-
5 ing data available on campus with various simulation scenarios (Samuelson, Ghorayshi, and Reinhart
6 220 2015). This calibration procedure was utilized in the performance reconciliation of 18 buildings that
7 were built according to the LEED Canada protocol and were under review of actualized performance.
8 222 This protocol is unique in its analysis process to uncover design model deficiencies in a step-wise
9 manner, utilizing the most readily available knowledge first and working towards equilibrium between
10 224 measured and simulated. There is an appropriate balance between the effort of implementation and
11 225 value generated through the calibration process.
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

226 3. Implementation

227 The co-simulation process is implemented on two case studies in Switzerland. The first is the ETH
228 Zürich Hoenggerberg campus in Zürich, Switzerland. The focus of this case study is to quantify
229 the impact of the information exchange through co-simulation within the EnergyPlus engine. The
230 intent on this campus was to develop techniques for retrofit analysis using EnergyPlus. The targeted
231 building on this campus is the HPI Building. Raw measured data is available for many of the
232 buildings on campus, thus a simplified calibration procedure is used to reconcile the simulation
233 results.

234 The second case study is the EPFL campus in Lausanne, Switzerland. The targeted building, in
235 this instance, was the Quartier Nord complex. The focus of this study was to compare the solo
236 and co-simulation output results of CitySim. Reliable measured data for calibration is not currently
237 available for this building.

239 3.1. Campus case study 1: ETHZ Hoenggerberg Campus

240 The ETH Zürich Hoenggerberg campus includes 32 higher education facilities with spaces allocated
241 to laboratories, office space, lecture halls, cafeterias, data centers and other types of similar areas.
242 The campus has a centralized energy management system (EMS) that contains 807 energy and water
243 measurement points from heating, cooling, electricity, city gas, domestic hot water, gray water, and
244 general water consumption.

245 The focus of the co-simulation process is that the performance of a targeted building is evaluated
246 through solo and coupled methods. The HPI building on campus was chosen in this case study due
247 to the amount and quality of measured data available from the EMS for this building. HPI is a 2,610
248 square meter building that is made up mostly of office space and classrooms. It also includes 400
249 m² convenience store and coffee shop. The building is indicated on a campus map shown in Figure
250 6 and is shaded red.

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60


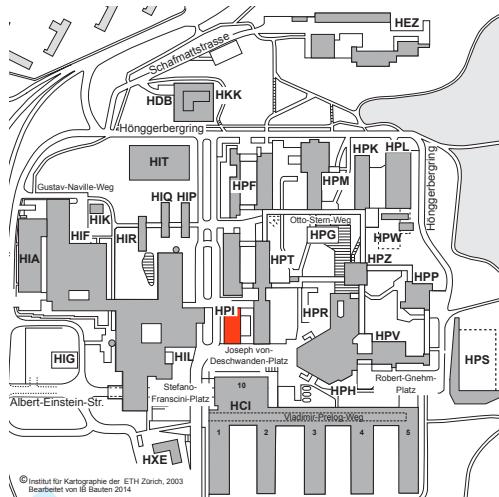


Figure 6. ETH Hoenggerberg campus map with the HPI building shaded red

251 3.2. Model development

252 In order to perform a co-simulation of the targeted buildings, initially a CitySim model of the
 253 campus was developed. Through the workflow automation process, this geometry was converted into
 254 an EnergyPlus input file as seen in Figure 7. The EnergyPlus input file was then used as an input to
 255 execute EnergyPlus solo and co-simulation processes for the purpose of simplified calibration, and
 256 then to understand the magnitude of the difference between these simulation scenarios.

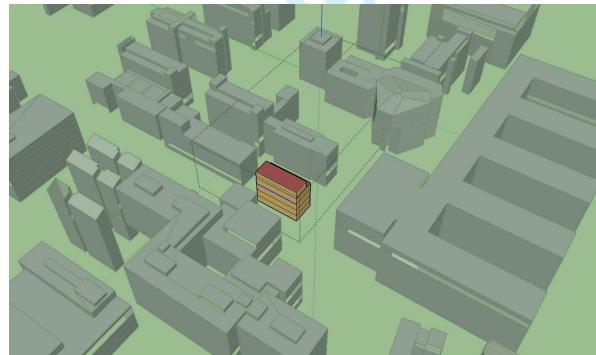


44 Figure 7. The HPI building EnergyPlus model extracted from the CitySim model. The HPI building is seen as the light
 45 and dark brown building in the center surrounded by gray masses that represent other buildings on campus. The graphic is
 illustrated with OpenStudio for Sketch-up.

257 3.3. Measured data collection and calibration


258 Energy data from the HPI building was collected and analyzed in the context of the simplified
 259 calibration procedures. The measured datasets were screened and aggregated into typical usage
 260 profiles to be used for the lighting, plug- loads, and HVAC equipment availability schedules and power
 261 densities. Figure 8 illustrates the aggregation examples of electrical energy for the HPI building. This
 262 profile was created through a filtering and clustering process known as *DayFilter* (Miller, Nagy, and
 263 Schlueter 2015). Cluster 0 represents the typical energy profile for Sunday, while Cluster 1 dominates
 264 the Saturdays of the data set. Clusters 2 and 3 make up most of the weekdays of the data set with
 265 Cluster 3 being more common in non-summer months. These profiles are used to set the availability

2
3
4 266 schedules as inputs into the EnergyPlus simulation to emulate the way occupants inhabit the building
5 267 and how the building management system (BMS) controls the lighting and HVAC systems.
6
7
8
9
10
11
12
13
14
15
16
17

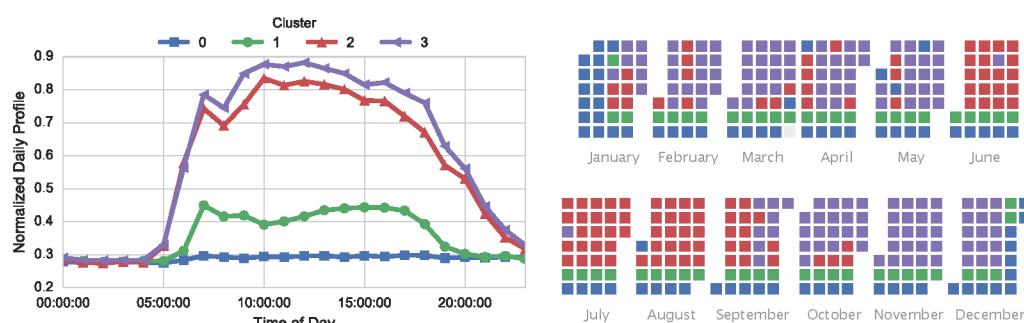

18 Figure 8. Typical measured data electricity profiles of (left) average daily electrical consumption for each cluster and (right)
19 color-coded calendar of which days fall within each cluster. The diagram on the right is each month of the year with each row
20 corresponding with a day of the week (starting with Monday) and each column corresponding to a week of the month.
21

22 The measured and simulated data from both the co-simulation and EnergyPlus solo simulation
23 were analyzed in order to understand how both the solo and co-simulations compare to real, mea-
24 sured data. The calibration process was undertaken through a series of steps such as including local
25 weather conditions for the simulation period and adding custom lighting schedules and power den-
26 sities extracted from the measured data. The models were calibrated to the summer season (May-
27 September) for cooling and the winter season (Jan-April and October to December) for heating.
28 Figure 9 illustrates a comparison of the measured data with the simulations after the tuning process.
29 The final calibrated EnergyPlus solo model had a normalized mean bias error (NMBe) of -9.36%
30 and a coefficient of variation of root mean square error (CVRMSE) of 21.7% for cooling and 5.02%
31 and 29.4% for heating. These metrics fall within the +/-10% NMBe and +/-30% CVRSME used in
32 this case study for calibration. A total of 37 calibration iterations were undertaken to modulate the
33 simulation results to within these criteria. The goal of calibration, in this case, is to just bring the
34 models to within a reasonable range of reality in order to bring more confidence to analysis of the
35 discrepancies between the solo and co-simulation scenarios.
36

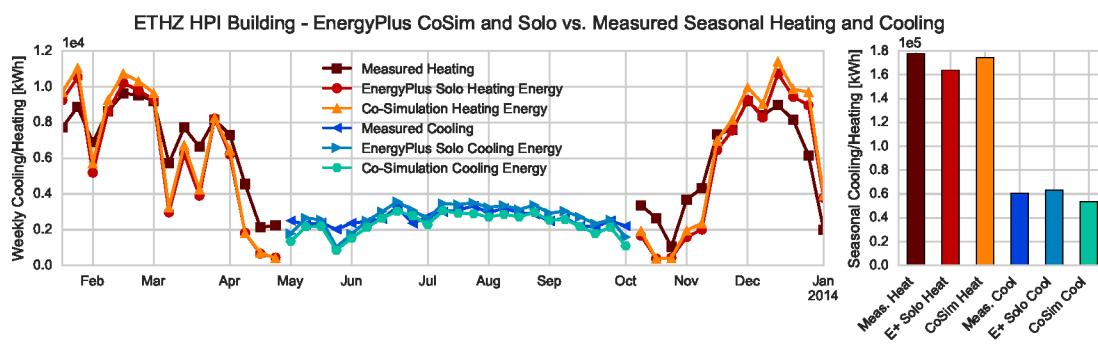

50 Figure 9. HPI Measured vs. Co-Simulation and EnergyPlus Solo for Heating and Cooling Seasons
51
52

53 282 3.4. EnergyPlus co-simulation results

54 For cooling, a discrepancy can be seen between co- simulation and solo EnergyPlus. Co-simulation
55 decreases the predicted cooling energy by 15.5%, as seen in Figure 10. Figure 11 illustrates the
56 difference in predicted heating energy consumption across the test year. A consistent offset exists
57 across the time frame of days in January, the peak of the heating season. A more varied discrepancy
58 283 284 285 286

across the heating months is noticed resulting an overall increase of heating prediction of 6.5% due to co-simulation. The exchange of long-wave radiation for this particular site is substantial due to the proximity of surrounding buildings.

When comparing the solo and co-simulated models to the measured data, it is noticed that cooling energy is over-predicted by the solo simulation by 4%, while co-simulation under-predicted by 11.1%. This discrepancy is likely due to a loss in long-wave radiation in the co-simulation to the surrounding buildings, thus reducing the overall cooling load.

For heating energy, co-simulation was able to bring the predicted value to within 2% of the measured value for the year, an improvement as compared to the solo simulation, which was 8.5% less than the measured value. This situation is also likely due to the long-wave radiation loss to surrounding buildings, thus increasing the overall heating load.

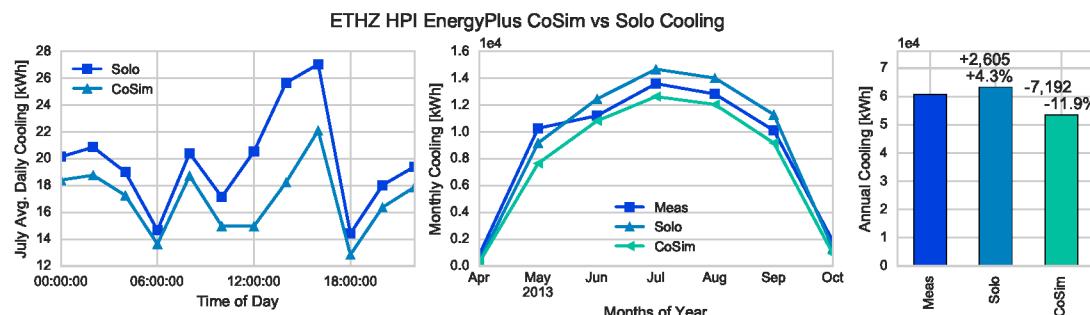


Figure 10. HPI Co-Simulation vs. EnergyPlus Solo for Cooling

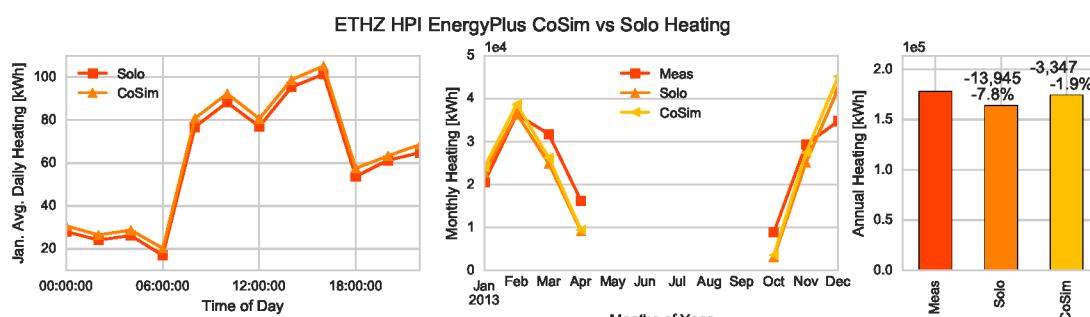


Figure 11. HPI Co-Simulation vs. EnergyPlus Solo for Heating

3.5. Campus case study 2: EPFL Quartier Nord

Quartier Nord is a whole new quarter of the École Polytechnique Fédérale de Lausanne (EPFL) campus located at its northwest corner. This complex includes a Convention Centre with an auditorium with a maximum capacity of 3000 (seated) people, housing for 516 students, retail and service areas and a hotel. As a public space, this ensemble is organized around the central plaza as seen in Figure 12. With a particularly strong visual and formal identity, the SwissTech Convention Centre (STCC) is clearly the key protagonist. Designed as a Minergie building, it includes modern energy conversion technologies to reduce its energy consumption. The focus of the co-simulation is realized on the STCC, simulated with the nearby buildings for housing, retail and service areas (Beyeler, Beglinger, and Roder 2009).

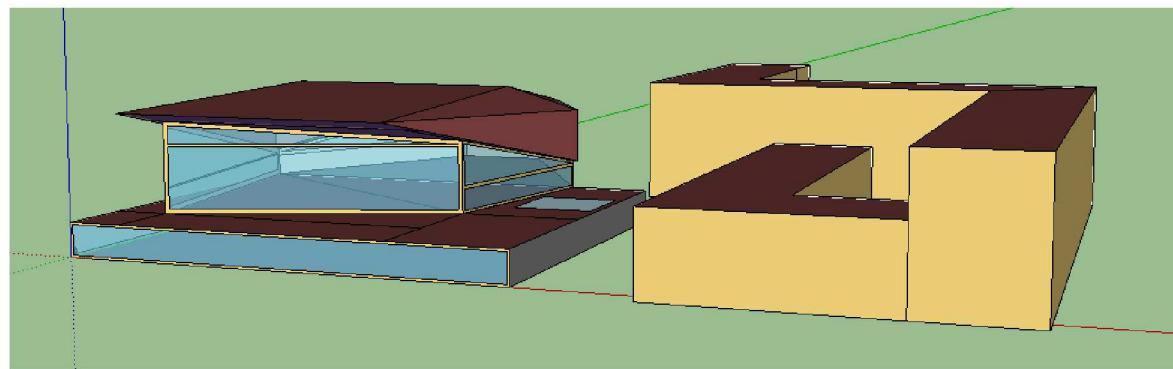


Figure 12. The Quartier Nord at EPFL in Lausanne

308 3.6. Model development

209 The information required in the simulation mainly comprises three parts: physical, geometrical and
 210 operational data. The geometry information including the shape, dimension, structure and materials
 211 was obtained from the Real Estate and Infrastructure Department of École Polytechnique Fédérale
 212 de Lausanne (EPFL), which was responsible for carrying out the project from call to tender to
 213 construction. However, since the documents provided were conflicting with what has been installed,
 214 the task to realize a precise model of the buildings itself is rather tedious. Besides, it is even more
 215 challenging to get the operational data (daily occupancy, lighting, and electrical equipment usage
 216 level and ventilation rate) as the building has only recently been set in operation mode and as
 217 engineers and technicians have been working on improving the controls. Therefore, due to unreliable
 218 monitoring data, the calibration step of the model was not undertaken.

319
 320 Considering the lack of detailed information about the building, a so-called detailed reference case
 321 was modeled with EnergyPlus (Mauree et al. 2015) in which regulation standards applied in the
 322 design phase from the local building code norms were used to complete the missing information. A
 323 rendering of this model is seen in Figure 13.

Figure 13. The Quartier Nord modeled with OpenStudio for Sketchup². The STCC on the left is the main focus of the study and is represented by two thermal zones.

51
 52 The corresponding CitySim model was created by exporting a DXF file from EnergyPlus for the
 53 whole of Quartier Nord, and importing it into the Graphical User Interface of CitySim. Physical
 54 characteristics of the building were added to complete the CitySim model. Finally, the same script
 55 as described in Section 2 was used to export the model from CitySim to EnergyPlus, giving a
 56 simplified EnergyPlus model.
 57
 58
 59
 60

3.7. Comparison of EnergyPlus and CitySim

Both the CitySim and EnergyPlus engines are utilized in this case study. The first comparison to observe is the differences between the two engines when focused on the STCC building. When simulated in isolation, the CitySim engine predicts a 28.6% increase in heating load and a 44.4% increase in cooling load as compared to EnergyPlus. This phenomenon is due to the differences in the way each of these engines calculates heating and cooling loads. CitySim has a much more simplified model of building occupants, lighting, and plug loads. CitySim also includes long-wave radiation exchange calculations that can greatly influence the heating and cooling load calculations as well. Use of the co-simulation process brings the engines to within 5.4%. Figure 14 illustrates these differences for cooling and Figure 15 for heating.

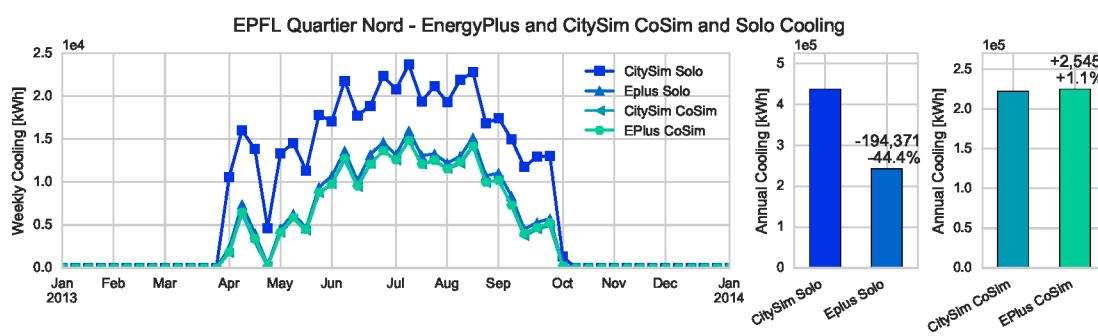


Figure 14. STCC CitySim vs. EnergyPlus Solo for Cooling

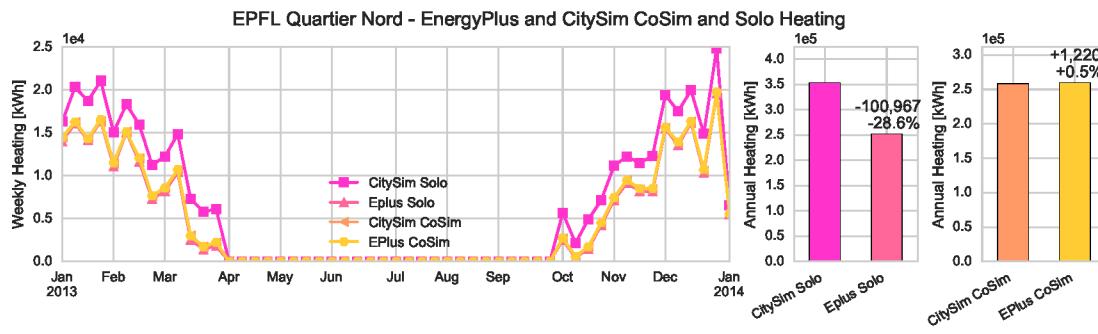


Figure 15. STCC CitySim vs. EnergyPlus Solo for Heating

3.8. EnergyPlus co-simulation results

The STCC building is also simulated within the solo and co-simulation environments. When focusing on the EnergyPlus results, a 7.5% decrease in cooling energy is observed, as seen in Figure 16. A 2.8% increase in heating energy is observed, as seen in Figure 17. These differences are less pronounced than the HPI and theoretical case studies due to the number and proximity of surrounding buildings is not as large. long-wave radiation exchange in this situation doesn't have as large of an impact on the heating and cooling calculations.

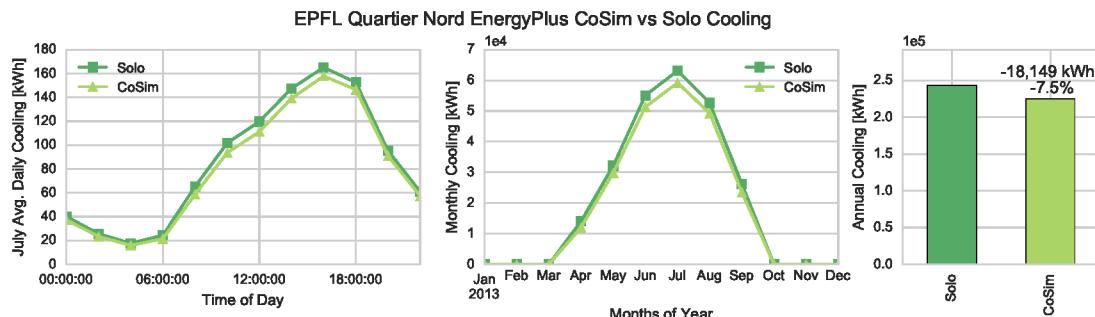


Figure 16. Quartier Nord EnergyPlus Co-Simulation vs. Solo for Cooling

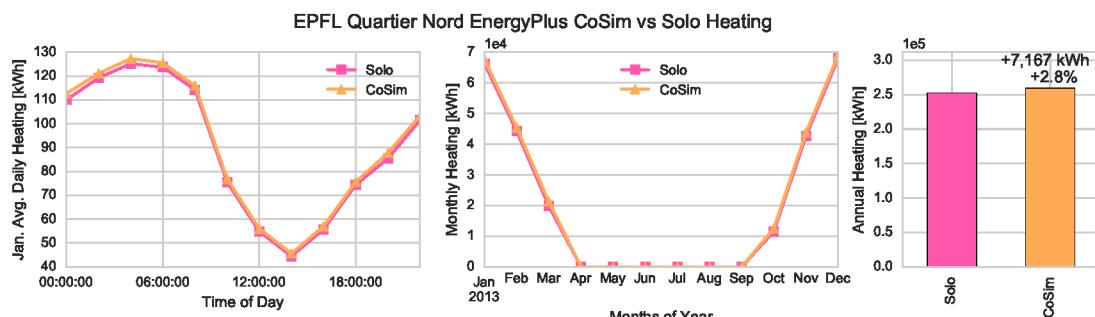


Figure 17. Quartier Nord EnergyPlus Co-Simulation vs. Solo for Heating

347 4. Discussion

348 Two campus case studies were presented in this paper to showcase a unique process of extracting
 349 model meta-data, conversion of those data into input files for two separate simulation engines, and
 350 the solo and co-simulation process of those engines on two real-world case studies. The analysis of
 351 the results shows that for the first case study, co-simulation can achieve values closer to measured
 352 reality for heating, but not cooling. These results are unique to this case study and simply show that
 353 the co-simulation process may be helpful for heating only in this particular instance. A limitation
 354 of this study is that we only analyze a single building against measured data in this context. In the
 355 second case study, significant discrepancies are found between the CitySim and EnergyPlus engines
 356 which were corrected using the co-simulation process.

357 One of the key insights in this work is that each of the engines is enabled to account for the various
 358 physical phenomenon in their simulation process that were previously impossible. For example,
 359 through co-simulation, EnergyPlus was able to utilize the long-wave radiation exchange capabilities
 360 of CitySim. The ability to couple and leverage the best aspects of multiple simulation engines can
 361 enhance the modeling of large-scale urban agglomerations.

362 Disadvantages of the co-simulation process are mainly centered upon the increase in computing
 363 time and power needed for the FMI to coordinate data exchange between the two simulation engines.
 364 After calibration, a comparison of the run-times of the co-simulation and solo EnergyPlus simulations
 365 show that the execution time for the solo EnergyPlus simulation was 1 minute and 49 seconds
 366 compared to 28 minutes and 10 seconds for the co-simulation.

367 5. Conclusion

368 This paper outlines the implementation of a fully automated workflow process that extracts geometry
369 information at the urban-scale, creates the necessary input information, executes each engine with
370 information exchange at each time step of targeted variables, and accumulates the results of the
371 analysis. The process has been implemented on simplified theoretical scenarios in the past, and
372 the key innovation with this work is in implementation on actual case study campuses and targeted
373 buildings. The results illustrate that the differences between the co-simulation and solo environments
374 are within range of previous theoretical models. More reliable results of the magnitude of differences
375 between the simulation techniques can be extracted from these real-world scenarios.

376 Future work in using co-simulation models for buildings and campuses would more intensively
377 utilize the model results in a practical implementation of retrofit scenarios or urban-scale energy
378 systems research. More implementations would also test the feasibility of using co-simulation for
379 retrofit analysis, urban planning studies, and cooling and heating system optimization.

380 5.1. Acknowledgments

381 The authors would like to acknowledge the ETH Zürich Campus Facilities Department, the EPFL
382 Real Estate and Infrastructure Department, and Emanuel Thoma for their assistance in this project.
383 This research was funded by the Competence Center in Energy and Mobility (CCEM) under the
384 Urban Multi-scale Energy Modeling (UMEM) project.

385 References

- 386 Allegrini, Jonas, Viktor Dorer, and Jan Carmeliet. 2012. "Influence of the urban microclimate in street
387 canyons on the energy demand for space cooling and heating of buildings." *Energy and Buildings* 55:
388 823–832.
- 389 Beyeler, Franz, Nick Beglinger, and Ursina Roder. 2009. "Minergie: The Swiss sustainable building standard." *Innovations* 4 (4): 241–244.
- 390 Bouyer, Julien, Christian Inard, and Marjorie Musy. 2011. "Microclimatic coupling as a solution to improve
391 building energy simulation in an urban context." *Energy and Buildings* 43 (7): 1549–1559.
- 392 Bueno, Bruno, Leslie K Norford, Julia Hidalgo, and Grégoire Pigeon. 2013. "The urban weather generator." *Journal of Building Performance Simulation* 6 (4): 269–281.
- 393 Bueno, Bruno, Leslie K Norford, Grégoire Pigeon, and Rex Britter. 2011. "Combining a Detailed Building
394 Energy Model with a Physically-Based Urban Canopy Model." *Boundary-Layer Meteorology* 140 (3):
395 471–489.
- 396 Dorer, Viktor, Jonas Allegrini, Kristina Orehounig, Peter Moonen, Govinda Upadhyay, Jérôme Kämpf, and
397 Jan Carmeliet. 2013. "Modelling the urban microclimate and its impact on the energy demand of buildings
398 and building clusters." In *Proceedings of BS2013: 13th Conference of International Building Performance
399 Simulation Association*, 3483–3489. Chambéry, France: International Building Performance Simulation
400 Association. Aug..
- 401 Evans, Ralph, Viktor Dorer, and Jan Carmeliet. 2014. "Simulating external longwave radiation exchange for
402 buildings." *Energy and Buildings* 75: 472–482.
- 403 Freire, Juliana, David Koop, Fernando Seabra Chirigati, and Cláudio T Silva. 2014. "Reproducibility using
404 VisTrails." *Implementing Reproducible Research* 33.
- 405 Haldi, Frédéric, and D Robinson. 2011. "The impact of occupants' behaviour on building energy demand." *Journal of Building Performance Simulation* 4 (4): 323–338.
- 406 Keirstead, James, Mark Jennings, and Aruna Sivakumar. 2012. "A review of urban energy system models:
407 Approaches, challenges and opportunities." *Renewable and Sustainable Energy Reviews* 16 (6): 3847–3866.
- 408 Lawrie, L K, Fred C Winkelmann, Fred Buhl, and Joe J Huang. 2001. "EnergyPlus: creating a new-generation
409 building energy simulation program." *Energy and Buildings* 33 (4): 319–331.
- 410 Martin, Miguel, Afshin Afshari, Peter R Armstrong, and Leslie K Norford. 2015. "Estimation of urban
411

- 1
2
3
4 414 temperature and humidity using a lumped parameter model coupled with an EnergyPlus model." *Energy*
5 415 and *Buildings* 96: 221–235.
6 416 Mauree, D, Y Yao, J KAEMPF, and J L Scartezzini. 2015. "Evaluation and Optimization of Renewable
7 417 Energy in the "Quartier Nord": Objective Zero-Power." *CISBAT 2015* .
8 418 Miller, Clayton, Zoltán Nagy, and Arno Schlueter. 2015. "Automated daily pattern fil-
9 419 tering of measured building performance data." *Automation in Construction* 49: 1–17.
10 420 <http://www.sciencedirect.com/science/article/pii/S0926580514002015>.
11 421 Miller, Clayton, and Chandra Sekhar. 2010. "Modeling of the Single Coil, Twin Fan Air-Conditioning System
12 422 in EnergyPlus." In *SimBuild 2010: Fourth National Conference of IBPSA-USA*, 201–206. New York, NY.
13 423 Aug..
14 424 Miller, Clayton, Daren Thomas, Silvia Domingo Irigoyen, Christian Hersberger, Zoltan Nagy, Dino Rossi, and
15 425 Arno Schlueter. 2014. "BIM-extracted EnergyPlus model calibration for retrofit analysis of a historically
16 426 listed building in Switzerland." In *In Proceedings of SimBuild 2014: 2014 ASHRAE/IBPSA-USA Building
17 427 Simulation Conference*, Atlanta, GA, USA. Sep..
18 428 Miller, Clayton, Daren Thomas, Jérôme Kämpf, and Arno Schlueter. 2015. "Long Wave Radiation Exchange
19 429 for Urban Scale Modeling within a Co-Simulation Environment." In *CISBAT*, Lausanne, Switzerland. Sep..
20 430 Nouidui, Thierry, Michael Wetter, and Wangda Zuo. 2014. "Functional mock-up unit for co-simulation
21 431 import in EnergyPlus." *Journal of Building Performance Simulation* 7 (3): 192–202.
22 432 Nouidui, Thierry Stephane, and Michael Wetter. 2014. "Tool coupling for the design and operation of
23 433 building energy and control systems based on the Functional Mock-up Interface standard." In *the 10th
24 434 International Modelica Conference, March 10-12, 2014, Lund, Sweden*, 311–320. Linköping University
25 435 Electronic Press. Mar..
26 436 Robinson, D, Frédéric Haldi, J Kämpf, Philippe Leroux, Diane Perez, Adil Rasheed, and Urs Wilke. 2009.
27 437 "CitySim: Comprehensive micro-simulation of resource flows for sustainable urban planning." In *Proceed-
28 438 ings of BS2009: 11th International Building Performance Simulation Association Conference*, Glasgow,
29 439 Scotland. Jul..
30 440 Robinson, D, and Andrew Stone. 2004. "Solar radiation modelling in the urban context." *Solar Energy* 77
31 441 (3): 295–309.
32 442 Samuelson, Holly W, Arash Ghorayshi, and Christoph F Reinhart. 2015. "Analysis of a simplified calibration
33 443 procedure for 18 design-phase building energy models." *Journal of Building Performance Simulation* 1–13.
34 444 Schlueter, Arno, and Frank Thesseling. 2009. "Building information model based energy/exergy performance
445 assessment in early design stages." *Automation in Construction* 18 (2): 153–163.
35 446 Srebric, Jelena, Mohammad Heidarnejad, and Jiying Liu. 2015. "Building neighborhood emerging properties
36 447 and their impacts on multi-scale modeling of building energy and airflows." *Building and Environment* 91
37 448 (C): 246–262.
38 449 Thomas, D, C Miller, J Kämpf, and Arno Schlueter. 2014. "Multiscale co-simulation of EnergyPlus and
39 450 CitySim models derived from a building information model." *BauSIM 2014: Fifth German-Austrian
40 451 IBPSA Conference* .
41 452 Thomas, Daren, and Arno Schlueter. 2012. "Customizable continuous building simulation using the de-
42 453 sign performance toolkit and Kepler scientific workflows." In *Proceedings of ECPPM 2012: eWork and
43 454 eBusiness in Architecture, Engineering and Construction*, 17–22. Reykjavik, Iceland: CRC Press.
44 455 Trčka, M, Jan Hensen, and M Wetter. 2010. "Co-simulation for performance prediction of integrated building
45 456 and HVAC systems—An analysis of solution characteristics using a two-body system." *Simulation Modelling
46 457 Practice and Theory* 18: 957–970.
47 458 United Nations. 2014. "World Urbanization Prospects: 2014 Update." 1–32.
48 459 United States Department of Energy (DOE). 2015. "EnergyPlus Engineering Reference Version 8.2: The
49 460 Reference to EnergyPlus Calculations." *The Reference to EnergyPlus Calculations* .
50 461 Wetter, Michael. 2011. "Co-simulation of building energy and control systems with the Building Controls
51 462 Virtual Test Bed." *Journal of Building Performance Simulation* 4 (3): 185–203.
52 463 Yang, Xiaoshan, Lihua Zhao, Michael Bruse, and Qinglin Meng. 2012. "An integrated simulation method
53 464 for building energy performance assessment in urban environments." *Energy and Buildings* 54: 243–251.
54 465 Zhang, Rui, Khee Poh Lam, Shi-chune Yao, and Yongjie Zhang. 2013. "Coupled EnergyPlus and com-
55 466 putational fluid dynamics simulation for natural ventilation." *Building and Environment* 68: 100–113.
56 467 <http://www.sciencedirect.com/science/article/pii/S0360132313001029>.

To appear in the *Journal of Building Performance Simulation*
Vol. 00, No. 00, Month 20XX, 1–18

Research Article

Urban and building multiscale co-simulation: case study implementations on two university campuses

(Submission for review on April 30, 2016)

The co-simulation of both urban and building-level models leverages the advantages of both platforms. It better accounts for the localized effects of surrounding buildings, geography and climate conditions while maintaining high-fidelity building systems representation. This paper describes the co-simulation process of the building and urban scale models of two university campuses in Switzerland using EnergyPlus and CitySim. campuses of higher education buildings in Switzerland. The campuses are modeled at both the building level, using the EnergyPlus simulation engine, and at the urban scale using the CitySim engine. A co-simulation framework is used to execute simulations from both engines concurrently with an exchange of information to leverage the various strengths of each. In the first case study, on-site weather and measured performance data is are then compared to the output from two modeling scenarios: building-scale simulation using EnergyPlus and co-simulation results. The of the engines. A partial calibration process is implemented to reconcile the simulations with the measured data of a targeted office building on campus. In the second case study examines the results of the two, the co-simulation results are compared to the both the CitySim simulation and EnergyPlus engines. The results show that coupling of EnergyPlus with CitySim resulted in a -15.5% and -7.5% impact on cooling consumption and a +6.5% and +4.8% impact on heating use as compared to solo simulations. The co-simulation process was able to better model realistic conditions for heating, but not cooling in one case study. It was able to substantially reduce the discrepancies in prediction between the engines in the other study.

consumption. Challenges encountered with the urban scale calibration and the strengths and weaknesses of the developed process are discussed.

Keywords: Building-scale simulation, Calibrated energy models, CitySim, Co-simulation, EnergyPlus, Urban-scale simulation

1. Introduction

Urban scale building performance simulation is a process that empowers the analysis and optimization of cities. Urban populations are growing around the world at an unprecedented rate. A transition from urban to rural is underway and 2.5 billion people are expected to join cities throughout the world by the year 2050 (?)(United Nations 2014). Expansions of entire districts and even cities is not an uncommon phenomenon, especially in East Asia and Africa. Urban scale modeling is in the midst of an intense focus on the research community with six key areas of practice: technology design, building design, urban climate, systems design, policy assessment, and land use and transportation (?)(Keirstead, Jennings, and Sivakumar 2012). The ability to simulate the interaction between large collections of buildings enables the development and testing of optimization and planning scenarios for this new development (?)(Dorer et al. 2013).

The CitySim simulation engine is an example of such a program designed and optimized for urban-scale simulation. CitySim is an urban performance simulation engine that comprises a solver-Solver module as well as a graphical user interface. It focuses on the energy flows of multiple simplified building models and their interdependent relationship with their urban climate (?)(Robinson et al. 2009). CitySim includes building thermal, urban radiation, occupant behavior, and plant/equipment models integrated as a single simulation engine. CitySim simulates multiple buildings up to city scale using simplified models to achieve a good compromise between modeling accuracy, computational overheads, and data availability. Each building's thermal behavior is based on an electrical analogy

1
2
3
4 20 using a two node resistor- capacitor network. The internal lighting, people, and miscellaneous loads
5 21 are modeled using a simplified occupancy-based approximation. The heating, ventilation, and air-
6 22 conditioning (HVAC) systems are modeled using a set of equations single equation that approximates
7 23 the total mass flow rate required to meet the sensible and latent loads of each building as a whole.
8 24 Each of these simplifying approximations empowers the urban-scale simulation to have reasonable
9 25 execution times on the number of buildings being simulated.

10
11 26 Building performance simulation is a mature domain of research relative to urban scale efforts. The
12 27 use of whole building simulation engines originated in the 1960's 1960s with the US government's de-
13 28 velopment of the BLAST and DOE-2 hourly energy simulation programs (?) (Lawrie et al. 2001). In
14 29 1996, development on a new simulation engine, EnergyPlus, began in order to combine the advantages
15 30 of previous efforts in a single, modular program. EnergyPlus, as a result, has become a popular choice
16 31 in detailed whole-building performance simulation due to the breadth of mechanical, renewable, and
17 32 electrical systems that can be modeled. EnergyPlus specifically excels in its ability to model unique
18 33 mechanical system types such as decoupled centralized cooling (?) (Miller and Sekhar 2010) and low
19 34 exergy heating and cooling systems (Hersberger and Sagerschnig 2013). Additionally, EnergyPlus is
20 35 designed to provide a high resolution in which internal loads and natural ventilation technologies
21 36 can be modeled in detail at the building level.

22 37 ~~EnergyPlus is also extensively used within the research community and has new features that
23 enable it to couple with other simulation programs.~~

24 38 Both building and urban-scale simulation domains have rightfully chosen boundary conditions
25 39 that reflect their key goals while seeking to minimize the input parameters necessary and run-times
26 40 of the engines themselves. This focus results in certain deficiencies concerning modeling various
27 41 ~~phenomena~~ phenomenon. For example, urban scale simulation highly simplifies the building systems
28 42 and internal load models, thus making a retrofit analysis at the systems level difficult. And whole
29 43 building simulation in EnergyPlus neglects many of the various contextual consideration of the urban
30 44 environment such as long-wave ~~long wave~~ long wave radiation exchange with adjacent surfaces and localized
31 45 urban weather effects (?).

32 46 ~~The To address the deficiencies of the individual engines, the current effort seeks to couple
33 building and urban scale simulation to address the deficiencies of the individual engines.~~
34 47 The research in this paper is part of a larger coupling effort in which various engines
35 48 are connected and co-simulated to create a more comprehensive analysis of the urban scale
36 49 (??) (Dorer et al. 2013; Allegri, Dorer, and Carmeliet 2012). The target is the computational in-
37 50 terface between the building energy model, using EnergyPlus, and the urban energy model using
38 51 CitySim. An overview of the larger scope is shown in Figure 1 and the context of the coupling task
39 52 appears as the interface between the City Energy Simulation (CES) model and the Building Energy
40 53 Simulation (BES) model.

41 54 ~~The scales and models contained in the urban environment context include the Urban Scale
42 Model (UC Model), the Urban Microclimate (UMC) model using OpenFoam, and the Meteorological
43 Meso-scale (MM model) using Climate Limited Area Modeling (COSMO-CLM). On the database
44 side, Revit, Global Information Systems (GIS), and building information systems (BIS) are utilized.~~

45 55 The coupling and co-simulation process is implemented on two case studies in Switzerland. The
46 56 first case study is the ETH Zürich Hoenggerberg campus in Zürich, Switzerland. It The campus was
47 57 modeled in the CitySim simulation engine and co-simulated using work-flow automation. The target
48 58 of this case study is to evaluate the differences between the coupled and solo EnergyPlus simulations
49 59 based on the variables exchanged. This scenario includes the use of measured data for heating and
50 60 cooling within their respective seasons to compare to the simulation results. The second case study
51 61 is the EPFL campus in Lausanne, Switzerland. The objective of this scenario is to evaluate the
52 62 differences between coupled and uncoupled versions of the CitySim simulation engine.

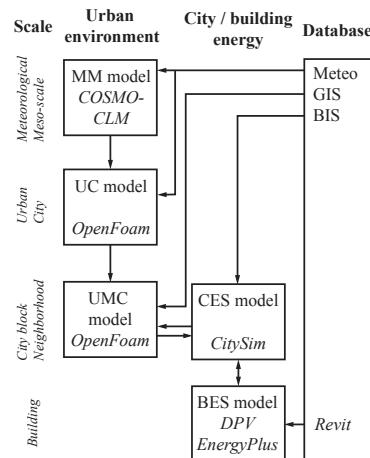


Figure 1. EnergyPlus and CitySim coupling are part of the wider context. Each block in the diagram represents an environment, with the tool/engine name in italics (??)(Thomas et al. 2014), adapted from (??)(Dorer et al. 2013)

This paper describes the achievement of several objectives. The first is to automate:

- (1) Automation of the process of simultaneous meta-data extraction from a Building Information Model-building information model (BIM) for the creation of both building and urban-scale performance models for a real-world campus of buildings -Next, we week to co-simulate-
- (2) Co-simulate the urban and building scale models through concurrent information exchange - Finally, we implement-
- (3) Implement a simplified calibration procedure for the first scenario by based on reconciling the co-simulation output results for a target building using measured energy performance data from the campus energy information system (EIS)

The first two objectives have been demonstrated in a simplified context in previous literature (??)(Thomas et al. 2014; Miller et al. 2015). The innovation in the current publication is an extension of this research through the modeling and co-simulation of real-world case studies. With respect to the third contribution, to the best of the authors' knowledge, no previous study has compared the results of a building and urban-scale co-simulation procedure to measured data from a real-world campus.

1.1. Previous multi-scale coupling studies


Previous attempts of information exchange have been implemented between simulation engines at various scales. Much of the initial co-simulation work in the literature is done at the subsystem and building-scale. Previous studies have analyzed strong and loose coupling of engines at this scale (??)(Trčka, Hensen, and Wetter 2010; Wetter 2011). Coupling of building-scale simulation with urban-scale computational fluid dynamics (CFD) is attempted for modeling natural ventilation (??)(Zhang et al. 2013) and to improve energy prediction (??)(Bouyer, Inard, and Musy 2011). A comprehensive review of energy and airflow modeling of neighborhoods and university campuses was published that includes strategic aspects of coupling different types of models (??)(Srebric, Heidarinejad, and Liu 2015). EnergyPlus has been coupled with ENVI-met, a microclimate computational fluid dynamics (CFD) program (??)(Yang et al. 2012). It was also coupled with simplified lumped parameter models to facilitate comparison with measured sensor data (??). While not directly coupled, (Martin et al. 2015), EnergyPlus and the TEP Urban Canopy Model program were connected through a modified weather file coupled to quantify the influences of urban localized weather effects on whole building simulation (??)(Bueno et al. 2011) and urban weather generation (??). (Bueno et al. 2013).

1
2
3
4 99 **2. Methodology**

5
6 100 **2.1. Coupling process**

7
8 101 The coupling process of a simplified single zone model and contextual surrounding buildings is
9 102 described in previous studies (Thomas et al. 2014), which forms the basis for the methodology
10 103 in the current effort. This process utilizes the Design Performance Viewer (DPV) and associated
11 104 workflow. The DPV is a tool written to extract and simulate an EnergyPlus input data file (IDF)
12 105 from an Autodesk™ Revit™ BIM (Schlueter and Thesseling 2009). The central philosophy be-
13 106 hind the tool is ~~the~~ a rapid simulation of the building information model from the earliest design
14 107 possible ~~that~~ and can be used throughout the life-cycle of the building including retrofit analysis
15 108 (Thomas et al. 2014). This process is achieved by augmenting the information in the BIM with
16 109 default values and abstracting information not relevant for energy simulation. The tool already has
17 110 a simplified notion of surrounding buildings, which are modeled in the BIM as simple mass objects
18 111 without further information and are exported as shading surfaces to EnergyPlus. This functionality
19 112 is used for creating the CitySim mass scene and leads to a crude model of the urban context of the
20 113 building. The current DPV philosophy of allowing the designer to iterate rapidly on early design
21 114 decisions based on feedback about the performance of the design remains. This approach includes
22 115 streamlining the process where running a simulation requires no effort from the designer due to
23 116 automatic creation of input files, execution, and analysis of the results.

24
25 117 The coupling process of EnergyPlus and CitySim is shown in Figure 2. ~~The solid lines depict the~~
26 118 ~~co-simulation of EnergyPlus and CitySim, and the dotted lines illustrate solo simulations of either~~
27 119 ~~EnergyPlus or CitySim~~. First, the DPV is used to extract an EnergyPlus simulation model from the
28 120 BIM. The DPV utilizes the Revit API to extract geometrical information about the building and
29 121 the physical properties of walls, windows, doors, roofs, and floors. This information is encoded in
30 122 the BIM model as wall types, roof types, floor types as well as window and door families. Wherever
31 123 possible, the tool uses the layering and materials of the construction types, enhancing them with
32 124 physical attributes relevant to EnergyPlus. Where not defined, it assumes default values.

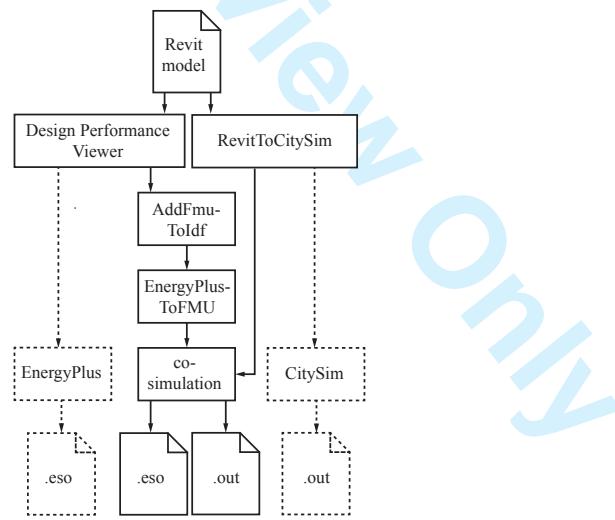

53 54 55 56 57 58 59 60 51 Figure 2. Overview diagram of the coupling process including tools and outputs (Thomas et al. 2014)


53
54 55 56 57 58 59 60 125 Next, geometry is created to be used in both the CitySim and EnergyPlus models as buildings
126 and surfaces surrounding the building targeted in the IDF. This feature of the DPV is used for
127 including shading surfaces in the EnergyPlus simulation model: it uses so-called *mass objects* in the
128 BIM model as surrounding buildings. The DPV model views these buildings as a series of shading
129 surfaces. A transformation is added to the DPV model that produces an input file for the CitySim

1
2
3
4 solver. This file uses an XML format describing the buildings in a scene for simulation, including their
5 construction types, geometry, and systems for heating and cooling. The main BIM is extracted to the
6 CitySim scene as one of the buildings to be simulated, with the properties of the construction types
7 matching those in the DPV model. The glazing ratio is calculated based on the window and wall
8 areas of the DPV model. Shading surfaces are grouped into buildings based on the mass object from
9 which they were extracted. These ~~adjacent~~neighboring buildings use default construction properties
10 for walls and roofs, and we assign them a default glazing ratio. These defaults can be overridden
11 by custom properties applied to the mass objects in the BIM much in the same way as the model
12 elements of the main building are enriched with DPV information.
13

14 As of version 8.1.0, EnergyPlus supports exporting a simulation model as a Functional Mock-up
15 Unit (FMU) ([?](#)(Nouidui, Wetter, and Zuo 2014; JModelica 2014)). This feature introduces new IDF
16 objects to specify the interface such an FMU exposes. These objects define which output variables
17 are exported by the FMU and which variables are imported. The FMU export functionality is closely
18 linked to the Energy Management System (EMS) of EnergyPlus. Co-simulation exchange variables
19 either mimic an EnergyPlus schedule, an EMS variable or drive an EMS actuator. Since the model
20 used by CitySim to simulate a building is more abstract than the model used by EnergyPlus, the
21 EMS is used to aggregate certain values. CitySim does not model windows separately. Therefore, a
22 weighted average of window and wall surface temperatures is calculated with EMS subroutines.
23

24 The FMU creation process is the basis for coupling the two models at each timestep in the sim-
25 ulation. Figure 3 illustrates this process from both the EnergyPlus and CitySim perspective. The
26 augmented IDF file is fed to the *EnergyPlusToFMI* script ([?](#)(Nouidui and Wetter 2014)). Once con-
27 figured, this script produces an FMU file based on the augmented IDF file and the weather file to
28 be used as well as a DLL file implementing the Functional Mock-up Interface that can load the IDF
29 file, locate EnergyPlus and run the simulation.
30

31 ~~154 The number of timesteps per hour for both CitySim and EnergyPlus is set to one per hour. The
frequency of data exchanges is set to once per timestep. No data averaging over time is performed.
Data exported from one simulation engine overwrites the corresponding data in the other simulation
engine at each timestep. Each simulation is performed for a whole year.~~

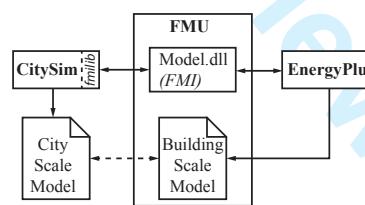

42 Figure 3. Simulation information exchange between CitySim and EnergyPlus using FMI ([?](#)(Thomas et al. 2014))
43

44 2.2. Coupled variables

45 Several key urban-scale weather variables are sent to EnergyPlus from CitySim to account better
46 for the localized effects of surrounding buildings, geography and climate conditions. These vari-
47 ables are outlined in Table 1. They include various outdoor air conditions such as dry bulb and
48 wet bulb temperatures, dew point~~dewpoint~~, humidity, wind speed and direction, and direct and dif-
49 fuse solar radiation. These variables overwrite the input weather variables that EnergyPlus obtains
50 from its weather file input. CitySim is designed to account for physical phenomenon inherent to
51 urban environments, which~~that~~ are often neglected in building-scale simulation environments ([??](#)).
52 CitySim can be connected to a simplified micro-climate airflow model that can predict local climatic
53 conditions around each building. Long-wave ([Robinson and Stone 2004; Robinson et al. 2009](#)). Long
54 wave~~wave~~ radiation exchange between the simulated building and its surroundings is sent to Energy-
55 Plus; this process is described in detail in Section 2.3. Finally, CitySim shares its calculated oc-
56
57
58
59
60

cupancy schedules as it can use a deterministic or stochastic occupant behavior model, whereas EnergyPlus models are solely a deterministic models (?) uses a more robust model of occupants behavior (Haldi and Robinson 2011).

Table 1. Values sent to EnergyPlus from CitySim by the FMU

Object	Variable Name	Description
Outdoor	Outdoor Drybulb	The outdoor dry-bulb temperature in °C
	Outdoor Dewpoint	The outdoor dewpoint temperature in °C
	Outdoor Relative Humidity	The outdoor relative humidity expressed in percent.
	Diffuse Solar	Diffuse horizontal irradiance in W/m ²
	Direct Solar	Beam normal irradiance in W/m ²
	Wind Speed	The outdoor wind speed in m/s
Long-Wave Radiation	Wind Direction	The wind direction in degrees (N=0, E=90, S=180, W=270)
	Environmental Radiant Temp.	Calculated T_{env} from the sky, ground, and surrounding surfaces
Zone	Environmental Radiant Heat Gain Coefficient	Calculated h_{env} from the sky, ground, and surrounding surfaces
	Occupation	Fraction of the maximum occupation (0.0-1.0) overrides the EnergyPlus occupation schedule with the CitySim stochastic schedule.

Variables sent to CitySim by EnergyPlus at each time step include several variables related to the calculation of heating and cooling loads of a targeted building. Table 2 outlines this list of exchanged variables. These variables are transferred due to the ability of EnergyPlus to model more detailed building systems, schedules, ventilation and internal load types than CitySim. For example, EnergyPlus is flexible enough to model a detailed radiant heating and cooling system that would be impossible in CitySim (Hersberger and Sagerschnig 2013). EnergyPlus is an engine optimized to accurately model building-scale systems. Thus, CitySim can take advantage of these models through coupling and co-simulation. EnergyPlus sends the heating and cooling loads, the surface temperatures of the exterior surfaces and the ventilation flow rates to CitySim.

Table 2. Values sent to CitySim from EnergyPlus by the FMU

Object	Variable Name	Description
Wall, Roof	Outside Surface Temperature	The temperature on the outside of the surface in °C
	Average Outside Surface Temperature	The (weighted) average temperature of the surface on the outside in °C.
Zone	Total Heating Energy	The heating energy in Joules used in this timestep.
	Total Cooling Energy	The cooling energy in Joules used in this timestep.
	Zone Mean Air Temperature	The mean air temperature in the zone in °C
	Ventilation Volume Flow Rate	The flow rate in m ³ /s (standard density)

2.3. long-wave-Long wave radiation exchange

long-wave-Long wave radiation exchange in the urban scale environment is coupled in the co-simulation process. It requires the development of a set of approximations to reduce the number of coupled variables between the engines and to account for differences in the methods by which each engine calculates this value. A detailed description of long-wave Long Wave Radiation (LWR) variable exchange and approximation is found in a previously published study (?) (Miller et al. 2015) on a simplified theoretical case.

In EnergyPlus, LWR exchange for a surface is calculated through the summation of radiation gain from the ground, sky, and air as seen in Equation 1 and Figure 4a (?) (United States Department of Energy (DOE) 2015). The radiant heat transfer coefficient for each of these environmental variables is calculated according to Equation 2 with σ as the Stefan-Boltzmann constant, ϵ as the emissivity and $F_{variable}$ being the view factor to the variable that can be sky, grd (ground) or air. A major assumption of this approach is that the modeled

1
2
3
4 building's surfaces and those of adjacent buildings are at a uniform temperature and the LWR ra-
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
195 building's surfaces and those of adjacent buildings are at a uniform temperature and the LWR ra-
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
779
780
781
782
783
784
785
786
787
788
789
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
809
810
811
812
813
814
815
816
817
818
819
819
820
821
822
823
824
825
826
827
828
829
829
830
831
832
833
834
835
836
837
838
839
839
840
841
842
843
844
845
846
847
848
849
849
850
851
852
853
854
855
856
857
858
859
859
860
861
862
863
864
865
866
867
868
869
869
870
871
872
873
874
875
876
877
878
879
879
880
881
882
883
884
885
886
887
888
889
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
909
910
911
912
913
914
915
916
917
918
919
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
939
940
941
942
943
944
945
946
947
948
949
949
950
951
952
953
954
955
956
957
958
959
959
960
961
962
963
964
965
966
967
968
969
969
970
971
972
973
974
975
976
977
978
979
979
980
981
982
983
984
985
986
987
988
989
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
10010
10011
10012
10013
10014
10015
10016
10017
10018
10019
10020
10021
10022
10023
10024
10025
10026
10027
10028
10029
10030
10031
10032
10033
10034
10035
10036
10037
10038
10039
10040
10041
10042
10043
10044
10045
10046
10047
10048
10049
10050
10051
10052
10053
10054
10055
10056
10057
10058
10059
10060
10061
10062
10063
10064
10065
10066
10067
10068
10069
10070
10071
10072
10073
10074
10075
10076
10077
10078
10079
10080
10081
10082
10083
10084
10085
10086
10087
10088
10089
10090
10091
10092
10093
10094
10095
10096
10097
10098
10099
100100
100101
100102
100103
100104
100105
100106
100107
100108
100109
100110
100111
100112
100113
100114
100115
100116
100117
100118
100119
100120
100121
100122
100123
100124
100125
100126
100127
100128
100129
100130
100131
100132
100133
100134
100135
100136
100137
100138
100139
100140
100141
100142
100143
100144
100145
100146
100147
100148
100149
100150
100151
100152
100153
100154
100155
100156
100157
100158
100159
100160
100161
100162
100163
100164
100165
100166
100167
100168
100169
100170
100171
100172
100173
100174
100175
100176
100177
100178
100179
100180
100181
100182
100183
100184
100185
100186
100187
100188
100189
100190
100191
100192
100193
100194
100195
100196
100197
100198
100199
100200
100201
100202
100203
100204
100205
100206
100207
100208
100209
100210
100211
100212
100213
100214
100215
100216
100217
100218
100219
100220
100221
100222
100223
100224
100225
100226
100227
100228
100229
100230
100231
100232
100233
100234
100235
100236
100237
100238
100239
100240
100241
100242
100243
100244
100245
100246
100247
100248
100249
100250
100251
100252
100253
100254
100255
100256
100257
100258
100259
100260
100261
100262
100263
100264
100265
100266
100267
100268
100269
100270
100271
100272
100273
100274
100275
100276
100277
100278
100279
100280
100281
100282
100283
100284
100285
100286
100287
100288
100289
100290
100291
100292
100293
100294
100295
100296
100297
100298
100299
100299
100300
100301
100302
100303
100304
100305
100306
100307
100308
100309
100310
100311
100312
100313
100314
100315
100316
100317
100318
100319
100320
100321
100322
100323
100324
100325
100326
100327
100328
100329
100330
100331
100332
100333
100334
100335
100336
100337
100338
100339
100340
100341
100342
100343
100344
100345
100346
100347
100348
100349
100350
100351
100352
100353
100354
100355
100356
100357
100358
100359
100360
100361
100362
100363
100364
100365
100366
100367
100368
100369
100370
100371
100372
100373
100374
100375
100376
100377
100378
100379
100380
100381
100382
100383
100384
100385
100386
100387
100388
100389
100390
100391
100392
100393
100394
100395
100396
100397
100398
100399
100399
100400
100401
100402
100403
100404
100405
100406
100407
100408
100409
100410
100411
100412
100413
100414
100415
100416
100417
100418
100419
100420
100421
100422
100423
100424
100425
100426
100427
100428
100429
100430
100431
100432
100433
100434
100435
100436
100437
100438
100439
100440
100441
100442
100443
100444
100445
100446
100447
100448
100449
100450
100451
100452
100453
100454
100455
100456
100457
100458
100459
100460
100461
100462
100463
100464
100465
100466
100467
100468
100469
100470
100471
100472
100473
100474
100475
100476
100477
100478
100479
100480
100481
100482
100483
100484
100485
100486
100487
100488
100489
100490
100491
100492
100493
100494
100495
100496
100497
100498
100499
100499
100500
100501
100502
100503
100504
100505
100506
100507
100508
100509
100510
100511
100512
100513
100514
100515
100516
100517
100518
100519
100520
100521
100522
100523
100524
100525
100526
100527
100528
100529
100530
100531
100532
100533
100534
100535
100536
100537
100538
100539
100540
100541
100542
100543
100544
100545
100546
100547
100548
100549
100550
100551
100552
100553
100554
100555
100556
100557
100558
100559
100560
100561
100562
100563
100564
100565
100566
100567
100568
100569
100570
100571
100572
100573
100574
100575
100576
100577
100578
100579
100580
100581
100582
100583
100584
100585
100586
100587
100588
100589
100590
100591
100592
100593
100594
100595
100596
100597
100598
100599
100599
100600
100601
100602
100603
100604
100605
100606
100607
100608
100609
100610
100611
100612
100613
100614
100615
100616
100617
100618
100619
100620
100621
100622
100623
100624
100625
100626
100627
100628
100629
100630
100631
100632
100633
100634
100635
100636
100637
100638
100639
100640
100641
100642
100643
100644
100645
100646
100647
100648
100649
100650
100651
100652
100653
100654
100655
100656
100657
100658
100659
100660
100661
100662
100663
100664
100665
100666
100667
100668
100669
100670
100671
100672
100673
100674
100675
100676
100677
100678
100679
100680
100681
100682
100683
100684
100685
100686
100687
100688
100689
100690
100691
100692
100693
100694
100695
100696
100697
100698
100699
100699
100700
100701
100702
100703
100704
100705
100706
100707
100708
100709
100710
100711
100712
100713
100714
100715
100716
100717
100718
100719
100720
100721
100722
100723
100724
100725
100726
100727
100728
100729
100730
100731
100732
100733
100734
100735
100736
100737
100738
100739
100740
100741
100742
100743
100744
100745
100746
100747
100748
100749
100750
100751
100752
100753
100754
100755
100756
100757
100758
100759
100760
100761
100762
100763
100764
100765
100766
100767
100768
100769
100770
100771
100772
100773
100774
100775
100776
100777
100778
100779
100779
100780
100781
100782
100783
100784
100785
100786
100787
100788
100789
100789
100790
100791
100792
100793
100794
100795
100796
100797
100798
100799
100799
100800
100801
100802
100803
100804
100805
100806
100807
100808
100809
100810
100811
100812
100813
100814
100815
100816
100817
100818
100819
100820
100821
100822
100823
100824
100825
100826
100827
100828
100829
100830
100831
100832
100833
100834
100835
100836
100837
100838
100839
100840
100841
100842
100843
100844
100845
100846
100847
100848
100849
100850
100851
100852
100853
100854
100855<br

1
2
3
4 216 pressing a single button. This functionality allows an iterative design style informed by readily avail-
5 able simulation results. An automated workflow ties work flow to tie the various steps together and
6 maintains maintain the effortless iterative design process. VisTrails enables the coupling of various
7 workflow work flow subprocesses script initializations, executions of the engines, and the compilation
8 of the outputs. This tool empowers the coupling of multiple various executable files and their con-
9 necting scripts in graphical diagrams that enhance enhances reproducibility and process automation
10 (?)(Freire et al. 2014). The VisTrails workflow work flow diagram for the first case study in this
11 paper is seen in Figure 5.
12
13
14
15
16
17



Figure 5. Workflow in VisTrails

1
2
3
4 **2.5. Simplified calibration**

5
6 In the first case study, one aspect of this analysis is the comparison of the—actual mea-
7 sured performance of the target building on campus with the simulation results of the co-
8 simulation. A simplified calibration procedure is adapted from previous research to compare
9 the measured heating and cooling data available on campus with various simulation scenarios
10 (?)^(Samuelson, Ghorayshi, and Reinhart 2015). This calibration procedure was utilized in the per-
11 formance reconciliation of 18 buildings that were built according to the LEED Canada protocol
12 and were under review of actualized performance. This protocol is unique in its analysis process to
13 uncover design model deficiencies in a step-wise manner, utilizing the most readily available easily
14 accessible knowledge first and working towards equilibrium between measured and simulated. There
15 is an appropriate balance between the effort of implementation and value generated through the
16 calibration process.

17
18
19
20
21
22
23
24 **3. Implementation**

25
26 The co-simulation process is implemented on two case studies in Switzerland. The first is the ETH
27 Zürich Hoenggerberg campus in Zürich, Switzerland. The focus of this case study is to quantify
28 compare the impact of the information exchange through co-simulation within the EnergyPlus
29 engine. The intent on this campus was to develop techniques for retrofit analysis using EnergyPlus.
30 The targeted building on this campus is the HPI Building. Raw measured data is available for
31 many of the buildings on campus, thus a simplified calibration procedure is used to reconcile the
32 simulation results.

33
34
35 The second case study is the EPFL campus in Lausanne, Switzerland. The targeted building, in
36 this instancecase, was the Quartier Nord complex. The focus of this study was to compare the solo
37 and co-simulation output results of CitySim^{both CitySim and EnergyPlus}. Reliable measured data
38 for calibration is not currently available for this building.

39
40
41
42
43
44
45 **3.1. Campus case study 1: ETHZ Hoenggerberg Campus**

46
47 The ETH Zürich Hoenggerberg campus includes 32 higher education facilities with spaces allocated
48 to laboratories, office space, lecture halls, cafeterias, data centers and other types of similar areas.
49 The campus has a centralized energy management system (EMS) that contains 807 energy and water
50 measurement points from heating, cooling, electricity, city gas, domestic hot water, ~~gray~~ grey water,
51 and general water consumption.

52
53 The focus of the co-simulation process is that the performance of a targeted building is evaluated
54 through solo and coupled methods. The HPI building on campus was chosen in this case study due
55 to the amount and quality of measured data available from the EMS for this building. HPI is a 2,610
56 square meter building that is made up mostly of office space and classrooms. It also includes 400
57 m² convenience store and coffee shop. The building is indicated on a campus map shown in Figure
58 6 and is shaded red.


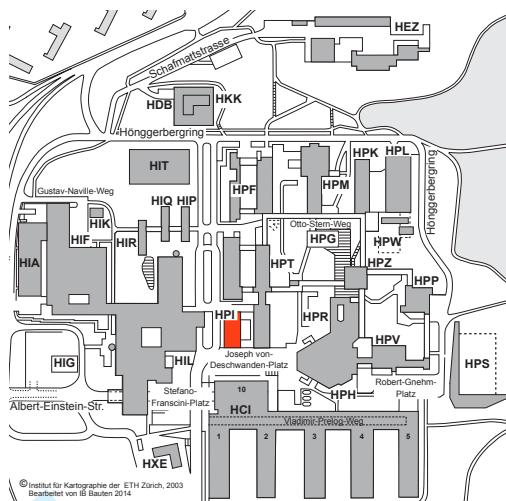


Figure 6. ETH Hoenggerberg campus map with the HPI building shaded red

261 3.2. Model development

262 In order to perform a co-simulation of the targeted buildings, initially a CitySim model of the
 263 campus was developed. Through the workflow automation process, this geometry was converted into
 264 an EnergyPlus input file as seen in Figure 7. The EnergyPlus input file was then used as an input to
 265 execute EnergyPlus solo and co-simulation processes for the purpose of simplified calibration, and
 266 then to understand the magnitude of the difference between these simulation scenarios.

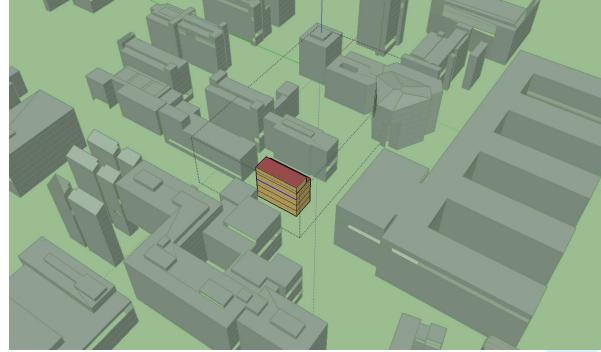

43 Figure 7. The HPI building EnergyPlus model extracted from the CitySim model. The HPI building is seen as the light
 44 and dark brown building in the center surrounded by gray masses that represent other buildings on campus. The graphic is
 45 illustrated modeled with OpenStudio for Sketch-up Sketchup

267 3.3. Measured data collection and calibration

268 Energy data from the HPI building was collected and analyzed in the context of the simplified
 269 calibration procedures. The measured datasets were ~~are~~ screened and aggregated into typical usage
 270 profiles to be used for the lighting, plug-loads, and HVAC equipment availability schedules and power
 271 densities. Figure 8 illustrates the aggregation examples of electrical energy for the HPI building.
 272 This profile was created through a filtering and clustering process known as *DayFilter* (?). Cluster
 273 0 represents the typical energy profile for Sunday, while Cluster 1 dominates the Saturdays of the
 274 data set. Clusters 2 and 3 make up most of the weekdays of the data set with Cluster 3 being more
 275 common in non-summer months. These profiles are ~~(Miller, Nagy, and Schlueter 2015)~~. This profile
 276 is used to set the availability schedules as inputs into the EnergyPlus simulation to emulate the

way occupants inhabit the building and how the building management system (BMS) controls the lighting and HVAC systems.

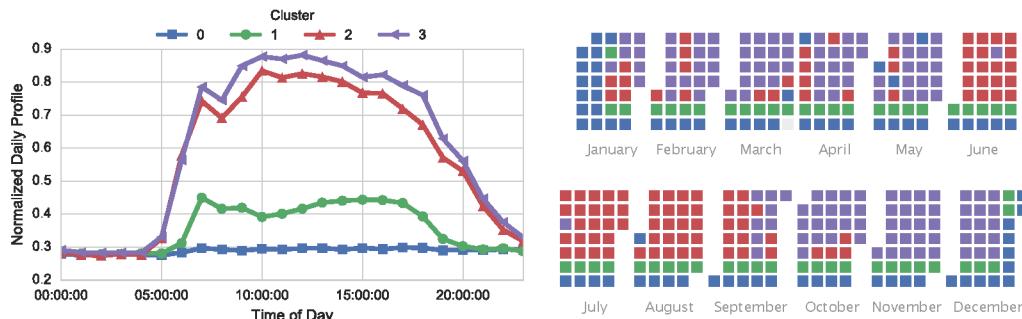


Figure 8. HPI Electrical Energy Typical measured data electricity profiles of (left) average daily electrical consumption for each cluster and (right) color-coded calendar of which days fall within each cluster. The diagram on the right is each month of the year with each row corresponding with a day of the week (starting with Monday) and each column corresponding to a week of the month. Profiles

The measured and simulated data from both the co-simulation and EnergyPlus solo simulation were analyzed was compared in order to understand how both the solo and co-simulations compare to real, measured datacreate a realistic scenario for comparison. The calibration process was undertaken through a series of steps such as including local weather conditions for the simulation period and adding custom lighting schedules and power densities extracted from the measured data. The models were calibrated to the summer season (May-September) for cooling and the winter season (January-April and October to December) for heating. This approach was taken as the data quality for the measurements were deemed most accurate during the appropriate seasons. Figure 9 illustrates a comparison of the measured data with the simulations after the tuning process. The final calibrated EnergyPlus solo model had a normalized mean bias error (NMBE) of -9.36% and a coefficient of variation of root mean square error (CVRMS) of 21.7% for cooling and 5.02-9.36% and 29.4% for heating. These metrics fall within the +/-10% NMBE and +/-30% CVRSME used in this case study for calibration. A total of 37 calibration iterations were undertaken to modulate the simulation results to within these criteria. The goal of calibration, in this case, is to just bring the models to within a reasonable range of reality in order to bring more confidence to analysis of the discrepancies between the solo and co-simulation scenarios.

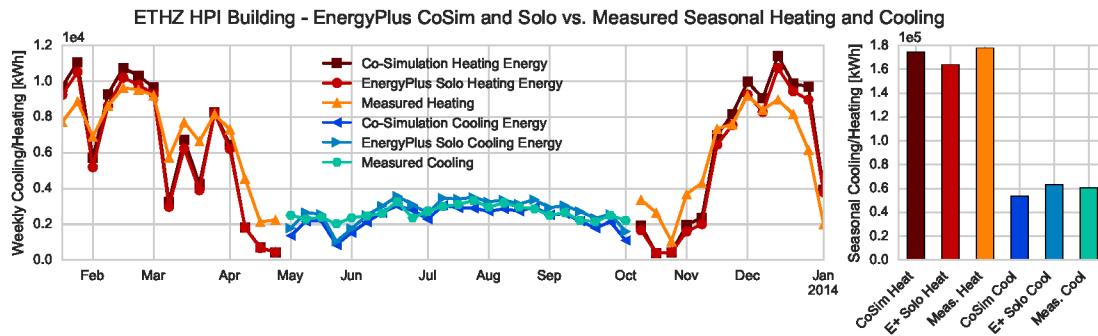


Figure 9. HPI Measured vs. Co-Simulation and EnergyPlus Solo for Heating and Cooling Seasons

3.4. EnergyPlus co-simulation results

After calibration, a comparison of co-simulation and solo EnergyPlus simulations is made. For cooling, a discrepancy can be seen between co-simulation and solo EnergyPlus. Co-simulation decreases

the predicted cooling energy by 15.5%, as seen in Figure 10. Figure 11 illustrates the difference in predicted heating energy consumption across the test year. A consistent offset exists across the time frame of days in January, the peak of the heating season. A more varied discrepancy across the heating months is noticed resulting in an overall increase of heating prediction of 6.5% due to co-simulation. The exchange of long-wave radiation for this particular site is substantial due to the proximity of surrounding buildings. These performance differences due to co-simulation are compared to a theoretical single-zone case study in which there was a 15-30% increase in heating energy and a 4-11% decrease in cooling energy (Miller et al. 2015). The results from this case study are less extreme on the heating side and more on the cooling side than the theoretical case study.

When comparing the solo and co-simulated models to the measured data, it is noticed that cooling energy is over-predicted by the solo simulation by 4%, while co-simulation under-predicted by 11.1%. This discrepancy is likely due to a loss in long-wave radiation in the co-simulation to the surrounding buildings, thus reducing the overall cooling load.

For heating energy, co-simulation was able to bring the predicted value to within 2% of the measured value for the year, an improvement as compared to the solo simulation, which was 8.5% less than the measured value.

This situation is also likely due to the long-wave radiation loss to surrounding buildings, thus increasing the overall heating load.

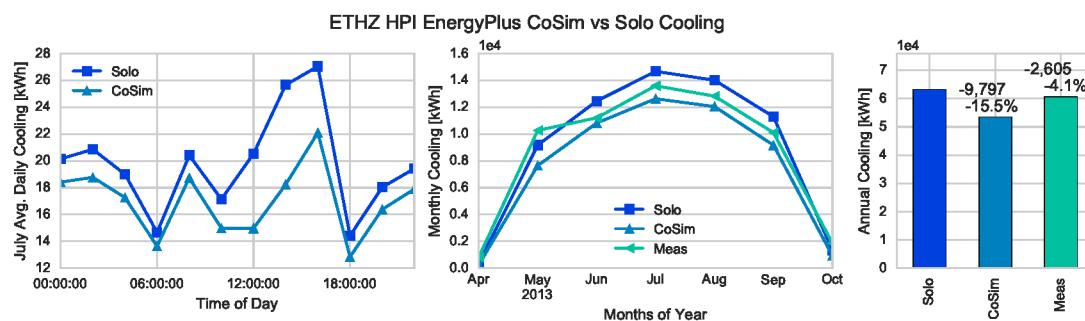


Figure 10. HPI Co-Simulation vs. EnergyPlus Solo for Cooling

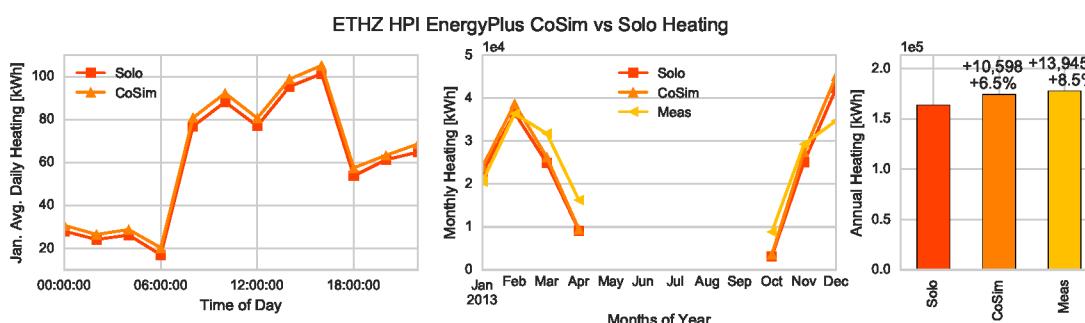


Figure 11. HPI Co-Simulation vs. EnergyPlus Solo for Heating

3.5. Campus case study 2: EPFL Quartier Nord

Quartier Nord is a whole new quarter of the École Polytechnique Fédérale de Lausanne (EPFL) campus located at its northwest corner. This complex includes a Convention Centre with an auditorium with a maximum capacity of 3000 (seated) people, housing for 516 students, retail and service areas and a hotel. As a public space, this ensemble is organized around the central plaza as seen in

Figure 12). With a particularly strong visual and formal identity, the SwissTech Convention Centre (STCC) is clearly the key protagonist. Designed as a Minergie building, it includes modern energy conversion technologies to reduce its energy consumption. The focus of the co-simulation is realized on the STCC, simulated with the nearby buildings for housing, retail and service areas(?)



Figure 12. The Quartier Nord at EPFL in Lausanne

325 3.6. *Model development*

The information required in the simulation mainly comprises three parts: physical, geometrical and operational data. The geometry information including the shape, dimension, structure and materials was obtained from the Real Estate and Infrastructure Department of École Polytechnique Fédérale de Lausanne (EPFL), which was responsible for carrying out the project from call to tender to construction. However, since the documents provided were full of details but also conflicting with what has been installed as compared to the documents before construction, the task to realize a precise model of the buildings itself is rather tedious. Besides, it is even more challenging to get the operational data (daily occupancy, lighting, and electrical equipment usage level and ventilation rate) as the building has only recently been set in operation mode and as engineers and technicians have been working on improving the controls. Therefore, due to unreliable monitoring data, the calibration step of the model was not undertaken.

Considering the lack of detailed information about the building, a so-called detailed reference case was modeled with EnergyPlus (?) (Mauree et al. 2015) in which regulation standards applied in the design phase from the local building code SIA norms were used to complete the missing information. A rendering of this model is seen in Figure 13.

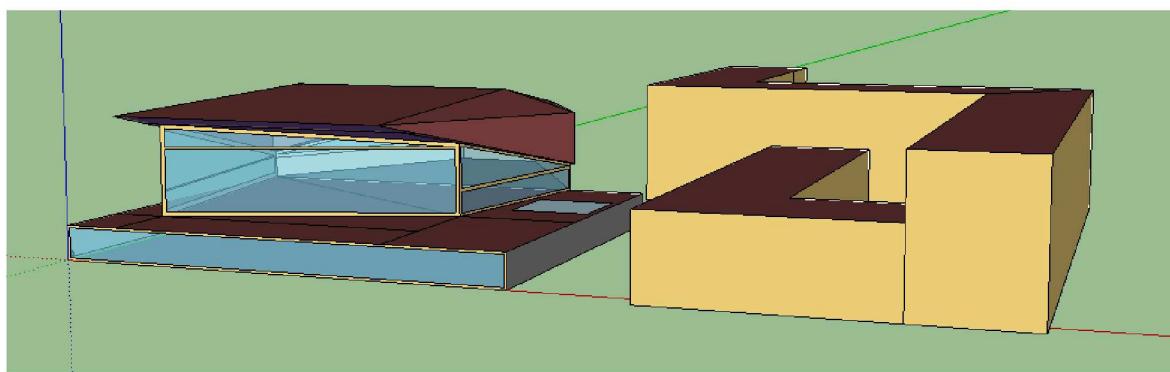


Figure 13. The Quartier Nord modeled with OpenStudio for Sketchup². The STCC on the left is the main focus of the study and is represented by two thermal zones.


³⁴² The corresponding CitySim model was created by exporting a DXF file from EnergyPlus for the

whole of Quartier Nord, and importing it into the Graphical User Interface of CitySim. Physical characteristics of the building were added to complete the CitySim model. Finally, the same script as described in Section 2 was used to export the model from CitySim to EnergyPlus, giving a simplified EnergyPlus model.


347

348 3.7. Comparison of EnergyPlus and CitySim

349 Both the CitySim and EnergyPlus engines are utilized in this case study. The first comparison
 350 to observe is the differences between the two engines when focused on the STCC Quartier Nord
 351 building. When simulated in isolation, the CitySim engine predicts a 28.6% increase in heating load
 352 and a 44.4% increase in cooling load as compared to EnergyPlus. This phenomenon is due to the
 353 differences in the way each of these engines calculates heating and cooling loads. CitySim has a
 354 much more simplified model of building occupants, lighting, and plug loads. CitySim also includes
 355 long-wave radiation exchange calculations that can greatly influence the heating and cooling load
 356 calculations as well. Use of the co-simulation process brings the engines to within 5.4%. Figure 14
 357 illustrates these differences for cooling and Figure 15 for heating.

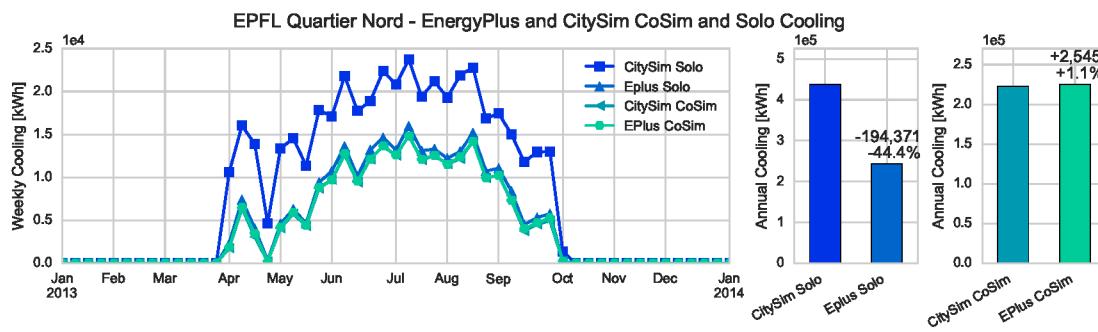

345 Figure 14. STCC Quartier Nord CitySim vs. EnergyPlus Solo for Cooling

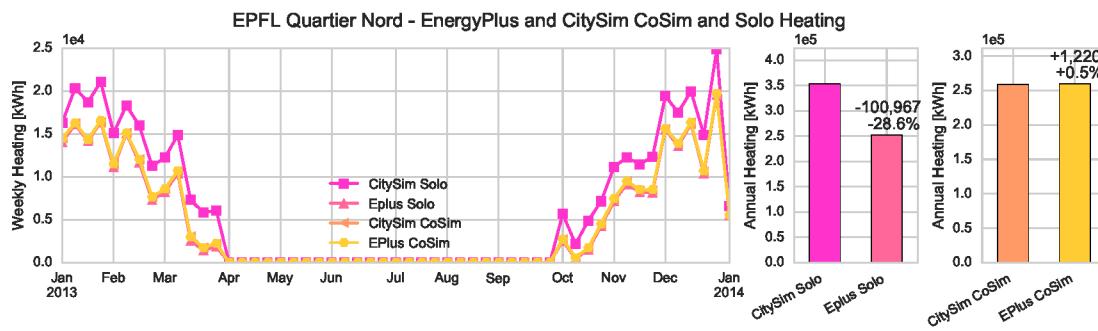

346 Figure 15. STCC Quartier Nord CitySim vs. EnergyPlus Solo for Heating

358 3.8. EnergyPlus co-simulation results

359 The STCC Quartier Nord building is also simulated within the solo and co-simulation environments.
 360 When focusing on the EnergyPlus results, a 7.5% decrease in cooling energy is observed,
 361 as seen in Figure 16. A 2.8% increase in heating energy is observed, as seen in Figure 17.
 362 These differences are less pronounced than the HPI and theoretical case studies due to the number

and proximity of surrounding buildings is not as large. Long wave radiation exchange in this situation doesn't have as large of an impact on the heating and cooling calculations.

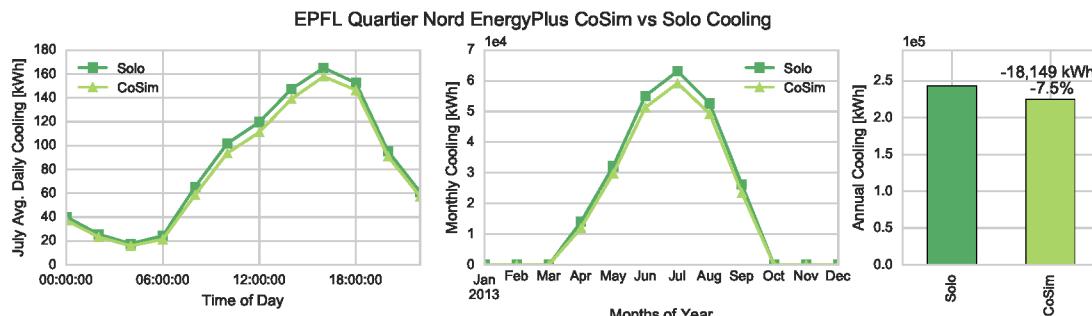


Figure 16. Quartier Nord EnergyPlus Co-Simulation vs. Solo for Cooling

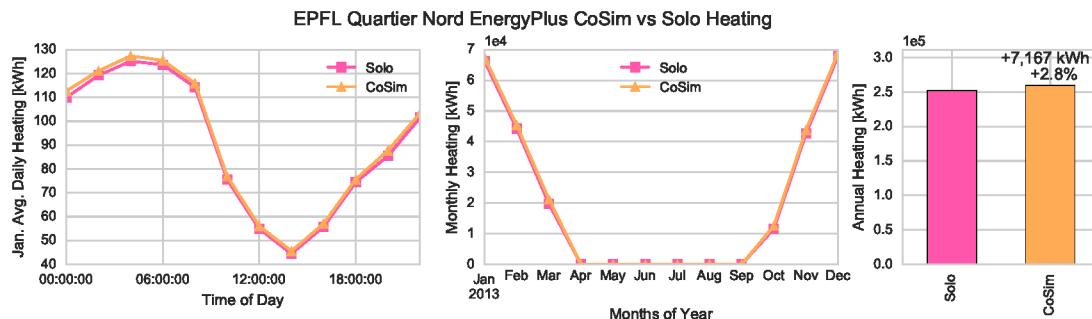


Figure 17. Quartier Nord EnergyPlus Co-Simulation vs. Solo for Heating

One of the key insights in this work is that each of the engines is enabled to account for the various physical phenomenon in their simulation process that were previously impossible. For example, through co-simulation, EnergyPlus was able to utilize the long-wave radiation exchange capabilities of CitySim. The Conclusion Discussion Two campus case studies were presented in this paper to showcase a unique process of extracting model meta-data, conversion of those data into input files for two separate simulation engines, and the solo and co-simulation process of those engines on two real-world case studies. The analysis of the results shows that for the first case study, co-simulation can achieve values closer to measured reality for heating, but not cooling. These results are unique to this case study and simply show that the co-simulation process may be helpful for heating only in this particular instance. A limitation of this study is that we only analyze a single building against measured data in this context. In the second case study, significant discrepancies are found between the CitySim and EnergyPlus engines which were corrected using the co-simulation process.

One of the key insights in this work is that each of the engines is enabled to account for the various physical phenomenon in their simulation process that were previously impossible. For example, through co-simulation, EnergyPlus was able to utilize the long-wave radiation exchange capabilities of CitySim. The Conclusion The ability to couple and leverage the best aspects of multiple simulation engines can enhance the modeling of large-scale urban agglomerations.

Disadvantages of the co-simulation process are mainly centered upon the increase in computing time and power needed for the FMI to coordinate data exchange between the two simulation engines. After calibration, a comparison of the run times of the co-simulation and solo EnergyPlus simulations show that the execution time for the solo EnergyPlus simulation was 1 minute and 49 seconds compared to 28 minutes and 10 seconds for the co-simulation.

1
2
3
4 387 **4. Conclusion**

5
6 This paper outlines the implementation of This paper has outlined two such scenarios in which
7 the building-focused EnergyPlus simulation engine is coupled and co-simulated with the urban-scale
8 CitySim engine. This process is implemented through a fully automated workflow work flow process
9 that extracts geometry information at the urban-scale, creates the necessary input information, exe-
10 cutes each engine with information exchange at each time step of targeted variables, and accumulates
11 the results of the analysis. The process has been implemented on simplified theoretical scenarios in
12 the past ,and the key innovation with this work is in implementation on actual case study campuses
13 and targeted buildings. The results illustrate that the differences between the co- simulation and
14 solo environments are within range of previous theoretical models. The results show that there is
15 a noticeable impact More reliable results of the magnitude of differences between the simulation
16 techniques can be extracted from these real-world scenarios.
17

18 Future work in using co-simulation models for buildings and campuses would more intensively
19 utilize the model results in a practical implementation of retrofit scenarios or urban-scale energy
20 systems research.

21 ~~More implementations would also test the feasibility of using co-simulation for retrofit analysis,
22 urban planning studies, and cooling and heating system optimization.~~

23
24 404 **3.1. Acknowledgments Acknowledgements**

25 The authors would like to acknowledge the ETH Zürich Campus Facilities Department, the EPFL
26 Real Estate and Infrastructure Department, and Emanuel Thoma for their assistance in this project.
27 This research was funded by the Competence Center in Energy and Mobility (CCEM) under the
28 Urban Multi-scale Energy Modeling (UMEM) project.
29

30
31 409 **References**

- 32
33
34
35 Allegrini, Jonas, Viktor Dorer, and Jan Carmeliet. 2012. "Influence of the urban microclimate in street
36 canyons on the energy demand for space cooling and heating of buildings." *Energy and Buildings* 55:
37 823–832.
38 Bouyer, Julien, Christian Inard, and Marjorie Musy. 2011. "Microclimatic coupling as a solution to improve
39 building energy simulation in an urban context." *Energy and Buildings* 43 (7): 1549–1559.
40 Bueno, Bruno, Leslie K Norford, Julia Hidalgo, and Grégoire Pigeon. 2013. "The urban weather generator."
41 *Journal of Building Performance Simulation* 6 (4): 269–281.
42 Bueno, Bruno, Leslie K Norford, Grégoire Pigeon, and Rex Britter. 2011. "Combining a Detailed Building
43 Energy Model with a Physically-Based Urban Canopy Model." *Boundary-Layer Meteorology* 140 (3):
44 471–489.
45 Dorer, Viktor, Jonas Allegrini, Kristina Orehounig, Peter Moonen, Govinda Upadhyay, Jérôme Kämpf, and
46 Jan Carmeliet. 2013. "Modelling the urban microclimate and its impact on the energy demand of buildings
47 and building clusters." In *Proceedings of BS2013: 13th Conference of International Building Performance
48 Simulation Association*, 3483–3489. Chambéry, France: International Building Performance Simulation
49 Association. Aug.
50 Evins, Ralph, Viktor Dorer, and Jan Carmeliet. 2014. "Simulating external longwave radiation exchange for
51 buildings." *Energy and Buildings* 75: 472–482.
52 Freire, Juliana, David Koop, Fernando Seabra Chirigati, and Cláudio T Silva. 2014. "Reproducibility using
53 VisTrails." *Implementing Reproducible Research* 33.
54 Haldi, Frédéric, and D Robinson. 2011. "The impact of occupants' behaviour on building energy demand."
55 *Journal of Building Performance Simulation* 4 (4): 323–338.
56 Hersberger, Christian, and Carina Sagerschnig. 2013. "Thermal Modelling of a Low Exergy HVAC System
57 in EnergyPlus: A Case Study." In *CISBAT*, 1139–1144. Lausanne, Switzerland. Sep..
58 JModelica. 2014. "<http://www.jmodelica.org/FMILibrary>." <http://www.jmodelica.org/FMILibrary>.
59
60

- 1
2
3
4 434 Keirstead, James, Mark Jennings, and Aruna Sivakumar. 2012. "A review of urban energy system models:
5 435 Approaches, challenges and opportunities." *Renewable and Sustainable Energy Reviews* 16 (6): 3847–3866.
6 436 Lawrie, L K, Fred C Winkelmann, Fred Buhl, and Joe J Huang. 2001. "EnergyPlus: creating a new-generation
7 437 building energy simulation program." *Energy and Buildings* 33 (4): 319–331.
8 438 Martin, Miguel, Afshin Afshari, Peter R Armstrong, and Leslie K Norford. 2015. "Estimation of urban
9 439 temperature and humidity using a lumped parameter model coupled with an EnergyPlus model." *Energy*
10 440 and *Buildings* 96: 221–235.
11 441 Mauree, D, Y Yao, J KAEMPF, and J L Scartezzini. 2015. "Evaluation and Optimization of Renewable
12 442 Energy in the "Quartier Nord": Objective Zero-Power." *CISBAT 2015* .
13 443 Miller, C, Z Nagy, and Arno Schlueter. 2015. "Automated daily pattern filtering of measured building
14 444 performance data." *Automation in Construction* .
15 445 Miller, Clayton, and Chandra Sekhar. 2010. "Modeling of the Single Coil, Twin Fan Air-Conditioning System
16 446 in EnergyPlus." In *SimBuild 2010: Fourth National Conference of IBPSA-USA*, 201–206. New York, NY.
17 447 Aug..
18 448 Miller, Clayton, Daren Thomas, Silvia Domingo Irigoyen, Christian Hersberger, Zoltan Nagy, Dino Rossi, and
19 449 Arno Schlueter. 2014. "BIM-extracted EnergyPlus model calibration for retrofit analysis of a historically
20 450 listed building in Switzerland." In *In Proceedings of SimBuild 2014: 2014 ASHRAE/IBPSA-USA Building
21 451 Simulation Conference*, Atlanta, GA, USA. Sep..
22 452 Miller, Clayton, Daren Thomas, Jérôme Kämpf, and Arno Schlueter. 2015. "Long Wave Radiation Exchange
23 453 for Urban Scale Modeling within a Co-Simulation Environment." In *CISBAT*, Lausanne, Switzerland. Sep..
24 454 Nouidui, Thierry, Michael Wetter, and Wangda Zuo. 2014. "Functional mock-up unit for co-simulation
25 455 import in EnergyPlus." *Journal of Building Performance Simulation* 7 (3): 192–202.
26 456 Nouidui, Thierry Stephane, and Michael Wetter. 2014. "Tool coupling for the design and operation of
27 457 building energy and control systems based on the Functional Mock-up Interface standard." In *the 10th
28 458 International Modelica Conference, March 10-12, 2014, Lund, Sweden*, 311–320. Linköping University
29 459 Electronic Press. Mar..
30 460 Robinson, D, Frédéric Haldi, J Kämpf, Philippe Leroux, Diane Perez, Adil Rasheed, and Urs Wilke. 2009.
31 461 "CitySim: Comprehensive micro-simulation of resource flows for sustainable urban planning." In *Proceed-
32 462 ings of BS2009: 11th International Building Performance Simulation Association Conference*, Glasgow,
33 463 Scotland. Jul..
34 464 Robinson, D, and Andrew Stone. 2004. "Solar radiation modelling in the urban context." *Solar Energy* 77
35 465 (3): 295–309.
36 466 Samuelson, Holly W, Arash Ghorayshi, and Christoph F Reinhart. 2015. "Analysis of a simplified calibration
37 467 procedure for 18 design-phase building energy models." *Journal of Building Performance Simulation* 1–13.
38 468 Schlueter, Arno, and Frank Thesseling. 2009. "Building information model based energy/exergy performance
39 469 assessment in early design stages." *Automation in Construction* 18 (2): 153–163.
40 470 Srebric, Jelena, Mohammad Heidarnejad, and Jiying Liu. 2015. "Building neighborhood emerging properties
41 471 and their impacts on multi-scale modeling of building energy and airflows." *Building and Environment* 91
42 472 (C): 246–262.
43 473 Thomas, D, C Miller, J Kämpf, and Arno Schlueter. 2014. "Multiscale co-simulation of EnergyPlus and
44 474 CitySim models derived from a building information model." *BauSIM 2014: Fifth German-Austrian
45 475 IBPSA Conference* .
46 476 Thomas, Daren, and Arno Schlueter. 2012. "Customizable continuous building simulation using the de-
47 477 sign performance toolkit and Kepler scientific workflows." In *Proceedings of ECPPM 2012: eWork and
48 478 eBusiness in Architecture, Engineering and Construction*, 17–22. Reykjavik, Iceland: CRC Press.
49 479 Trčka, M, Jan Hensen, and M Wetter. 2010. "Co-simulation for performance prediction of integrated building
50 480 and HVAC systems—An analysis of solution characteristics using a two-body system." *Simulation Modelling
51 481 Practice and Theory* 18: 957–970.
52 482 United Nations. 2014. "World Urbanization Prospects: 2014 Update." 1–32.
53 483 United States Department of Energy (DOE). 2015. "EnergyPlus Engineering Reference Version 8.2: The
54 484 Reference to EnergyPlus Calculations." *The Reference to EnergyPlus Calculations* .
55 485 VisTrails. 2014. "www.vistrails.org." <http://www.vistrails.org>.
56 486 Wetter, Michael. 2011. "Co-simulation of building energy and control systems with the Building Controls
57 487 Virtual Test Bed." *Journal of Building Performance Simulation* 4 (3): 185–203.
58 488 Yang, Xiaoshan, Lihua Zhao, Michael Bruse, and Qinglin Meng. 2012. "An integrated simulation method
59 489 for building energy performance assessment in urban environments." *Energy and Buildings* 54: 243–251.
60

1
2
3
4 490 Zhang, R, Khee Poh Lam, S Yao, and Y Zhang. 2013. "Coupled EnergyPlus and computational fluid dy-
5 namics simulation for natural ventilation." *Building and Environment* .
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60



Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich

Institute of Technology in Architecture

ETH Zurich
Mr. Clayton Miller
Researcher
Future Cities Laboratory
1 CREATE Way #06-01
Singapore

Ian Beausoleil-Morrison
Jan Hensen
Co-Editors
Journal of Building Performance Simulation

Phone (Worldwide Contact Number):
+1 402 403 0090
miller.clayton@arch.ethz.ch
www.systems.arch.ch

Singapore, December 19, 2016

Journal Paper Submission

Dear Dr. Beausoleil-Morrison and Dr. Hensen:

The attached manuscript entitled "Urban and building multiscale co-simulation: case study implementations on two university campuses" is an original research article that I would like to submit for consideration in Journal of Building Performance Simulation. This paper outlines the process of co-simulation between EnergyPlus and CitySim for two campuses. This paper builds upon the work from two previous conference papers and includes properly-referenced content from both papers. References of those papers are found below:

Thomas, D., Miller, C., Kämpf, J., Schlueter, A., 2014. Multiscale co-simulation of EnergyPlus and CitySim models derived from a building information model, in: Proceedings of Bausim 2014: Fifth German-Austrian IBPSA Conference. Presented at the Bausim 2014: Fifth German-Austrian IBPSA Conference, IBPSA, Aachen, Germany, pp. 469–476. doi:10.13140/2.1.4639.1040

Miller, C., Thomas, D., Kämpf, J., Schlueter, A., 2015. Long wave radiation exchange for urban scale modelling within a co-simulation environment, in: Proceedings of CISBAT 2015. Presented at the CISBAT 2015, CISBAT, Lausanne, Switzerland, pp. 871–876. doi:10.13140/RG.2.1.2876.4640

This paper builds upon the previous research by applying the workflow to two campus case study projects. This contextual application gives a realistic analysis of how much differences between solo and co-simulations.


This paper was funded through the UMEM: Urban Multiscale Energy Modelling project from the Swiss Competence Center Energy and Mobility (CCEM).

Any questions or comments can be directed to myself as the corresponding author. I am available via email at miller.clayton@arch.ethz.ch and by phone at 1-402-403-0090.

Kind Regards,


Clayton Miller


Meteorological
Meso-scale
4
5
8
9
10
11
12
13
14
15
16
17
18
19

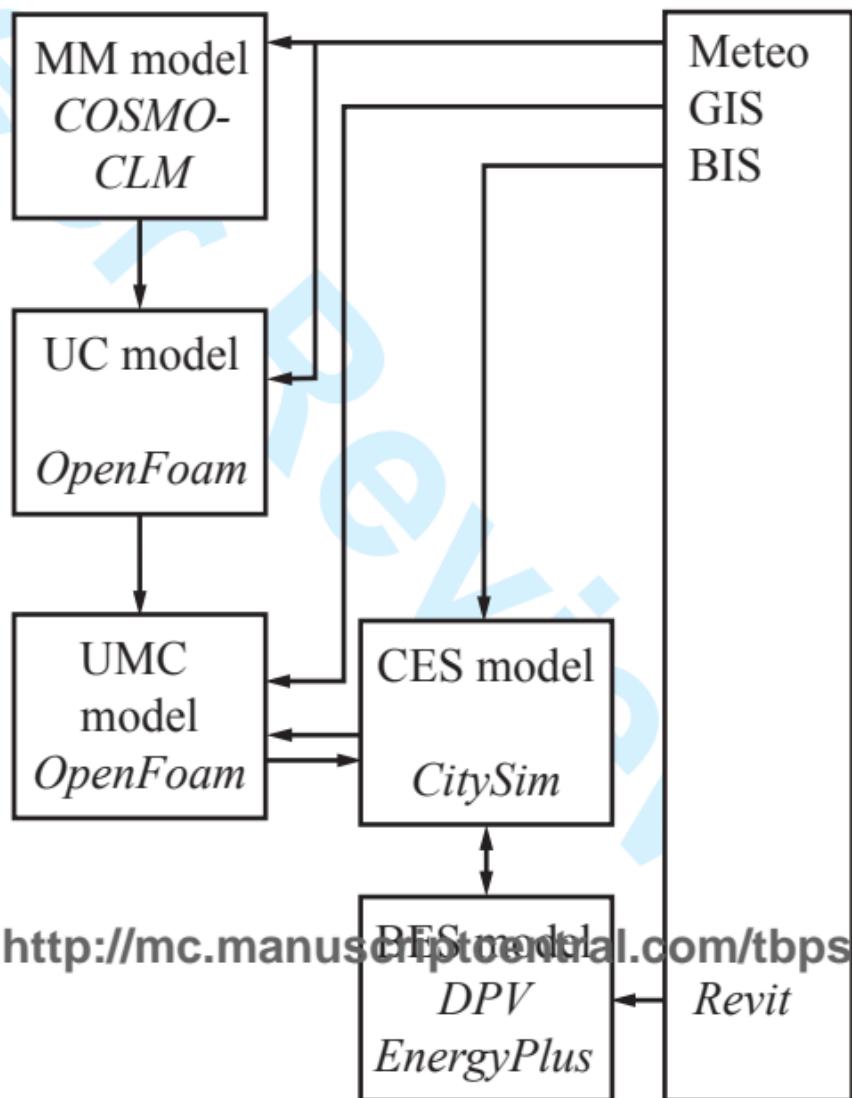


URL: <http://mc.manuscriptcentral.com/tbps>

JBagea et al. / Building Performance Simulation

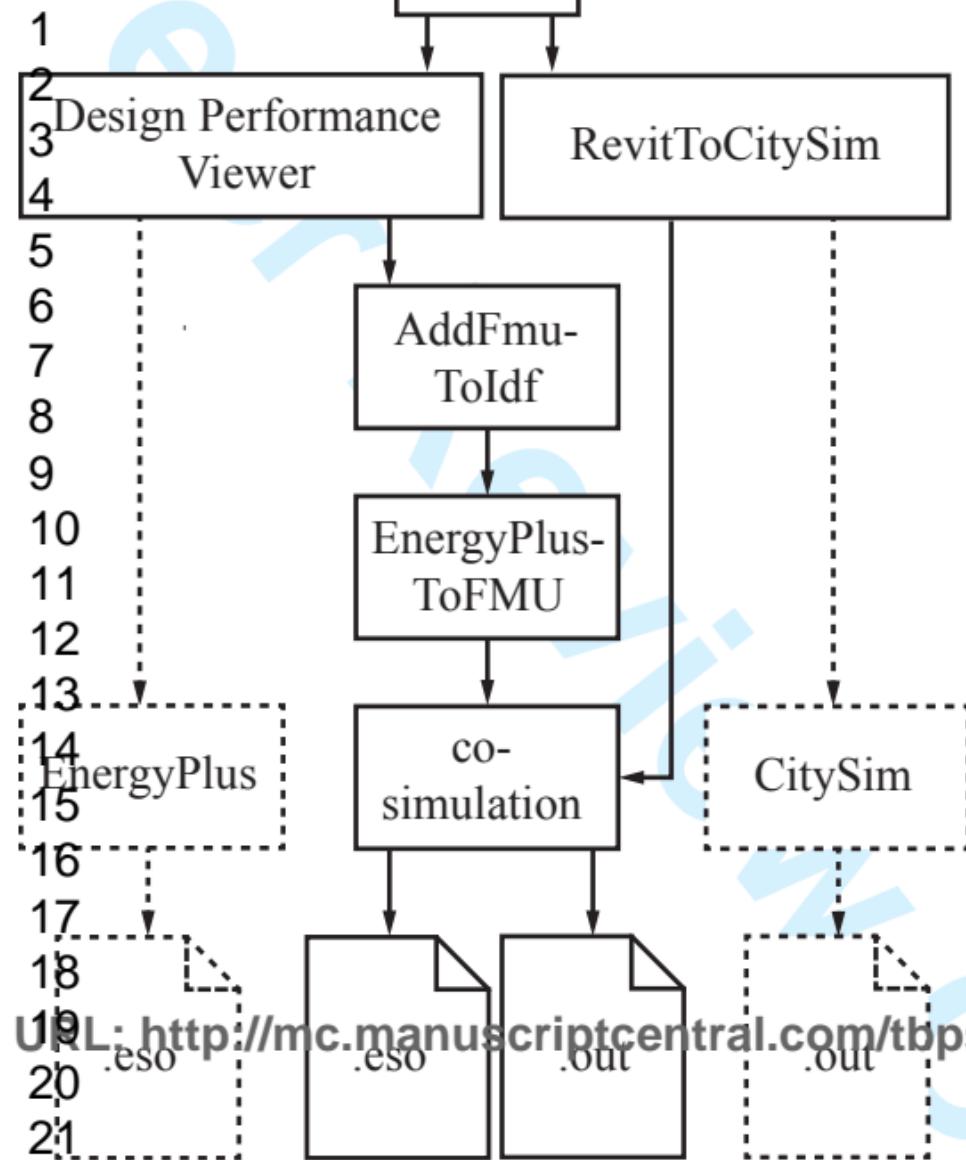


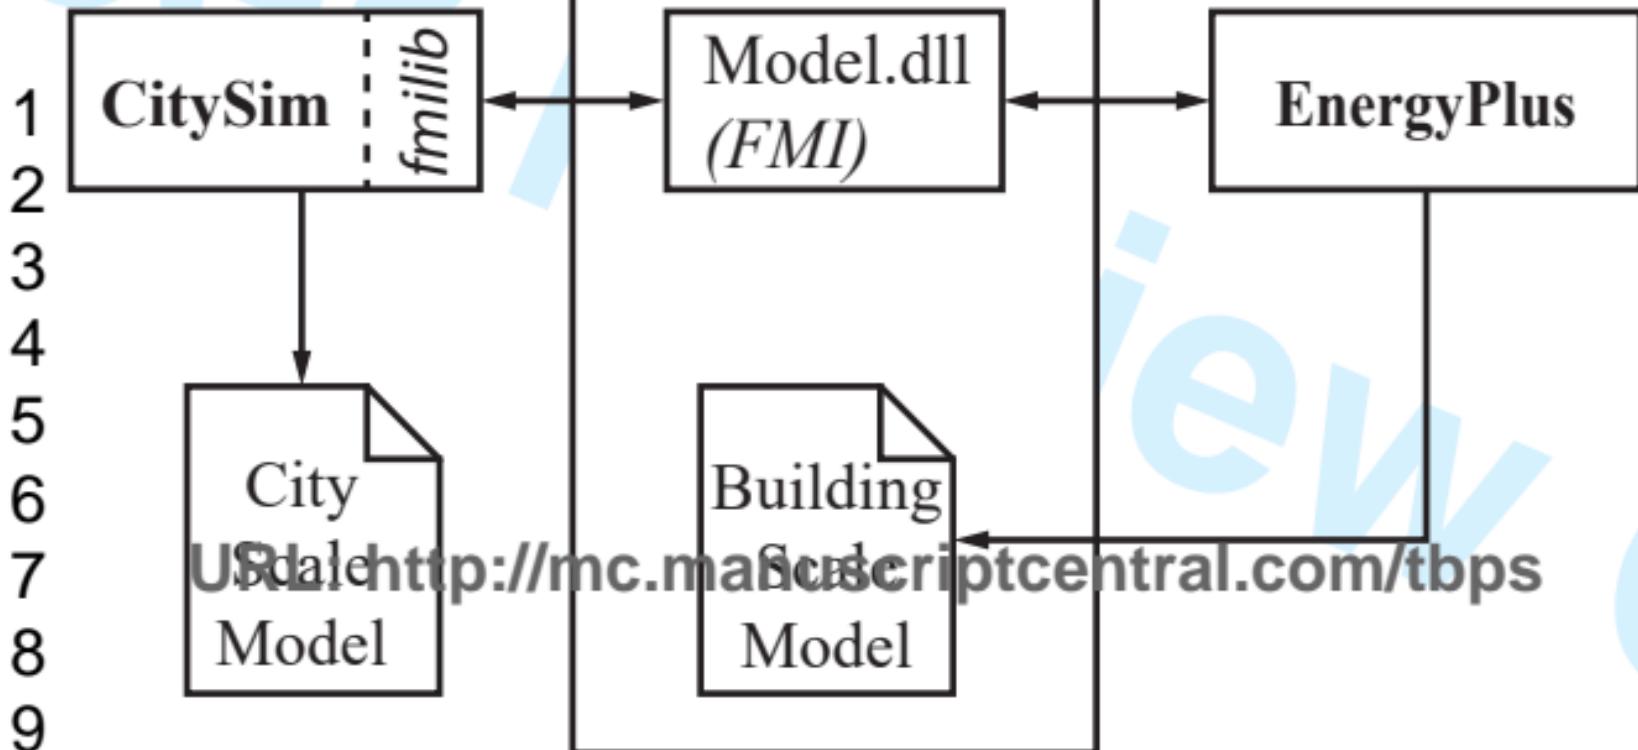


diffie hellman key exchange






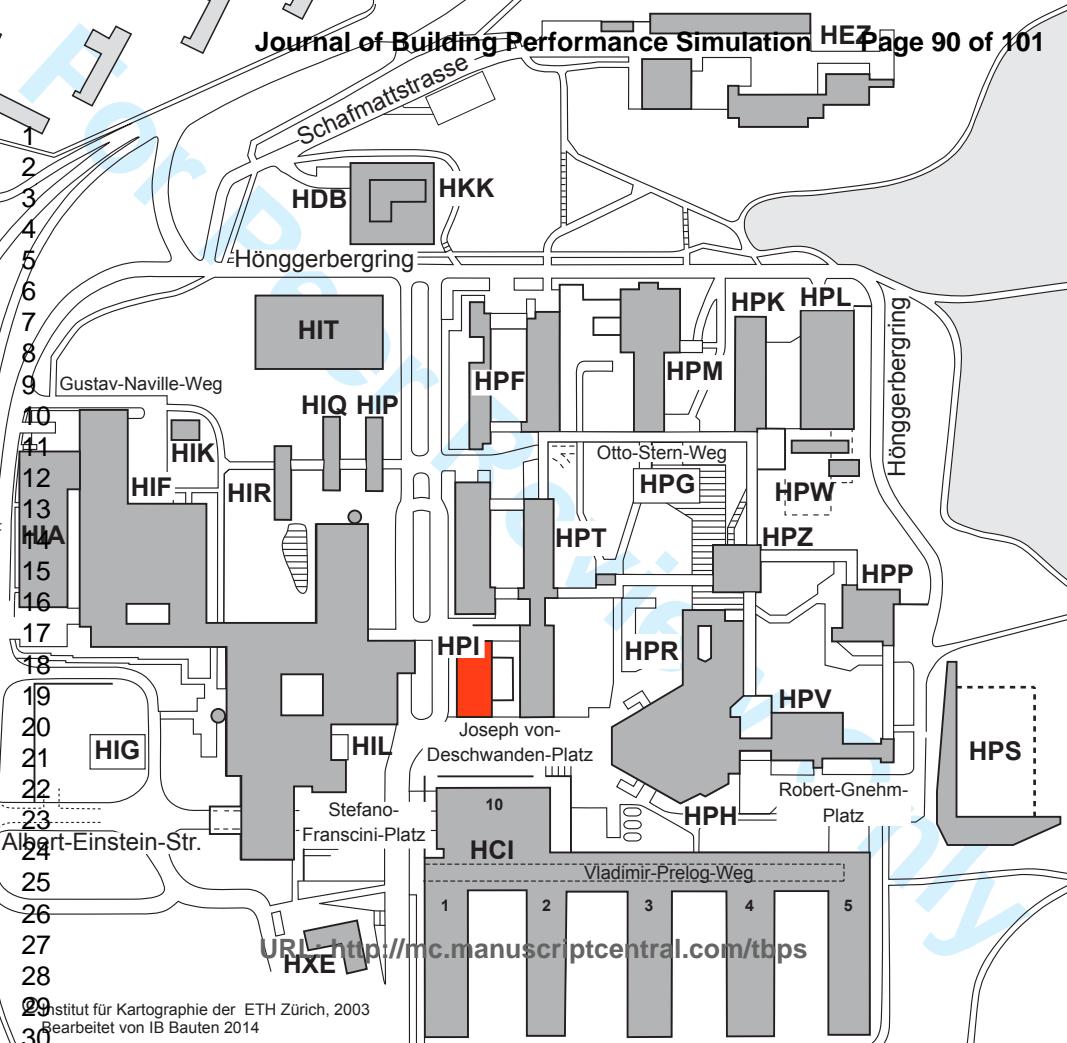


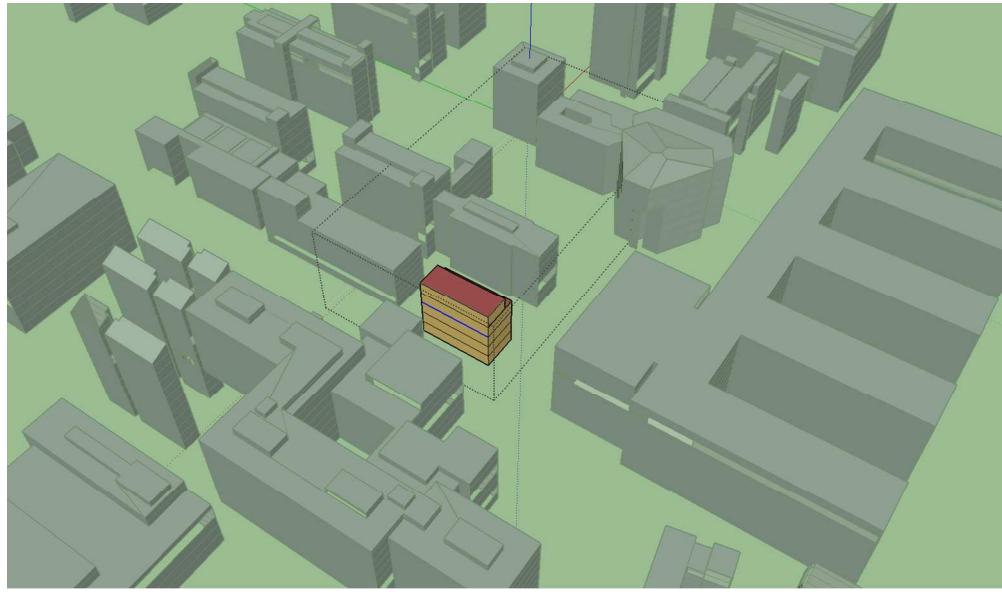




The HPI building EnergyPlus model extracted from the CitySim model. The HPI building is seen as the light and dark brown building in the center surrounded by gray masses that represent other buildings on campus.


The graphic is illustrated with OpenStudio for Sketch-up.

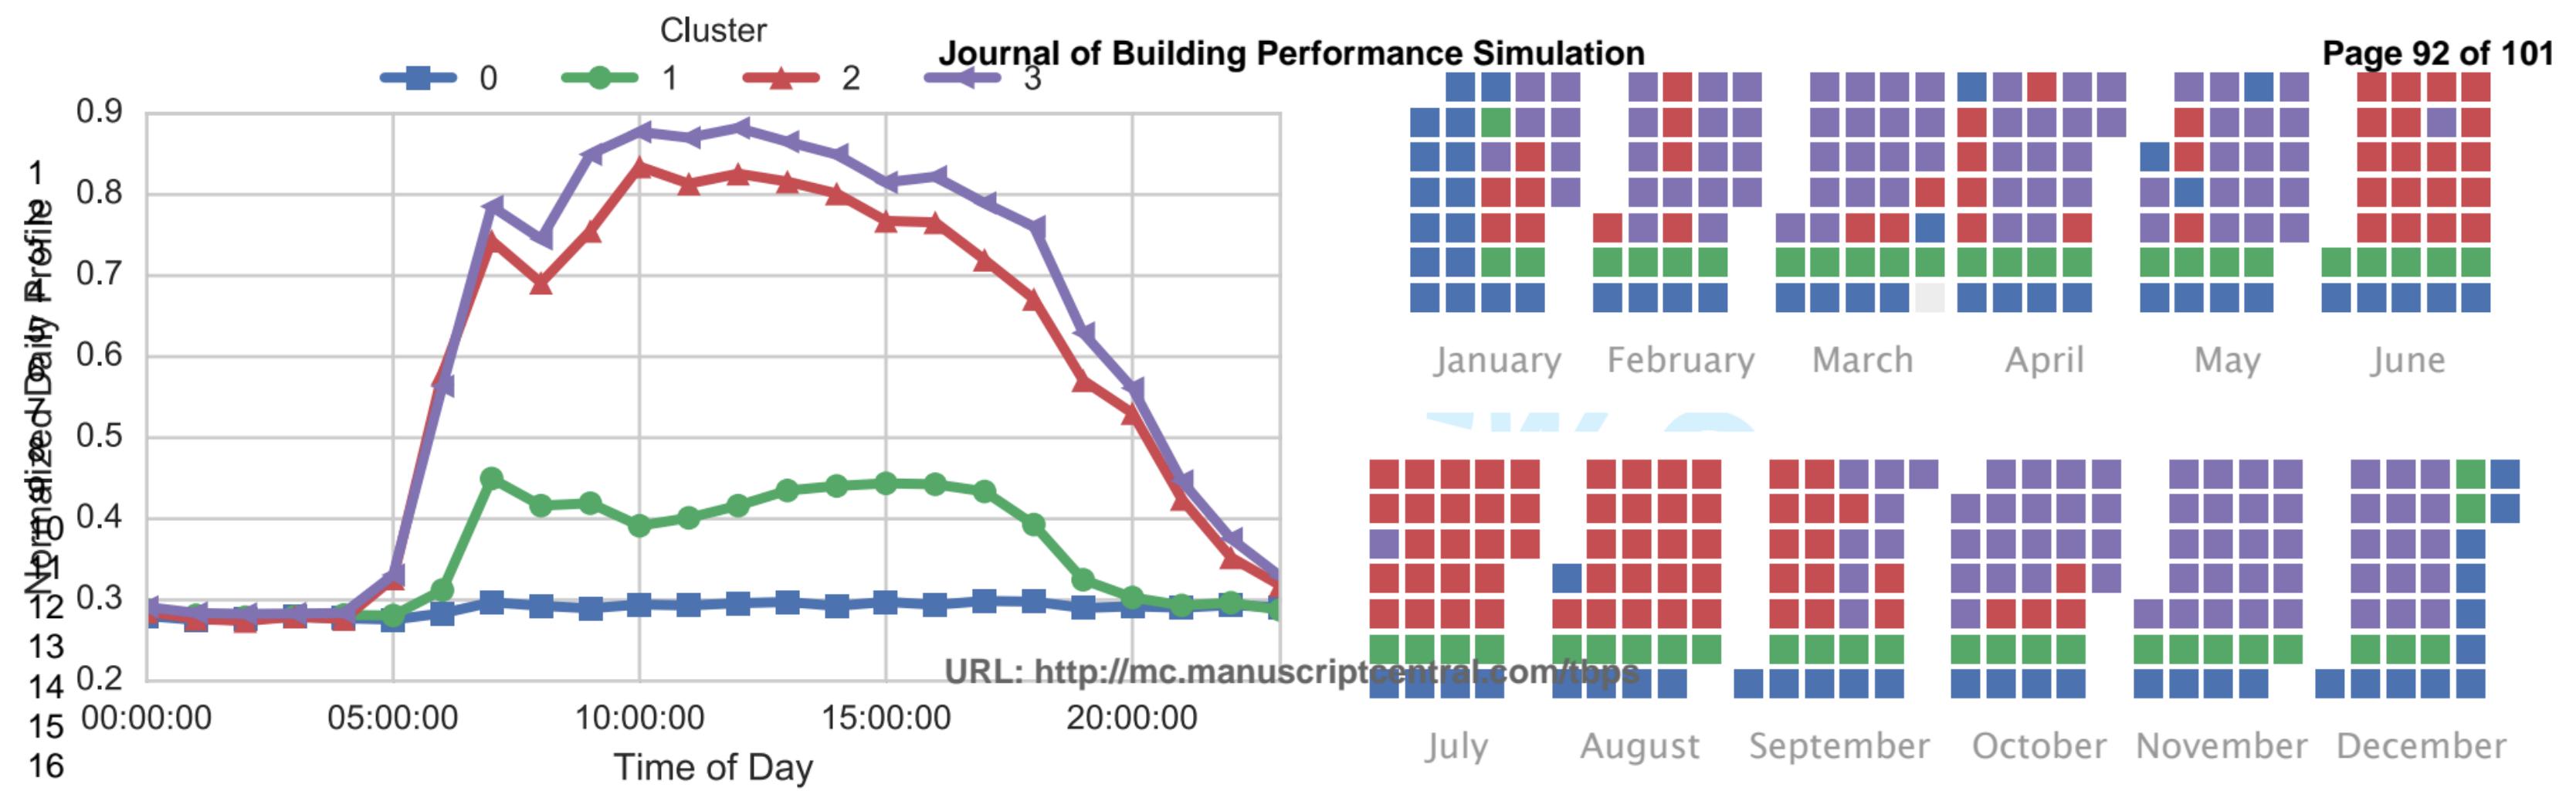

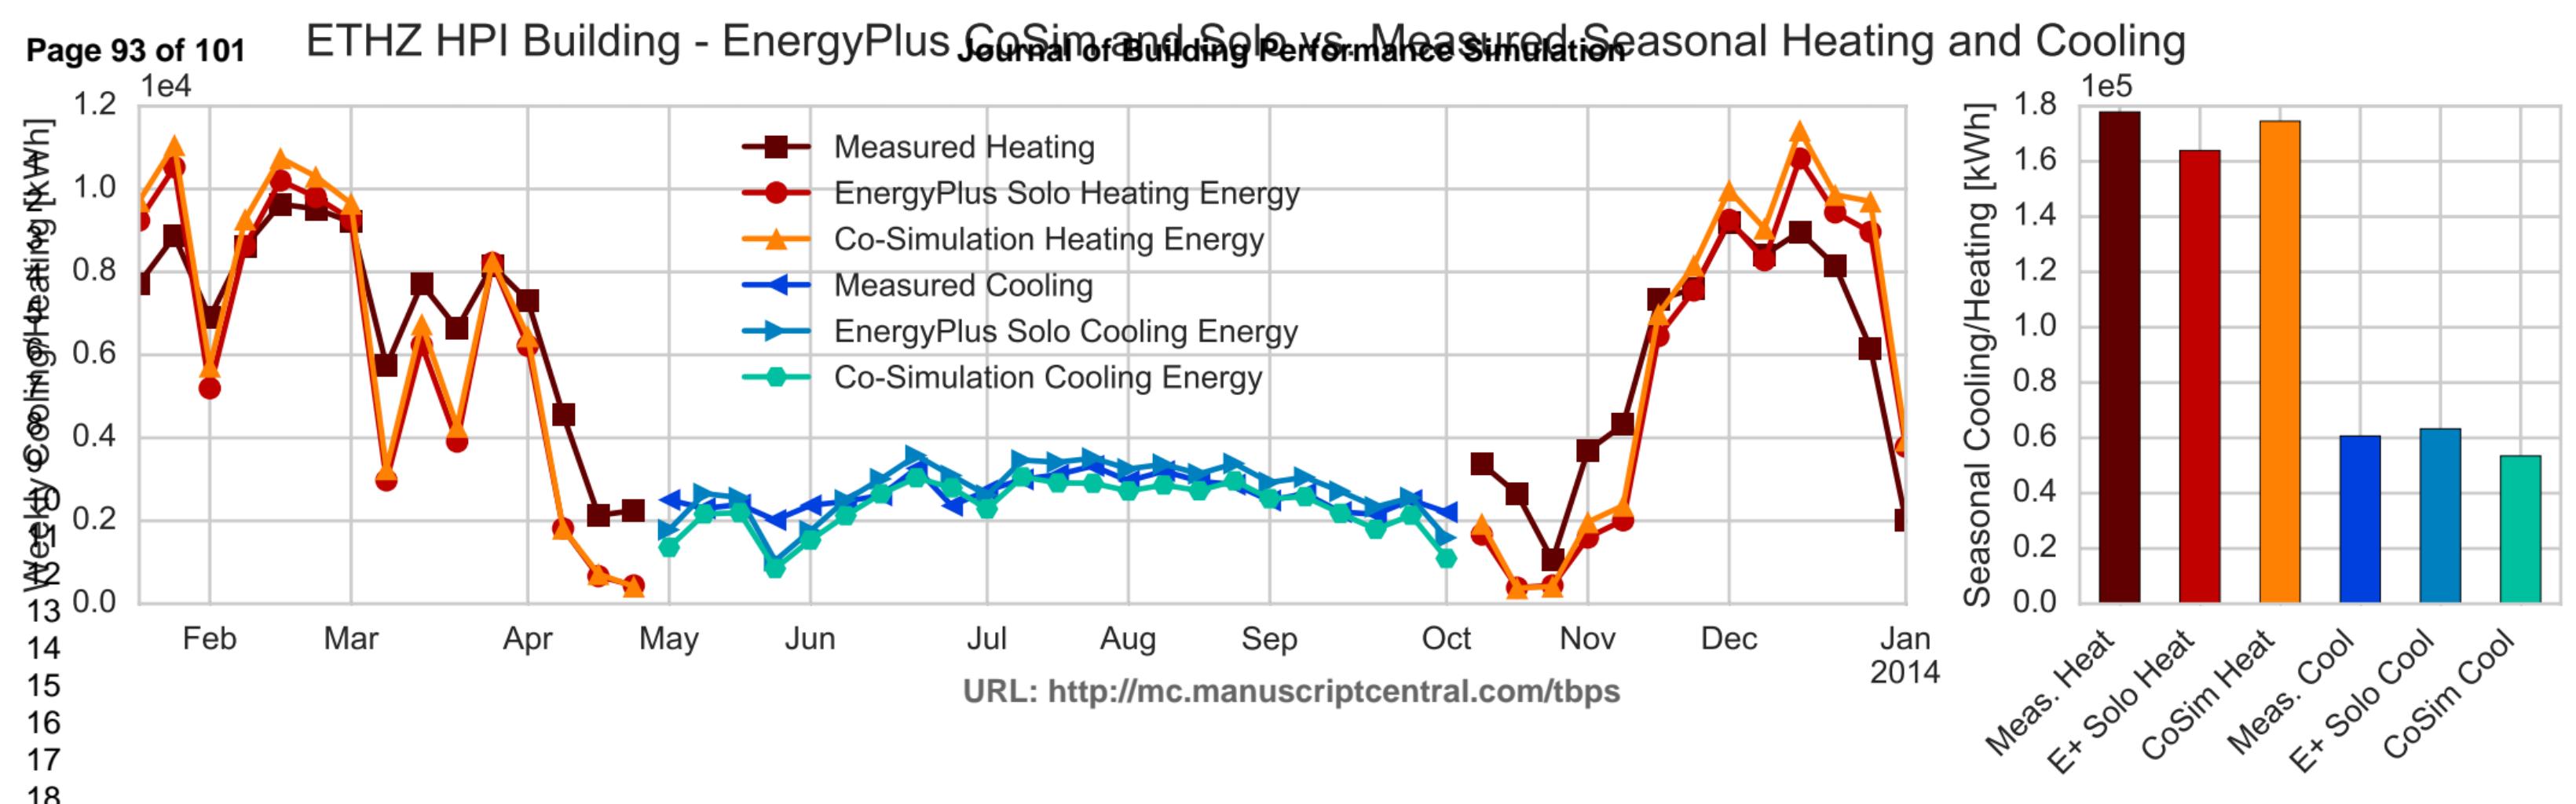

ETHZ HPI EnergyPlus CoSim vs Solo Cooling

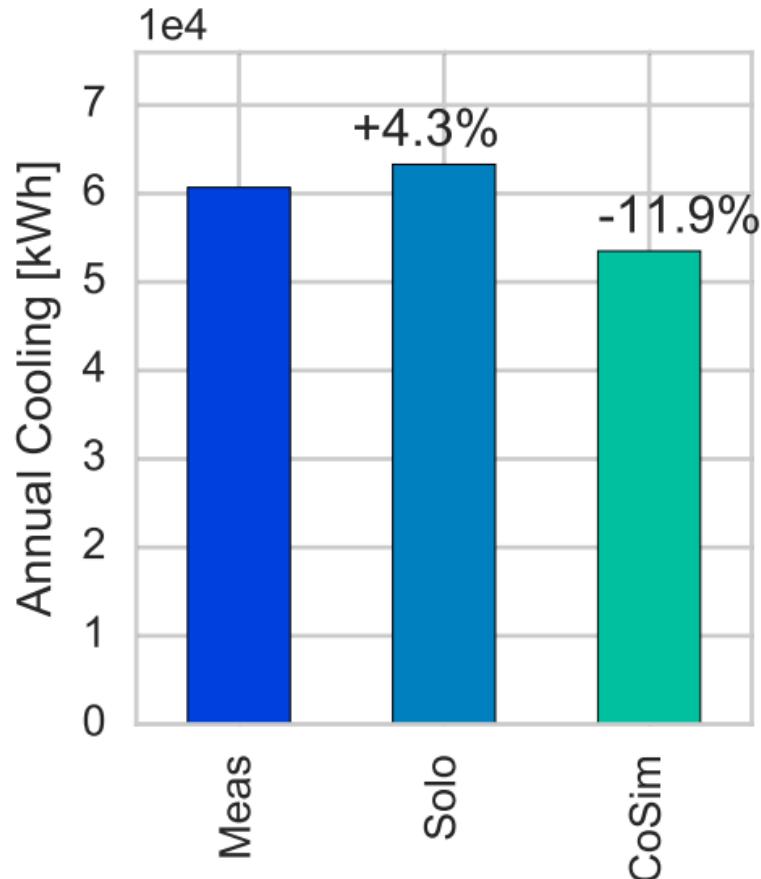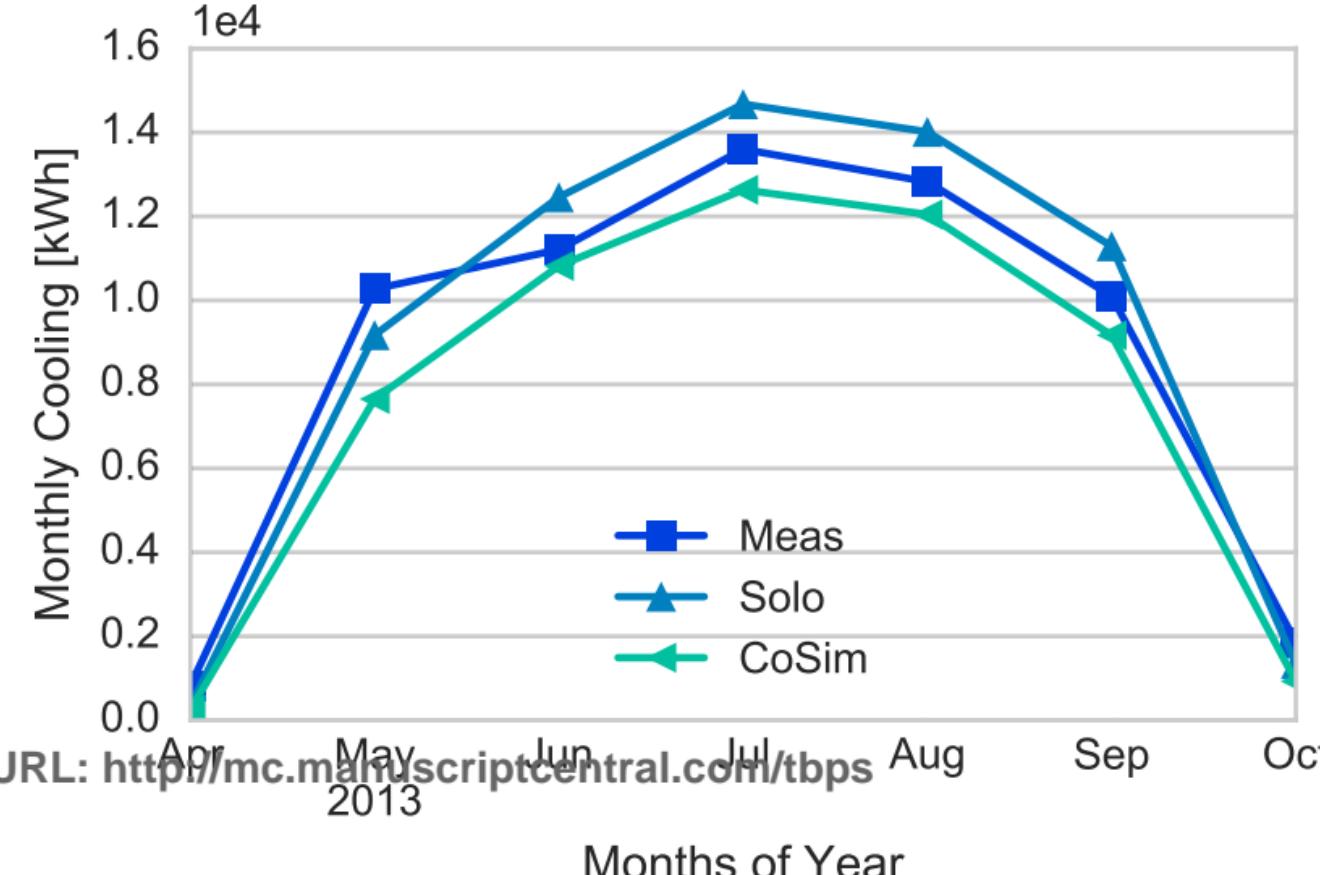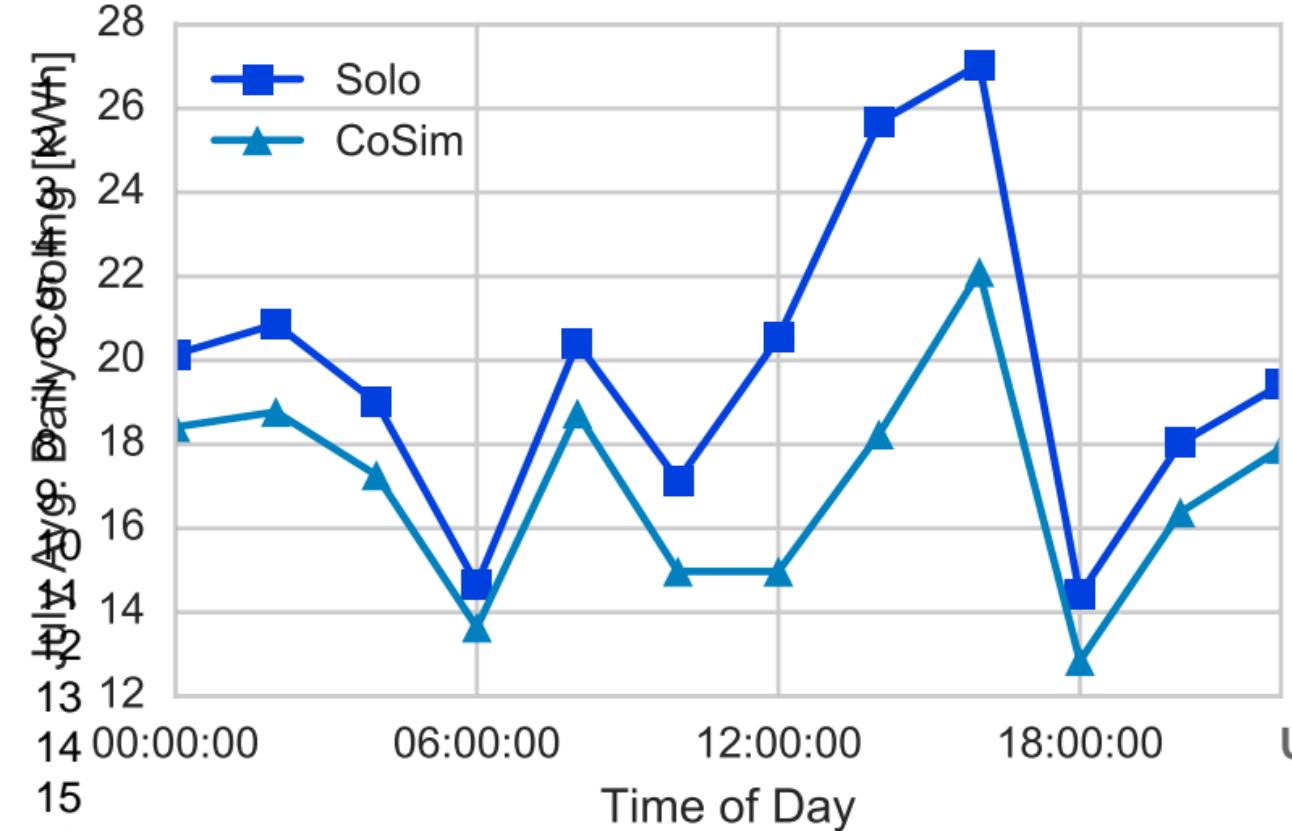


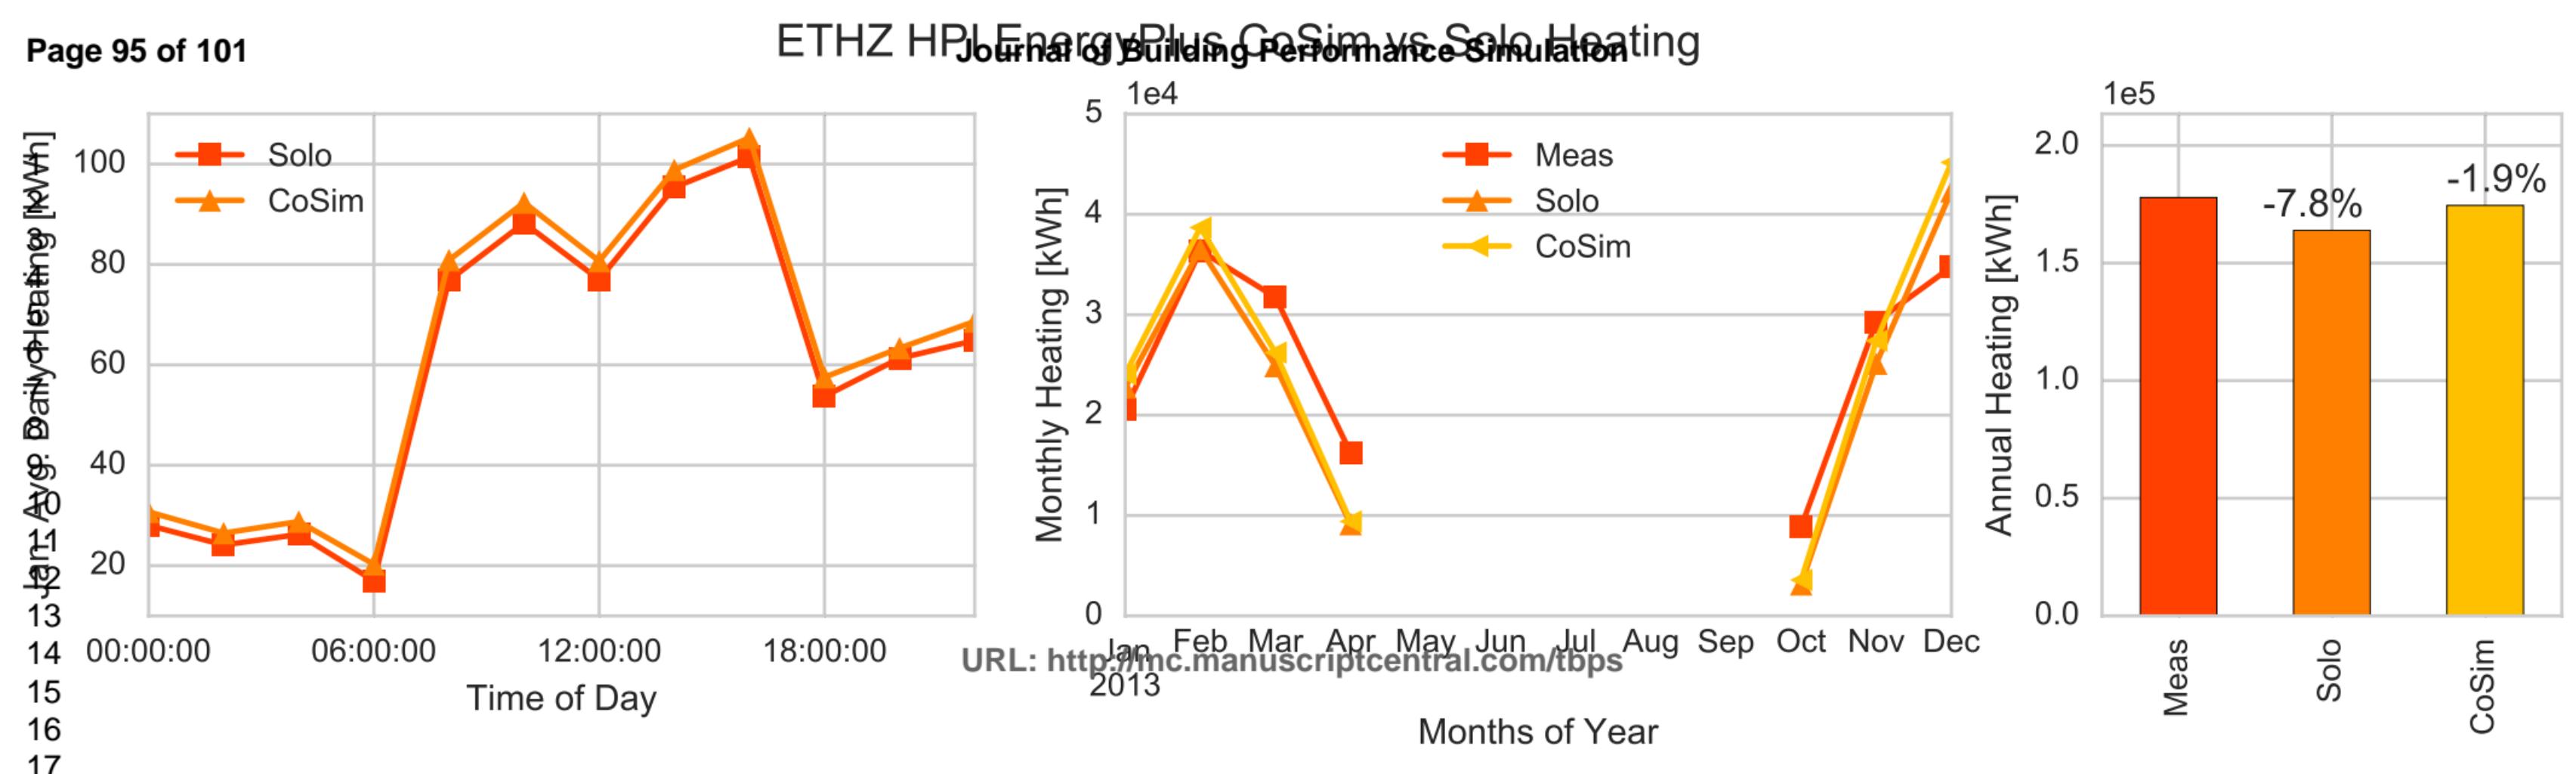



The Quartier Nord at EPFL in Lausanne




Peer Review Only

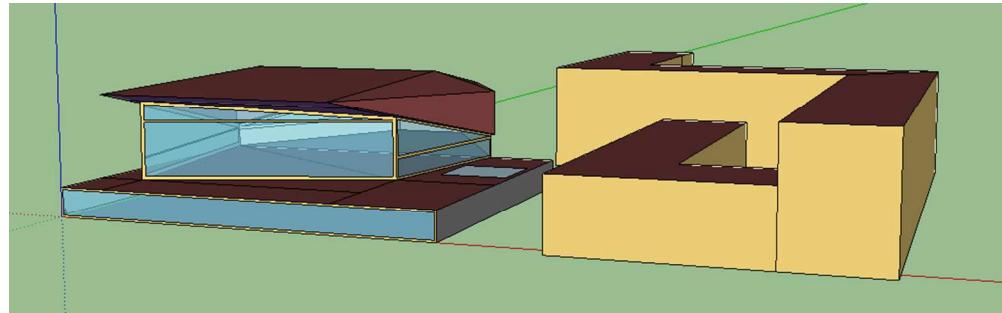


The Quartier Nord modeled with OpenStudio for Sketchup. The STCC on the left is the main focus of the study and is represented by two thermal zones.

Peer Review Only

EPFL Quartier Nord - EnergyPlus and CitySim Co-Simulation and Solo Cooling

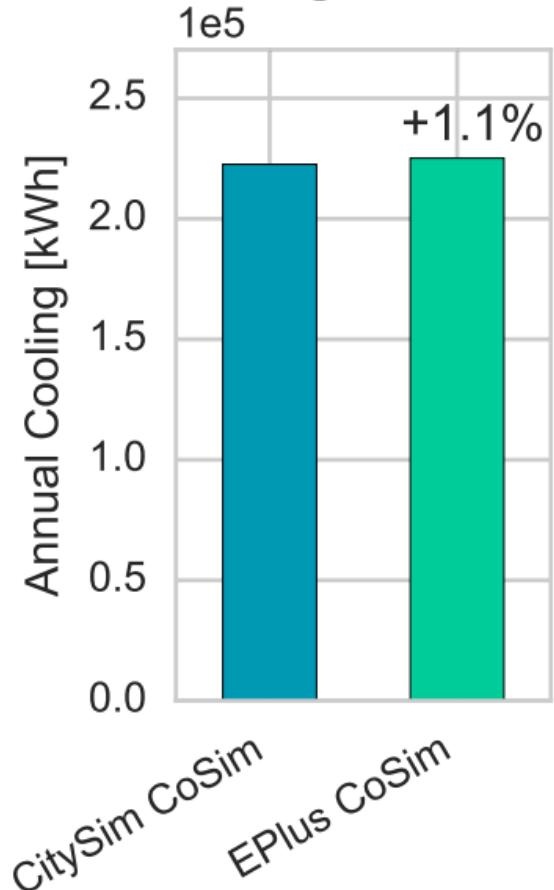
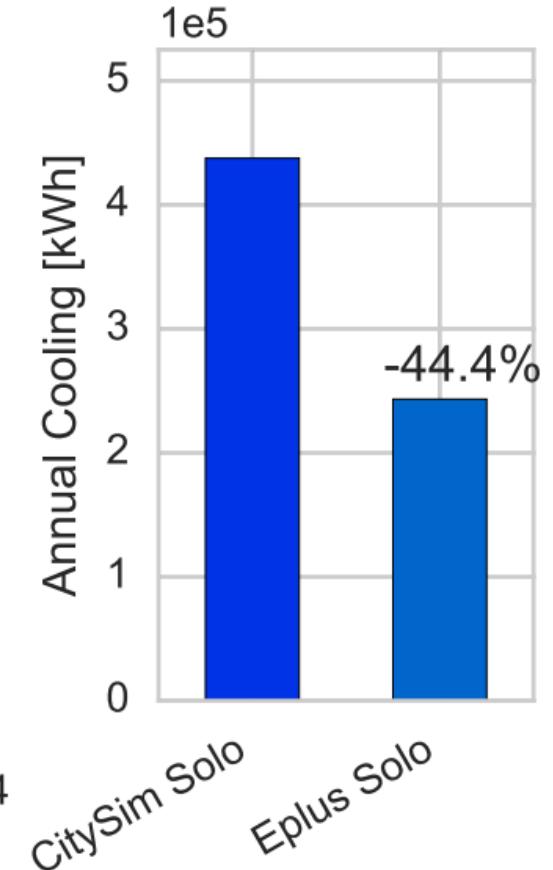
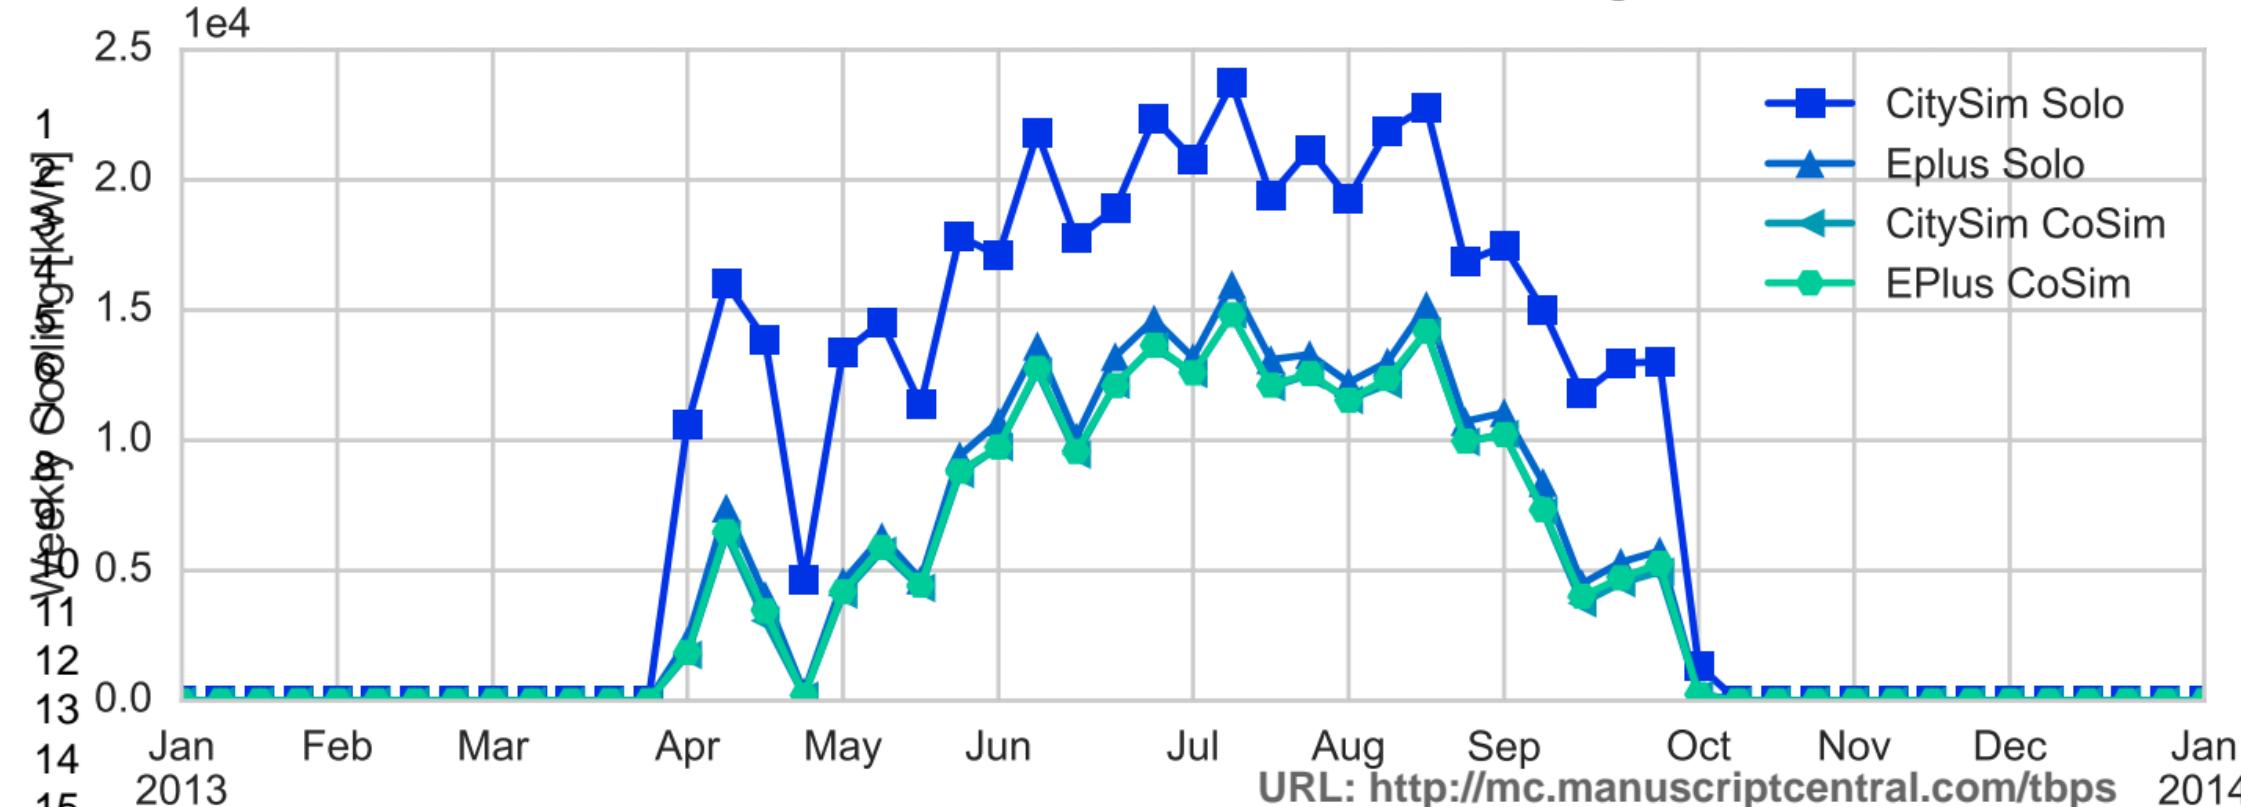


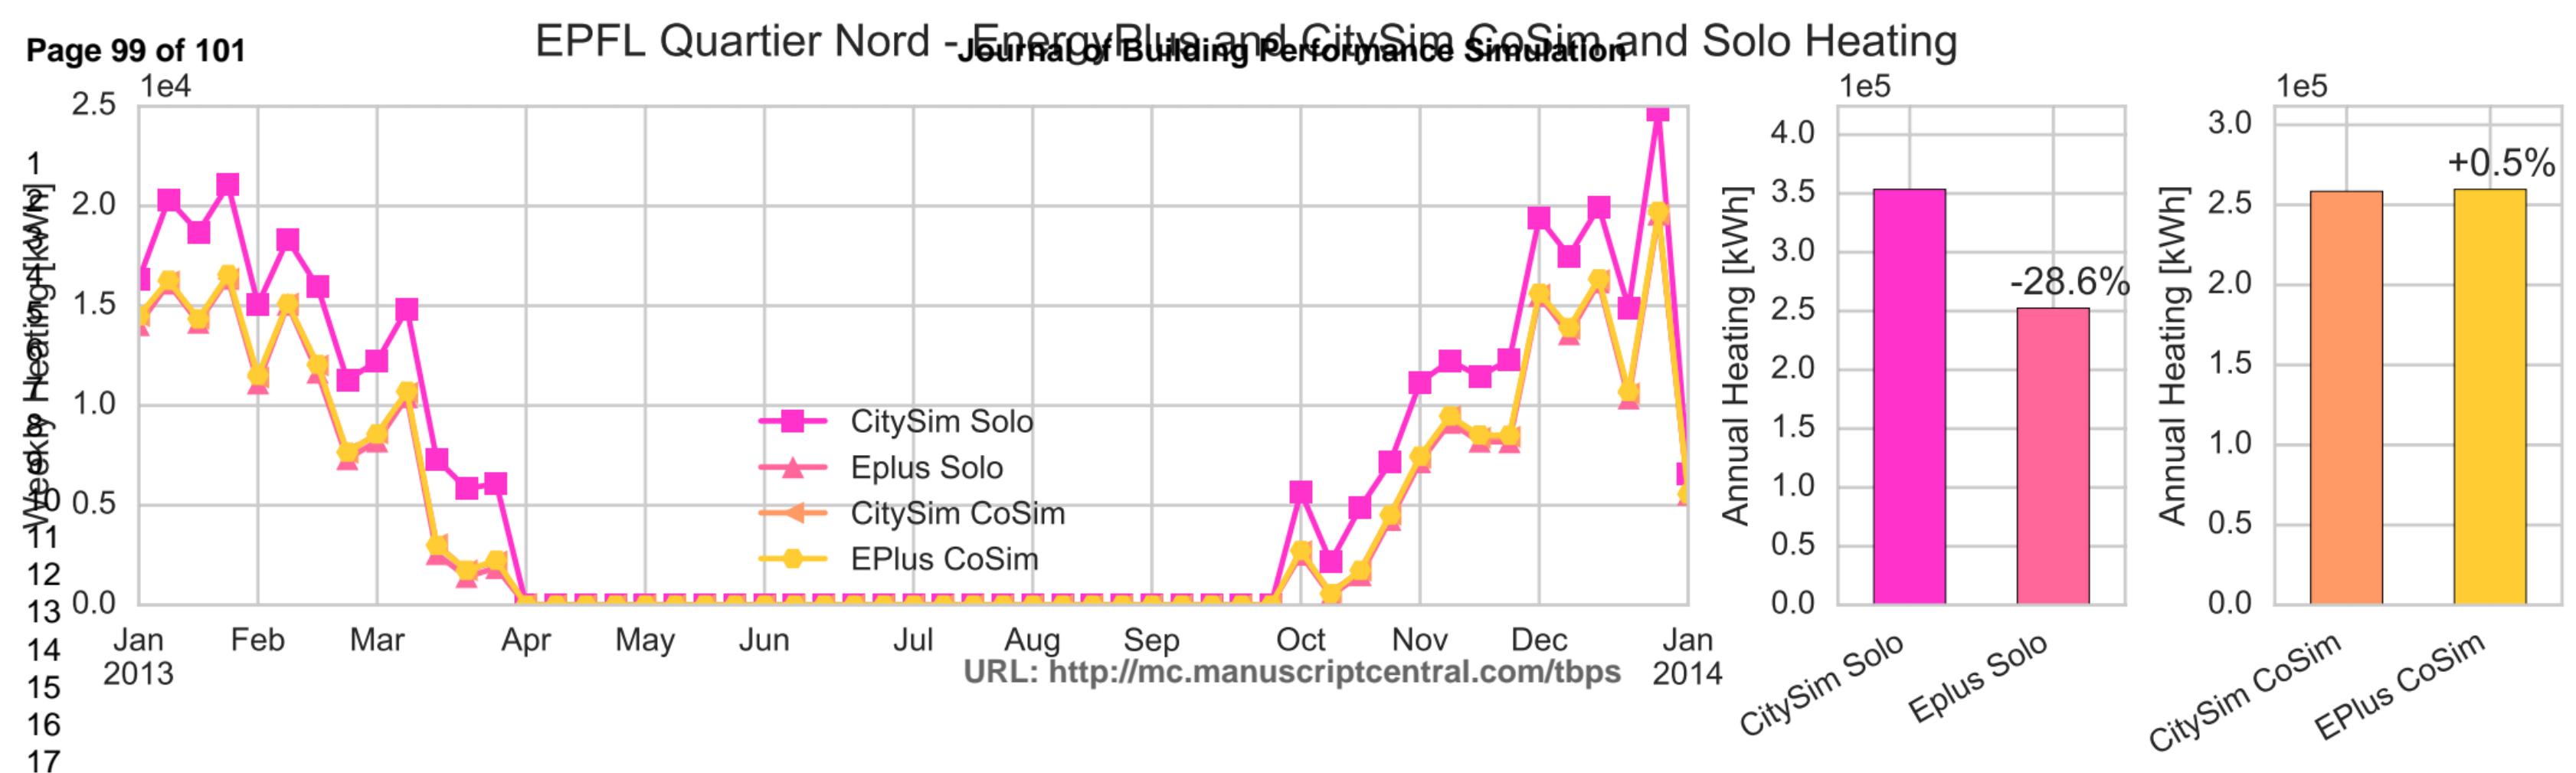

EPFL Quartier Nord Energy Plus CoSim vs Solo Cooling

Journal of Building Performance Simulation

Page 100 of 101

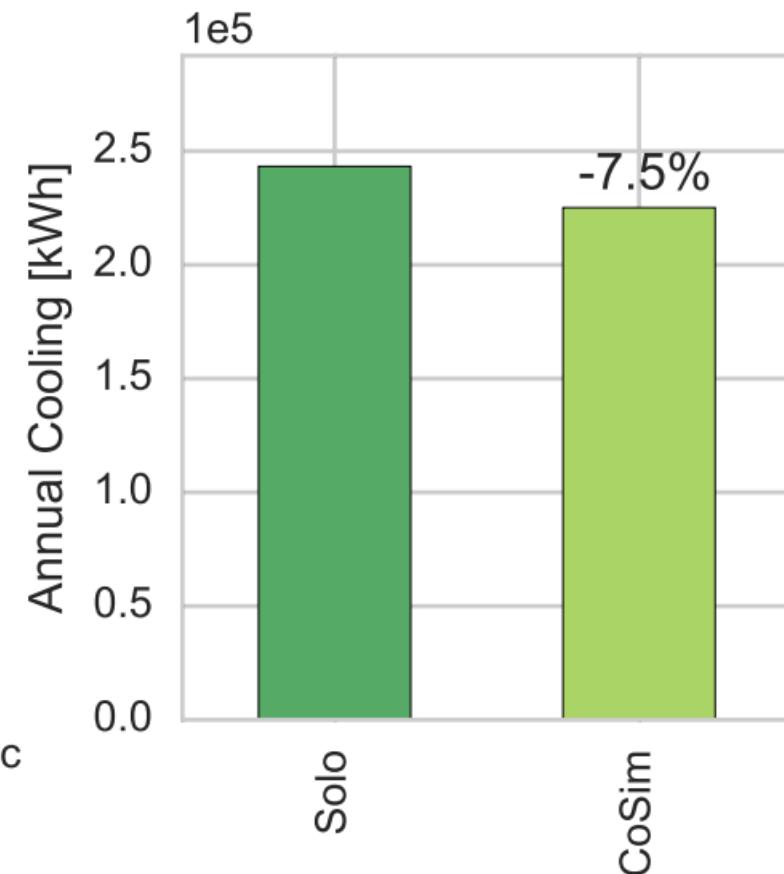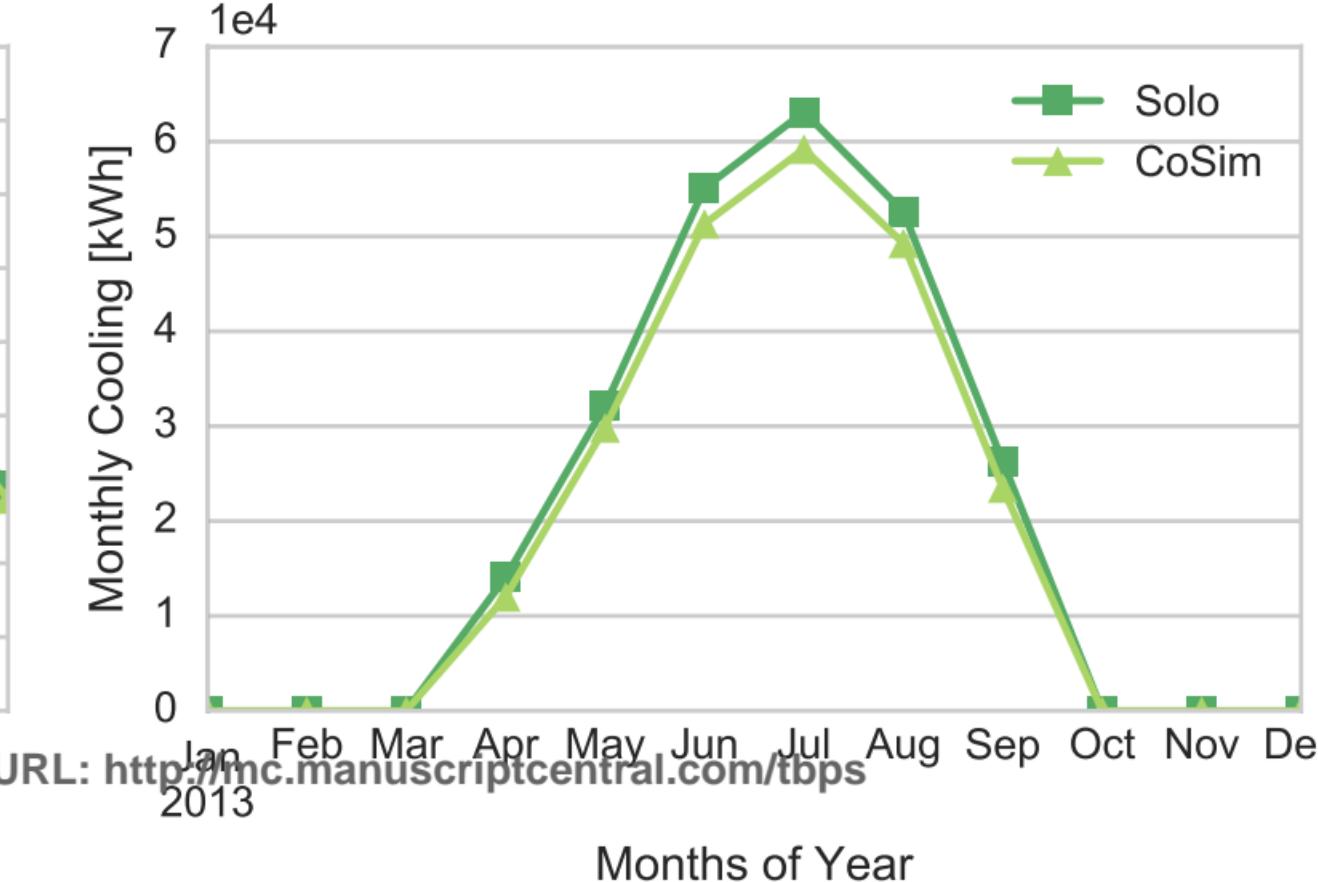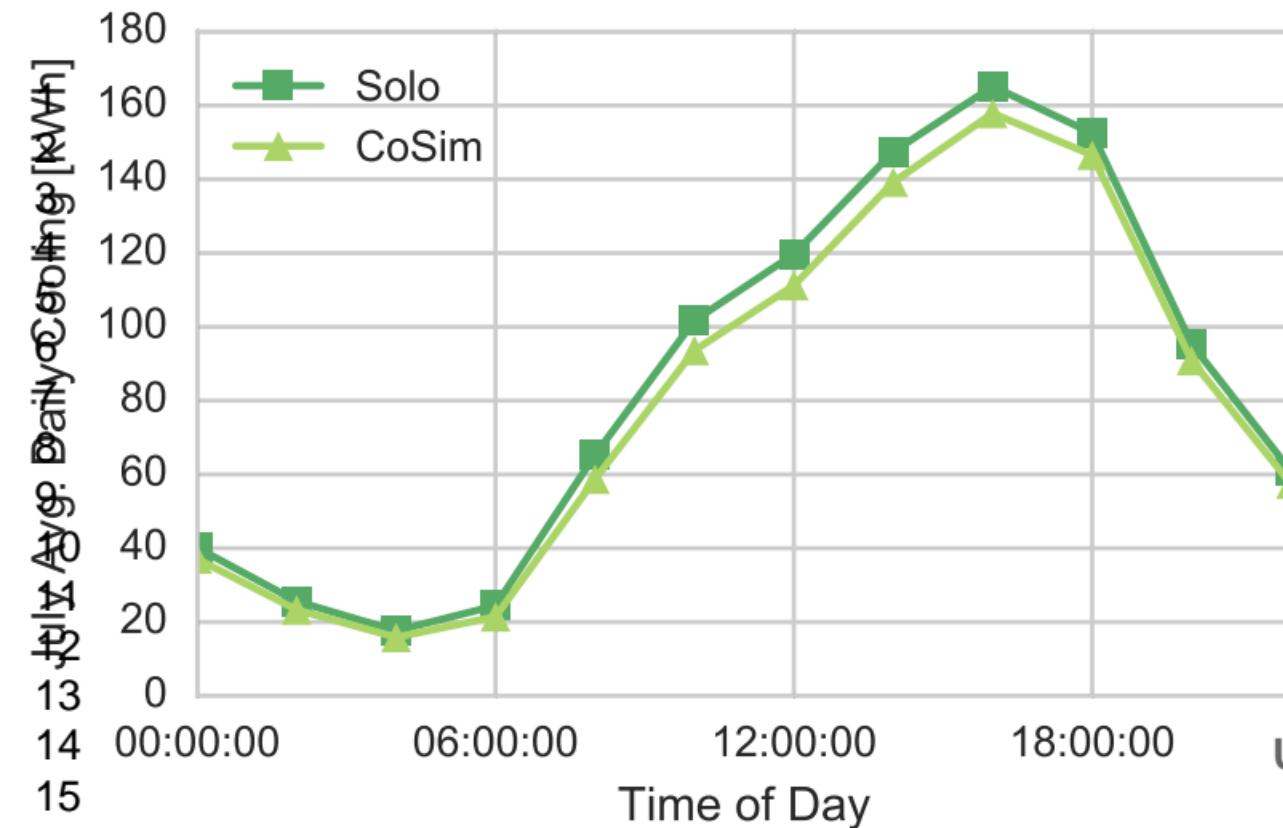

URL: <http://mc.manuscriptcentral.com/tbps>

2013

