

PROOF COVER SHEET

Author(s): Clayton Miller

Article title: Urban and building multiscale co-simulation: case study implementations on two university campuses

Article no: TBPS1354070

Enclosures: 1) Query sheet
2) Article proofs

Dear Author,

1. Please check these proofs carefully. It is the responsibility of the corresponding author to check these and approve or amend them. A second proof is not normally provided. Taylor & Francis cannot be held responsible for uncorrected errors, even if introduced during the production process. Once your corrections have been added to the article, it will be considered ready for publication.


Please limit changes at this stage to the correction of errors. You should not make trivial changes, improve prose style, add new material, or delete existing material at this stage. You may be charged if your corrections are excessive (we would not expect corrections to exceed 30 changes).

For detailed guidance on how to check your proofs, please paste this address into a new browser window: <http://journalauthors.tandf.co.uk/production/checkingproofs.asp>

Your PDF proof file has been enabled so that you can comment on the proof directly using Adobe Acrobat. If you wish to do this, please save the file to your hard disk first. For further information on marking corrections using Acrobat, please paste this address into a new browser window: <http://journalauthors.tandf.co.uk/production/acrobat.asp>

2. Please review the table of contributors below and confirm that the first and last names are structured correctly and that the authors are listed in the correct order of contribution. This check is to ensure that your name will appear correctly online and when the article is indexed.

Sequence	Prefix	Given name(s)	Surname	Suffix
1		Clayton	Miller	
2		Daren	Thomas	
3		Jérôme	Kämpf	
4		Arno	Schlueter	

Queries are marked in the margins of the proofs, and you can also click the hyperlinks below. Content changes made during copy-editing are shown as tracked changes. Inserted text is in **red font** and revisions have a red indicator . Changes can also be viewed using the list comments function. To correct the proofs, you should insert or delete text following the instructions below, but **do not add comments to the existing tracked changes**.

AUTHOR QUERIES

General points:

- (1) **Permissions:** You have warranted that you have secured the necessary written permission from the appropriate copyright owner for the reproduction of any text, illustration, or other material in your article. Please see <http://journalauthors.tandf.co.uk/permissions/usingThirdPartyMaterial.asp>.
- (2) **Third-party content:** If there is third-party content in your article, please check that the rightsholder details for re-use are shown correctly.
- (3) **Affiliation:** The corresponding author is responsible for ensuring that address and email details are correct for all the co-authors. Affiliations given in the article should be the affiliation at the time the research was conducted. Please see <http://journalauthors.tandf.co.uk/preparation/writing.asp>.
- (4) **Funding:** Was your research for this article funded by a funding agency? If so, please insert 'This work was supported by <insert the name of the funding agency in full>', followed by the grant number in square brackets '[grant number xxxx]'.
- (5) **Supplemental data and underlying research materials:** Do you wish to include the location of the underlying research materials (e.g. data, samples or models) for your article? If so, please insert this sentence before the reference section: 'The underlying research materials for this article can be accessed at <full link>/ description of location [author to complete]'. If your article includes supplemental data, the link will also be provided in this paragraph. See <<http://journalauthors.tandf.co.uk/preparation/multimedia.asp>> for further explanation of supplemental data and underlying research materials.
- (6) The **CrossRef database** (www.crossref.org/) has been used to validate the references. Mismatches will have resulted in a query.

QUERY NO.	QUERY DETAILS
AQ1	Please note that the ORCID section has/have been created from information provided through CATS. Please correct if this is inaccurate.
AQ2	Please spell out 'HPI' in full at first mention.
AQ3	Please note that Figures 6 and 7 will be set in black and white in print. Please rephrase the legend so that there is no reference to any colours. Please check the endnote in Figure 13 whether it can be retained or deleted. Please check and provide missing text for the same.
AQ4	The disclosure statement has been inserted. Please correct if this is inaccurate.

AQ5	The Funding information provided (Competence Center in Energy and Mobility) has been checked against the Open Funder Registry and we failed to find a match. Please check and resupply the funding details if necessary.
AQ6	Please note that the Funding section has been created by summarising information given in your acknowledgements. Please correct if this is inaccurate.
AQ7	The CrossRef database (www.crossref.org/) has been used to validate the references. Mismatches between the original manuscript and CrossRef are tracked in red font. Please provide a revision if the change is incorrect. Do not comment on correct changes.
AQ8	Please provide the missing page range for reference 'Freire et al. (2014)'.
AQ9	Please provide the missing city/state name for reference 'Mauree et al. (2015)'.
AQ10	Please provide the missing volume number for reference 'Samuelson et al. (2015)'.
AQ11	Please provide the missing city/state name for reference 'Thomas et al. (2014)'.
AQ12	The resolution of figure 12 is too low. Please resupply the figure in a resolution of at least 300 dpi.

How to make corrections to your proofs using Adobe Acrobat/Reader

Taylor & Francis offers you a choice of options to help you make corrections to your proofs. Your PDF proof file has been enabled so that you can edit the proof directly using Adobe Acrobat/Reader. This is the simplest and best way for you to ensure that your corrections will be incorporated. If you wish to do this, please follow these instructions:

1. Save the file to your hard disk.
2. Check which version of Adobe Acrobat/Reader you have on your computer. You can do this by clicking on the “Help” tab, and then “About”.

If Adobe Reader is not installed, you can get the latest version free from <http://get.adobe.com/reader/>.

3. If you have Adobe Acrobat/Reader 10 or a later version, click on the “Comment” link at the right-hand side to view the Comments pane.
4. You can then select any text and mark it up for deletion or replacement, or insert new text as needed. Please note that these will clearly be displayed in the Comments pane and secondary annotation is not needed to draw attention to your corrections. If you need to include new sections of text, it is also possible to add a comment to the proofs. To do this, use the Sticky Note tool in the task bar. Please also see our FAQs here: <http://journalauthors.tandf.co.uk/production/index.asp>.
5. Make sure that you save the file when you close the document before uploading it to CATS using the “Upload File” button on the online correction form. If you have more than one file, please zip them together and then upload the zip file.

If you prefer, you can make your corrections using the CATS online correction form.

Troubleshooting


Acrobat help: <http://helpx.adobe.com/acrobat.html>

Reader help: <http://helpx.adobe.com/reader.html>

Please note that full user guides for earlier versions of these programs are available from the Adobe Help pages by clicking on the link “Previous versions” under the “Help and tutorials” heading from the relevant link above. Commenting functionality is available from Adobe Reader 8.0 onwards and from Adobe Acrobat 7.0 onwards.

Firefox users: Firefox’s inbuilt PDF Viewer is set to the default; please see the following for instructions on how to use this and download the PDF to your hard drive: http://support.mozilla.org/en-US/kb/view-pdf-files-firefox-without-downloading-them#w_using-a-pdf-reader-plugin

Urban and building multiscale co-simulation: case study implementations on two university campuses

Clayton Miller ^{a,b,*}, Daren Thomas^a, Jérôme Kämpf^c and Arno Schlueter^a

^aArchitecture and Building Systems (A/S), Institute of Technology in Architecture (ITA), ETH Zürich, Zürich, Switzerland; ^bDepartment of Building, School of Design and Environment, National University of Singapore, 117566 Singapore; ^cENERGY Institute, HEIA-FR / HES-SO Fribourg, Bd Perolles 80, 1750 Fribourg, Switzerland

(Received 19 December 2016; accepted 7 July 2017)

The co-simulation of both urban and building-level models leverages the advantages of both platforms. It better accounts for the localized effects of surrounding buildings, geography and climate conditions while maintaining high-fidelity building systems representation. This paper describes the co-simulation process of the building and urban-scale models of two university campuses in Switzerland using EnergyPlus and CitySim. In the first case study, on-site measured performance data is compared to the co-simulation results. The second case study examines the results of the two engines. The results show that coupling of EnergyPlus with CitySim resulted in a -15.5% and -7.5% impact on cooling consumption and a $+6.5\%$ and $+4.8\%$ impact on heating use as compared to solo simulations. The co-simulation process was able to better model realistic conditions for heating, but not cooling in one case study. It was able to substantially reduce the discrepancies in prediction between the engines in the other study.

Keywords: building-scale simulation; calibrated energy models; CitySim; co-simulation; EnergyPlus; urban-scale simulation

1. Introduction

Urban-scale building performance simulation is a process that empowers the analysis and optimization of cities. Urban populations are growing around the world at an unprecedented rate. A transition from urban to rural is underway and 2.5 billion people are expected to join cities throughout the world by the year 2050 (United Nations 2014). Expansions of entire districts and even cities is not an uncommon phenomenon, especially in East Asia and Africa. Urban-scale **modelling** is in the midst of an intense focus on the research community with six key areas of practice: technology design, building design, urban climate, systems design, policy assessment, and land use and transportation (Keirstead, Jennings, and Sivakumar 2012). The ability to simulate the interaction between large collections of buildings enables the development and testing of optimization and planning scenarios for this new development (Dorer et al. 2013).

The CitySim simulation engine is an example of such a program designed and optimized for urban-scale simulation. CitySim is an urban performance simulation engine that comprises a solver module as well as a graphical user interface. It focuses on the energy flows of multiple simplified building models and their interdependent relationship with their urban climate (Robinson

et al. 2009). CitySim includes building thermal, urban radiation, occupant **behaviour**, and plant/equipment models integrated as a single simulation engine. CitySim simulates multiple buildings up to city scale using simplified models to achieve a good compromise between **modelling** accuracy, computational overheads, and data availability. Each building's thermal **behaviour** is based on an electrical analogy using a two node resistor-capacitor network. The internal lighting, people, and miscellaneous loads are **modelled** using a simplified occupancy-based approximation. The heating, ventilation, and air-conditioning (HVAC) systems are **modelled** using a set of equations that approximates the total mass flow rate required to meet the sensible and latent loads of each building as a whole. Each of these simplifying approximations empowers the urban-scale simulation to have reasonable execution times on the number of buildings being simulated.

Building performance simulation is a mature domain of research relative to urban-scale efforts. The use of whole building simulation engines originated in the **1960s** with the US government's development of the BLAST and DOE-2 hourly energy simulation programs (Lawrie et al. 2001). In 1996, development on a new simulation engine, EnergyPlus, began in order to combine the advantages of previous efforts in a single, modular program.

*Corresponding author. Email: clayton@nus.edu.sg

EnergyPlus, as a result, has become a popular choice in detailed whole-building performance simulation due to the breadth of mechanical, renewable, and electrical systems that can be modelled. EnergyPlus specifically excels in its ability to model unique mechanical system types such as decoupled centralized cooling (Miller and Sekhar 2010). Additionally, EnergyPlus is designed to provide a high resolution in which internal loads and natural ventilation technologies can be modelled in detail at the building level. EnergyPlus is also extensively used within the research community and has new features that enable it to couple with other simulation programs.

Both building and urban-scale simulation domains have rightfully chosen boundary conditions that reflect their key goals while seeking to minimize the input parameters necessary and run-times of the engines themselves. This focus results in certain deficiencies concerning modelling various phenomena. For example, urban-scale simulation highly simplifies the building systems and internal load models, thus making a retrofit analysis at the systems level difficult. And whole building simulation in EnergyPlus neglects many of the various contextual consideration of the urban environment such as long-wave radiation (LWR) exchange with adjacent surfaces and localized urban weather effects (Lawrie et al. 2001).

The current effort seeks to couple building and urban-scale simulation to address the deficiencies of the individual engines. The research in this paper is part of a larger coupling effort in which various engines are connected and co-simulated to create a more comprehensive analysis of the urban-scale (Allegrini, Dorer, and Carmeliet 2012; Dorer et al. 2013). The target is the computational interface between the building energy model, using EnergyPlus, and the urban energy model using CitySim. An overview of the larger scope is shown in Figure 1 and the context of the coupling task appears as the interface between the City Energy Simulation (CES) model and the Building Energy Simulation (BES) model. The scales and models contained in the urban environment context include the Urban-Scale Model (UC Model), the Urban Microclimate (UMC) model using OpenFoam, and the Meteorological Meso-scale (MM model) using Climate Limited-Area Modelling (COSMO-CLM). On the database side, Revit, Global Information Systems (GIS), and building information systems (BIS) are utilized.

The coupling and co-simulation process is implemented on two case studies in Switzerland. The first case study is the ETH Zürich Hoenggerberg campus in Zürich, Switzerland. It was modelled in the CitySim simulation engine and co-simulated using work-flow automation. The target of this case study is to evaluate the differences between the coupled and solo EnergyPlus simulations based on the variables exchanged. This scenario includes the use of measured data for heating and cooling within their respective seasons to compare to the

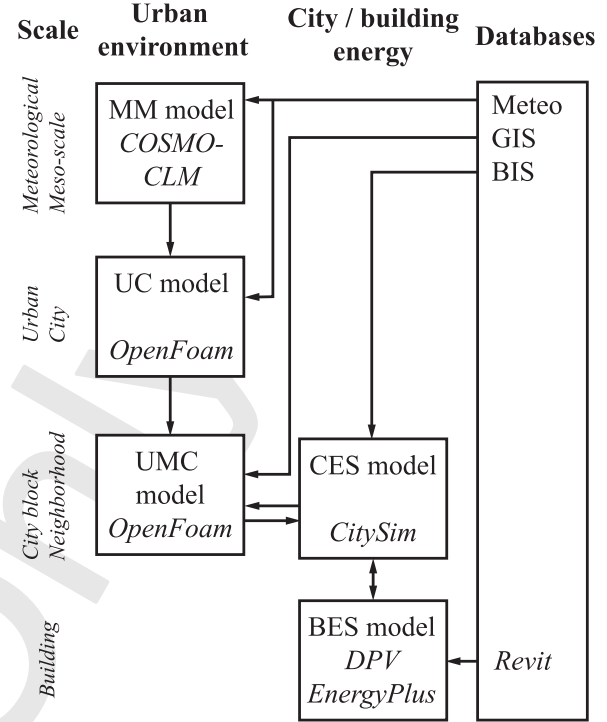


Figure 1. EnergyPlus and CitySim coupling are part of the wider context. Each block in the diagram represents an environment, with the tool/engine name in italics (Thomas et al. 2014, adapted from Dorer et al. 2013).

simulation results. The second case study is the École Polytechnique Fédérale de Lausanne (EPFL) campus in Lausanne, Switzerland. The objective of this scenario is to evaluate the differences between coupled and uncoupled versions of the CitySim simulation engine.

This paper describes the achievement of several objectives. The first is to automate the process of simultaneous meta-data extraction from a Building Information Model (BIM) for the creation of both building and urban-scale performance models for a real-world campus of buildings. Next, we co-simulate the urban and building scale models through concurrent information exchange. Finally, we implement a simplified calibration procedure for the first scenario by reconciling the co-simulation output results for a target building using measured energy performance data from the campus energy information system (EIS).

The first two objectives have been demonstrated in a simplified context in previous literature (Thomas and Schlüter 2012; Miller and Thomas 2015). The innovation in the current publication is an extension of this research through the modelling and co-simulation of real-world case studies. With respect to the third contribution, to the best of the authors' knowledge, no previous study has compared the results of a building and urban-scale co-simulation procedure to measured data from a real-world campus.

1.1. Previous multi-scale coupling studies

Previous attempts of information exchange have been implemented between simulation engines at various scales. Much of the initial co-simulation work in the literature is done at the subsystem and building-scale. Previous studies have analysed strong and loose coupling of engines at this scale (Trčka, Hensen, and Wetter 2010; Wetter 2011). Coupling of building-scale simulation with urban-scale computational fluid dynamics (CFD) is attempted for modelling natural ventilation (Zhang et al. 2013) and to improve energy prediction (Bouyer, Inard, and Musy 2011). A comprehensive review of energy and airflow modelling of neighbourhoods and university campuses was published that includes strategic aspects of coupling different types of models (Srebric, Heidarinejad, and Liu 2015). EnergyPlus has been coupled with ENVI-met, a micro-climate CFD program (Yang et al. 2012). It was also coupled with simplified lumped parameter models to facilitate comparison with measured sensor data (Martin et al. 2015). While not directly coupled, EnergyPlus and the TEP Urban Canopy Model program were connected through a modified weather file to quantify the influences of urban localized weather effects on whole building simulation (Bueno and Norford 2011).

2. Methodology

2.1. Coupling process

The coupling process of a simplified single zone model and contextual surrounding buildings is described in previous studies (Thomas et al. 2014), which forms the basis for the methodology in the current effort. This process utilizes the Design Performance Viewer (DPV) and associated workflow. The DPV is a tool written to extract and simulate an EnergyPlus input data file (IDF) from an AutodeskTM RevitTM BIM (Schlueter and Thesseling 2009). The central philosophy behind the tool is the rapid simulation of the building information model from the earliest design possible that can be used throughout the life-cycle of the building including retrofit analysis (Miller et al. 2014). This process is achieved by augmenting the information in the BIM with default values and abstracting information not relevant for energy simulation. The tool already has a simplified notion of surrounding buildings, which are modelled in the BIM as simple mass objects without further information and are exported as shading surfaces to EnergyPlus. This functionality is used for creating the CitySim mass scene and leads to a crude model of the urban context of the building. The current DPV philosophy of allowing the designer to iterate rapidly on early design decisions based on feedback about the performance of the design remains. This approach includes streamlining the process where running a simulation requires no effort from the designer due to automatic creation of input files, execution, and analysis of the results.

The coupling process of EnergyPlus and CitySim is shown in Figure 2. The solid lines depict the co-simulation of EnergyPlus and CitySim, and the dotted lines illustrate solo simulations of either EnergyPlus or CitySim. First, the DPV is used to extract an EnergyPlus simulation model from the BIM. The DPV utilizes the Revit API to extract geometrical information about the building and the physical properties of walls, windows, doors, roofs, and floors. This information is encoded in the BIM model as wall types, roof types, floor types as well as window and door families. Wherever possible, the tool uses the layering and materials of the construction types, enhancing them with physical attributes relevant to EnergyPlus. Where not defined, it assumes default values.

Next, geometry is created to be used in both the CitySim and EnergyPlus models as buildings and surfaces surrounding the building targeted in the IDF. This feature of the DPV is used for including shading surfaces in the EnergyPlus simulation model: it uses so-called *mass objects* in the BIM model as surrounding buildings. The DPV model views these buildings as a series of shading surfaces. A transformation is added to the DPV model that produces an input file for the CitySim solver. This file uses an XML format describing the buildings in a scene for simulation, including their construction types, geometry, and systems for heating and cooling. The main BIM is extracted to the CitySim scene as one of the buildings to be simulated, with the properties of the construction types

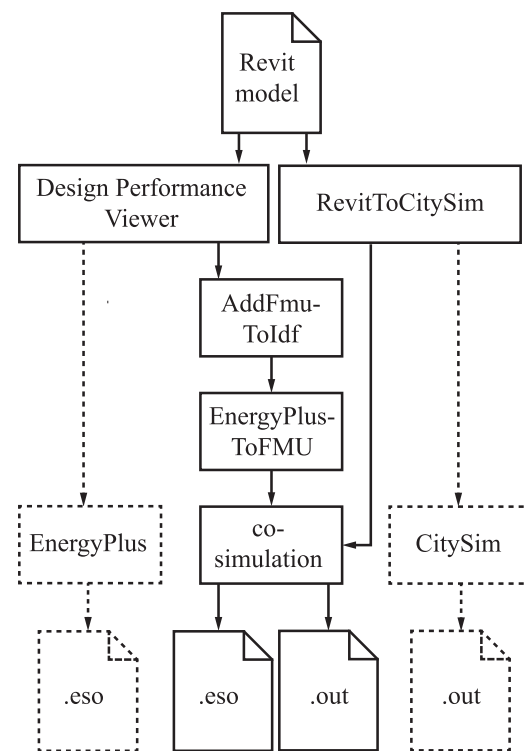


Figure 2. Overview diagram of the coupling process including tools and outputs (Thomas et al. 2014).

matching those in the DPV model. The glazing ratio is calculated based on the window and wall areas of the DPV model. Shading surfaces are grouped into buildings based on the mass object from which they were extracted. These adjacent buildings use default construction properties for walls and roofs, and we assign them a default glazing ratio. These defaults can be overridden by custom properties applied to the mass objects in the BIM much in the same way as the model elements of the main building are enriched with DPV information.

As of version 8.1.0, EnergyPlus supports exporting a simulation model as a Functional Mock-up Unit (FMU) (Nouidui, Wetter, and Zuo 2014). This feature introduces new IDF objects to specify the interface such an FMU exposes. These objects define which output variables are exported by the FMU and which variables are imported. The FMU export functionality is closely linked to the Energy Management System (EMS) of EnergyPlus. Co-simulation exchange variables either mimic an EnergyPlus schedule, an EMS variable or drive an EMS actuator. Since the model used by CitySim to simulate a building is more abstract than the model used by EnergyPlus, the EMS is used to aggregate certain values. CitySim does not model windows separately. Therefore, a weighted average of window and wall surface temperatures is calculated with EMS subroutines.

The FMU creation process is the basis for coupling the two models at each timestep in the simulation. Figure 3 illustrates this process from both the EnergyPlus and CitySim perspective. The augmented IDF file is fed to the *EnergyPlusToFMI* script (Nouidui and Wetter 2014). Once configured, this script produces an FMU file based on the augmented IDF file and the weather file to be used as well as a DLL file implementing the Functional Mock-up Interface that can load the IDF file, locate EnergyPlus and run the simulation.

The number of timesteps for both CitySim and EnergyPlus is set to one per hour. The frequency of data exchanges is set to once per timestep. No data averaging over time is performed. Data exported from one simulation engine overwrites the corresponding data in the other simulation engine at each timestep. Each simulation is performed for a whole year.

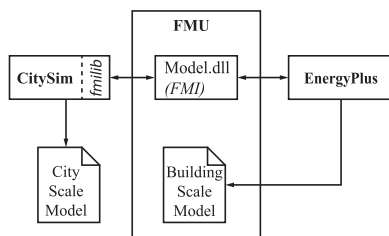


Figure 3. Simulation information exchange between CitySim and EnergyPlus using FMI (Thomas et al. 2014).

2.2. Coupled variables

Several key urban-scale weather variables are sent to EnergyPlus from CitySim to account better for the localized effects of surrounding buildings, geography and climate conditions. These variables are outlined in Table 1. They include various outdoor air conditions such as dry bulb and wet bulb temperatures, dew-point, humidity, wind speed and direction, and direct and diffuse solar radiation. These variables overwrite the input weather variables that EnergyPlus obtains from its weather file input. CitySim is designed to account for physical phenomenon inherent to urban environments, which are often neglected in building-scale simulation environments (Robinson and Stone 2004; Robinson et al. 2009). CitySim can be connected to a simplified micro-climate airflow model that can predict local climatic conditions around each building. LWR exchange between the simulated building and its surroundings is sent to EnergyPlus; this process is described in detail in Section 2.3. Finally, CitySim shares its calculated occupancy schedules as it can use a deterministic or stochastic occupant behaviour model, whereas EnergyPlus models are solely a deterministic models (Haldi and Robinson 2011).

Variables sent to CitySim by EnergyPlus at each time step include several variables related to the calculation of

Table 1. Values sent to EnergyPlus from CitySim by the FMU.

Object	Variable name	Description
Outdoor	Outdoor drybulb	The outdoor dry-bulb temperature in °C
	Outdoor dewpoint	The outdoor dewpoint temperature in °C
	Outdoor relative humidity	The outdoor relative humidity expressed in percent.
	Diffuse solar	Diffuse horizontal irradiance in W/m ²
	Direct solar	Beam normal irradiance in W/m ²
	Wind speed	The outdoor wind speed in m/s
LWR	Wind direction	The wind direction in degrees ($N = 0, E = 90, S = 180, W = 270$)
	Environmental radiant temp.	Calculated T_{env} from the sky, ground, and surrounding surfaces
	Environmental radiant heat	Calculated h_{env} from the sky, ground, and surrounding surfaces
	Gain coefficient	Fraction of the maximum occupation (0.0–1.0) overrides the EnergyPlus occupation schedule with the CitySim stochastic schedule
Zone	Occupation	

Table 2. Values sent to CitySim from EnergyPlus by the FMU.

Object	Variable name	Description
Wall, roof	Outside surface temperature	The temperature on the outside of the surface in °C
Wall	Average outside surface temperature	The (weighted) average temperature of the surface on the outside in °C.
Zone	Total heating energy	The heating energy in Joules used in this timestep.
	Total cooling energy	The cooling energy in Joules used in this timestep.
	Zone mean air temperature	The mean air temperature in the zone in °C
	Ventilation volume flow rate	The flow rate in m ³ /s (standard density)

heating and cooling loads of a targeted building. Table 2 outlines this list of exchanged variables. These variables are transferred due to the ability of EnergyPlus to model more detailed building systems, schedules, ventilation and internal load types than CitySim. For example, EnergyPlus is flexible enough to model a detailed radiant heating and cooling system that would be impossible in CitySim. EnergyPlus is an engine optimized to accurately model building-scale systems. Thus, CitySim can take advantage of these models through coupling and co-simulation. EnergyPlus sends the heating and cooling loads, the surface temperatures of the exterior surfaces and the ventilation flow rates to CitySim.

2.3. LWR exchange

LWR exchange in the urban-scale environment is coupled in the co-simulation process. It requires the development of a set of approximations to reduce the number of coupled

variables between the engines and to account for differences in the methods by which each engine calculates this value. A detailed description of LWR variable exchange and approximation is found in a previously published study (Miller and Thomas 2015) on a simplified theoretical case.

In EnergyPlus, LWR exchange for a surface is calculated through the summation of radiation gain from the ground, sky, and air as seen in Equation (1) and Figure 4(a) (United States Department of Energy (DOE) 2015). The radiant heat transfer coefficient for each of these environmental variables is calculated according to Equation (2) with σ as the Stefan-Boltzmann constant, ϵ as the emissivity and F_{variable} being the view factor to the variable that can be sky, grd (ground) or air. A major assumption of this approach is that the modelled building's surfaces and those of adjacent buildings are at a uniform temperature and the LWR radiation exchange is negligible; a situation that is an oversimplification in an urban scale domain (Evins, Dorer, and Carmeliet 2014).

$$Q_{\text{LWR,EnergyPlus}} = h_{r,\text{grd}}(T_{\text{surf}} - T_{\text{grd}}) + h_{r,\text{sky}}(T_{\text{surf}} - T_{\text{sky}}) + h_{r,\text{air}}(T_{\text{surf}} - T_{\text{air}}), \quad (1)$$

$$h_{r,\text{variable}} = \frac{\epsilon \sigma F_{\text{variable}} (T_{\text{surf}}^4 - T_{\text{variable}}^4)}{T_{\text{surf}} - T_{\text{variable}}}. \quad (2)$$

In comparison, CitySim calculates LWR exchange by calculating an aggregated equivalent temperature, T_{env} , and radiative heat transfer coefficient, $h_{r,\text{env}}$, from surrounding urban surfaces in addition to ground, sky, and air (Robinson et al. 2009). The calculation for T_{env} is expressed in Equation (3) with the F values being view factors of the surrounding environment including adjacent surfaces $i = 1..n$. $h_{r,\text{env}}$ is based on a first-order Taylor development of the numerator of Equation 2 around $(T_{\text{surf}} + T_{\text{variable}})/2$ and therefore $Q_{\text{LWR,CitySim}}$ is calculated using Equation (4).

$$\sigma T_{\text{env}}^4 = \sigma F_{\text{sky}} T_{\text{sky}}^4 + \sigma F_{\text{grd}} T_{\text{grd}}^4 + \sum_{i=1}^n \epsilon_i \sigma F_i T_i^4, \quad (3)$$

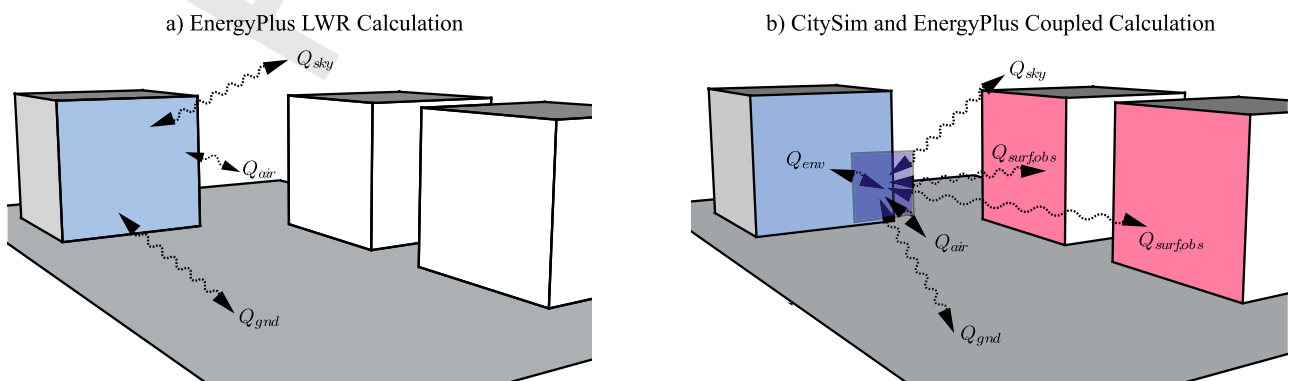


Figure 4. Comparison of the LWR components between (a) Solo EnergyPlus and (b) coupled CitySim/EnergyPlus configuration (Miller and Thomas 2015).

$$Q_{LWR, CitySim} = h_{r,env}(T_{surf} - T_{env}). \quad (4)$$

In the coupled simulation, EnergyPlus uses the CitySim supplied equivalent $h_{r,env}$ and T_{env} to calculate weighted $h_{r,sky}$, $h_{r,grd}$, and $h_{r,air}$ values using the view factors and the sky-to-air split ratio. Figure 4 illustrates the schematic differences between the solo and coupled simulations on a theoretical example of a target building with two adjacent buildings with surfaces available for radiation exchange.

2.4. Work flow automation

The coupling, simulation and co-simulation process is completely managed within a program called VisTrails (Freire et al. 2014). The implementation of this type of workflow is outlined in previous work focused on automating DPV using the Kepler platform (Thomas and Schlueter 2012). This process reduces the effort expended by a designer down to pressing a single button. This functionality allows an iterative design informed by readily available simulation results. An automated workflow

ties the various steps together and maintains the effort-less iterative design process. VisTrails enables the coupling of various workflow subprocesses script initializations, executions of the engines, and the compilation of the outputs. This tool empowers the coupling of multiple executable files and their connecting scripts in graphical diagrams that enhance reproducibility and process automation (Freire et al. 2014). The VisTrails workflow diagram for the first case study in this paper is seen in Figure 5.

2.5. Simplified calibration

In the first case study, one aspect of this analysis is the comparison of the actual measured performance of the target building on campus with the results of the co-simulation. A simplified calibration procedure is adapted from previous research to compare the measured heating and cooling data available on campus with various simulation scenarios (Samuelson, Ghorayshi, and Reinhart 2015). This calibration procedure was utilized in the performance

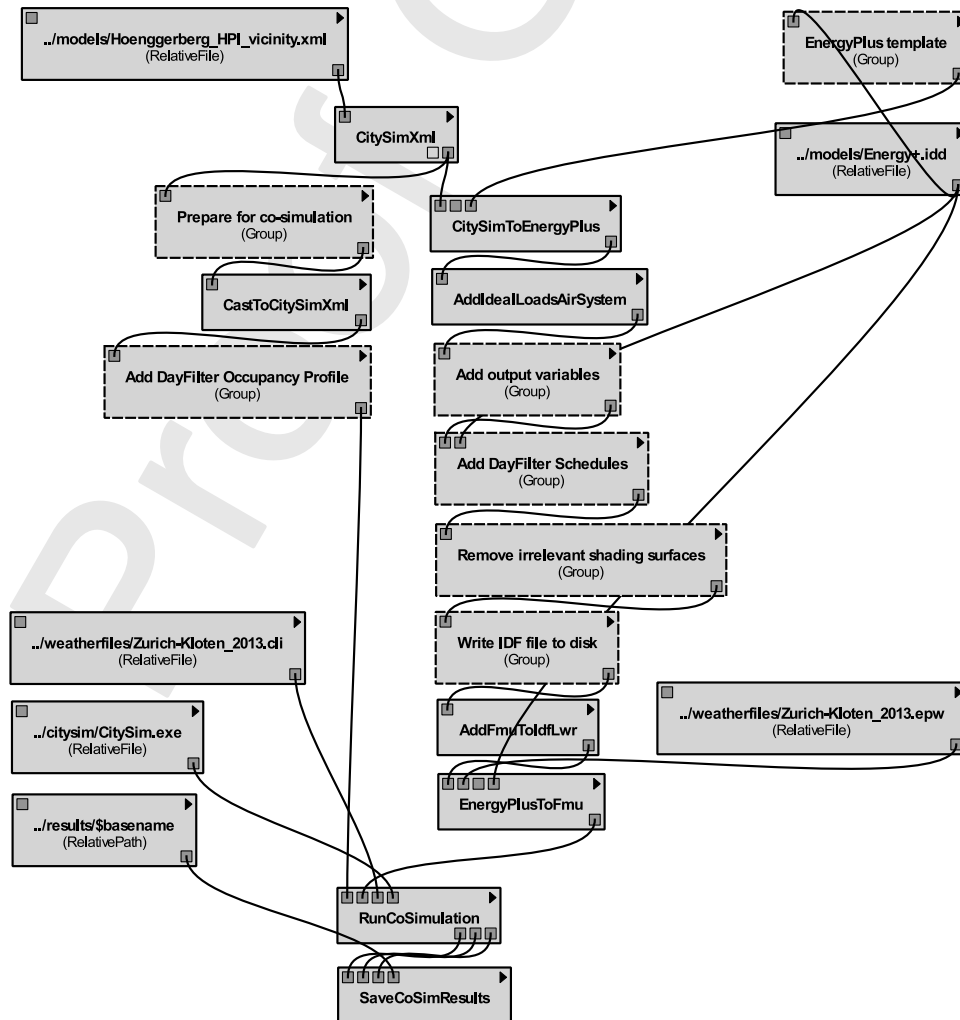


Figure 5. Workflow in VizTrails.

reconciliation of 18 buildings that were built according to the LEED Canada protocol and were under review of actual performance. This protocol is unique in its analysis process to uncover design model deficiencies in a step-wise manner, utilizing the most readily available knowledge first and working towards equilibrium between measurement and simulation. There is an appropriate balance between the effort of implementation and value generated through the calibration process.

3. Implementation

The co-simulation process is implemented on two case studies in Switzerland. The first is the ETH Zürich Hoenggerberg campus in Zürich, Switzerland. The focus of this case study is to quantify the impact of the information exchange through co-simulation within the EnergyPlus engine. The intent on this campus was to develop techniques for retrofit analysis using EnergyPlus. The targeted building on this campus is the HPI Building. Raw measured data is available for many of the buildings on campus, thus a simplified calibration procedure is used to reconcile the simulation results.

The second case study is the EPFL campus in Lausanne, Switzerland. The targeted building, in this instance,

was the Quartier Nord complex. The focus of this study was to compare the solo and co-simulation output results of CitySim. Reliable measured data for calibration is not currently available for this building.

3.1. Campus case study 1: ETHZ Hoenggerberg campus

The ETH Zürich Hoenggerberg campus includes 32 higher education facilities with spaces allocated to laboratories, office space, lecture halls, cafeterias, data centres and other types of similar areas. The campus has a centralized EMS that contains 807 energy and water measurement points from heating, cooling, electricity, city gas, domestic hot water, gray water, and general water consumption.

The focus of the co-simulation process is that the performance of a targeted building is evaluated through solo and coupled methods. The HPI building on campus was chosen in this case study due to the amount and quality of measured data available from the EMS for this building. HPI is a 2610 square metre building that is made up mostly of office space and classrooms. It also includes 400 m² convenience store and coffee shop. The building is indicated on a campus map shown in Figure 6 and is shaded red.

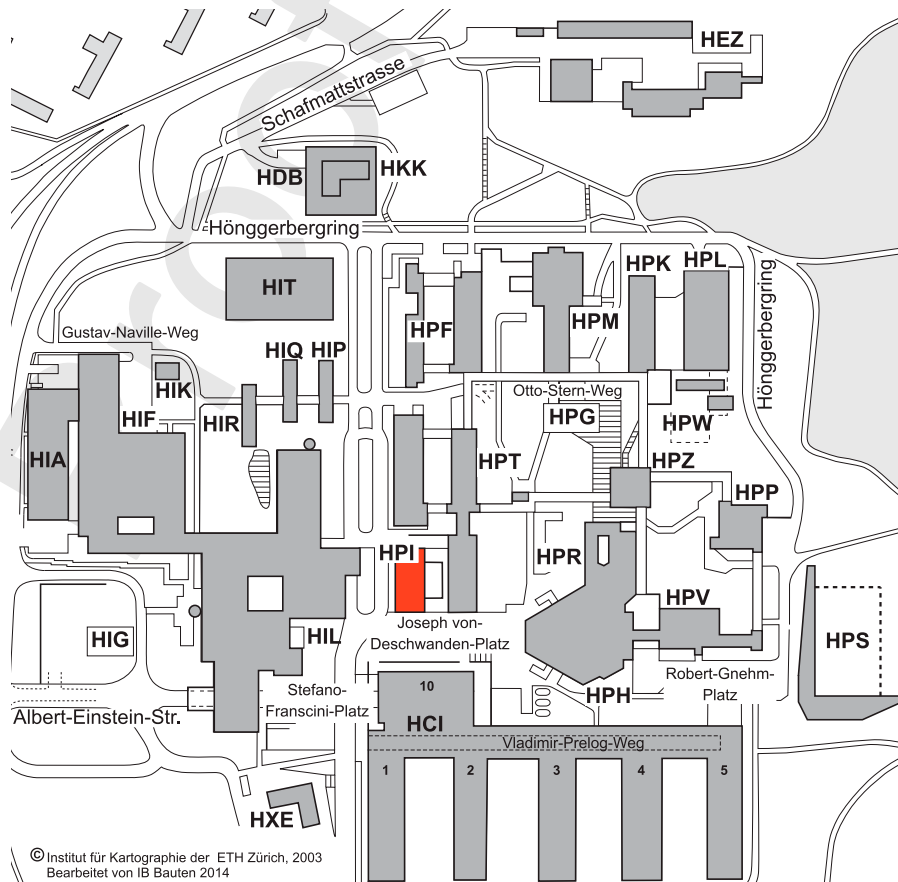


Figure 6. ETH Hoenggerberg campus map with the HPI building shaded red.

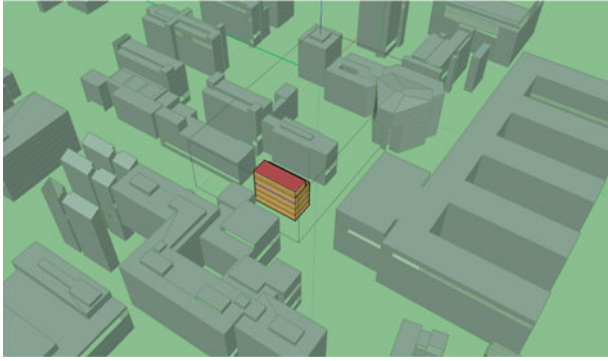



Figure 7. The HPI building EnergyPlus model extracted from the CitySim model. The HPI building is seen as the light and dark brown building in the centre surrounded by gray masses that represent other buildings on campus. The graphic is illustrated with OpenStudio for Sketch-up.

3.2. Model development

In order to perform a co-simulation of the targeted buildings, initially a CitySim model of the campus was developed. Through the workflow automation process, this geometry was converted into an EnergyPlus input file as seen in Figure 7. The EnergyPlus input file was then used as an input to execute EnergyPlus solo and co-simulation processes for the purpose of simplified calibration, and then to understand the magnitude of the difference between these simulation scenarios.

3.3. Measured data collection and calibration

Energy data from the HPI building was collected and analysed in the context of the simplified calibration procedures. The measured data sets were screened and aggregated into typical usage profiles to be used for the lighting, plug loads, and HVAC equipment availability schedules and power densities. Figure 8 illustrates the aggregation examples of electrical energy for the HPI building. This profile was created through a filtering and clustering process known

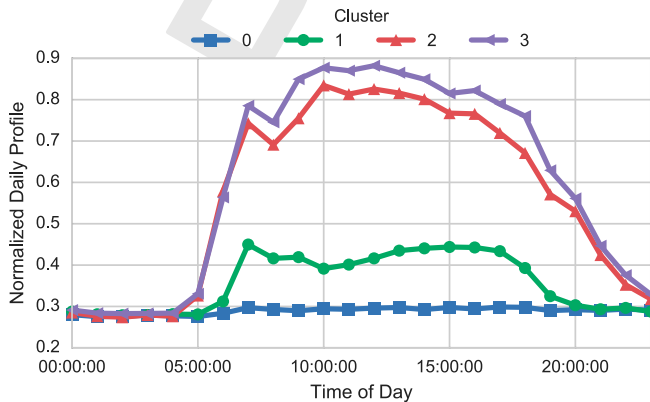

as *DayFilter* (Miller, Nagy, and Schlueter 2015). Cluster 0 represents the typical energy profile for Sunday, while Cluster 1 dominates the Saturdays of the data set. Clusters 2 and 3 make up most of the weekdays of the data set with Cluster 3 being more common in non-summer months. These profiles are used to set the availability schedules as inputs into the EnergyPlus simulation to emulate the way occupants inhabit the building and how the building management system controls the lighting and HVAC systems.

The measured and simulated data from both the co-simulation and EnergyPlus solo simulation were analysed in order to understand how both the solo and co-simulations compare to real, measured data. The calibration process was undertaken through a series of steps such as including local weather conditions for the simulation period and adding custom lighting schedules and power densities extracted from the measured data. The models were calibrated to the summer season (May–September) for cooling and the winter season (January–April and October to December) for heating. Figure 9 illustrates a comparison of the measured data with the simulations after the tuning process. The final calibrated EnergyPlus solo model had a normalized mean bias error (NMBE) of -9.36% and a coefficient of variation of root mean square error (CVRMSE) of 21.7% for cooling and 5.02% and 29.4% for heating. These metrics fall within the $\pm 10\%$ NMBE and $\pm 30\%$ CVRSMSE used in this case study for calibration. A total of 37 calibration iterations were undertaken to modulate the simulation results to within these criteria. The goal of calibration, in this case, is to just bring the models to within a reasonable range of reality in order to bring more confidence to analysis of the discrepancies between the solo and co-simulation scenarios.

3.4. EnergyPlus co-simulation results

For cooling, a discrepancy can be seen between co-simulation and solo EnergyPlus. Co-simulation decreases

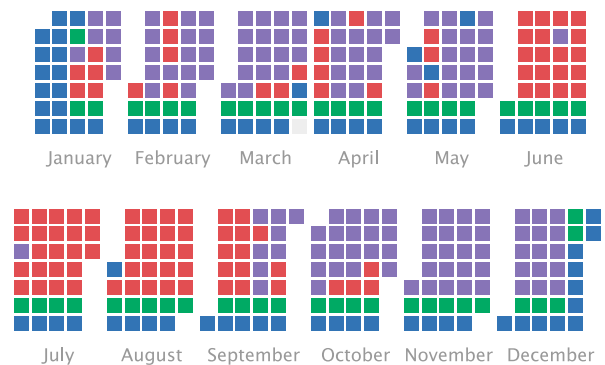


Figure 8. Typical measured data electricity profiles of (left) average daily electrical consumption for each cluster and (right) colour-coded calendar of which days fall within each cluster. The diagram on the right is each month of the year with each row corresponding with a day of the week (starting with Monday) and each column corresponding to a week of the month.

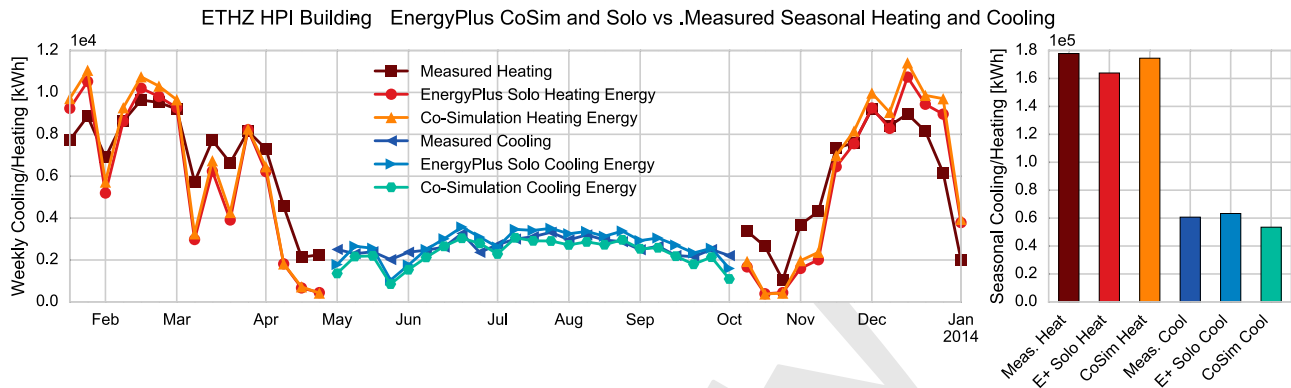


Figure 9. HPI measured vs. co-simulation and EnergyPlus solo for heating and cooling seasons.

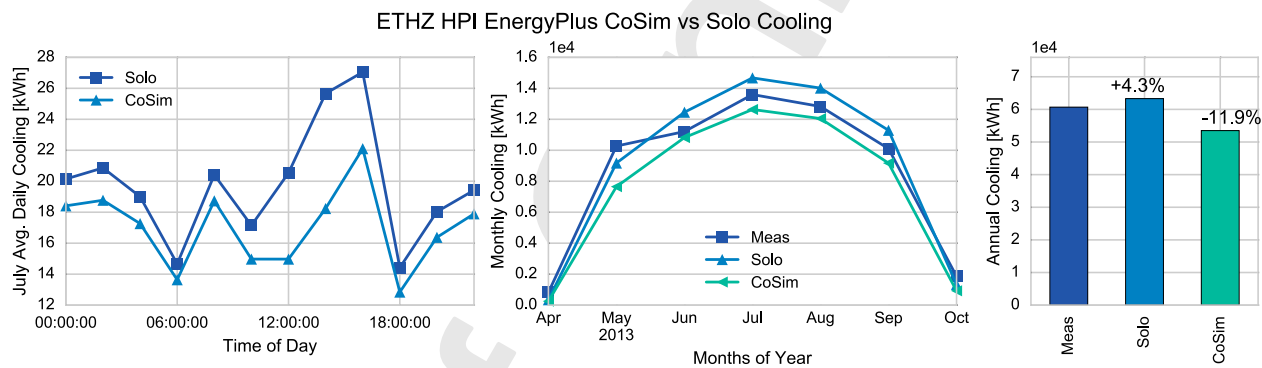


Figure 10. HPI co-simulation vs. EnergyPlus solo for cooling.

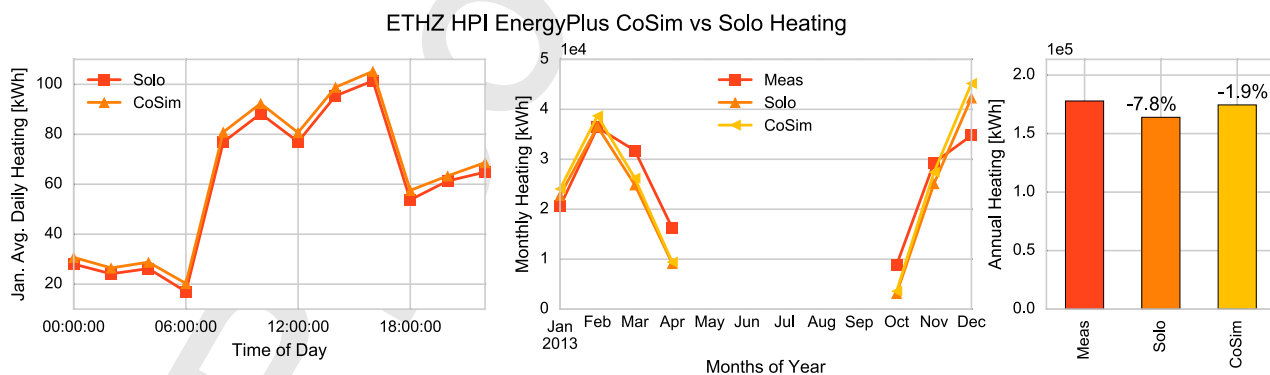


Figure 11. HPI co-simulation vs. EnergyPlus solo for heating.

the predicted cooling energy by 15.5%, as seen in Figure 10. Figure 11 illustrates the difference in predicted heating energy consumption across the test year. A consistent offset exists across the time frame of days in January, the peak of the heating season. A more varied discrepancy across the heating months is noticed resulting an overall increase of heating prediction of 6.5% due to co-simulation. The exchange of *LWR* for this particular site is substantial due to the proximity of surrounding buildings.

When comparing the solo and co-simulated models to the measured data, it is noticed that cooling energy is

over-predicted by the solo simulation by 4%, while co-simulation under-predicted by 11.1%. This discrepancy is likely due to a loss in *LWR* in the co-simulation to the surrounding buildings, thus reducing the overall cooling load.

For heating energy, co-simulation was able to bring the predicted value to within 2% of the measured value for the year, an improvement as compared to the solo simulation, which was 8.5% less than the measured value. This situation is also likely due to the *LWR* loss to surrounding buildings, thus increasing the overall heating load.

3.5. Campus case study 2: EPFL Quartier Nord

Quartier Nord is a whole new quarter of the EPFL campus located at its northwest corner. This complex includes a Convention Centre with an auditorium with a maximum capacity of 3000 (seated) people, housing for 516 students, retail and service areas and a hotel. As a public space, this ensemble is organized around the central plaza as seen in Figure 12). With a particularly strong visual and formal identity, the SwissTech Convention Centre (STCC) is clearly the key protagonist. Designed as a Minergie building, it includes modern energy conversion technologies to reduce its energy consumption (Beyeler, Beglinger, and Roder 2009). The focus of the co-simulation is realized on the STCC, simulated with the nearby buildings for housing, retail and service areas.

3.6. Model development

The information required in the simulation mainly comprises three parts: physical, geometrical and operational data. The geometry information including the shape, dimension, structure and materials was obtained from the Real Estate and Infrastructure Department of École Polytechnique Fédérale de Lausanne (EPFL), which was responsible for carrying out the project from call to tender to construction. However, since the documents provided were conflicting with what has been installed, the task to realize a precise model of the buildings itself is rather



Figure 12. The Quartier Nord at EPFL in Lausanne.

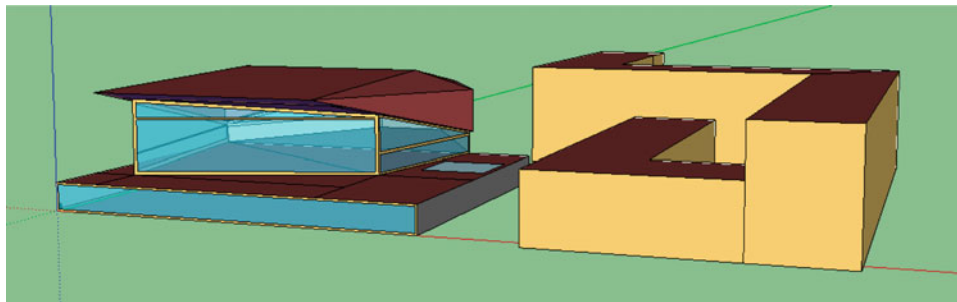


Figure 13. The Quartier Nord modelled with OpenStudio for Sketchup¹. The STCC on the left is the main focus of the study and is represented by two thermal zones.

tedious. Besides, it is even more challenging to get the operational data (daily occupancy, lighting, and electrical equipment usage level and ventilation rate) as the building has only recently been set in operation mode and as engineers and technicians have been working on improving the controls. Therefore, due to unreliable monitoring data, the calibration step of the model was not undertaken.

Considering the lack of detailed information about the building, a so-called detailed reference case was modelled with EnergyPlus (Mauree et al. 2015) in which regulation standards applied in the design phase from the local building code norms were used to complete the missing information. A rendering of this model is seen in Figure 13.

The corresponding CitySim model was created by exporting a DXF file from EnergyPlus for the whole of Quartier Nord, and importing it into the Graphical User Interface of CitySim. Physical characteristics of the building were added to complete the CitySim model. Finally, the same script as described in Section 2 was used to export the model from CitySim to EnergyPlus, giving a simplified EnergyPlus model.

3.7. Comparison of EnergyPlus and CitySim

Both the CitySim and EnergyPlus engines are utilized in this case study. The first comparison to observe is the differences between the two engines when focused on the STCC building. When simulated in isolation, the CitySim engine predicts a 28.6% increase in heating load and a 44.4% increase in cooling load as compared to EnergyPlus. This phenomenon is due to the differences in the way each of these engines calculates heating and cooling loads. CitySim has a much more simplified model of building occupants, lighting, and plug loads. CitySim also includes long-wave radiation exchange calculations that can greatly influence the heating and cooling load calculations as well. Use of the co-simulation process brings the engines to within 5.4%. Figure 14 illustrates these differences for cooling and Figure 15 for heating.

3.8. EnergyPlus co-simulation results

The STCC building is also simulated within the solo and co-simulation environments. When focusing on the

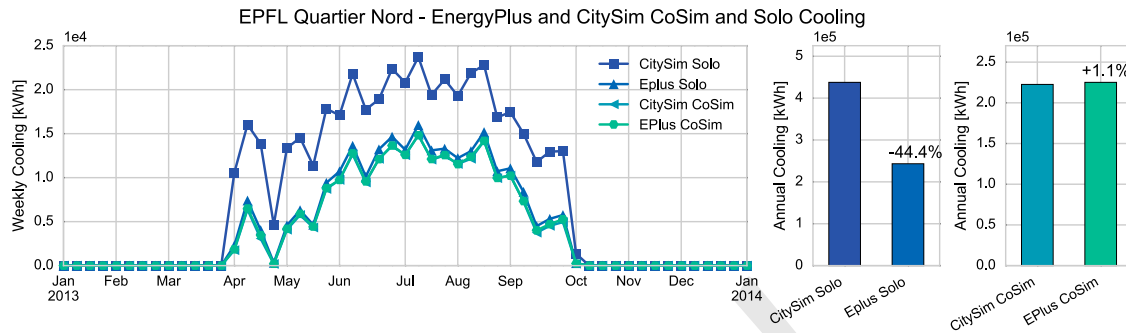


Figure 14. STCC CitySim vs. EnergyPlus solo for cooling.

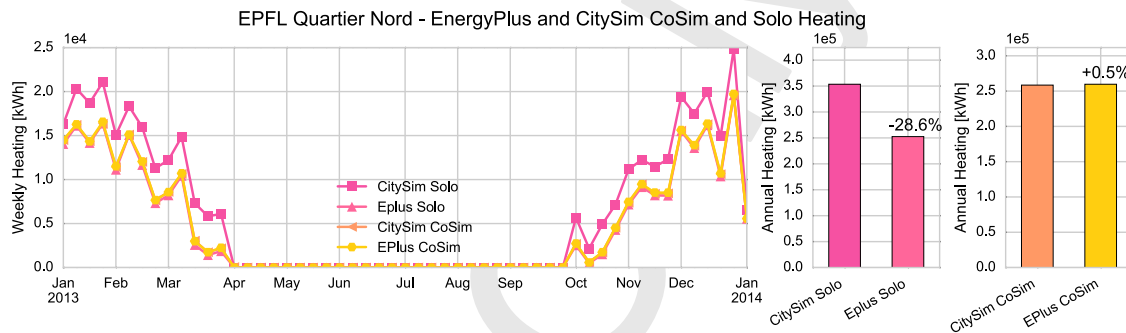


Figure 15. STCC CitySim vs. EnergyPlus solo for heating.

EnergyPlus results, a 7.5% decrease in cooling energy is observed, as seen in Figure 16. A 2.8% increase in heating energy is observed, as seen in Figure 17. These differences are less pronounced than the HPI and theoretical case

studies due to the number and proximity of surrounding buildings is not as large, LWR exchange in this situation doesn't have as large of an impact on the heating and cooling calculations.

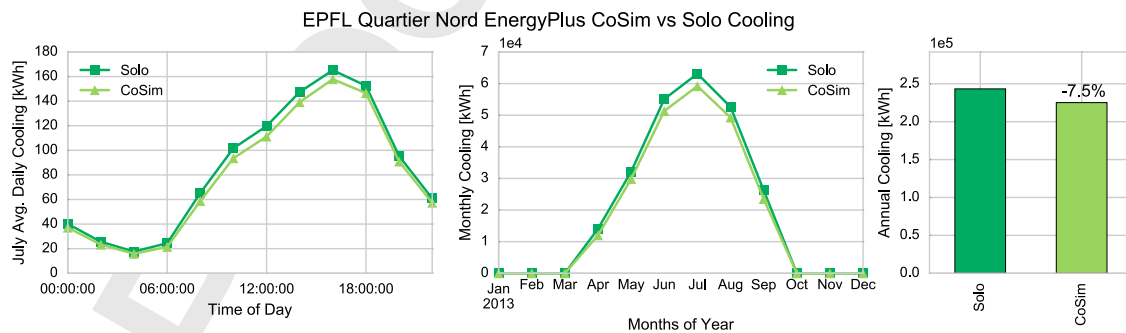


Figure 16. Quartier Nord EnergyPlus co-simulation vs. solo for cooling.

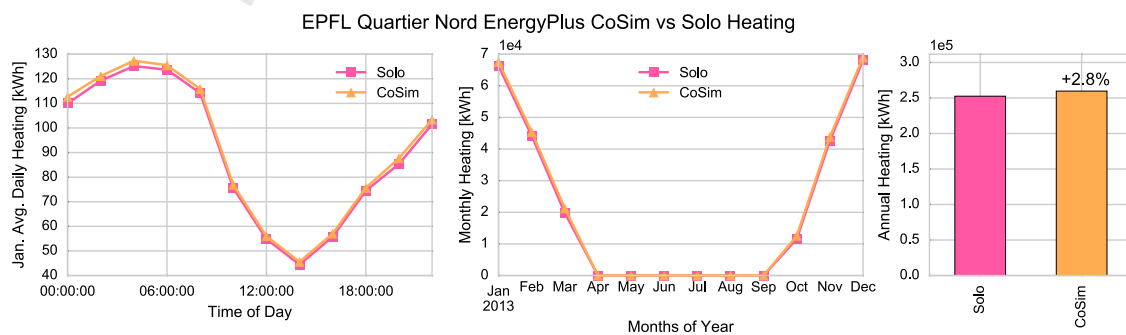


Figure 17. Quartier Nord EnergyPlus co-simulation vs. solo for heating.

4. Discussion

Two campus case studies were presented in this paper to showcase a unique process of extracting model meta-data, conversion of those data into input files for two separate simulation engines, and the solo and co-simulation process of those engines. The analysis of the results shows that for the first case study, co-simulation can achieve values closer to measured reality for heating, but not cooling. These results are unique to this case study and simply show that the co-simulation process may be helpful for heating only. A limitation of this study is that we only analyse a single building against measured data in this context. In the second case study, significant discrepancies are found between the CitySim and EnergyPlus engines which were corrected using the co-simulation process.

One of the key insights in this work is that each of the engines is enabled to account for the various physical phenomenon in their simulation process that were previously impossible. For example, through co-simulation, EnergyPlus was able to utilize the LWR exchange capabilities of CitySim. The ability to couple and leverage the best aspects of multiple simulation engines can enhance the modelling of large-scale urban agglomerations.

Disadvantages of the co-simulation process are mainly centred upon the increase in computing time and power needed for the FMI to coordinate data exchange between the two simulation engines. After calibration, a comparison of the run-times of the co-simulation and solo EnergyPlus simulations show that the execution time for the solo EnergyPlus simulation was 1 minute and 49 s compared to 28 min and 10 s for the co-simulation.

5. Conclusion

This paper outlines the implementation of a fully automated work flow process that extracts geometry information at the urban-scale, creates the necessary input information, executes each engine with information exchange at each time step of targeted variables, and accumulates the results of the analysis. The process has been implemented on simplified theoretical scenarios in the past, and the key innovation with this work is in implementation on actual case-study campuses and targeted buildings. The results illustrate that the differences between the co-simulation and solo environments are within range of previous theoretical models. More reliable results of the magnitude of differences between the simulation techniques can be extracted from these real-world scenarios.

Future work in using co-simulation models for buildings and campuses would more intensively utilize the model results in a practical implementation of retrofit scenarios or urban-scale energy systems research. More implementations would also test the feasibility of using co-simulation for systems analysis, urban planning studies, and cooling and heating system optimization.

Acknowledgements

The authors would like to acknowledge the ETH Zürich Campus Facilities Department, the EPFL Real Estate and Infrastructure Department, and Emanuel Thoma for their assistance in this project.

Disclosure statement

No potential conflict of interest was reported by the authors.

Funding

This research was funded by the Competence Center in Energy and Mobility (CCEM) under the Urban Multi-scale Energy Modeling (UMEM) project.

Note

1. s/sketchup/SketchUp/

ORCID

C. Miller  <http://orcid.org/0000-0002-1186-4299>

References

- Allegri, Jonas, Viktor Dorer, and Jan Carmeliet. 2012. "Influence of the Urban Microclimate in Street Canyons on the Energy Demand for Space Cooling and Heating of Buildings." *Energy and Buildings* 55: 823–832.
- Beyeler, Franz, Nick Beglinger, and Ursina Roder. 2009. "Minergie: The Swiss Sustainable Building Standard." *Innovations* 4 (4): 241–244.
- Bouyer, Julien, Christian Inard, and Marjorie Musy. 2011. "Microclimatic Coupling as a Solution to Improve Building Energy Simulation in an Urban Context." *Energy and Buildings* 43 (7): 1549–1559.
- Bueno, B., L. Norford, Grégoire Pigeon, and R. Britter. 2011. "Combining a Detailed Building Energy Model with a Physically-Based Urban Canopy Model." *Boundary-Layer Meteorology* 140 (3): 471–489.
- Dorer, Viktor, Jonas Allegri, Kristina Orehoung, Peter Moonen, and Govinda Upadhyay. 2013. "Modelling the Urban Microclimate and Its Impact on the Energy Demand of Buildings and Building Clusters." Proceedings of BS2013: 13th Conference of International Building Performance Simulation Association, 3483–3489. Chambéry, France: International Building Performance Simulation Association, August.
- Evins, Ralph, Viktor Dorer, and Jan Carmeliet. 2014. "Simulating External Longwave Radiation Exchange for Buildings." *Energy and Buildings* 75: 472–482.
- Freire, Juliana, David Koop, Fernando Seabra Chirigati, and Cláudio T. Silva. 2014. "Reproducibility using VisTrails." *Implementing Reproducible Research* 33.
- Haldi, Frédéric, and D. Robinson. 2011. "The Impact of Occupants' Behaviour on Building Energy Demand." *Journal of Building Performance Simulation* 4 (4): 323–338.
- Keirstead, James, Mark Jennings, and Aruna Sivakumar. 2012. "A Review of Urban Energy System Models: Approaches, Challenges and Opportunities." *Renewable and Sustainable Energy Reviews* 16 (6): 3847–3866.
- Lawrie, L. K., Fred C. Winkelmann, Fred Buhl, and Joe J. Huang. 2001. "EnergyPlus: Creating a New-Generation Building

- Energy Simulation Program." *Energy and Buildings* 33 (4): 319–331.
- Martin, Miguel, Afshin Afshari, Peter R. Armstrong, and Leslie K. Norford. 2015. "Estimation of Urban Temperature and Humidity using a Lumped Parameter Model Coupled with an EnergyPlus Model." *Energy and Buildings* 96: 221–235.
- Mauree, D, Y Yao, J Kaempf, and J. L. Scartezini. 2015. "Evaluation and Optimization of Renewable Energy in the "Quartier Nord": Objective Zero-Power." CIBAT 2015.
- Miller, Clayton, Zoltán Nagy, and Arno Schlueter. 2015. "Automated Daily Pattern Filtering of Measured Building Performance Data." *Automation in Construction* 49: 1–17. <http://www.sciencedirect.com/science/article/pii/S0926580514002015>.
- Miller, Clayton, and Chandra Sekhar. 2010. "Modeling of the Single Coil, Twin Fan Air-Conditioning System in EnergyPlus." SimBuild 2010: Fourth National Conference of IBPSA-USA, 201–206. New York, NY, August.
- Miller, Clayton, and Daren Thomas. 2015. "Long Wave Radiation Exchange for Urban Scale Modeling within a Co-Simulation Environment." CIBAT, Lausanne, Switzerland, September.
- Miller, Clayton, Daren Thomas, Silvia Domingo Irigoyen, Christian Hersberger, Zoltan Nagy, Dino Rossi, and Arno Schlueter. 2014. "BIM-Extracted EnergyPlus Model Calibration for Retrofit Analysis of a Historically Listed Building in Switzerland." Proceedings of SimBuild 2014: 2014 ASHRAE/IBPSA-USA Building Simulation Conference, Atlanta, GA, USA, September.
- Nouidui, Thierry Stephane, and Michael Wetter. 2014. "Tool Coupling for the Design and Operation of Building Energy and Control Systems based on the Functional Mock-up Interface Standard." The 10th International Modelica Conference, March 10–12, 2014, 311–320. Lund, Sweden. Linköping University Electronic Press, March.
- Nouidui, Thierry, Michael Wetter, and Wangda Zuo. 2014. "Functional Mock-Up Unit for Co-Simulation Import in EnergyPlus." *Journal of Building Performance Simulation* 7 (3): 192–202.
- Robinson, D, Philippe Leroux, Diane Perez, Adil Rasheed, and Urs Wilke. 2009. "CitySim: Comprehensive Micro-Simulation of Resource Flows for Sustainable Urban Planning." Proceedings of BS2009: 11th International Building Performance Simulation Association Conference, Glasgow, Scotland, July.
- Robinson, D, and Andrew Stone. 2004. "Solar Radiation Modelling in the Urban Context." *Solar Energy* 77 (3): 295–309.
- Samuelson, Holly W., Arash Ghorayshi, and Christoph F. Reinhart. 2015. "Analysis of a Simplified Calibration Procedure for 18 Design-Phase Building Energy Models." *Journal of Building Performance Simulation* 1–13.
- Schlueter, Arno, and Frank Thesseling. 2009. "Building Information Model based Energy/Exergy Performance Assessment in Early Design Stages." *Automation in Construction* 18 (2): 153–163.
- Srebric, Jelena, Mohammad Heidarinejad, and Jiying Liu. 2015. "Building Neighborhood Emerging Properties and Their Impacts on Multi-Scale Modeling of Building Energy and Airflows." *Building and Environment* 91 (C): 246–262.
- Thomas, D, C Miller, J Kämpf, and Arno Schlueter. 2014. "Multiscale Co-Simulation of EnergyPlus and CitySim Models Derived from a Building Information Model." BauSIM 2014: Fifth German-Austrian IBPSA Conference.
- Thomas, Daren, and Arno Schlueter. 2012. "Customizable Continuous Building Simulation Using the Design Performance Toolkit and Kepler Scientific Workflows." Proceedings of ECPPM 2012: eWork and eBusiness in Architecture, Engineering and Construction, 17–22. Reykjavik, Iceland: CRC Press.
- Trčka, M, Jan L. M. Hensen, and M Wetter. 2010. "Co-Simulation for Performance Prediction of Integrated Building and HVAC Systems – An Analysis of Solution Characteristics using a Two-Body System." *Simulation Modelling Practice and Theory* 18: 957–970.
- United Nations. 2014. "World Urbanization Prospects: 2014 Update." 1–32.
- United States Department of Energy (DOE). 2015. "EnergyPlus Engineering Reference Version 8.2: The Reference to EnergyPlus Calculations." The Reference to EnergyPlus Calculations.
- Wetter, Michael. 2011. "Co-Simulation of Building Energy and Control Systems with the Building Controls Virtual Test Bed." *Journal of Building Performance Simulation* 4 (3): 185–203.
- Yang, Xiaoshan, Lihua Zhao, Michael Bruse, and Qinglin Meng. 2012. "An Integrated Simulation Method for Building Energy Performance Assessment in Urban Environments." *Energy and Buildings* 54: 243–251.
- Zhang, Rui, Khee Poh Lam, Shi-chune Yao, and Yongjie Zhang. 2013. "Coupled EnergyPlus and Computational Fluid Dynamics Simulation for Natural Ventilation." *Building and Environment* 68: 100–113. <http://www.sciencedirect.com/science/article/pii/S0360132313001029>.

Q10

Q11