



SAPCON INSTRUMENTS

40+ Years in Process Control Instrumentation



131 Palshikar Colony, Indore




0731-4757575



www.sapconinstruments.com

Introduction : Virtuous Cycle

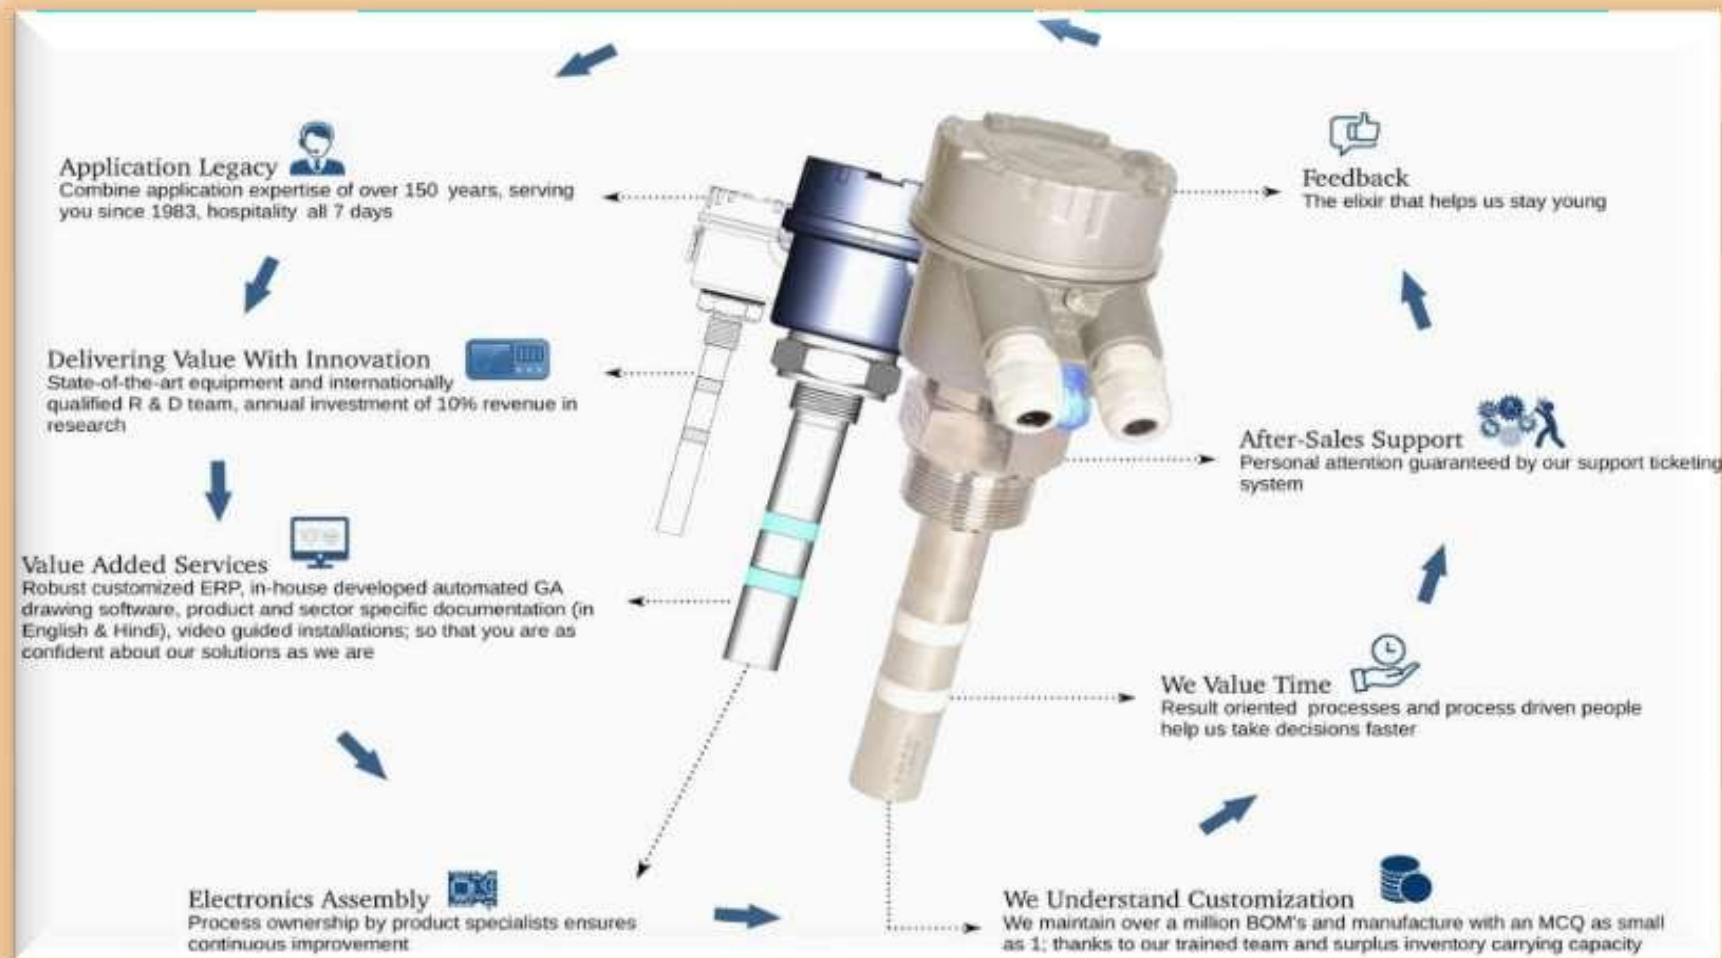



Rajendra R. Palshikar

CA, Institute of Chartered Accountant of India
Director Finance &Accounts




Ashwin R. Palshikar

MBA, S.P. Jain Institute of Management & Research
Director Business Development

Our New Plant Expansion

New Facility 60,000 Sqft.

Sanwer Road, Indore

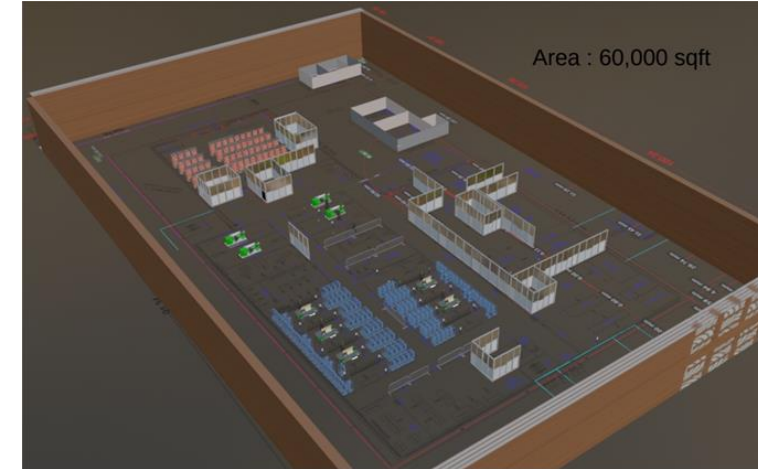

Our Manufacturing Process



LEVEL SWITCHES

High and Low Level Detector
 Overfill & Dry Run Detection
 Available for Hazardous Area



LEVEL SENSORS


Continuous Monitoring
 Accuracy in Process Automation
 Reliable & Stable Operation



Our Experience in Fields of Instrumentation



- 40+Years of experience in Instrumentation.
- 90,000+ Successful Installations.
- 8,000+ Valuable Clients.
- Export to 90+ Countries.
- Renowned brand in the process automation market.

General Work Flow

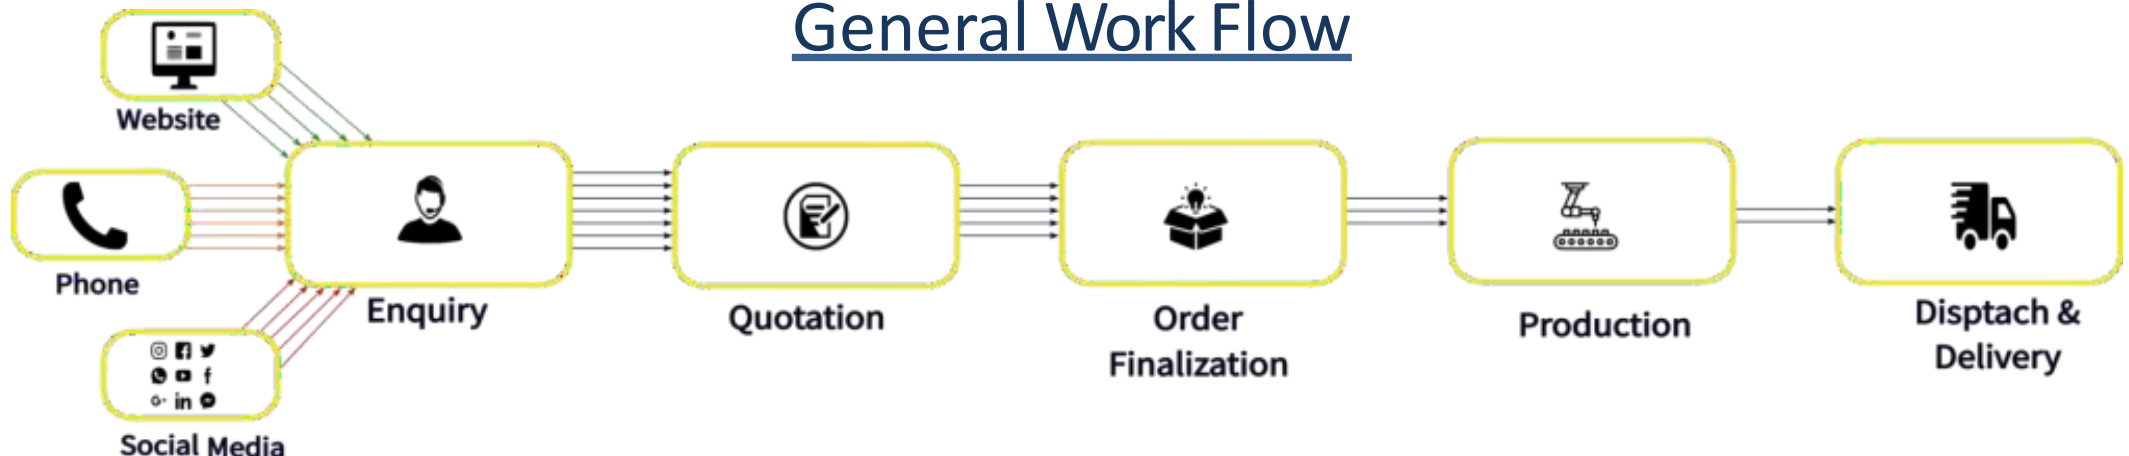

Our Certifications

- CMIFR-Flame proof housing IIC
- EIL certified.
- Ingress Protection IEC: 60529
- Explosion Protection IEC: 60079
- EMI/EMC : IEC 61000, CISPR 11
- IP-68 certified.
- Intrinsic safety certified.
- CE/ISI/CCOE/PESO
- ISO 9001:2015
- ISO 14001:2015
- ISO 22000:2018
- ISO 45001:2018
- EHEDG Certified.

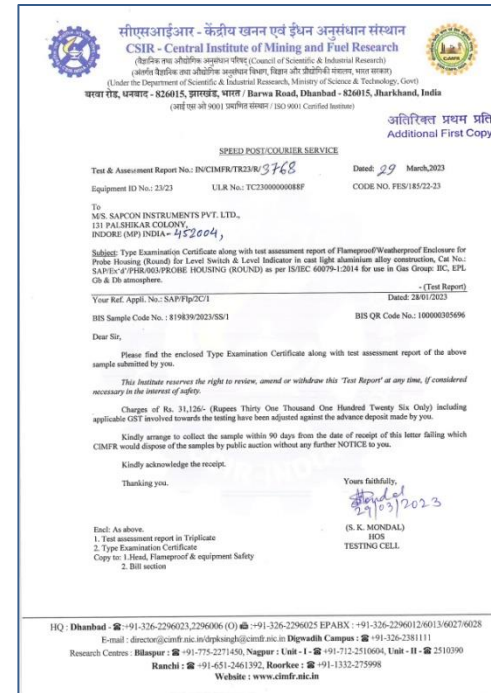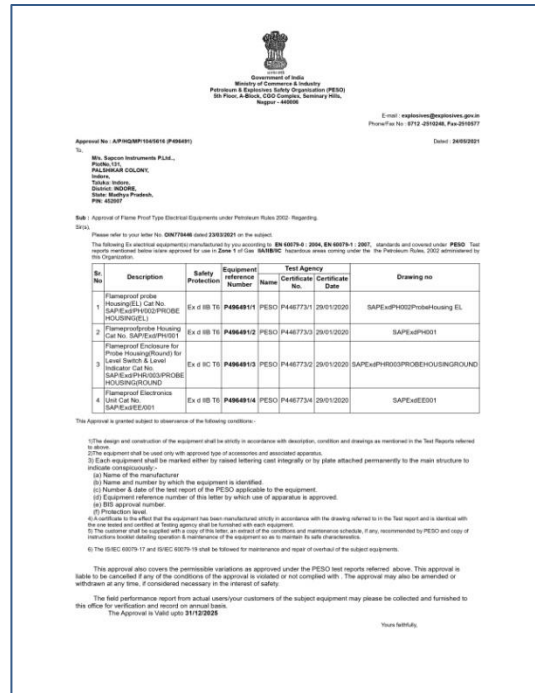

Our Major Clients of Edible Oil Industries



- A. Desmet Ballestra (Bunkri Project)
- B. Desmet Ballestra (Masoom Project)
- C. Alfa Laval India Pvt Ltd.
- D. Gemini Edible & Fats India Limited.

											
Purchase order PO Number : PO-47717 Project : BUNERI Order date : 25/01/2022 Project manager : Lingangouda H Patil Phone number : E-mail :	Supplier Sapcon Instruments Pvt. Ltd. No.13, Pashukar Colony 452 004 Indore, MP INDIA Contact : Mr. Pratik Phadke GSTIN : 23AACCS4126N2C										
Delivery conditions Delivery terms: EXW, Indore Packaging : Ordinary packing Rng Delivery date : 22/03/2022 Purchase assistant: Shwetha K. Delivery address	Invoice and Payment Conditions Payment Conditions 100% within 10 days on receipt of invoice										
Vendor reference Qm Ref. Email Dst. 25-01-2022	T.D.S : TDS on Goods										
Buyer group: INSTRUMENTATION ALL											
						GST Taxable Value	GST Rate Amount	GST Rate Amount	Curr	Delivery	Shipment
Pos.	Function	Items	HSN / SAC	Quantity	Unit	Price	Value	Amount	Amount		
10		862/73-1	P00494329	9626	1.00	Pcs			18.00%	INR	22/03/2022
Supply of Vibrating Fork Type Level Switches as per enclosed annexure											
Total :							INR				
Indian Rupee _____											
Naveen Kumar K. G. Project Manager OR : U22BKR0A19MFT7CITTT 23 : 29AAKZS233JL12D GSTIN : 29AAKZS233JL12D Desmet Ballestra India Private Limited Vaishnav Meridian, Ground Floor, No. 12, Infantry Road, 560 001 BENGALURU, KA INDIA Phone: +91 80 6659 8200 • Fax: E-mail: india@desmetballestra.com http://www.desmetballestra.com Authorized Signature _____											
For DESMET BALLESTRA INDIA PVT. LTD.											

Purchase order										Supplier					
PO Number : PO-46135										Secon Instruments Pvt. Ltd.					
Project : MASOOM										No. 15, Pakshir Colony					
Order date : 28/09/2021										452/004 Indira, MP					
Project manager : Linganguo H Patil										INDIA					
Pocuser number :										Contact : Mr. Pratik Phadke					
E-mail :										GSTIN : 23AACCA124N2NC					
Delivery conditions										Invoice and Payment Conditions					
Delivery terms : EXW, Indore										100% within 10 days on receipt of invoice					
Packaging : Ordinary packing															
Reg.Delivery date : 27/09/2021															
Purchase assistant : Shwanti K.															
Delivery address															
Vendor reference										T.O.S : As applicable					
Cin Ref Email Doc 28-06-2021															
No.	Pos.	Function	Item	HSN / SAC	Quantity	Unit	Unit price	Taxable Value	GST Rate	GST Rate Amount	IGST Rate	IGST Rate Amount	Curr	Delivery	Shipment
10		6106-62773	P00840N8	9038	3.00	Pcs					18.00%	INR	23/08/2021		
Supply of Level Switches as per enclosed annexure															0
Total:															INR
Indian Rupee															
"LIQUIDATED DAMAGES FOR DELAYED DELIVERY" In the case of equipment, materials and spare parts not being delivered in accordance with the delivery date stated in the order, the Supplier shall pay the Liquidated damages @ 1% per week or per part thereof to a maximum of 5% of the order value. The payment of Liquidated damages shall not relieve the Supplier from his obligation of delivery. Warranty Clause All equipment supplied by SELLER, as per Purchase Order, shall be of: good quality, brand new, in accordance with the design and engineering documents, of sufficient and suitable quality for the purpose intended and shall be free of defects. SELLER will make good or replace defective components or any parts thereof if it is clear for such repairs or replacements is bad design, defective materials or faulty manufacturing workmanship. SELLER will provide warranty for the equipment supplied on the Date of Coming into Force and continue through the period ending "12 months after the start-up of the plant or 18 months from the date of dispatch of the last consignment whichever is earlier." GST: Compliance Clause - Endorsement Clause: "Supplier / Service Provider" represents that they are registered under GST laws and are compliant with necessary provisions under GST laws enabling "Desmet" to avoid input tax credits.															
For DESMET BALLESTRA INDIA PVT. LTD.															
Navem Kumar K. G. Project Manager										_____ Authorized Signature					
Page: 1 / 2															
Desmet Ballestra India Private Limited															
Valhmani Desmet, Ground Floor, No. 12, Infantry Road, 560 001 BANGALURU, KA INDIA															
Phone: +91 969 8200 7400 Fax: E-mail: dbinfo@desmetballestra.com															
http://desmetballestra.com															
CIN	UDN296K0184FC0777 23														
GSTIN	23AACCA123513L20														

Purchase Order

SAPCON INSTRUMENTS PVT. LIMITED
131 PALSHIRAM COLONY INDORE 452004

GETIN No. : 23AACCD428W42C w.e.f. 01.09.2023(01)

PO Type : : 4127
Supplier Code : : 584627
Place of Delivery : Gst No. 330, 334, Narsapur waal,
Payment Terms : : 60 Days Credit

PO No/Rev : : E260065
Currency : : INR
Freight Terms : : F.O.B. OUR WAREHOUSE

Date : : 2023/09
Delivery Method : : BY ROAD
Delivery Terms : : Door Delivery
MO Number : :

Our Reference : : S Kulkarni
Telephone No. : :
Fax / E-Mail : :

Your Reference / RATE AGREEMENT
Telephone No. : : 902441608
Fax / E-Mail : : j.narasimhan@sapcon.in

Please supply following as per general terms and conditions.

Sl No/Item No.	Slip Item No.	Rev No.	Description	LM	QTY	Unit Price	Total Price	Del Date
Project On No.								
1	LEWITCH 011P 730359 901		LEVEL SWITCH SAPCON MODEL EL USA 7-1/2"	EL	PC	19.00		2023/11
			HENSAC Code : WIDE HENSAC Desc : Measuring Instruments, Pressure					
	IGST		18.00					

Order Value : INR

CONTACT PERSON : N.JYOTIRAM

TERMS AND CONDITIONS:

- 1) ALL TEST & GUARANTEE CERTIFICATE, MANUALS TO BE SUBMITTED
- 2) PLEASE FORWARD YOUR ORDER ACCEPTANCE IF WE DO NOT RECEIVE YOUR ORDER ACCEPTANCE WITHIN 5 WORKING DAYS, IT WILL BE ASSUMED THAT YOU HAVE ACCEPTED OUR PURCHASE ORDER UNCONDITIONALLY.
- 3) THIS P.O IS GOVERN BY GENERAL TERMS & CONDITION
- 4) MATERIAL TO BE PACKED IN WOODEN PACKING BOX
- 5) PLEASE SEND ALL THE DOCUMENTS LIKE TC, INVOICE CHALLAN ETC ALONG WITH MATERIAL, TO OUR CHAMAN NARE HOUSE
- 6) MATERIAL WILL BE INSPECTED AT OUR CHAMAN NARE HOUSE

Correspond With :

PG A Project Ware House
Gst No. 330, 334, Narsapur waal,
Taluka - Khedi, Chahan,
Pune - 410501.

Page 1 of 1

[illegible]

(A)

(B)

(C)

(D)

- A. Kumar Metal Industries Ltd.
- B. Bunge India Pvt Ltd.
- C. Fowler Westrup India Pvt Ltd.
- D. Adani Wilmar

	KURNAR METAL INDUSTRIES PVT. LTD.		PUNJAB/01 REV/2/01 - 18/05/2015					
	MANUFACTURERS & EXPORTERS OF VEGETABLE OIL, M.E.L.S. OIL, REFINING AND SOLVENT EXTRACTION PLANTS		CIN No. U72299-PB-2007PCC-06876					
	GOVT. RECOGNISED EXPORT HOUSE							
	PURCHASE ORDER							
Supplier Code Address : 090026 SAMPOR INDUSTRIES PVT. LTD. 131, PULWAKHAR COLONY, ROHINI-422004 A.P. Tel. No. - 0731 247571-247572 Attn: MR. RAJIV			PO & SO NO. : PC/1930437 / SC/1000100 REVISION : PO Date : 01/03/2016 Doc. Type : SO SO Date : Ref. Quant. : SAP L3-26363.000.2014 RP Quoted. Date : 13/02/2016 Delivery Date :					
Please submit the following goods/services as per the terms & conditions mentioned below:								
Sr. No.	Item Code	Item Description	Qty	UOM	Rate (INR)	Dis (%)	Amount (INR)	Sales Order No / (Del. Date)
1	IMBELSWT001	LEVEL SWITCH FOR LIQUID TAG LL-T101, HL-T101, LL-T106, HL-T101, LL-T102, LL-T106, HL-T106, LL-T103, HL-T121, LL-T121, LL-T141, LL-T142, HL-8122, HL-8122, LL-T106, HL-T06, LL-T886, HL-T886, HL-T882, HL-V001, HL-V003, LL-V003, LL-T421, LL-T409, HL-T486, HL-C902, LL-C902, HL-T886, LL-T886, HL-T881, LL-T881, HL-T886, LL-T899, PG-01, SPARE-1, SPARE-2, SPARE-3, SPARE-4 PROBE LENGTH-- 193 MM AFTER THREAD MODEL NO. ELUXOR H1 (A-B) W T 58 8116 SENSING FPC SS 316 OTHER DETAILS AS PER SERIAL NO 2 IN YOUR QUOTE REFER QUOTE NO SAP L3-26363.000.2014 RP	38.00	NO		20.30	SC/1000100 31/03/2016	
2	IMBELSWT002	LEVEL SWITCH FOR SOLID TAG NO LL-8703 PROBE LENGTH-- 203 MM FROM THREAD MODEL- VITAL 5 B W T 58 C203 SENSING FPC SS 316 AS PER YOUR QUOTE SERIAL NO. 1 REFER QUOTE NO SAP L3-26363.000.2014 RP	1.00	NO		12.50	SC/1000100 31/03/2016	
3	BELTTRM002	LEVEL TRANSMITTER PROBE LENGTH - 1000MM	2.00	NO		17.80	SC/1000100 31/03/2016	

Page 1 of 4

		BUNGE INDIA PVT. LTD. The Capital 601C & 6102 8th Floor, C-70 (3 Block) Bandra Kurla Complex, Bandra East, Mumbai - 400051 CIN : L74110MH198159PTC1214287 PAN: AAAC0230M																																																																		
PURCHASE/SERVICE ORDER																																																																				
Vendor No: B0252323 GARCON INSTRUMENTS PVT.LTD 131 FALSHIBHARU COLONY INDORE Madhya Pradesh Pin-452004 Tel-731475726 / 9329198445 Madhya Pradesh(CD) GST No:23AAC05410N1K2C PAN No : AACCC34120N		Delivery Address: BUNGE INDIA PVT. LTD. KANDLA PLANT SURVEY NO15/1/1, 15/2, 15/2, 15/41 1542, 157 NATIONAL HIGHWAY 6A MOTI CHIRAI BHACHAU KLUTCH Pin-370145 Gujarat(24) GSTIN No : 24AAC07034K1ZP																																																																		
PO No: 418583725 PO Date: 09.09.2019 Reference Contract Terms of Payment: Net 15 Days Terms of Delivery: EXW Intra Extra Currency: INR Broker Name 1 Broker Name 2																																																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No.</th> <th>Material Code - HSN/EBC/INC No.</th> <th>Unit/ Bbl.</th> <th>Unit/ Bbl.</th> <th>Unit/ Bbl.</th> <th>Basic Price</th> <th>Discount</th> <th>Taxable Amount</th> <th>GST Amt</th> <th>GST Rate</th> <th>GST Amt</th> <th>GST Rate</th> <th>Total Amount</th> </tr> <tr> <th></th> <th>Material Description</th> <th>Unit</th> <th>Bbl.</th> <th>Bbl.</th> <th>Bbl.</th> <th></th> <th></th> <th>INR</th> <th>%</th> <th>INR</th> <th>%</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>230221 - INDIA-103 LEV 9870T/300/120/120/5</td> <td>EA</td> <td>10.00</td> <td>EA</td> <td>10.00</td> <td>2019</td> <td></td> <td>0.00</td> <td></td> <td>0.00</td> <td></td> <td></td> </tr> <tr> <td></td> <td>SCM</td> <td></td> <td>2.00</td> <td>EA</td> <td>20.00</td> <td>2019</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="13"> Basic Amount After Discount Total CGST Total SGST/IGST Total GST Total Freight Packing & Forwarding Octroi Insurance Others Grand Total _____ _____ _____ _____ _____ _____ _____ _____ _____ </td> </tr> </tbody> </table>				No.	Material Code - HSN/EBC/INC No.	Unit/ Bbl.	Unit/ Bbl.	Unit/ Bbl.	Basic Price	Discount	Taxable Amount	GST Amt	GST Rate	GST Amt	GST Rate	Total Amount		Material Description	Unit	Bbl.	Bbl.	Bbl.			INR	%	INR	%		1	230221 - INDIA-103 LEV 9870T/300/120/120/5	EA	10.00	EA	10.00	2019		0.00		0.00				SCM		2.00	EA	20.00	2019							Basic Amount After Discount Total CGST Total SGST/IGST Total GST Total Freight Packing & Forwarding Octroi Insurance Others Grand Total _____ _____ _____ _____ _____ _____ _____ _____ _____												
No.	Material Code - HSN/EBC/INC No.	Unit/ Bbl.	Unit/ Bbl.	Unit/ Bbl.	Basic Price	Discount	Taxable Amount	GST Amt	GST Rate	GST Amt	GST Rate	Total Amount																																																								
	Material Description	Unit	Bbl.	Bbl.	Bbl.			INR	%	INR	%																																																									
1	230221 - INDIA-103 LEV 9870T/300/120/120/5	EA	10.00	EA	10.00	2019		0.00		0.00																																																										
	SCM		2.00	EA	20.00	2019																																																														
Basic Amount After Discount Total CGST Total SGST/IGST Total GST Total Freight Packing & Forwarding Octroi Insurance Others Grand Total _____ _____ _____ _____ _____ _____ _____ _____ _____																																																																				
Amount in Words Payment Terms : -																																																																				
APPROVED BY																																																																				
Acknowledgement from vendor is required within 3 days from Purchase Order date, else the document shall deemed to have been acknowledged by the vendor																																																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 40%;">Other Info:</th> <th style="width: 60%;"></th> </tr> </thead> <tbody> <tr> <td>Packing & Forwarding:</td> <td>On Vendor</td> </tr> <tr> <td>Freight Comments:</td> <td>By Bunge</td> </tr> <tr> <td>Other Remarks</td> <td></td> </tr> <tr> <td>Material Specification</td> <td>Conditional - Bunge Specified</td> </tr> </tbody> </table>				Other Info:		Packing & Forwarding:	On Vendor	Freight Comments:	By Bunge	Other Remarks		Material Specification	Conditional - Bunge Specified																																																							
Other Info:																																																																				
Packing & Forwarding:	On Vendor																																																																			
Freight Comments:	By Bunge																																																																			
Other Remarks																																																																				
Material Specification	Conditional - Bunge Specified																																																																			

Page No of 2

SAPCON INSTRUMENTS PRIVATE LIMITED 131, PALSHIKAN COLONY, 455004 INDORE (M.P.) Tel:-0731-2475751 GST.No :23AACCS4126N13C		Purchase order PO number/date 4800010400 / 28.06.2023 Contact person/telephone Projects SLD Our reference SRV	
Your vendor number with us 110005067			
Please deliver to: Fowles Wastpur India Pvt. Ltd. Plot No.60-63, KIADB Industrial Area IV Phase, Malur Taluque, Kolar District, 563138 MALUR (KARNATAKA, INDIA) GST.No :29AACFS164H1EX			
Terms of payment: 07 Days from Date of Receipt of Goods		Currency INR	
Item	Material	Description	
Order qty.	Unit	Price per unit	Net value
00010 SEN-100-B0001	40 each	LEVEL SENSOR (VIBRATING FORK TYPE)	
Control code :	90328100		
Vibrating Fork Level Limit Switch Make : Sapcon. Model : SLM-130 (Square) ELECTRONIC EVALUATION UNIT WITH FORK: Housing : Cast aluminium weather proof stoving enamel painted with fork integral with mounting arrangement. Protection : IP-65, Cable Entry : 2 X 1/2" BSP, CS Gland, Brass. Output : 1 X SPST pot. free C/o. contacts. Rated at 6 amps, 230 V AC Switching : Single Point Level Switching Mains : 24 VDC Mounting : Screwed 1-1/2" BSP Material : MS (Plated). Sensing : Fork, S S 316.			

Adani Wilmar Limited KOTLA JALPIRI HIGHWAY SILOR ROAD BUNDI 323001 RAJASTHAN Phone: Fax: E-Mail:																						
To, SAPCON INSTRUMENTS PVT LTD 131 DALSHIRGA COLONY -INDORE-452004-Sate-23 Madhya Pradesh INDIA State - Madhya Pradesh Phone -+91 Mobile-+91 Email :PREETI.SHARMA@SAPCON.IN Vendor Code- 100552 Vendor GSTIN & Tax Reg. Details Vendor GSTIN No 23AACCS4126N1ZC Pan No. AACCS4126N	PO No 1000265803 PO Date 09.01.2023 PO Release Date 09.01.2023 Our GSTIN & Tax Registration Details Company GSTIN No 08AACCB056G1ZP PAN No AACCB056G Our Contact Details PO Created by Rajendra Singh Phone: 9122732553 E-Mail: Rajendra.Singh@adaniwilmar.in																					
<table style="width: 100%; border: none;"> <tr> <td style="width: 40%;">Order Value Summary</td> <td style="width: 20%; text-align: center;">Currency</td> <td style="width: 40%; text-align: right;">Amount</td> </tr> <tr> <td>Total Basic Amount</td> <td style="text-align: center;">INR</td> <td></td> </tr> <tr> <td>Discount</td> <td></td> <td></td> </tr> <tr> <td>Total GST Amount</td> <td></td> <td></td> </tr> <tr> <td>Total Purchase Order Price</td> <td></td> <td></td> </tr> <tr> <td colspan="3">In Words:</td> </tr> <tr> <td colspan="3">ONLY</td> </tr> </table>		Order Value Summary	Currency	Amount	Total Basic Amount	INR		Discount			Total GST Amount			Total Purchase Order Price			In Words:			ONLY		
Order Value Summary	Currency	Amount																				
Total Basic Amount	INR																					
Discount																						
Total GST Amount																						
Total Purchase Order Price																						
In Words:																						
ONLY																						
For Adani Wilmar Limited Authorized Signatory For SAPCON INSTRUMENTS PVT LTD, Authorized Signatory & Stamp																						
* This is a System generated document, Signature is not required. Help of Adani Wilmar Limited or online helpdesk: helpdesk@adaniwilmar.com / adaniwilmar@adaniwilmar.com / adaniwilmar@adaniwilmar.com Tel: +91 79 2058 16507 ex: +91 79 2058 1625 www.adaniwilmar.com																						

(A)

(B)


(C)

(D)

Edible Oil industries & its Application

Globally trending "king of beans"-soy is the key source of protein and vegetable oil and has a crucial place in the world's essential seed producer due to its surging demand, productivity and contribution towards vegetable oil production and feeds of poultry and fish. The manufacturing process undergoes crushing and drying operation to make variety of soybean resultant products.

Applications

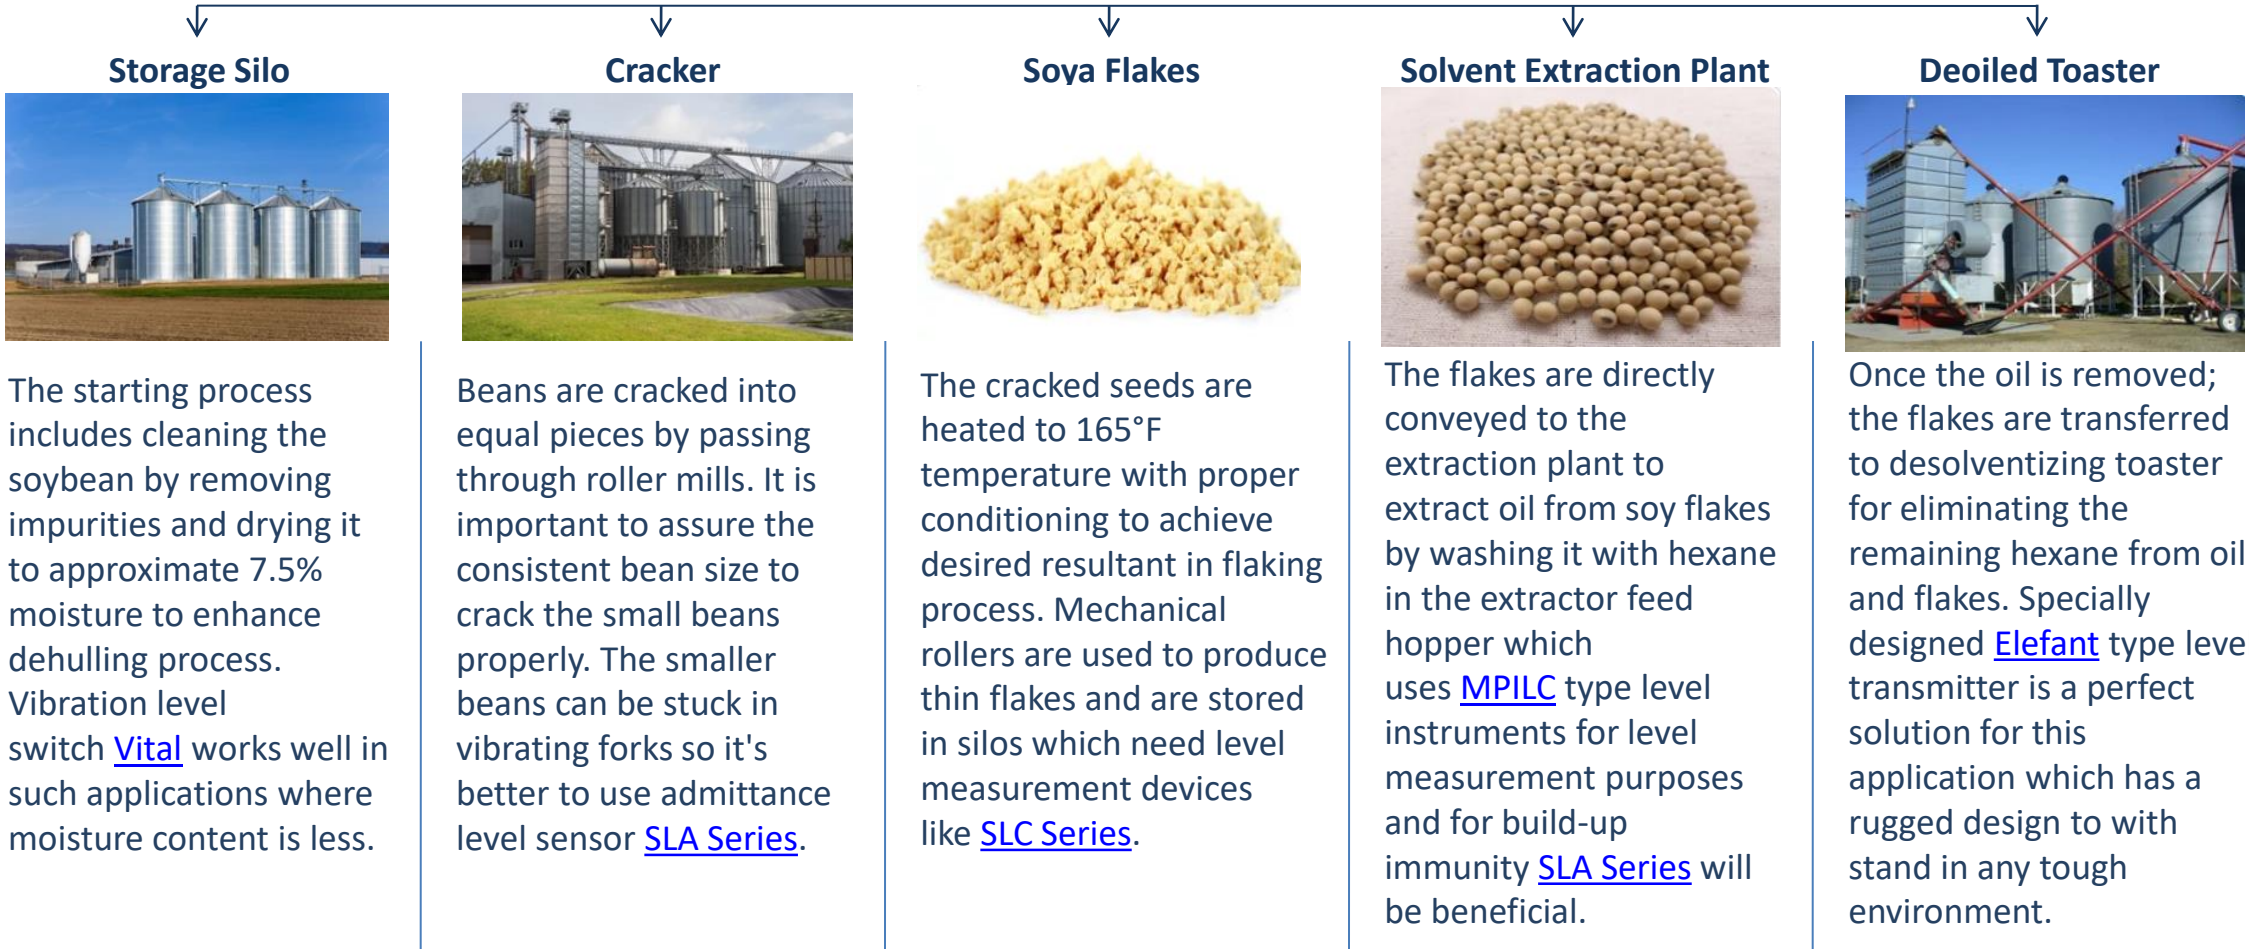

Our Specialized Products For Edible Oil Industries

- Tuning Fork Type Level Switch (Elixir)
- Compact Tuning Fork Type Level Switch (Elixir T-Uni)
- Vibrating Fork Type Level Switch (Vital)
- Level Transmitter For Deoiled-Toaster (Elefant)
- RF Admittance Type Level Switch (Coat Endure, SLA)
- Capacitance Based Level Switch and Transmitter (SLC, MPILC)
- Rotating Paddle Type Level Switch (Orbit Paddle)



Tuning Fork Type Level Switch: Elixir

Working Principle :

A compact liquid level sensor based on the tuning fork principle is a cost-effective solution with hygienic-pipe fittings & useful for all kinds of liquids. This tuning fork level sensor is used for point level detection in storage tanks, silos and pipelines to avoid overflow & dry run conditions.

Properties :

- Universal Power Supply: 18 - 55V DC & 90 - 265V AC
- Application Temperature Range : up to 200° C
- Output: 8.2V Namur, SPDT & DPDT Relay, AS-I
- Process Connection: Threads, Flanges and Tri-Clamp (Hygienic Connection)
- ECTFE coated, polished & hygienic fork
- Extendable probe length from 68 to 3000 mm
- Certifications: Flame Proof Housing IIC, PESO, BIS, CCOE, EIL, Ex-ia
- Fork Level Sensor **with Namur Output** Intrinsically Safe design Ex-ia Certified New

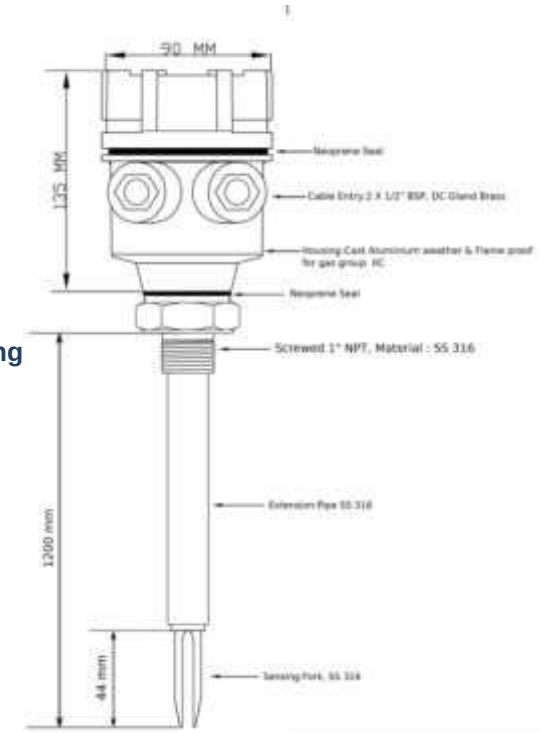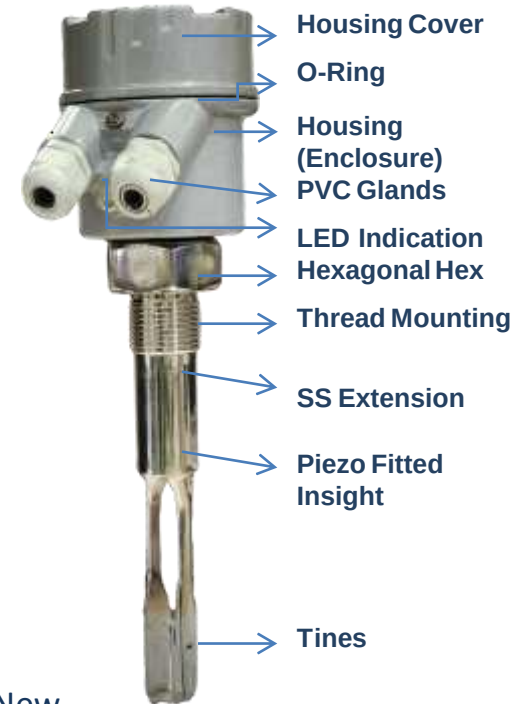

Advantages:

1. Technical Advantage

- Tines are resilient to practical with conditions
- IR communication for diagnosis, trouble shoot and configuration
- LED for switch indication (Device safe visual Operations)
- Fast Switching.

2. Commercial Advantage

- An obvious price benefit over competitor
- Reduced delivery in cycle time of receiving the product
- Better after sales support
- Strong Presence in the market
- extended guarantee period

• Elixir

• GA Drawing

Tuning Fork Type Level Switch: Elixir-T Uni

Working Principle :


A compact fork type level switch based on a tuning fork working principle with a hygienic connection is useful for all types of liquids. This kind of fork is suitable for liquid level measurement techniques in process vessels, storage tanks, silos, hoppers, and pipelines to prevent overflow & dry run conditions.

Properties :

- Power Supply :18-30 V DC
- Output: PNP, AN-I bus Interface
- Temp Range : Up to 150°C
- Certified By EL Class I by EHEDG
- Enclosure : IP68 Weatherproof
- Process Connection : Threads , Tri-Clamp (Hygienic Connection)
- Wetted Parts: SS316, SS316L with hygienic finish (Ra<0.8μ)



• Elixir T-Uni

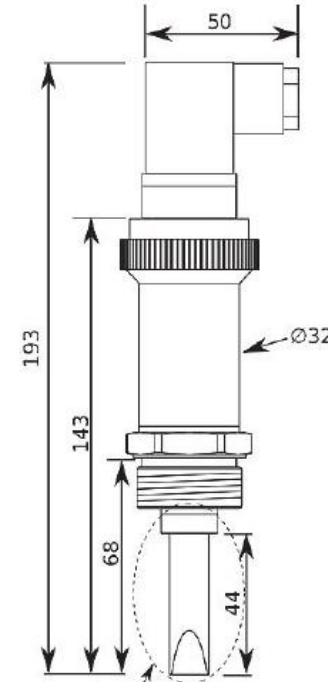

• GA Drawing

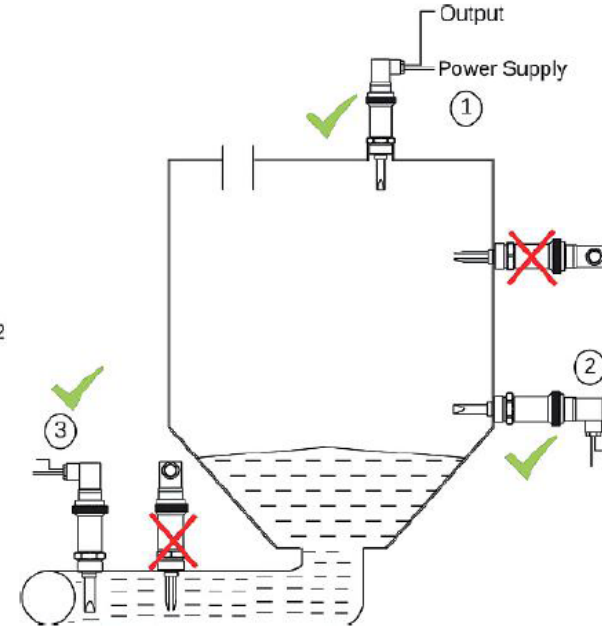


Figure 3: Installation Diagram

Advantages:

- Level detection of soap & detergent in the manufacturing process is a challenging task as it deals with sticky & foaming materials but with the help of tuning fork level sensor **Elixir T-uni** it become easy.
- Ignores foam build-up on tuning fork. Useful in dairy applications where foam build up is excessive.
- Suitable for applications involving bubbles, steam and material flow at 150°C.
- Industry standard valve plug-in connection, easy to install and ready to use.
- A simple diagnostic tool to check output connections and start diagnostics.

RF Admittance Type Level Switch: Coat Endure

Working Principle :

A compact admittance type level switch based on RF admittance working principle is specially design to detect sticky solids and liquids. This level measuring device is suitable for conductive as well as non-conductive application media.


Properties :

- Universal Power Supply: 18-55V DC & 90-265V AC
- Application Temperature Range : up to 250° C
- Outputs: DPDT Relay, Open Collector PNP Output
- Process Connection: Threads and Flanges
- Wetted Parts: PTFE, SS 304 &, SS 316
- Probe length: 65 mm to 1500 mm
- Certifications : Flame Proof IIC & IP68 Housing
- RF Level Limit Switch **with Namur Output** Intrinsically Safe design Ex-ia Certified **New**


Advantages :

1. Technical Advantage

- a. Foam, No-Foam Detection.
- b. Suitable for Conductive and Non Conductive Application.
- c. External LED Indication Available.
- d. Fast Switching.

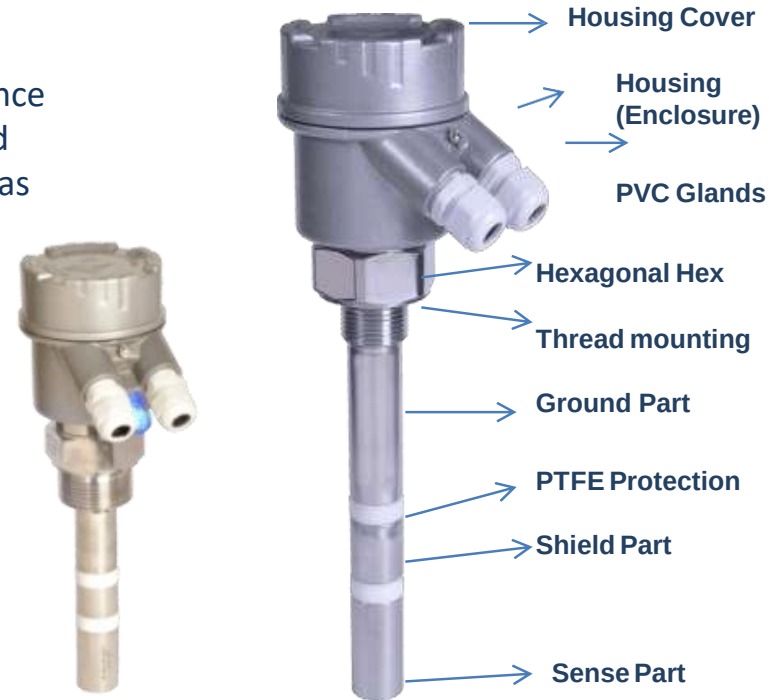

• Coat Endure

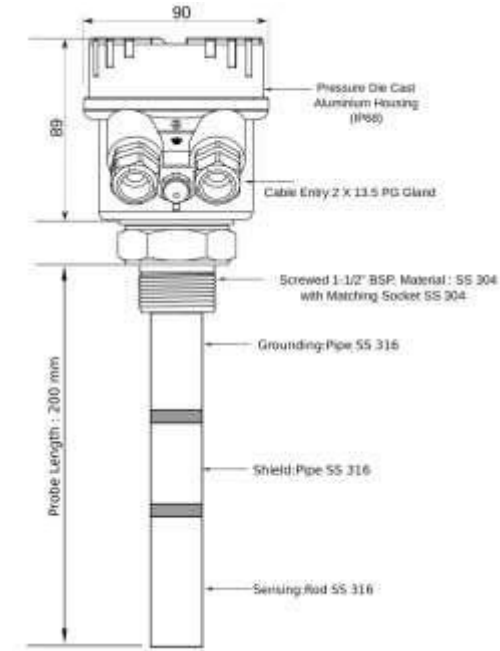

• GA Drawing

2. Commercial Advantage

- a. An obvious price benefit over competitor
- b. Reduced delivery in cycle time of receiving the product
- c. Better after sales support
- d. Strong Presence in the market
- e. Extended guarantee period


Vibrating Fork Type Level Switch: Vital

Working Principle :


A specially shaped tuning fork is kept vibrating using piezo-electric elements. The oscillations of the fork dampen when it comes in contact with the application material. The loss of oscillation amplitude is detected and used for switching the output. The output contacts of the relay are in turn used for annunciation and / or control.

Properties :

- Universal Power Supply: 18 - 55V DC & 90 - 265V AC
- Application Temperature Range : up to 200° C
- Outputs: DPDT Relay, Open Collector PNP Output
- Process Connection: Threads and Flanges
- Polished & hygienic fork
- Fast Switching: 0.5s & 0.8s options available
- Certifications: Flame Proof Housing IIC, IP-68 Housing

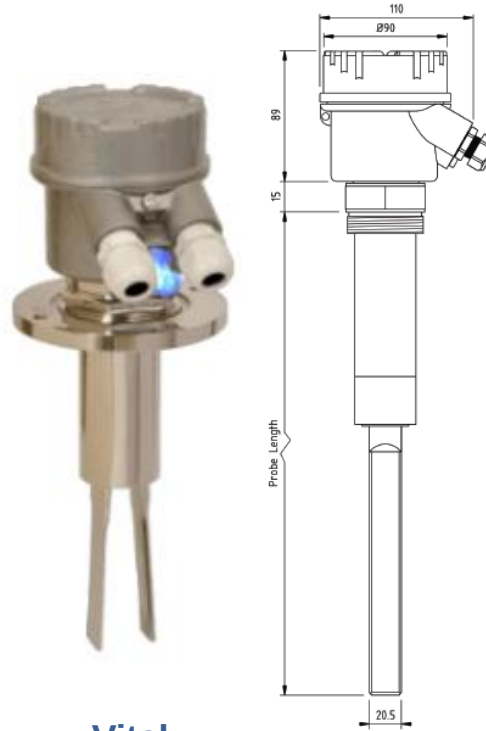

• **Vital**

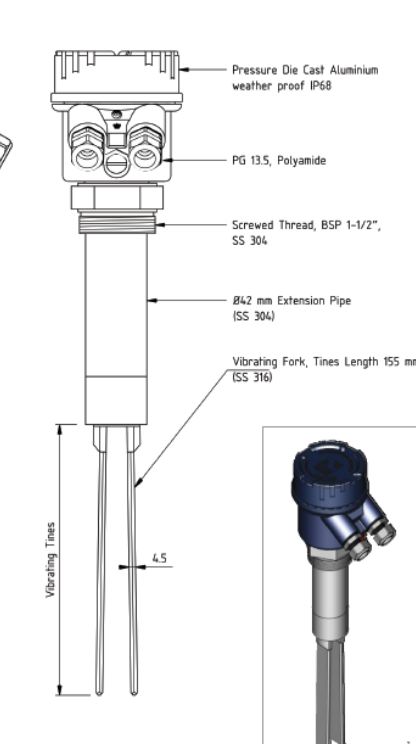

• **GA Drawing**

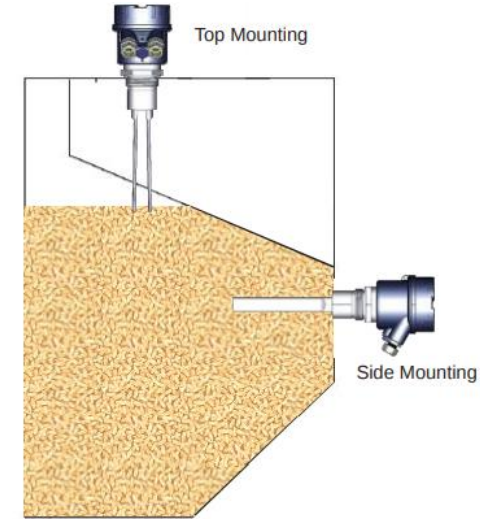


Figure 2: Mounting Arrangement for Vital

Features :

- Compact instrument, minimum tine length of 100 mm
- No moving parts, no wear and tear, maintenance free
- Comes with a fork erosion alarm
- IP68 Protection, as per IS13947
- Fast switching time < 0.85 seconds (available on request)
- Polished tines ideal for hygienic applications

Applications :

- PET / PVC chips with under water detection
- Rice, wheat, other food grains, flour
- Iron ore, sinters & pulverized coal
- Dry sand & fly-ash
- Packaging machines
- Milk Powder

Level Transmitter for Deoiled-Toaster : Elephant

Working Principle :

Sapcon's Elephant continuous monitoring sensor works on the principle of physical movement of a float. A single shaft float is inserted in the DT chamber. This shaft, which has a counter coupling, can be connected to the shaft of the elephant probe. Due to the upward and downward movement of the float, the shaft rotates and the inner variable capacitor changes the value of the capacitance. This change in capacitance can be calculated for the evaluation unit to show the output in form of current.

Features :


- Special solution to Deoiled Toaster application
- Exclusively for soya industries
- Flameproof enclosure for gas groups IIA and IIB
- High accuracy and stability
- Weatherproof (IP65)
- Rugged design
- Highly durable and reliable

Certification :

- CIMFR for hazardous Gas Groups IIA and IIB
- Weatherproof IP65 for evaluation unit
- ISI mark for hazardous area
- ROHS compliance
- CE compliance



Elephant

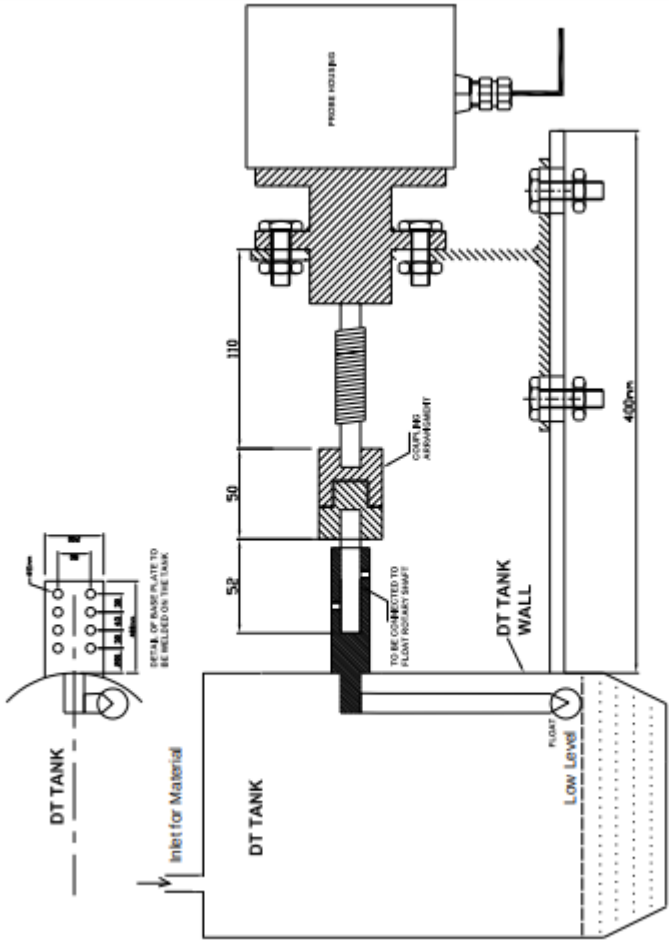

Note :- 1) All dimensions are in mm.

Rotating Paddle Type Level Switch: Orbit

Working Principle :

A paddle is rotated slowly by a stepper motor. An encoder coupled to the paddle shaft produces electrical pulses during its rotation. The pulses are monitored by a microprocessor to ascertain its movement. Paddle rotation stops when the material covers it. The microprocessor signals the material presence and sends the result in the form of potential free contacts. When the material uncovers the paddle's blades, the motor resumes free operation, which is detected by the microprocessor. Thereafter, the output status is changed and the motor starts rotating smoothly again waiting for the level to come.

Properties :

- Universal Power Supply: 90-265 V AC & 24-55 V DC
- Application Temperature Range : up to 200° C
- Outputs: DPDT Relay, SPDT Relay
- Rope probe available for longer lengths
- Adjustable RPM and adjustable switching sensitivity
- Foldable paddle mechanism for ease of installation
- 2 potential free contacts with adjustable time delay

Features :

- Direct stepper motor design, maintenance free
- Need for gear boxes and clutches eliminated
- Variable torque control, one paddle for all applications
- Selectable failsafe operation
- Foldable paddle mechanism for ease of installation
- Rope probe available for longer lengths

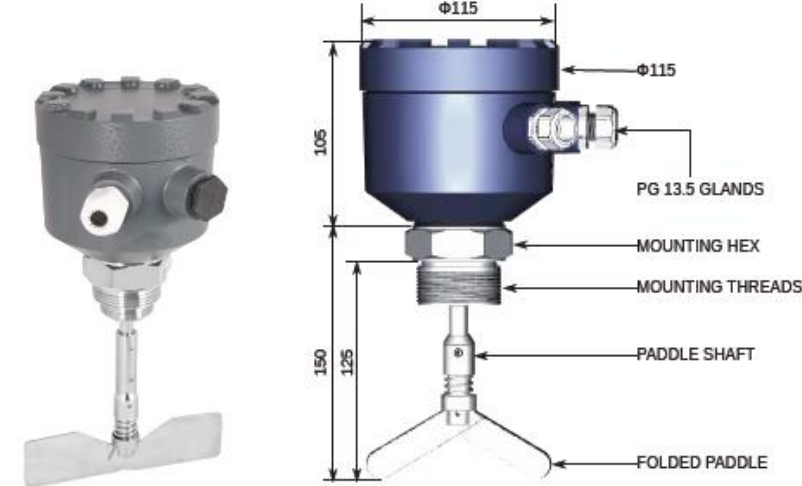


Figure 1: Parts of Orbit Paddle

- Orbit Paddle
- CAD Drawing

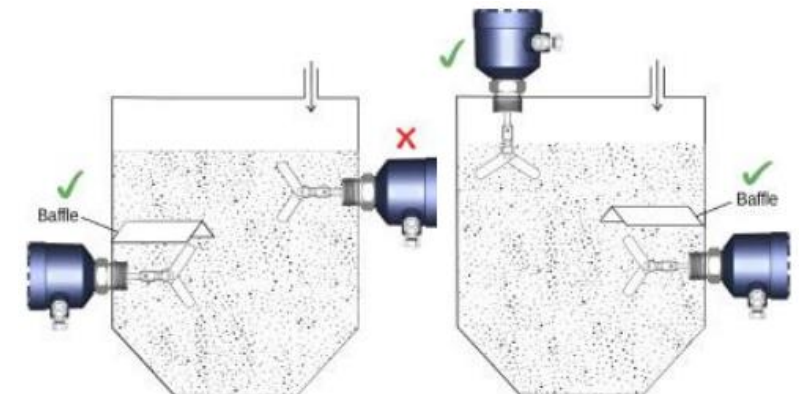


Figure 3: Correct Side Mounting

Capacitance Based Level Switch : SLC Series

Working Principle :

The probe comprises of a sense electrode, electrically isolated from the metallic tank by means of a suitable insulator. The sense electrode and the vessel wall serve as the two electrodes of a capacitor with the service material acting as the dielectric. A change in the level of material causes a change in the dielectric, which in turn causes the value of this tank capacitor to change.

- SLC



Properties :

- Universal Power Supply: 18-55 V DC & 90-265 V AC
- Application Temperature Range : Up to 350°C
- Outputs Options: 1/2 SPDT Relay & Pump Control Logic
- Available in Integral model
- Process Connection: Screwed & Flange
- Probe length: 100 mm to 10m
- Certifications: Flame Proof IIA & IIB Housing

Application:

This process includes grinding of material into finer pellets if inlet is solid and combining powder particles together by compressing to form granules. For solid applications, [SLC](#) will be helpful.

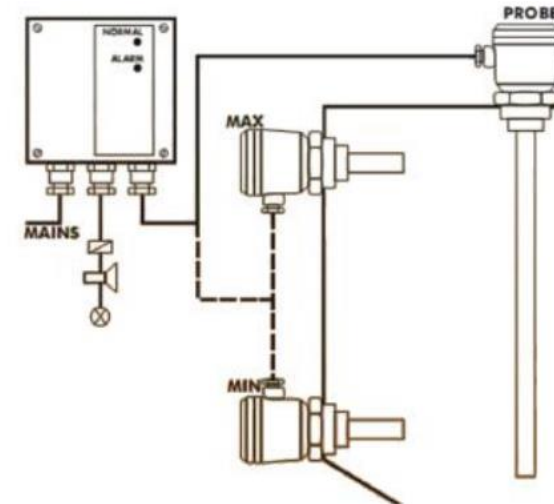


Figure 2: System Diagram




Smart SSI : Speed Monitoring System

- Easy to install and simple to calibrate
- Over- speed / Under-speed alarm, Field select-able, with fail-safe relay operation.
- Normal, Alarm and Power Failure, indicated by LED's.
- 4-20mA transmission for PLC/SCADA
- Temperature Durability up to 200°C
- Flashing LED in the evaluation unit confirms receipt of pulses



MPILC : Liquid Level Controller & Transmitter

- Universal Power Supply: 90 to 260V AC & 24V DC
- Application Temperature Range : Up to 350°C
- Output Options: 4-20mA
- Process Connections: Screwed Thread & Flanges
- Available in Rod & Rope Versions
- Certifications: Flame Proof IIA, IIB & IP65, IP66 Housing
- Probe length: 100 mm to 10m

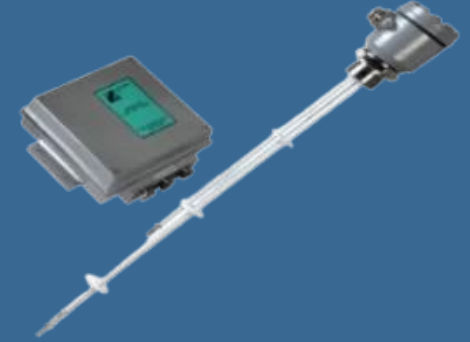

SLW : Conductivity Type Level Switch

- Universal Power Supply: 18-55V DC and 90-265V at 50Hz AC
- Application Temperature Range : Up to 250° C
- Output Options: 1/2 SPDT Relay, Pump Control Logic
- Available in Integral & Remote version
- Available in Rod & Rope Versions
- Certifications: Flame Proof IIA & IIB, IP65 & IP66 Housing
- Probe length: 65 mm to 5m



OrbitLite Rotatory Paddle Level Switch

- Light weight body
- Adjustable switching sensitivity
- AC synchronous motor design, maintenance-free
- Variable sensitivity control, wide application range
- Foldable paddle mechanism for ease of installation
- Transparent cover, easy visibility



Magnetic Level Switch in SS Float

- Mounting connection-Flange type
- Switch rating : 5mA at 230VAC
- Max. working temperature up to 250°C
- Specific gravity 0.8
- Out Put : 2 No+ 2 NC



Float & Board Level Indicator

- Installation Available for Overhead, Ground Level and Underground level tank.
- Specific Gravity ≥ 0.8
- Temp range : Up to 100°C.
- Random Visible from long distance.
- Weatherproof Scale board (SS304)
- Pure polyester powder coated scale).



SAP-Sonic : Ultrasonic Level Transmitter

- 2,4 Wire Compact.
- 2- Wire integrated level transmitter
- Temperature Compensation
- Fixed target suppression to avoid obstacles inside the tank
- Non-contact level measurement
- Maximum 25m (82ft.) measuring range
- Narrow (5°) beam angle
- Full temperature compensation
- Communication.



SAP-Flow : Electromagnetic Flow Meter

- Universal power supply: 24 VDC 230VAC and battery operated.
- Application temperature range: up to 80°C
- Suitable for conductive liquid, $\sigma > 5\mu\text{S}/\text{CM}$
- PTFE, Neoprene, PFA, HDPE,
- Polyurethane, CPVC, Rubber
- Output: 4-20mA, Relay for alarm, Pulses



Hydrostatic Pressure Based Level Transmitter

- Latest RISC Core Micro-Controller Technology
- Measured Level is displayed continuously in terms of level, volume or mass
- Multipurpose 8 digit seven segment LED display for better resolution
- Two wire Analog Communication from Sensor to evolution unit support as much as 1 km distance between sensor and evolution unit

Our Instruments in Different Coating and Material For Special Application



Halar Coated (ECTFE)



PFA Coated



Buffed Finished


Many crucial advantages make coating with ECTFE /PFA so functional and effective:

- Very good weathering resistance: Practically no changes under the influence of weather
- Very good electrical properties: Low, stable dielectric constant over a broad range of temperatures and frequencies.
- Outstanding chemical resilience: Resistant to most technical acids, bases and solvents
- ECTFE coated tuning fork sensor extends the operating life under application media involving corrosive liquids


Our Products with Halar/ PFA Coatings used in Special Application:

- Glass Line HCL Reactors.
- Vessels in Chemical Reactions.
- Cylindrical and Around shaped tank shoring chemicals.
- Storage tanks other chemical like: Ethanol, Benzene, HCL etc.
- ❖ Elixir with halar coating is perfectly suitable for this type of application.
- ❖ EHEDG certified tuning fork level sensor Elixir-T Uni will be give justified solution for this type of application.
- ❖ level sensor SLC with full PTFE insulation will be fruitful for this type of application.

Our Annual Growth

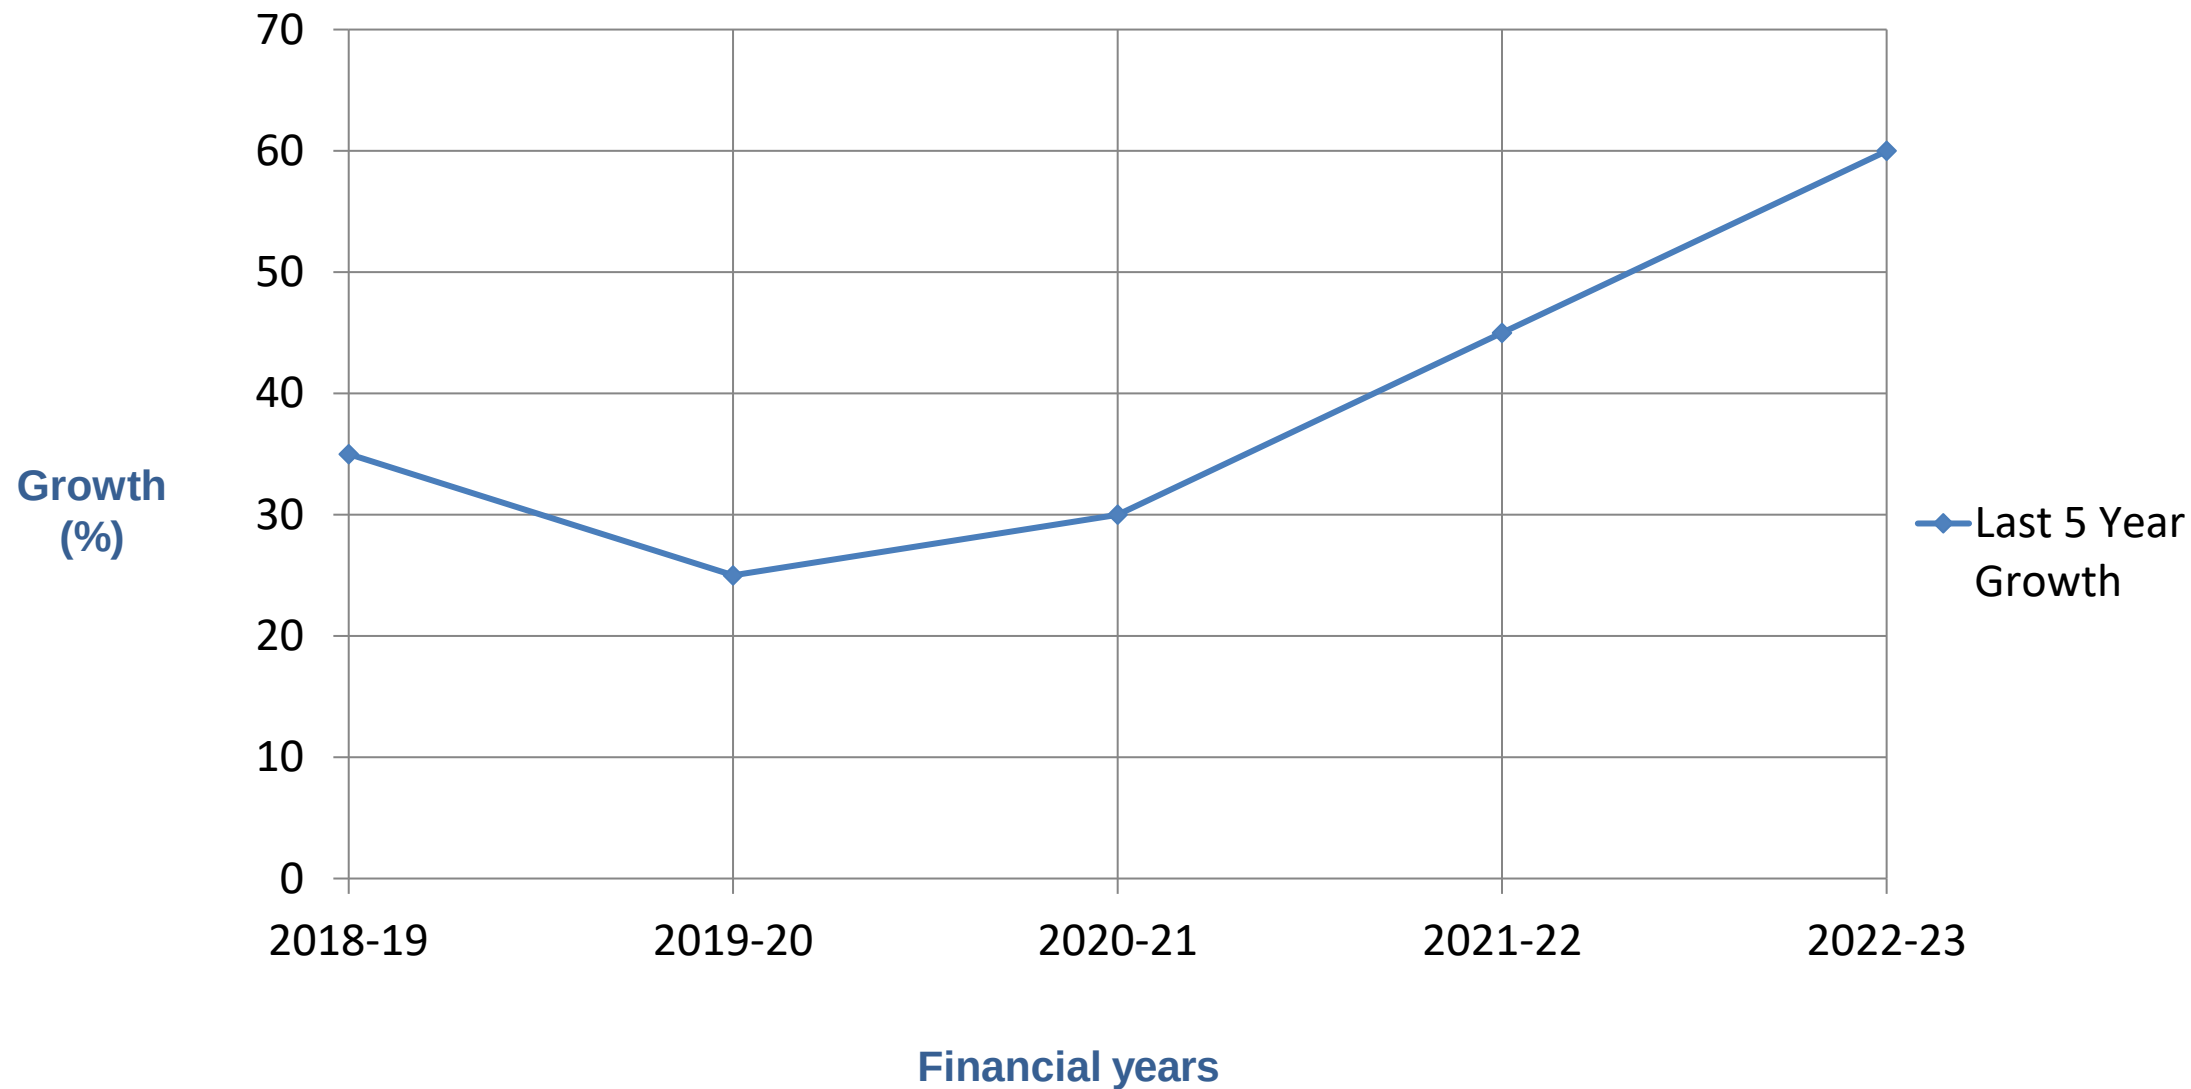

About us: Highlights Our Presence

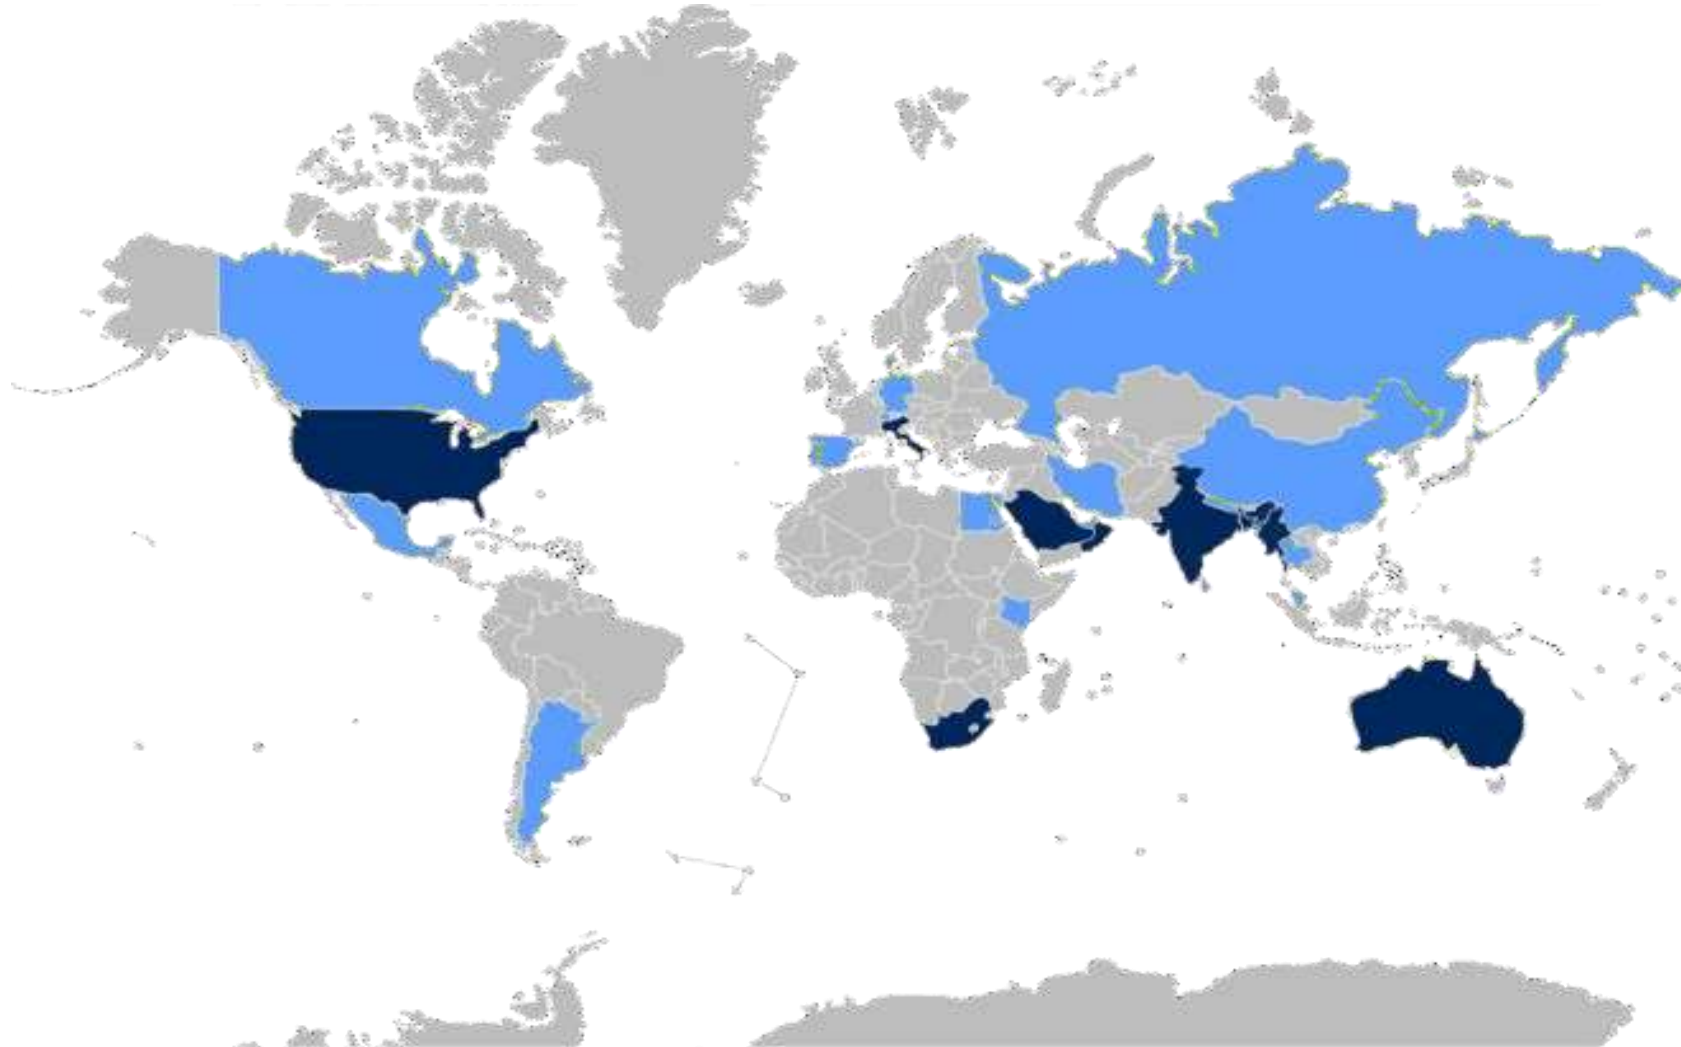

Our Manufacturing Process



PMI/XRF
handheld
machine
Ensuring
expected
composition



PMI TESTING

Mechanical Production



SEMI-AUTOMATIC TIG WELDING

Electrical Production



IPC(Institute for Printed) Members ,India Chapter
Standard PCB Manufacturers
Circuit Systems India, Gandhinagar
DMS Tech, Mysore

Other Manufacturing Equipments

- Insulation tester
- Hydraulic and Pneumatic Pressure testing
- Pneumatic Vice for faster assembly
- Battery operated Screw Drivers and Nut Tightener's

Our Team

CUSTOMER SUPPORT TEAM



RESEARCH & DEVELOPMENT TEAM



BUSINESS DEVELOPMENT TEAM



ELECTRONICS MANUFACTURING TEAM



Knowledge up-skilling

- Regular Visits to Tech Expos
- IPC Membership
- ISA Maharashtra Members
- IMA (Indore Management Association)
- EO(Entrepreneur Organization)

- **Market Penetration**
- **Strong Know-how/Credentials**
- **Dedicated service support**
- **Team**
- **Customized products**
- **Customized delivery**
- **Cost for 'Brain' only**
- **Competitive rates**



THANK YOU



GET IN TOUCH:

www.sapconinstruments.com/cement

+91-731-4757575

131 Palshikar Colony, Indore

Present Today:

Ashwin Palshikar, Director - Business Development