

Energy Deposition in Polymers

Matthew J. Urffer

December 1, 2012

Todo list

Get URL to work	9
Figure: Turner Fig of EDep	18
Write Results Section	21

Contents

1 Introduction	2
2 Previous Work	4
2.1 Spectra Measurements	4
2.2 Single Collision Energy Loss	4
3 Introduction to GEANT4	7
3.1 Organization of the GEANT4 Toolkit	7
3.2 GEANT4 Tracking and Secondaries	7
4 Methods	9
4.1 GEANT4 Implemenation	9
4.1.1 Detector Geometry	9
4.1.2 Physics Lists	10
4.1.3 Primary Event Generator	11
4.2 Sensitive Detectors	12
4.3 Analysis	13
4.4 Determination of Energy Deposition	14
5 Simulation Validation	18
5.1 Energy Deposition Validation	18
5.2 Spectra Validation	18
6 Results	21
.1 Scintillation Process	23
.2 Optical Photon Transport	23

List of Figures

1 Portal Entry Points into the U.S.	3
2 Spectra properties as a function of film thickness	4
3 Gamma intrinsic efficiency (dashed lines) plotted against neutron counts (solid)	5
4 Single-collision energy loss spectra for electrons in water [?]	6
5 Average and median energy transfer in liquid water as functions of incident-electron energy [?]	6

6	10 Layer Detector with a simulated gamma event	17
7	Single Collision Energy Loss of Water	18
8	Gamma Simulation Agreement	19
9	Neutron Simulation Agreement	20
10	Simulated Energy Depositon for a Single Film (gammas)	21
11	Simulated Energy Depositon for a Single Film (neutrons)	22

List of Tables

1	Replacement Detector Requirements [?]	2
2	Maximum Energy of Secondary Electrons from Compton Scattering	2

1 Introduction

A typical day in 2011 saw 932,456 people enter into the U.S. (258,191 by air 48,073 by sea, and 621,874 by land) [?]. In addition there was 64,483 truck, rail and sea containers with 253,821 privately-owned vehicles [?]. As shown in Figure 1 there are numerous entry points into the U.S. that are interconnected by a networks of rail and highways. In the interdiction of special nuclear material it is desirable to detect and seize the material before it enters into this complex network. Radiation Portal Monitors (RPMs) are passive radiation detection systems implemented at over a thousand border crossings, designed to determine if cargo contains any nuclear material in a safe, nondestructive and effective manner[?]. The Department of Homeland Security (DHS) continues to fund research through the Domestic Nuclear Detection Office (DNDO) in order to develop replacement technologies for the current ^3He RPMs as ^3He cannot be economically replaced. There are several alternatives to ^3He being considered and all, with the exception of gas filled proportional detectors involve the detection of neutrons from scintillation events of the energy deposited in the material from the neutron absorption reaction. These detectors (among other requirements outline in Table 1) must be able to effectively discriminate between gamma (which can occur in medical isotopes) and neutrons (which are likely to be a signature of special nuclear material).

Table 1: Replacement Detector Requirements [?]

Parameter	Specification
Absolute neutron detection efficiency	2.5 cps/ng of ^{252}Cf (in specified test configuration)
Intrinsic gamma-neutron detection efficiency	$\epsilon_{int,\gamma n} \leq 10^{-6}$
Gamma absolute rejection ratio for neutrons (GARRn)	$0.9 \leq \text{GARRn} \leq 1.1$ at 10 mR/h exposure
Cost	\$ 30,000 per system

Neutron detectors often utilize a material doped with an isotope of large thermal cross section for absorption such as ^6Li or ^{10}B . When these materials absorb a neutron the nucleus of the isotope becomes unstable and fissions into reaction products. These reaction products (having an initial kinetic energy from the Q-value of the neutron absorption reaction) travel through the material, transferring their kinetic energy to the material. Photon interactions in the detector occur when a photon scatters of a single electron in a Compton scattering event (Table 2). This Compton electron then produces a cascade of secondary electrons in the material, which depending upon the energy may or may not deposit a majority of it's energy in the detector. The difference in the transfer of kinetic energy from charged particle to electrons and from photon interactions (Compton scattering) to electrons introduces an opportunity to exploit the difference in energy deposition in order to maximize the discrimination between neutron and photon interactions in a detector.

Table 2: Maximum Energy of Secondary Electrons from Compton Scattering

	Photon Energy (MeV)	Maximum Compton Energy (MeV)
^{137}Cs	0.662	0.478
^{60}Co	1.17, 1.33	0.960, 1160

This document is organized as follows. A brief overview of the interaction of charged particles in matter will be provided in Section 2, as well as some preliminary experiments demonstrating the range of secondary electrons to aid in neutron-gamma discrimination. The GEANT4 toolkit was used for the modeling of the energy deposition. Section 3 will provide an overview of the GEANT4 toolkit. Section 4 will provide details on how the GEANT4 toolkit was implemented for this particular simulation, as well as providing validation of the calculations preformed by the GEANT4 toolkit in Section 5. In Section 6 the results of this model applied to a single film will demonstrate the enhanced ability of neutron-gamma discrimination through secondary electrons.

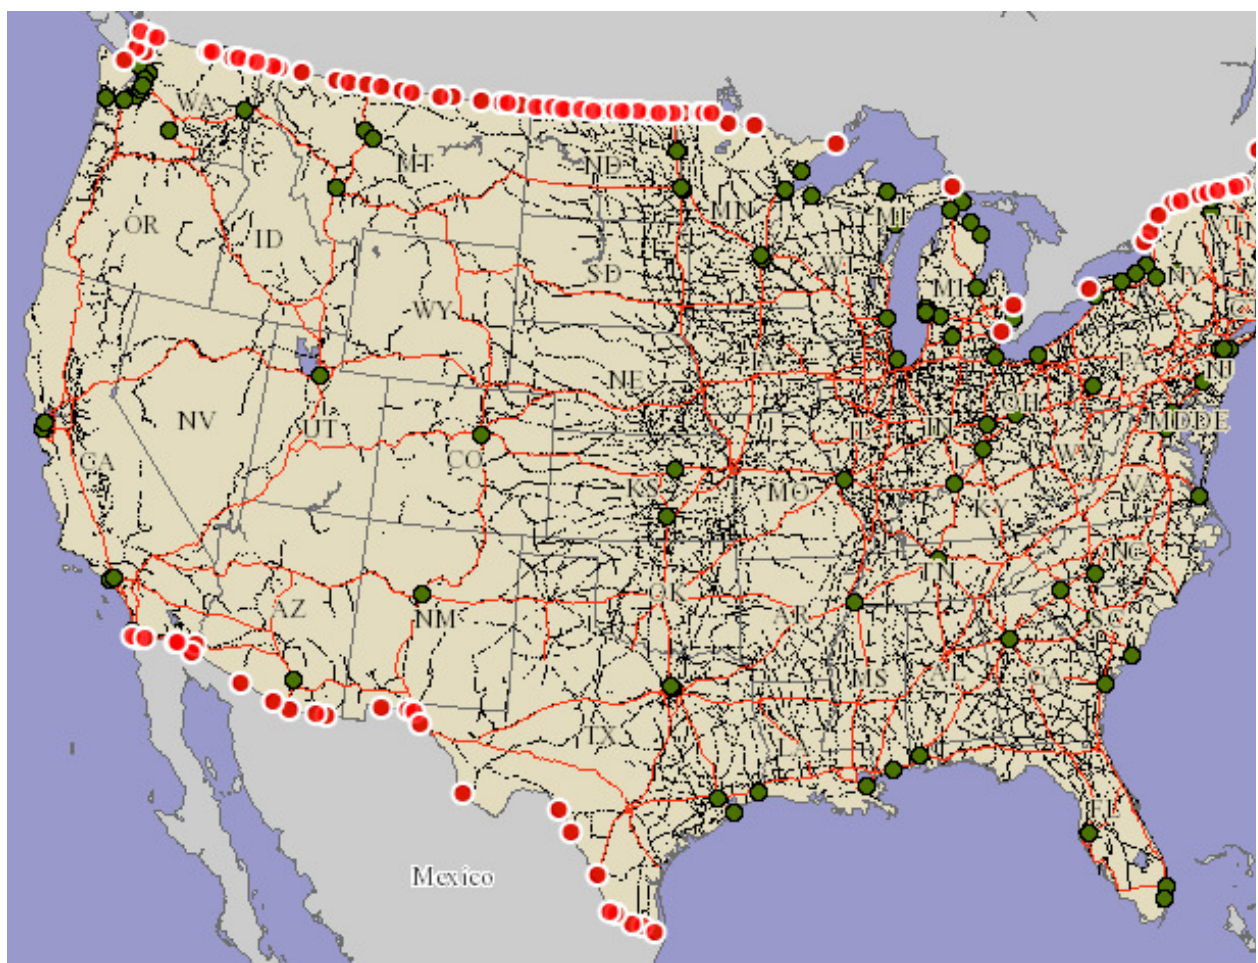


Figure 1: Portal Entry Points into the U.S.

2 Previous Work

Previous work on the energy deposition of thin focused on spectra measurements from fabricated films as wells as single collision energy loss spectra. A sequence of 10% ^6LiF , 5% PPO/POPOP films in a PS matrix cast to thickness between 15 and 600 μm where fabricated and the response was measured from a gamma source as well as a neutron source. These experiment results are shown in 2.1.

2.1 Spectra Measurements

Evidence that the secondary electrons contribute to energy loss can be seen in Figure 2 where there is an increase in the endpoint of the spectra as films become thicker. This increase in the spectra endpoint is indicative of the film producing more light, and as the light collection geometry remained constant the increase in the endpoint is attributed to a larger energy deposition in the 50 μm film compared to the 15 μm or 25 μm film. Figure 3 shows the intrinsic efficiency of these film (from spectra obtained from a ^{60}Co

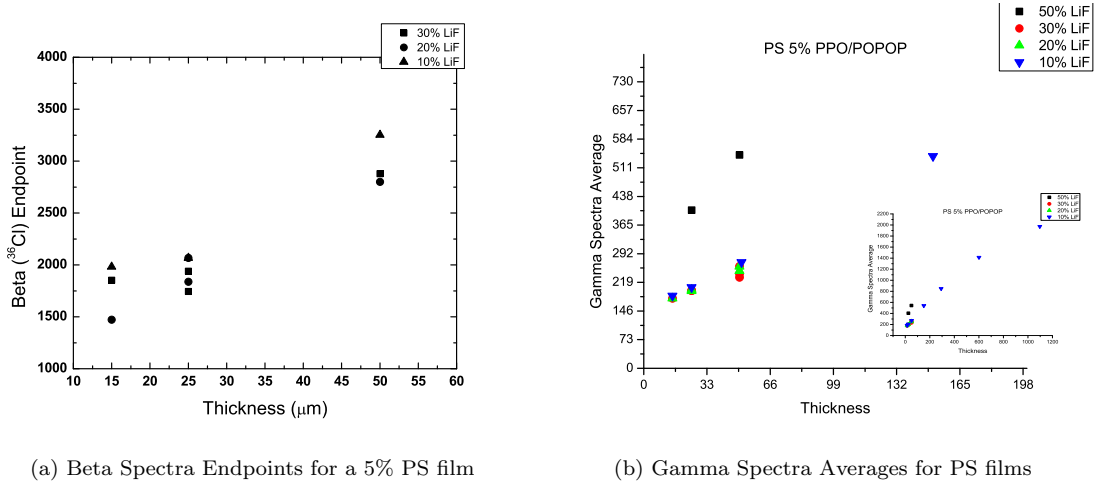


Figure 2: Spectra properties as a function of film thickness

source). As the film thickness increases the pulse height discriminator at which an intrinsic efficiency of one in a million ($\epsilon_{int,\gamma} \leq 10^{-6}$) is reached also increase. The neutron spectra (shown in the solid lines) does not increase in light yield with increasing thickness, further providing an indication that the thickness of the films can be optimized to maximize the neutron count rates¹ while minimizing the response of the detector to photons.

2.2 Single Collision Energy Loss

Single collision energy loss spectra provide the probability that that a given collision will result in an energy loss of Q . Provided a spectra of secondary electrons from either the Compton scattered electron or the ^6Li reaction products it is then possible to determine the average energy loss per collision. A single collision energy loss spectra for water is shown in Figure 4. For low electron energies (< 50 eV) it is very probable that the electron will lose a majority of its energy in a single collision. For higher electron energies, however, the electrons tend to lose a lower fraction of there total energy. A Compton scattered photon, with an energy in the MeV range, will then lose far less energy per collision than an electron (in the low keV range) liberated from the passage of a neutron reaction product through the material. When the average and median energy transfer are plotted as a function of incident electron energy (Figure 5) the difference in the energy loss spectra becomes more apparent. For low energies (up to an incident electron energy of 100 eV) the average and median energy transfer are roughly equal to each other, about half of the incident electron. Past 100 eV

¹The neutron count rate is increased with thickness by the increased mass of the detector

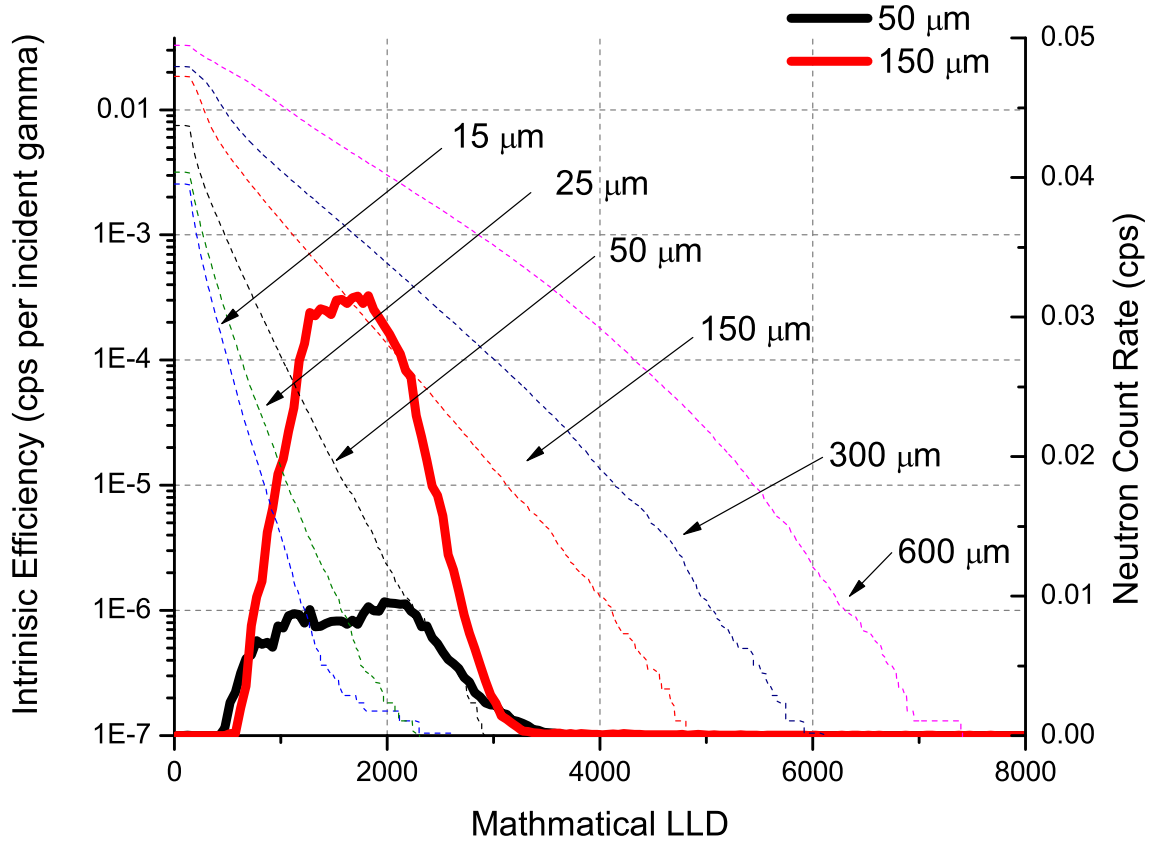


Figure 3: Gamma intrinsic efficiency (dashed lines) plotted against neutron counts (solid)

average energy increases faster than the median energy transfer implying that while a few collisions result in large energy transfers most of the collisions do not. It is also interesting to note that the average and median do not increase linearly with the incident energy past 100 eV (the ordinate axis is a log scale). In fact, the average energy transferred per collision is mostly bounded by 60 eV even for incident electron energies of 10 keV. This is significant because it implies that high energy electrons from photon events will deposit a small fraction of their energy in the material.

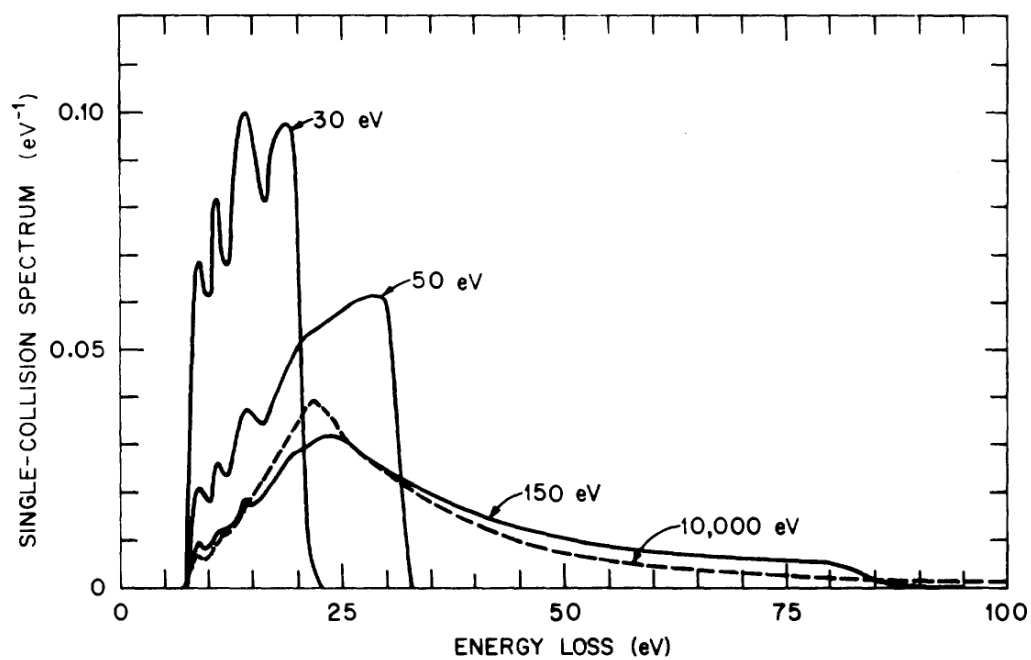


Figure 4: Single-collision energy loss spectra for electrons in water [?]

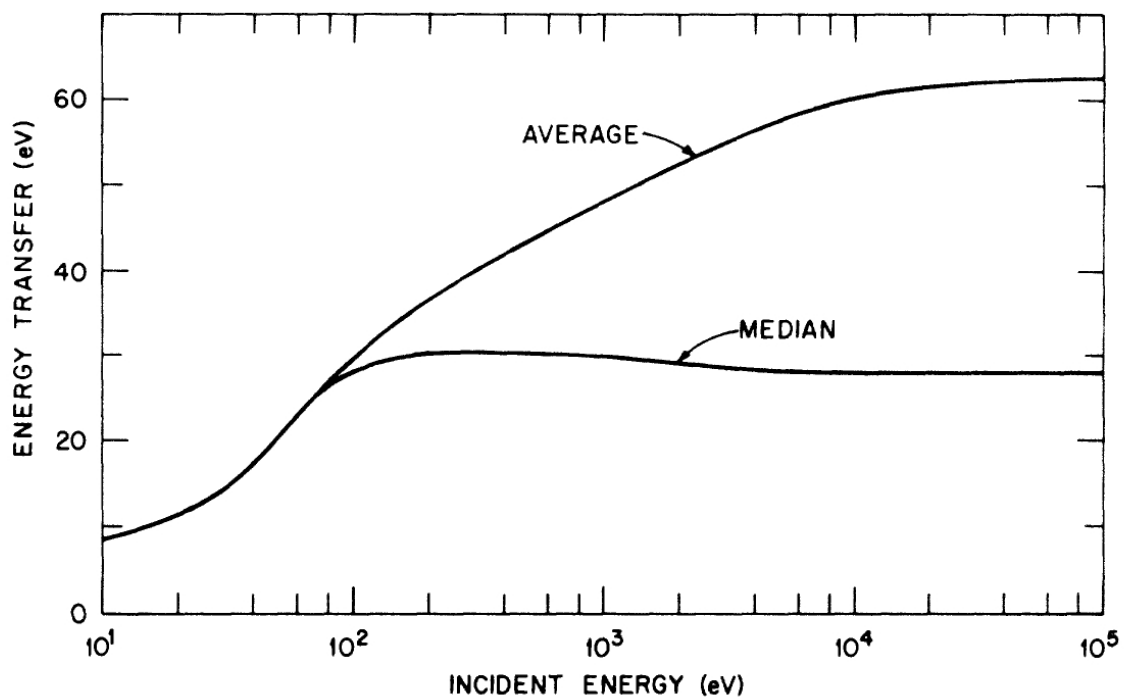


Figure 5: Average and median energy transfer in liquid water as functions of incident-electron energy [?]

3 Introduction to GEANT4

GEANT4 (GEometry ANd Tracking) is a free, open source Monte Carlo based physics simulation toolkit developed and maintained at CERN widely used in the physics community. As GEANT4 is a toolkit primarily developed for high energy physics particles are designated according to the PDG (Particle Data Group) encoding. In addition, the physics processes are referenced according to the standard model. In the standard model particles are divided into two families, bosons (the force carriers such as photons) and fermions (matter). The fermions consist of both hadrons and leptons. Hadrons are particles composed of quarks which are divided into two classes: baryons (three quarks) and mesons (two quarks). Typical baryons include the neutron and the proton, while an example of a meson is the pion. An example of a lepton is the electron.

3.1 Organization of the GEANT4 Toolkit

The GEANT4 toolkit is divided into eight (8) class categories:

- Run and Event - generation of events and secondary particles.
- Tracking and Track - transport of a particle by analyzing the factors limiting the step size and by applying the relevant physics models.
- Geometry and Magnetic Field - the geometrical definition of a detector (including the computation of the distances to solids) as well as the management of magnetic fields.
- Particle Definition and Matter - definition of particles and matter.
- Hits and Digitization - the creation of hits and their use for digitization in order to model a detector's readout response.
- Visualization - the visualization of a simulation including the solid geometry, trajectories and hits.
- Interface - the interactions between the toolkit and graphical user interfaces and well as external software.

There are then three classes which must be implemented by the user in order to use the toolkit. These classes are:

- `G4VuserDetectorConstruction` which defines the geometry of the simulation,
- `G4VuserPhysicsList` which defines the physics of the simulation, and
- `G4VuserPrimaryGeneratorAction` which defines the generation of primary events.

Five additional classes are available for further control over the simulation:

- `G4UserRunAction` which allows for user actions

3.2 GEANT4 Tracking and Secondaries

A GEANT4 simulation starts with a run which contains a set number of events. An event is a particular process of interest to the user, such as shooting a single particle at a detector. Typical usage might be to have a run be firing 1,000 neutrons at a detector, where each neutron is a single event. Each particle transported in GEANT4 is assigned a unique track ID and a parent ID. The particle that initiates the event is given a parent ID of 0 and a track ID of 1. If the parent particle has a collision and produces a secondary particle this secondary particle is then given a parent ID of 1 (corresponding to the first secondary) and a track ID of 2. Secondaries are tracked in GEANT4 utilizing a stack tracking the most recent secondary (and its cascade) first. Listing 1 provides an example from the verbose output of GEANT4 of the tracking in which only secondaries are not shown for the secondaries. The initial particle in the event is the neutron because it has a parent ID of 0. The alpha and triton are the secondaries produced by this collision. The alpha is assigned a parent ID of 1 (corresponding to the first generation) with a track ID of 3. The triton is also assigned a parent ID of 1, but with a track ID of 2.

Listing 1: Tracking Example

```

1 *****
2 * G4Track Information: Particle = neutron, Track ID = 1, Parent ID = 0
3 *****
5 Step#      X(mm)      Y(mm)      Z(mm) KinE(MeV)  dE(MeV) StepLeng TrackLeng  NextVolume ProcName
6      0          0          0      -6.59    2.5e-08      0          0          0      Absorber initStep
7      1          0          0      -3.64      0          0      2.95      2.95      Absorber NeutronInelastic
8      :----- List of 2ndaries - #SpawnInStep= 2(Rest= 0,Along= 0,Post= 2), #SpawnTotal= 2 -----
9      :          0          0      -3.64      2.73      triton
10     :          0          0      -3.64      2.05      alpha
11     :----- EndOf2ndaries Info -----
13 *****
14 * G4Track Information: Particle = alpha, Track ID = 3, Parent ID = 1
15 *****
17 Step#      X(mm)      Y(mm)      Z(mm) KinE(MeV)  dE(MeV) StepLeng TrackLeng  NextVolume ProcName
18      0          0          0      -3.64      2.05      0          0          0      Absorber initStep
19      1 -0.000201 0.000128      -3.64      2.01    0.0491 0.000266 0.000266      Absorber ionIoni
20      2 -0.00049 0.000312      -3.64      1.93    0.0705 0.000381 0.000647      Absorber ionIoni
21 *****
22 * G4Track Information: Particle = triton, Track ID = 2, Parent ID = 1
23 *****
25 Step#      X(mm)      Y(mm)      Z(mm) KinE(MeV)  dE(MeV) StepLeng TrackLeng  NextVolume ProcName
26      0          0          0      -3.64      2.73      0          0          0      Absorber initStep
27      1 0.000339 -0.000215      -3.64      2.71    0.0116 0.000447 0.000447      Absorber hIoni

```

4 Methods

A discussion of the steps necessary to implement the simulation of energy deposition in GEANT4 follows. This involved writing the code for the simulation, as well as correctly interpreting the output. As such, this section is organized by first examining the process of setting up the simulation and then will go into the analysis of the results from the toolkit.

4.1 GEANT4 Implementation

A large focus of this work was on creating a working simulation of the GEANT4 toolkit. Preliminary attempts were made to install GEANT4 on a windows based machine linking to Microsoft Visual Studio. While these attempts were successful, a larger scale computing environment was desired. GEANT4 was then installed on the University of Tennessee's nuclear engineering computing cluster, along with the necessary visualization drivers and data files. Brief documentation on compiling simple examples on the cluster are available at necluster.engr.utk.edu/wiki/index.php/Geant4². For convenience a subversion repository was created to manage the developed code base, and all source code is available by anonymous checkout from <http://www.murphs-code-repository.googlecode.com/svn/trunk/layeredPolymerTracking>. Revision 360 was the code base used to generate the results shown in 6. The following section provides implementation specific details of the code base used to simulate the energy deposition in thin films. It is organized according to the three base classes that a user must implement in GEANT4, namely `G4VUserDetectorConstruction`, `G4VUserPhysicsList`, and `G4VuserPrimaryGeneratorAction`.

Get URL to work

4.1.1 Detector Geometry

A detector geometry in GEANT4 is made up of a number of volumes. The largest volume is the `world` volume which contains all other volumes in the detector geometry. Each volume (an instance of `G4VPhysicalVolume`) by assigning a position, a pointer to the mother volume and a pointer to its mother volume (or NULL if it is the `world` volume). A volume's shape is described by `G4VSolid` which has a shape and the specific values for each dimension. A volume's full properties is described by a logical volume. A `G4LogicalVolume` includes a pointer to the geometrical properties of the volume (the solid) along with physical characteristics including:

- the material of the volume,
- sensitive detectors of the volume and,
- any magnetic fields.

Listing 2 provides the implementation of the world physical volume. The geometry was setup such that it is possible to define multiple layers of detectors, as shown in Figure 6.

Listing 2: World Physical Volume

```
2 // World
   worldS = new G4Box("World",worldSizeXY, worldSizeXY, worldSizeZ*0.5);
   worldLV = new G4LogicalVolume(worldS,defaultMaterial,"World");
4   worldPV = new G4PVPlacement(0,G4ThreeVector(),worldLV,"World",0,false,0,fCheckOverlaps);
```

The detector was described by creating creating a single layer of neutron absorber and gap material and placing it in another volume (the calorimeter). The containing volume (calorimeter) was placed inside of the the physical world (Listing 3).

Listing 3: Calorimeter Volume

```
2 // Calorimeter (gap material)
   caloS = new G4Tubs("Calorimeter",iRadius,oRadius,caloThickness/2,startAngle,spanAngle);
   caloLV = new G4LogicalVolume(caloS,gapMaterial,"Calorimeter");
4   caloPV = new G4PVPlacement(0,G4ThreeVector(),caloLV,"Calorimeter",worldLV,false,0,
       fCheckOverlaps);
```

²It should be noted that this example uses the CMAKE build system (as per the GEANT4 recommendation) but a large majority of the examples still use GNUmake for building. This can be accomplished by adding `source /opt/geant4/geant4-9.5p1/share/Geant4-9.5.1/geant4make/geant4make.sh` to the user's `.bashrc`.

The `calorimeter` was the mother volume for each layer. The code was developed such that the simulation of multiple layers can be easily set at compile time or by utilizing a run macro through the `DetectorMessenger` class. Multiple repeated volume can be achieved in GEANT4 through `G4PVReplica` or `G4PVParameterised`. As each of the layers had the same geometry, `G4PVReplica` was chosen as the implementation (Listing 4.

Listing 4: Layer Volume

```

1 // Layer (Consists of Absorber and Gap)
2 layerS = new G4Tubs("Layer",iRadius,oRadius,layerThickness/2,startAngle,spanAngle);
3 layerLV = new G4LogicalVolume(layerS,defaultMaterial,"Layer");
4 if (nofLayers > 1){
5     layerPV = new G4PVReplica("Layer",layerLV,caloLV,kZAxis,nofLayers,layerThickness,-
6         caloThickness/2);
7 }else{
8     layerPV = new G4PVPlacement(0,G4ThreeVector(0.0,0.0,0.0),layerLV,"Layer",caloLV,
9         false,0,fCheckOverlaps);
10 }

```

Finally, the neutron absorber and gap material were defined as single cylinders which were then placed in the layer mother volume (Listing 5). The size of these solids (and the materials) could be set either at compile time through `DetectorConstruction` constructor or by using the `DetectorMessenger` in the run macro. Figure 6 shows a rendering of the 10 layers of the detector with the trajectories from a gamma event.

Listing 5: Absorber and Gap Volumes

```

1 // Absorber
2 absS = new G4Tubs("Abso",iRadius,oRadius,absThickness/2,startAngle,spanAngle);
3 absLV = new G4LogicalVolume(absS,absMaterial,"Absorber",0);
4 absPV = new G4PVPlacement(0,G4ThreeVector(0.0,0.0,-gapThickness/2),absLV,"Absorber",
5     layerLV,false,0,fCheckOverlaps);
6
7 // Gap
8 gapS = new G4Tubs("Gap",iRadius,oRadius,gapThickness/2,startAngle,spanAngle);
9 gapLV = new G4LogicalVolume(gapS,gapMaterial,"Gap",0);
10 gapPV = new G4PVPlacement(0,G4ThreeVector(0.0,0.0,absThickness/2),gapLV,"Gap",layerLV,
11     false,0,fCheckOverlaps);

```

4.1.2 Physics Lists

The user of the GEANT4 toolkit is responsible for selecting the proper physics processes to model in the `PhysicsList`. This is unlike other transport codes (such as MCNPX) where basic physics are enabled by default and the user only has select the appropriate cards. However, GEANT4 does provide examples of implemented `PhysicsLists` as wells as modular physics lists which provide a way to construct a physics list by combing physics list. Thus, extensive use of `G4ModularPhysicsList` was employed to handle the assigning of the physics processes to each particle in the correct order. The physics lists chosen for this simulation are listed below:

- **G4EmStandardPhysics** The electromagnetic physics defines the electrons, muons, and taus along with their corresponding neutrinos. For electrons, the primary concern of this simulation, multiple scattering, electron ionization, and electron bremsstrahlung processes were assigned. In addition the positron is defined and the multiple scattering process, electron ionization process, electron bremsstrahlung process and positron annihilation is assigned [?].
- **G4EmLivermorePhysics** The Livermore physics process extend the `EMStandardPhysics` down to low (250 eV) energies. Even lower energies can be reached by including `G4DNAPhysics`. These physics processes extended with `G4EmLivermorePhysics` are the photo-electric effect, Compton scattering, Rayleigh scattering, gamma conversion, Ionisation and Bremsstrahlung[?].
- **HadronPhysicsQGSP_BERT_HP** Hadronic physics are included to model the nuclear interactions. The chosen list is a Quark Gluon String Model for energies in the 5-25 GeV range, with a Bertini cascade model until 20 MeV. Once a hadron has an energy of 20 MeV the high precision cross section driven models are applied[?].

- **G4IonPhysics** Finally, to handle the transport of the charged ions resulting from an ${}^6\text{Li}((n), \alpha){}^3\text{H}$ interaction the **G4IonPhysics** list was used.

Listing 6: Implemented Physics List

```

1 /**
2  * PhysicsList
3  *
4  * Constructs the physics of the simulation
5  */
6 PhysicsList::PhysicsList() : G4VModularPhysicsList() {
7     currentDefaultCut = 10*nm;
8
9     // Adding Physics List
10    //RegisterPhysics( new G4EmDNAPhysics());
11    RegisterPhysics( new G4EmStandardPhysics());
12    RegisterPhysics( new G4EmLivermorePhysics());
13    RegisterPhysics( new HadronPhysicsQGSP_BERT_HP());
14    RegisterPhysics( new G4IonPhysics());
15 }

```

Finally, the default cut range was decreased from 1 cm to 1 nm in **SetCuts()** (Listing ??)

Listing 7: Implemented Physics List

```

1 void PhysicsList::SetCuts(){
2     SetDefaultCutValue(10*nm);
3 }

```

4.1.3 Primary Event Generator

The user is responsible for telling the simulation toolkit the primary event to generate. While there is great flexibility to generate any source distribution, a particle gun was chosen for simplicity. **G4ParticleGun** generates primary particle(s) with a given momentum and position without any randomization. The implementation of this is shown in Listing 8.

Listing 8: Primary Event Generator

```

1 PrimaryGeneratorAction::PrimaryGeneratorAction() : G4VUserPrimaryGeneratorAction(),
2     fParticleGun(0) {
3     G4int nofParticles = 1;
4     fParticleGun = new G4ParticleGun(nofParticles);
5
6     // default particle kinematic
7     G4ParticleDefinition* particleDefinition = G4ParticleTable::GetParticleTable()->
8         FindParticle("e-");
9     fParticleGun->SetParticlePosition(G4ThreeVector(0.,0.,0.0));
10    fParticleGun->SetParticleDefinition(particleDefinition);
11    fParticleGun->SetParticleMomentumDirection(G4ThreeVector(0.,0.,1.));
12    fParticleGun->SetParticleEnergy(50.*MeV);
13 }

```

Actual primary particles are generated with **GeneratePrimaries**, which uses the **G4ParticleGun** to determine the vertex of the primary event.

Listing 9: Generate Primaries

```

1 void PrimaryGeneratorAction::GeneratePrimaries(G4Event* anEvent)
2 {
3     // This function is called at the beginning of event
4
5     // In order to avoid dependence of PrimaryGeneratorAction
6     // on DetectorConstruction class we get world volume
7     // from G4LogicalVolumeStore
8     G4double worldZHalfLength = 0;
9 }

```

```

10  G4LogicalVolume* worlLV = G4LogicalVolumeStore::GetInstance()->GetVolume("World");
    G4Box* worldBox = 0;
    if ( worlLV) worldBox = dynamic_cast< G4Box*>(worlLV->GetSolid());
12  if ( worldBox ) {
        worldZHalfLength = worldBox->GetZHalfLength();
14  }
    else {
16        G4cerr << "World volume of box not found." << G4endl;
        G4cerr << "Perhaps you have changed geometry." << G4endl;
18        G4cerr << "The gun will be place in the center." << G4endl;
    }
20
    // Set gun position
22    fParticleGun->SetParticlePosition(G4ThreeVector(0., 0., -worldZHalfLength+1*cm));
    fParticleGun->GeneratePrimaryVertex(anEvent);
24 }

```

4.2 Sensitive Detectors

GEANT4 offers a myriad of different ways to output the results of a simulation. It is possible to write out every track with the `Verbose = 1` option, create `MultiFunctionalDetector` and `G4VPrimitiveScorer`, or implement a hit and readout based approach [?]. Previous GEANT4 experience included `G4VHit` and `G4VSensitiveDetector` so this approach was used in this simulation. A hit is defined to be a snapshot of the physical interaction of a track in a sensitive region of a detector. As the user is responsible for writing implementing `G4VHit` the hit can contain any information about the step, including

- the position and time of the step,
- the momentum and energy of the track,
- the energy deposition of the step,
- or information about the geometry.

For this simulation any information about the particle that could be recorded was recorded. This included the energy deposition, position of the hit, momentum, kinetic energy, track ID, parent ID, particle definition, volume and copy number (Listing 10).

Listing 10: Calorimeter Hit

```

/**
2  * @brief - Hit: a snapshot of the physical interaction of a track in the sensitive region
    of a detector
    *
4  * Contains:
    * - Particle Information (type and rank (primary, secondary, tertiary ...))
6  * - Position and time
    * - momentum and kinetic energy
8  * - deposition in volume
    * - geometric information
10 */
class CaloHit : public G4VHit {
12 public:
    CaloHit(const G4int layer);
14    ~CaloHit();

    inline void* operator new(size_t);
    inline void operator delete(void*);
18    void Print();

20 private:
    G4double edep;                /* Energy Deposited at the Hit */
22    G4ThreeVector pos;           /* Position of the hit */
    G4double stepLength;          /* Step Length */

```

```

24      G4ThreeVector momentum;           /* Momentum of the step */
      G4double kEnergy;                 /* Kinetic Energy of the particle */
26      G4int trackID;                   /* Track ID */
      G4int parentID;                   /* Parent ID */
28      G4ParticleDefinition* particle;   /* Particle Definition */
      G4int particleRank;               /* Primary, Secondary, etc */
30      G4VPhysicalVolume* volume;       /* Physical Volume */
      G4int layerNumber;                /* Copy Number of Layer */
32
      public:
34      // Setter and Getters
    };
36
    typedef G4THitsCollection<CaloHit> CaloHitsCollection;
38    extern G4Allocator<CaloHit> HitAllocator;

40    inline void* CaloHit::operator new(size_t){
      void *aHit;
42      aHit = (void *) HitAllocator.MallocSingle();
      return aHit;
44    }

46    inline void CaloHit::operator delete(void *aHit){
      HitAllocator.FreeSingle((CaloHit*) aHit);
48    }

```

The G4VSensitiveDetector is attached to a logical volume and is responsible for filling the hit collection. This is accomplished in the ProcessHits of CaloSensitiveDetector (Listing ??).

Listing 11: Sensitive Detector

The simulation was designed so that a separate sensitive detector was assigned to the gap and absorber. While this is not strictly necessary as the geometric position determines what layer of the gap or absorber the hit occurred in this made the analysis code easier to write. A separate method was written in DetectorConstruction to create the sensitive detectors and assign them to the proper logical volumes (Listing 11) SetSensitiveDetectors() is called from the constructor of DetectorConstruction.

Listing 12: Creating Sensitive Detectors

```

1  /**
   * SetSensitiveDetectors
   *
3  * Setting the Sensitive Detectors of the Detector
   */
5  void DetectorConstruction::SetSensitiveDetectors(){
7      G4SDManager* SDman = G4SDManager::GetSDMpointer();
      absSD = new CaloSensitiveDetector("SD/AbsSD", "AbsHitCollection");
9      SDman->AddNewDetector(absSD);
      absLV->SetSensitiveDetector(absSD);
11
      gapSD = new CaloSensitiveDetector("SD/GapSD", "GapHitCollection");
13      SDman->AddNewDetector(gapSD);
      gapLV->SetSensitiveDetector(gapSD);
15  }

```

4.3 Analysis

Analysis of hit collection was performed with ROOT. Once again there are other options (notably OpenScientist) but previous experience was why ROOT was selected as the base for the Analysis framework. A singleton class was written for the analysis which processed the hit collections, assigning the various results to root histograms. User action classes EventAction and RunAction are called at the beginning and end of each run and event, respectively (Listing 12,13). These classes allowed for the analysis code to be independent of the simulation.

Listing 13: Event Action

```

1 EventAction::EventAction() : G4UserEventAction(){
    // Nothing to be Done Here
3 }

5 /**
   * BeginOfEventAction
7 *
   * @param const G4Event* event - event to be processed
9 *
   * At the beginning of an event we want to clear all the event
11 * accumulation variables.
   */
13 void EventAction::BeginOfEventAction(const G4Event* event){
    Analysis::GetInstance()->PrepareNewEvent(event);
15 }

17 /**
   * EndOfEventAction
19 *
   * @param const G4Event* event - event to be processed
21 *
   * At the end of an event we want to call analysis to process
23 * this event, and record the useful information.
   */
25 void EventAction::EndOfEventAction(const G4Event* event){
    Analysis::GetInstance()->EndOfEvent(event);
27 }

```

Listing 14: Run Action

```

1 RunAction::RunAction() : G4UserRunAction(){ }

3 void RunAction::BeginOfRunAction(const G4Run* run){
    G4cout<<"Starting run: " << run->GetRunID()<< G4endl;
    Analysis::GetInstance()->PrepareNewRun(run);
5 }

7 void RunAction::EndOfRunAction(const G4Run* aRun){
    Analysis::GetInstance()->EndOfRun(aRun);
9 }

```

4.4 Determination of Energy Deposition

The energy deposition of an event is calculated by the sum of all of the energy deposited by individual hits in the sensitive detector (Equation 4.1). While it is possible to break down the energy deposition by which physics process caused the deposition, this was not implemented in order to avoid over complication.

$$[h]E_{\text{dep,event}} = \sum E_{\text{dep,hit}} \quad (4.1)$$

`ProcessHitCollection` is called at the end of each event (Listing 14). Each hit is accessed and the layer at which it occurs is determined³. In addition the name of the volume is determined, and the energy deposition of the hit is added to the energy deposition of the event. If the hit occurred in the **absorber** layer and the particle is an electron the kinetic energy of that hit is also recorded.

Listing 15: Process Hit Collection

```

1 /**
   * ProcessHitCollection
3 *

```

³C arrays start at 0, so memory is allocated for one more than the total number of layers. This allows for `NUMLAYERS+1` to be used as an index into the histogram for the total of all layers in the material (either **gap** or **absorber**).

```

5  * @param G4VHitsCollection *hc
6  */
7  void Analysis::ProcessHitCollection(G4VHitsCollection *hc, G4int eventID){
8
9      // Looping through the hit collection
10     G4double hitColEdepTot_Abs[NUMLAYERS+1]; // Total EDep (abs) for Hit Collection
11     G4double hitColEdepTot_Gap[NUMLAYERS+1]; // Total EDep (gap) for Hit Collection
12     G4int PID; // Parent ID
13     for(int i = 0; i < NUMLAYERS+1; i++){
14         hitColEdepTot_Abs[i] = 0.0;
15         hitColEdepTot_Gap[i] = 0.0;
16     }
17
18     // Energy Deposition of the event
19     for(G4int i = 0; i < hc->GetSize(); i++){
20         CaloHit* hit = (CaloHit*) hc->GetHit(i);
21
22         G4double eDep = hit->GetEdep();
23         G4int layerNum = hit->GetLayerNumber();
24         if (strcmp(hit->GetVolume()->GetName(), "Gap")){
25             // Hit occurred in the Gap
26             hitColEdepTot_Gap[layerNum] += eDep;
27             (hHitTotEdepGap[layerNum])->Fill(eDep);
28         }else if(strcmp(hit->GetVolume()->GetName(), "Absorber")){
29             // Hit occurred in the Abs
30             hitColEdepTot_Abs[layerNum] += eDep;
31             (hHitTotEdepAbs[layerNum])->Fill(eDep);
32
33             /* Is this a secondary electron of the event? */
34             if(hit->GetParticle()->GetPDGEncoding() == 11){
35                 PID = hit->GetParentID();
36                 if (PID < NUMPID){
37                     (hSecElecKinAbs[layerNum][PID])->Fill(hit->GetKineticEnergy());
38                 }
39             }
40         }else{
41             G4cout<<"ERROR - Unkown Volume for sensitive detector"<<G4endl;
42         }
43     }
44
45     // Adding this Hit collection's energy deposited to event total
46     for (int i = 0; i < NUMLAYERS; i++){
47         // Incrementing each individual bin
48         eventEdepTot_Abs[i] += hitColEdepTot_Abs[i];
49         eventEdepTot_Gap[i] += hitColEdepTot_Gap[i];
50
51         // Last bin is Calorimeter Total (all Abs layers and all Gap layers)
52         eventEdepTot_Abs[NUMLAYERS] += hitColEdepTot_Abs[i];
53         eventEdepTot_Gap[NUMLAYERS] += hitColEdepTot_Gap[i];
54     }
55 }

```

Finally, a run macro was written to control the entire run (Listing 15). The material and thickness of the detector are declared (made possible by the use of `DetectorMessenger`), and then the detector is dynamically updated. A ^{60}Co source is simulated by shooting photons of the 1.1732 MeV and 1.3325 MeV. The source particle is then changed to a neutron, and thermal (0.025 eV) neutrons are shot at the detector. The thickness of the absorber is then increased, the geometry updated, and the entire process repeated. As these runs tend to take a large amount of time, GEANT4 was parallized for use with MPI to take advantage of the cluster computing power.

Listing 16: Run Macro

```

1 #
2 /tracking/verbose 0
3 #
4 # Setting up the detector

```



```
5 #
  /PolymerTransport/det/setAbsMat PS_Detector
7 /PolymerTransport/det/setGapMat G4_POLYSTYRENE
  /PolymerTransport/det/setGapThick 0.3175 cm
9 #
  /PolymerTransport/det/setAbsThick 15 um
11 /PolymerTransport/det/update
   # Cobalt 60
13 /gun/particle gamma
   /gun/direction 0 0 1
15 /gun/energy 1.1732 MeV
   /run/beamOn 500000000 # 500 Million
17 /gun/energy 1.3325 MeV
   /run/beamOn 500000000 # 500 Million
19 # Neutron
   /gun/particle neutron
21 /gun/energy 0.025 eV
   /run/beamOn 1000000 # 1 Million
23 #
  /PolymerTransport/det/setAbsThick 25 um
25 /PolymerTransport/det/update
```



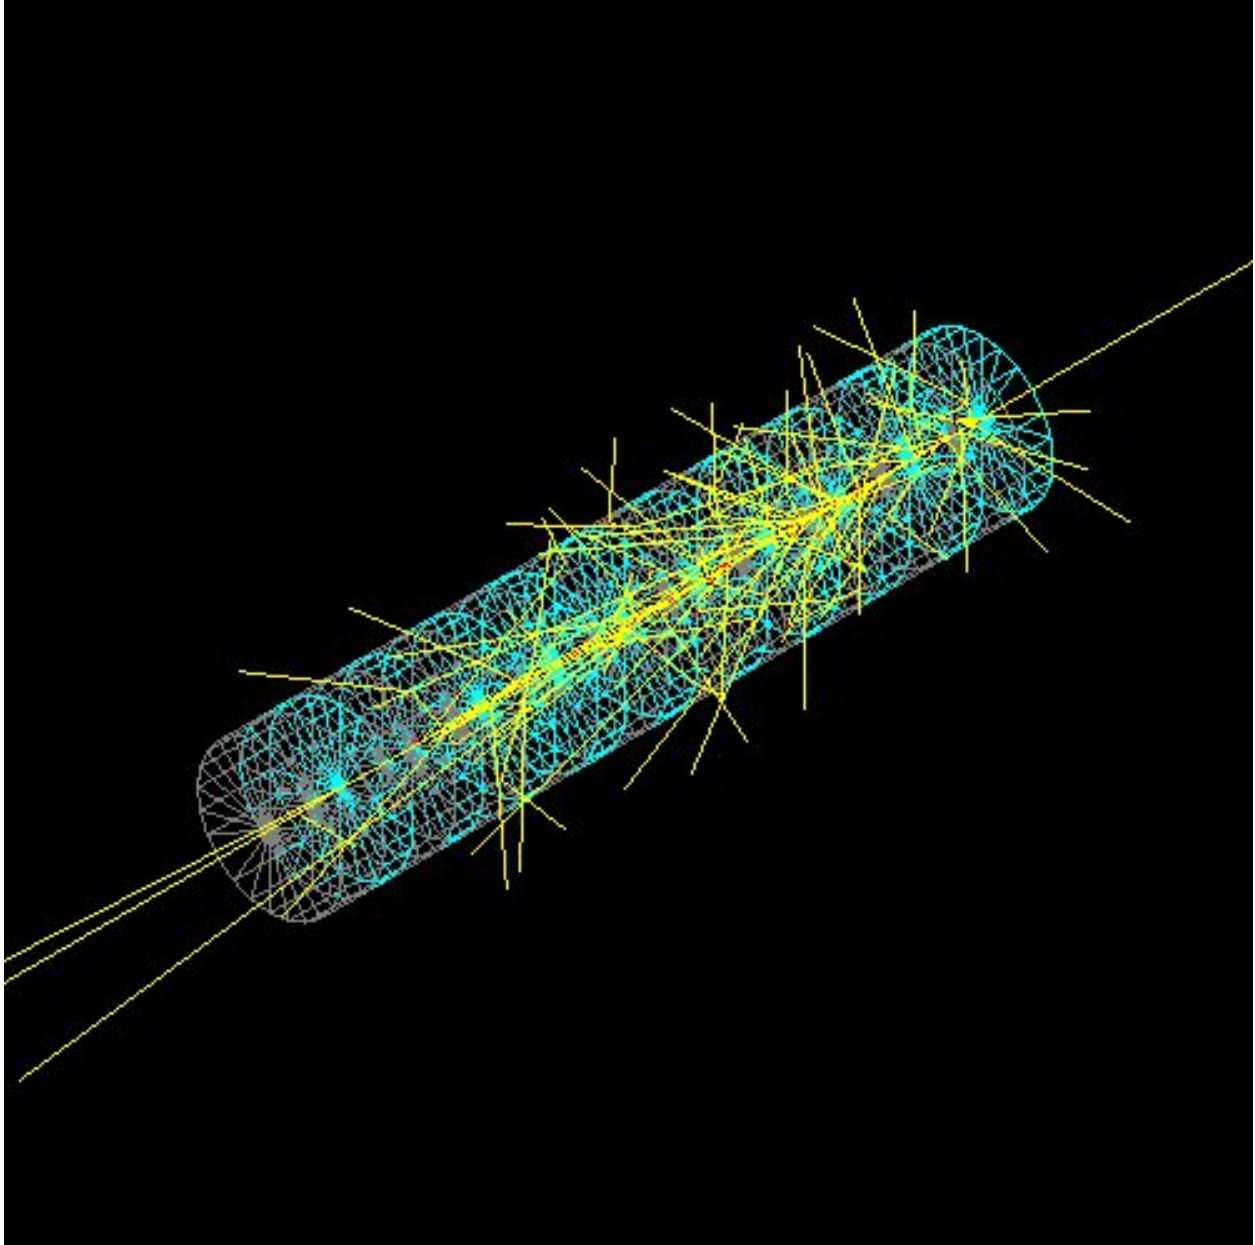


Figure 6: 10 Layer Detector with a simulated gamma event

Figure 7: Single Collision Energy Loss of Water

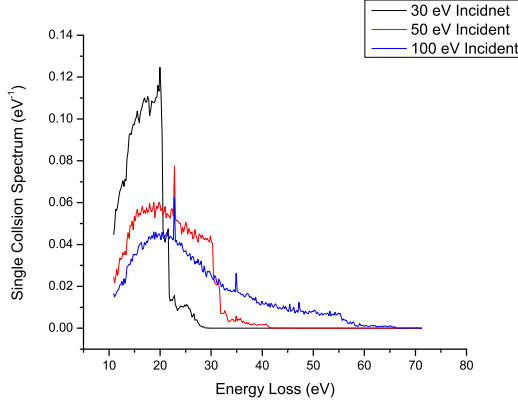

(a) Simulated

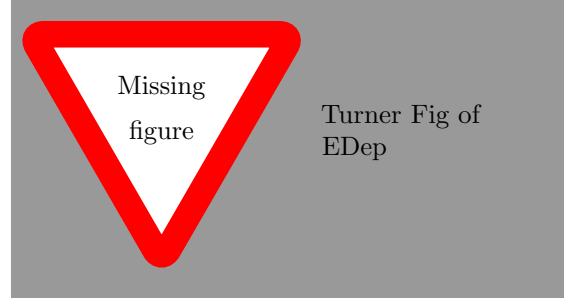

(b) Turner

5 Simulation Validation

5.1 Energy Deposition Validation

The energy deposition was tested by reproducing the single collision energy loss spectra in water⁴. The `PhysicsList` was extended to include `G4DNAPhysics` and the detector material was set to the NIST definition contained in the toolkit with `G4Material* H2O = man->FindOrBuildMaterial("G4_WATER")`. In general there was excellent agreement between the simulated energy spectra and that of [?]. The simulated spectra had much better resolution at fine energies (corresponding to discrete states) of which Turners did not.

5.2 Spectra Validation

The simulation was validated by computing the weighted average of the energy deposition 5.1 and comparing it to the spectra average defined in 5.2.

$$\langle E \rangle = \frac{\int_0^\infty \phi(E) E dE}{\int_0^\infty \phi(E) dE} \text{ where} \quad (5.1)$$

$$\langle \mu \rangle = \frac{\int_0^\infty f(x) x dx}{\int_0^\infty x(x) dx} \text{ where} \quad (5.2)$$

⁴An analysis class was not written for this simulation. Instead the verbosity of the simulation was set to `verbose=1` in the run macro. The first ionisation collision (`e-G4DNAIonisation`) was then extracted with `sed -n '/ParentID = 0/,/e-G4DNAIonisation/p' G4OutputFileName.txt grep` and `awk` were then used to extract the actual energy, `| grep "e-_G4DNAIonisatioin" | awk '{print $5}'`

Figure 8: Gamma Simulation Agreement


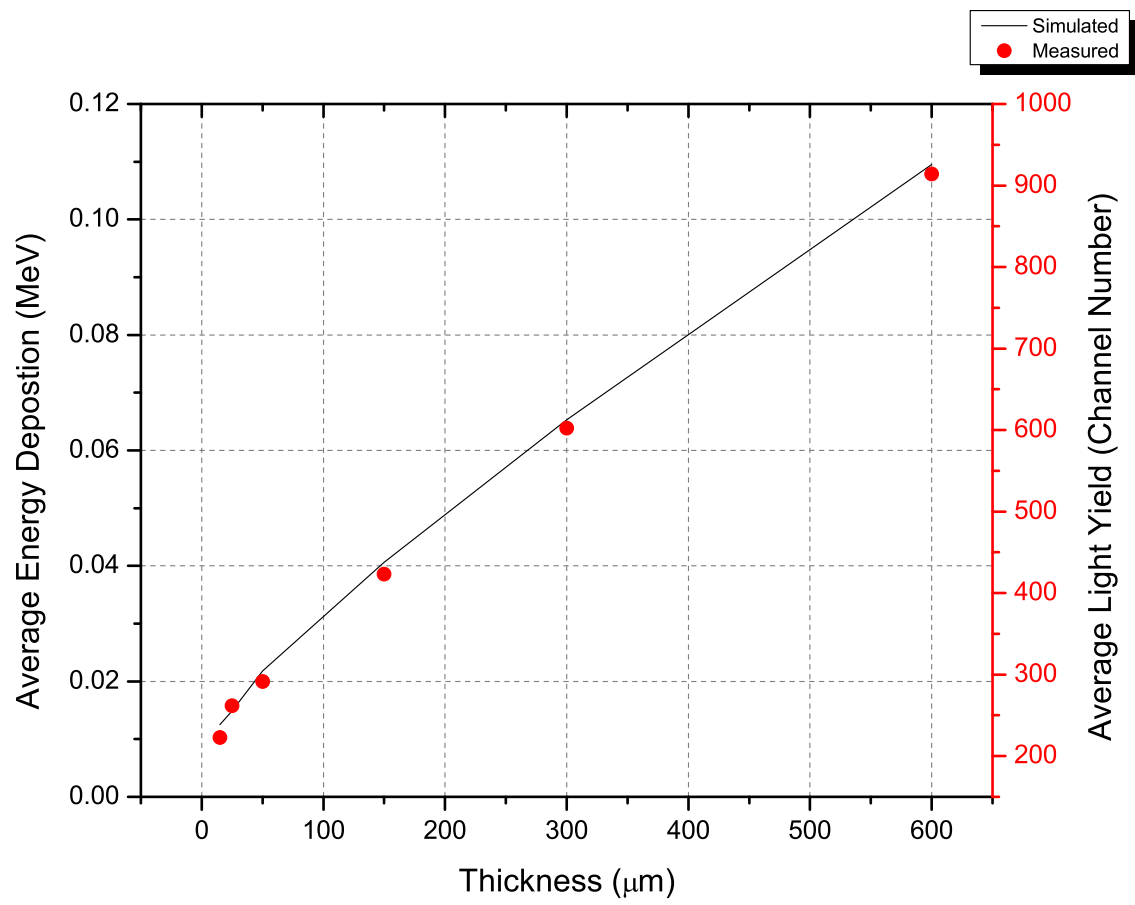


Figure 9: Neutron Simulation Agreement

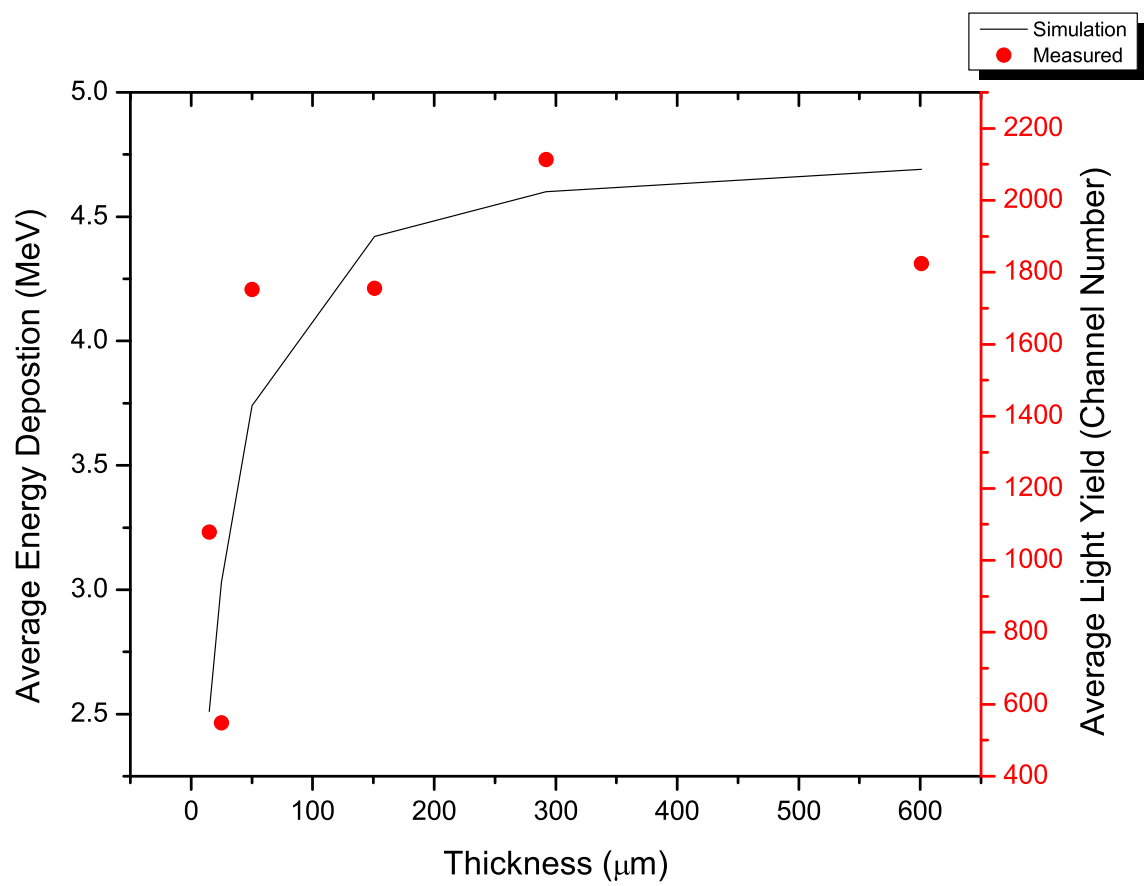

Co60 Energy Deposition

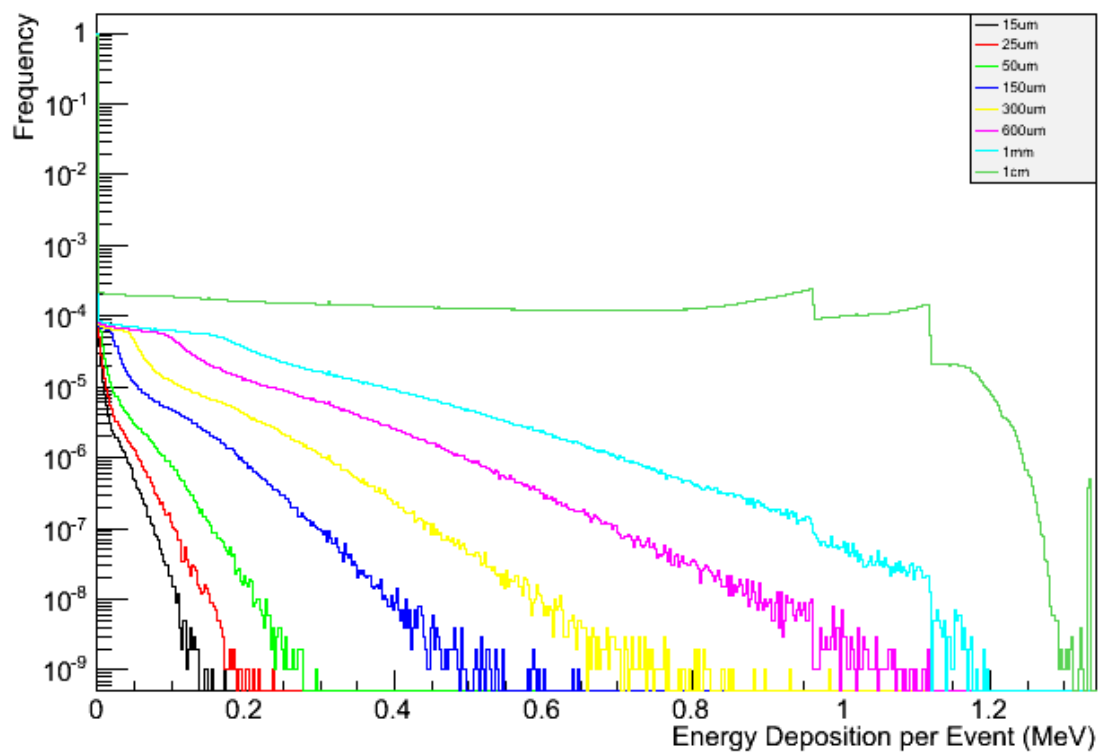


Figure 10: Simulated Energy Deposition for a Single Film (gammas)

6 Results

Write Re-
sults Section

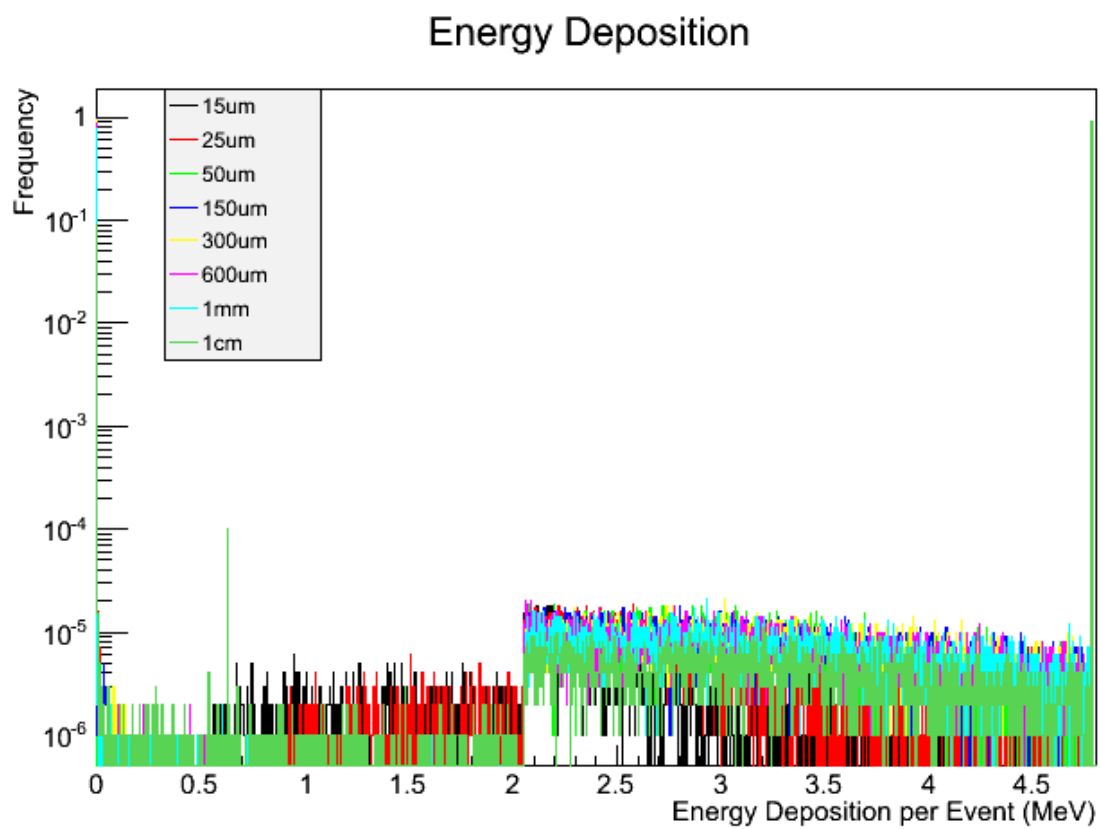


Figure 11: Simulated Energy Deposition for a Single Film (neutrons)

GEANT4 Implementation

Visible light in GEANT4 is known as an optical photon. An optical photon has momentum ($\vec{p} = \hbar\vec{k}$), corresponding to the energy and direction of the photon, as well as a polarization (\vec{e}). The GEANT4 toolkit breaks up light transport into two parts; the creation of the optical photon and the transport of the optical photon through the material. Each of these are material dependent properties which need to be supplied by the user. This is done by creating a material properties table `G4MaterialPropertyTable`, of which the following properties are available:

- RINDEX
- ABSLENGTH

.1 Scintillation Process

The number of optical photons generated by GEANT4 is proportional to the energy lost during the step, determining the energy from the empirical emission spectra of the material. In GEANT4 this is accomplished by creating a `G4Scintillation` process.⁵

```
#include "G4Scintillation.hh"
2
G4Scintillation* theScintProcess = new G4Scintillation("Scintillation");
4
theScintProcess->SetTrackSecondariesFirst(true);
6 theScintProcess->SetScintillationYield(7500.0/MeV);
theScintProcess->SetResolutionScale(1.0);
8 theScintProcess->SetScintillationTime(45.*ns);
```

.2 Optical Photon Transport

There are three classes of optical photon interactions in GEANT4:

- Refraction and reflection
- Bulk Absorption
- Rayleigh scattering

Of these only refraction and reflection are necessary. [?]

⁵As the scintillation properties are attached to the process and not the material GEANT4 is incapable of more than one scintillation material in any given application.