

Supplementary Materials for “Scalable Enumeration of Pareto-optimal Polymers for Computing Equilibrium Concentrations”

Archit Patil ✉ 

University of Texas at Austin, USA

Minki Hhan ✉ 


Korea Advanced Institute of Science and Technology, South Korea

David Soloveichik ✉ 

University of Texas at Austin, USA

1 Implementation Details

As discussed in Section 6.2 of the main text, Figures 1a and 1b illustrate the runtime as a function of k for the Scaffolded DNA and AND gate linear cascade systems (Section 7.1 of the main text), respectively. As observed, the estimated runtime is very close to the actual runtime, and there is an optimal value of k that minimizes the runtime.

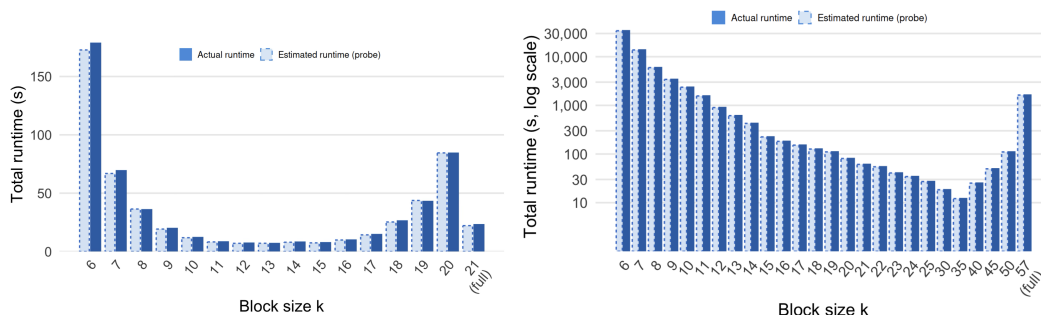

(a) Scaffolded DNA system ($|M| = 21$, $t = 5$).

(b) AND gate linear cascade, 7 modules ($|M| = 57$, $t = 5$).

Figure 1 Probe-estimated total Hilbert basis runtime as a function of block size k , with support bound fixed at $t = 5$. Each point is the product of the per-block trial time (100-iteration probe) and the number of blocks in the covering design. The minimum of each curve identifies the selected k .

2 Leakage Analysis Plots

Section 7.4 of the main text analyzes leakage depending on which module has its input removed in a fixed-length AND gate linear cascade system. Figure 2 shows the final output concentration variation for this experiment across different values of E and concentration regimes A and B.

3 Equilibrium-Accuracy Plots

In Section 7.3 of the main text, we report the Regime B leakage condition with bond energy $E = -20$ kcal/mol. Here we include the corresponding concentration-error plots for both concentration regimes (A and B), each tested with different bond energies ($E = -20, -10$ kcal/mol). As shown in Figure 3, $t = 5$ provides a slightly more accurate equilibrium analysis compared to $t = 3$, although the concentrations of most equilibrium-relevant polymers

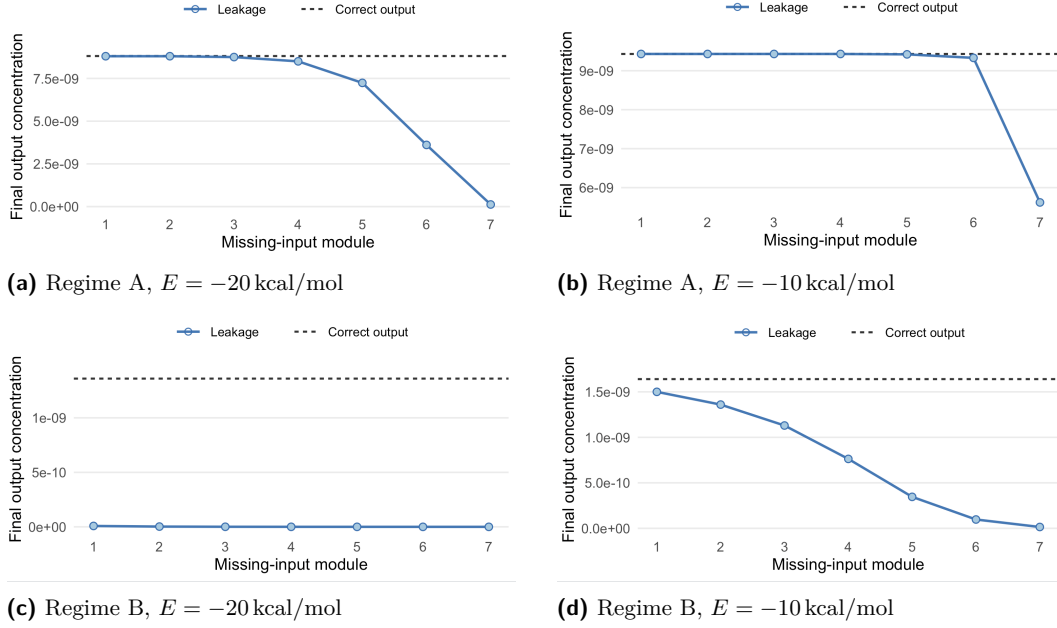


Figure 2 Final output concentration under single-input deletion in a seven-module linear cascade. The x -axis indicates the module whose input is removed. The solid curve shows the leakage concentration, and the dashed horizontal line shows the correct-output concentration when all inputs are present. The four panels compare Regimes A and B under bond energies $E = -20, -10$ kcal/mol.

are accurately captured even with the smaller support bound. Runtime for different cascade lengths and values of t is compared in Figure 4. Although the runtime for the covering-design algorithm still scales exponentially with the number of modules, the rate of growth is much lower than that of the full Hilbert basis computation.

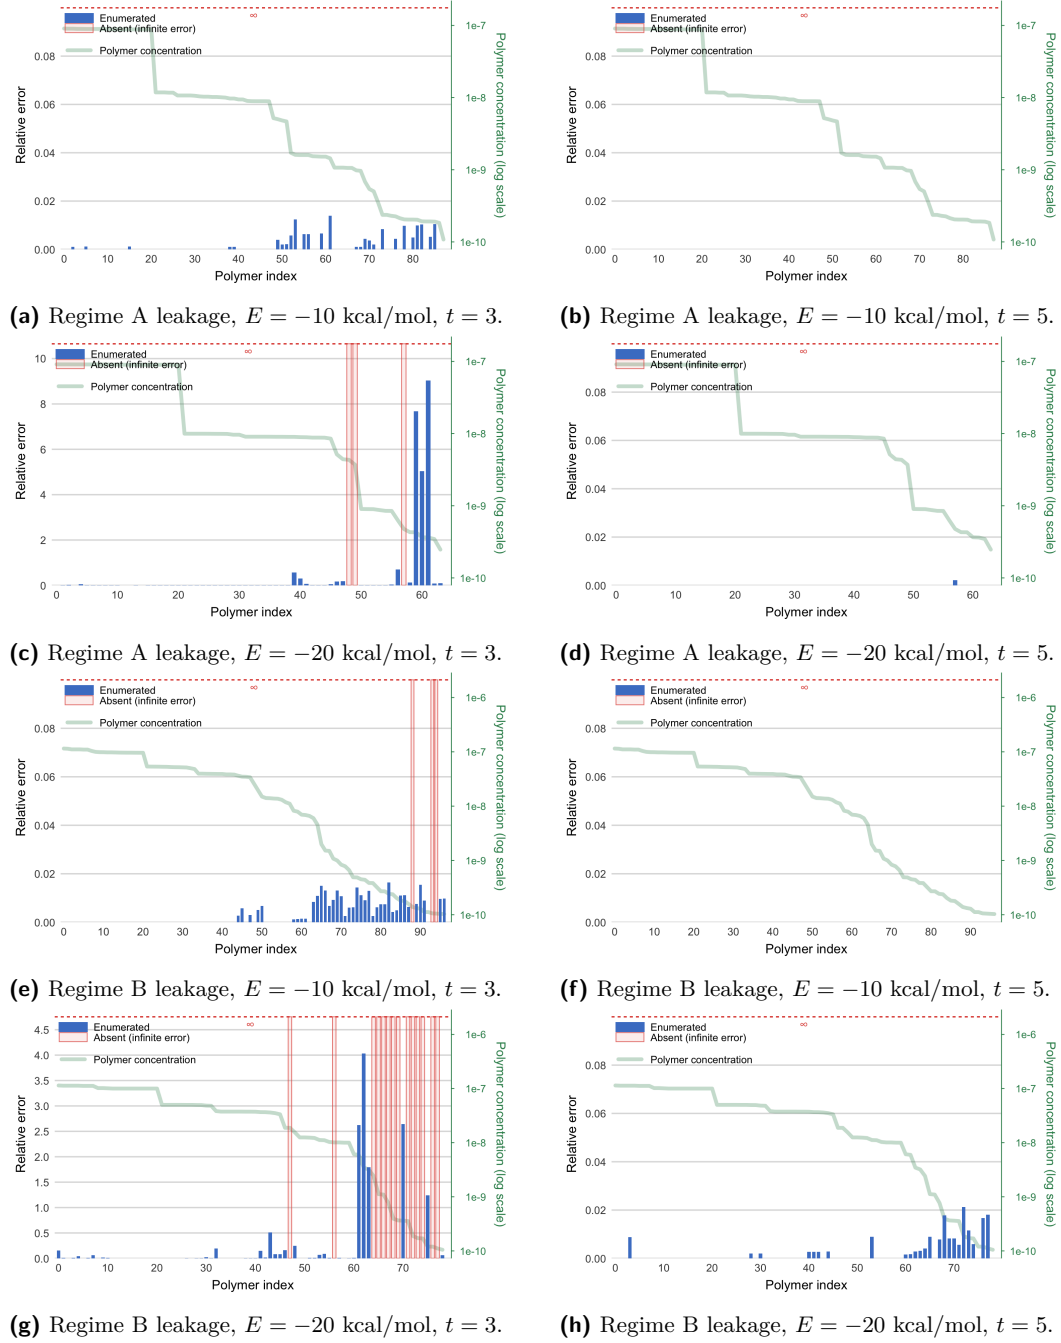


Figure 3 Relative concentration error for equilibrium-relevant polymers in the seven-module linear cascade under Regimes A and B with bond energies $E = -20, -10$ kcal/mol, mirroring saturated and unsaturated systems, respectively.

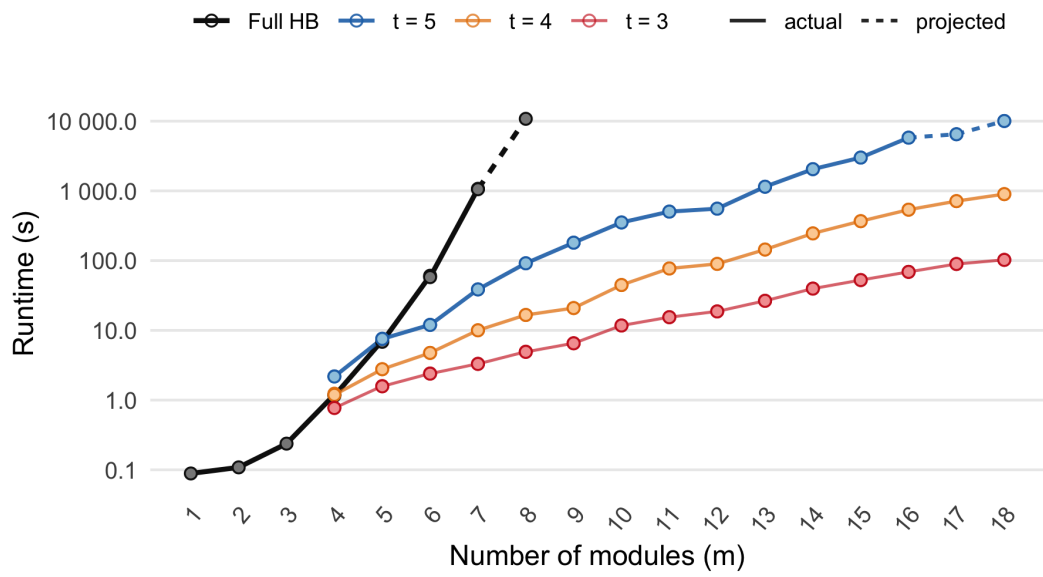


Figure 4 Runtime comparison for leakage experiments across linear cascade lengths and different parameters of the covering-design algorithm. Full HB represents the runtime required for full Hilbert basis computation using Normaliz, and the projected runtime is computed from the probing step of Section 6.2 of the main text.