NOTES:
1. MATERIAL PER TITLE BLOCK
2. ANODIZE PER TITLE BLOCK (AFTER MACHINING)
3. DEBURR ALL EDGES; BREAK SHARP CORNERS 0.3mm x 45 deg
4. GENERAL TOLERANCE PER TITLE BLOCK
5. GROUND STUD: TAP PER TITLE BLOCK (M10 COMMERCIAL / M12 DEFENSE)
6. APPLY EPDM SECONDARY SEAL PER MIL-DTL-XXXX (SPEC TBD)

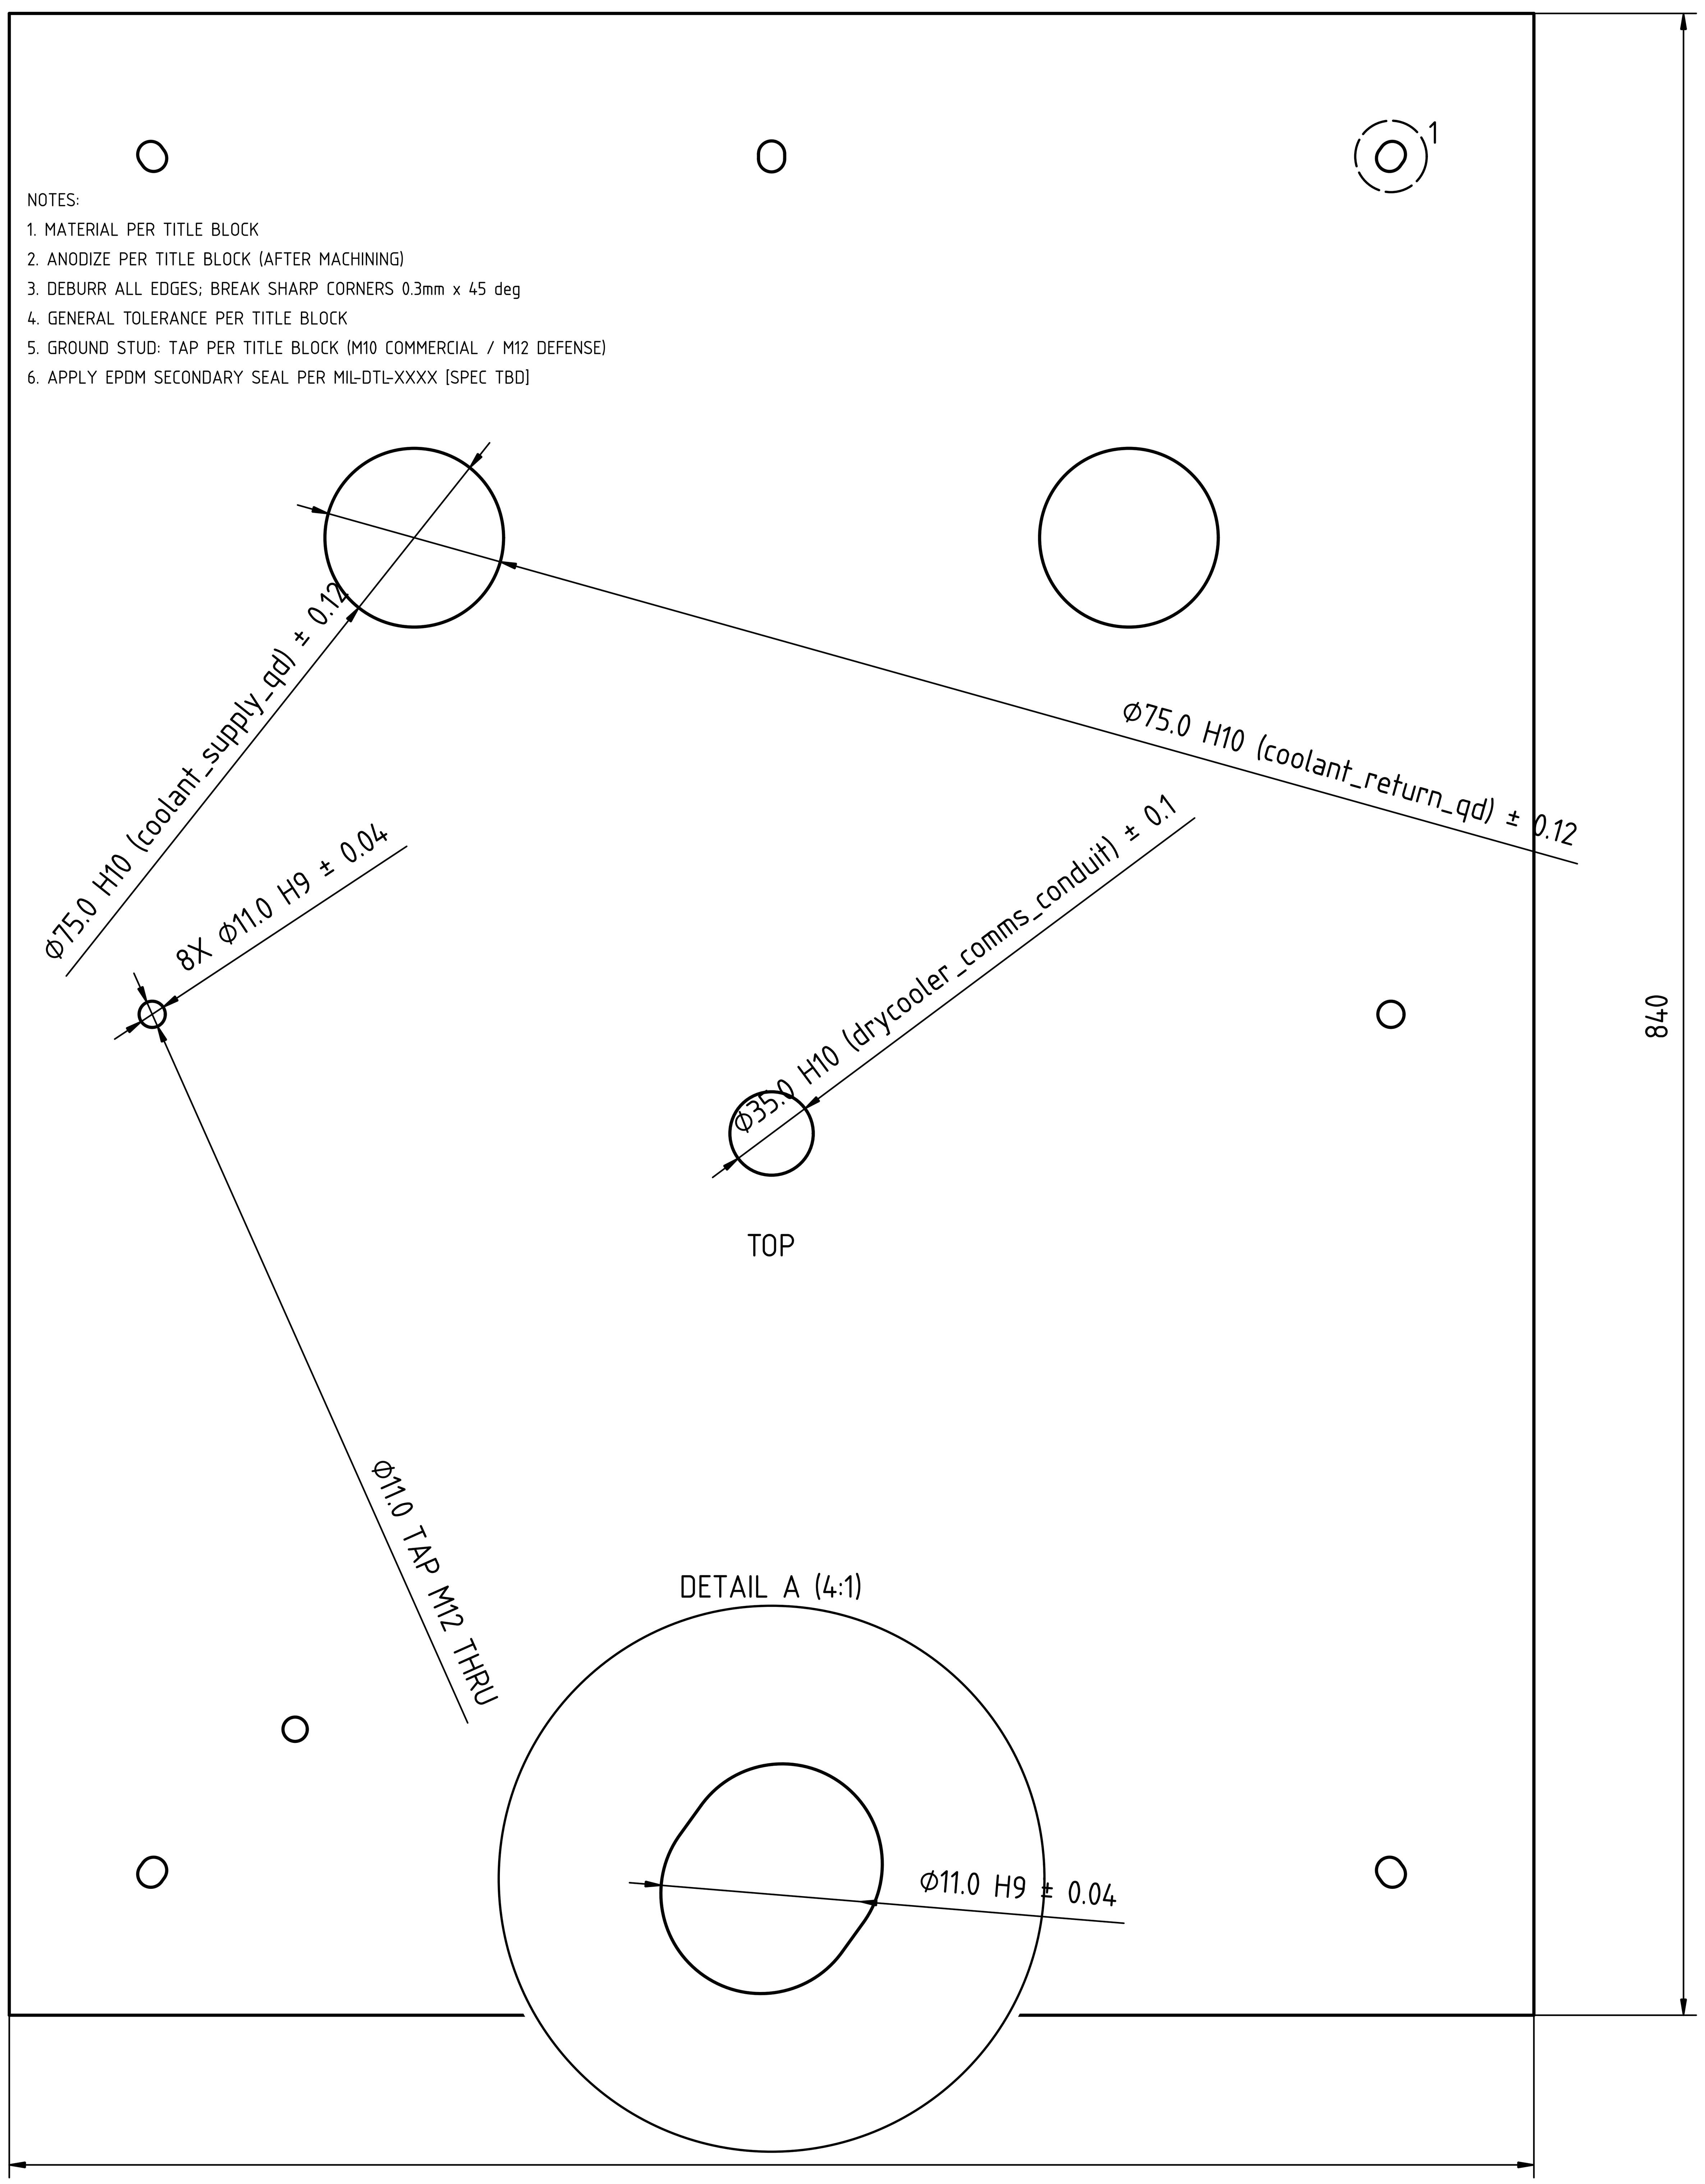

TYP 6 PLACES
(4 CORNERS + 2 LONG-AXIS MIDPOINTS)
SLOT ORIENTED RADIALLY TOWARD PATTERN CENTER

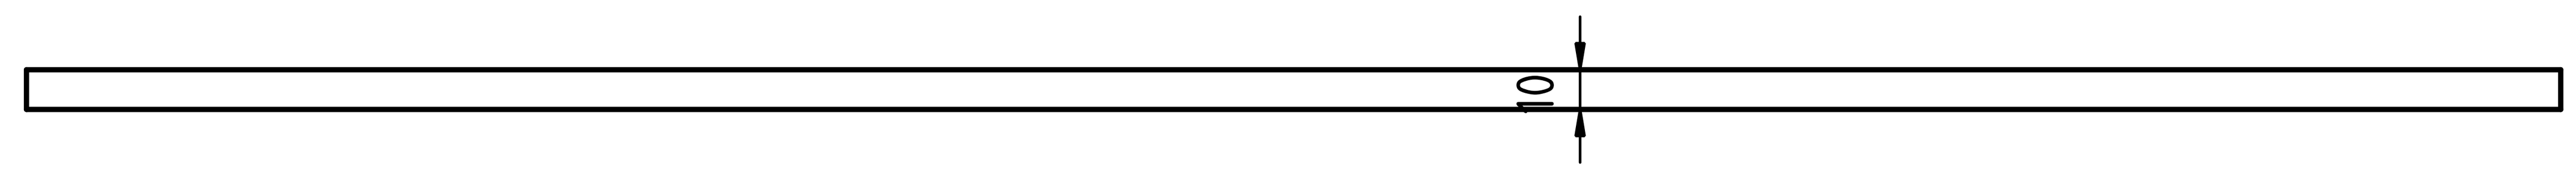

FRONT

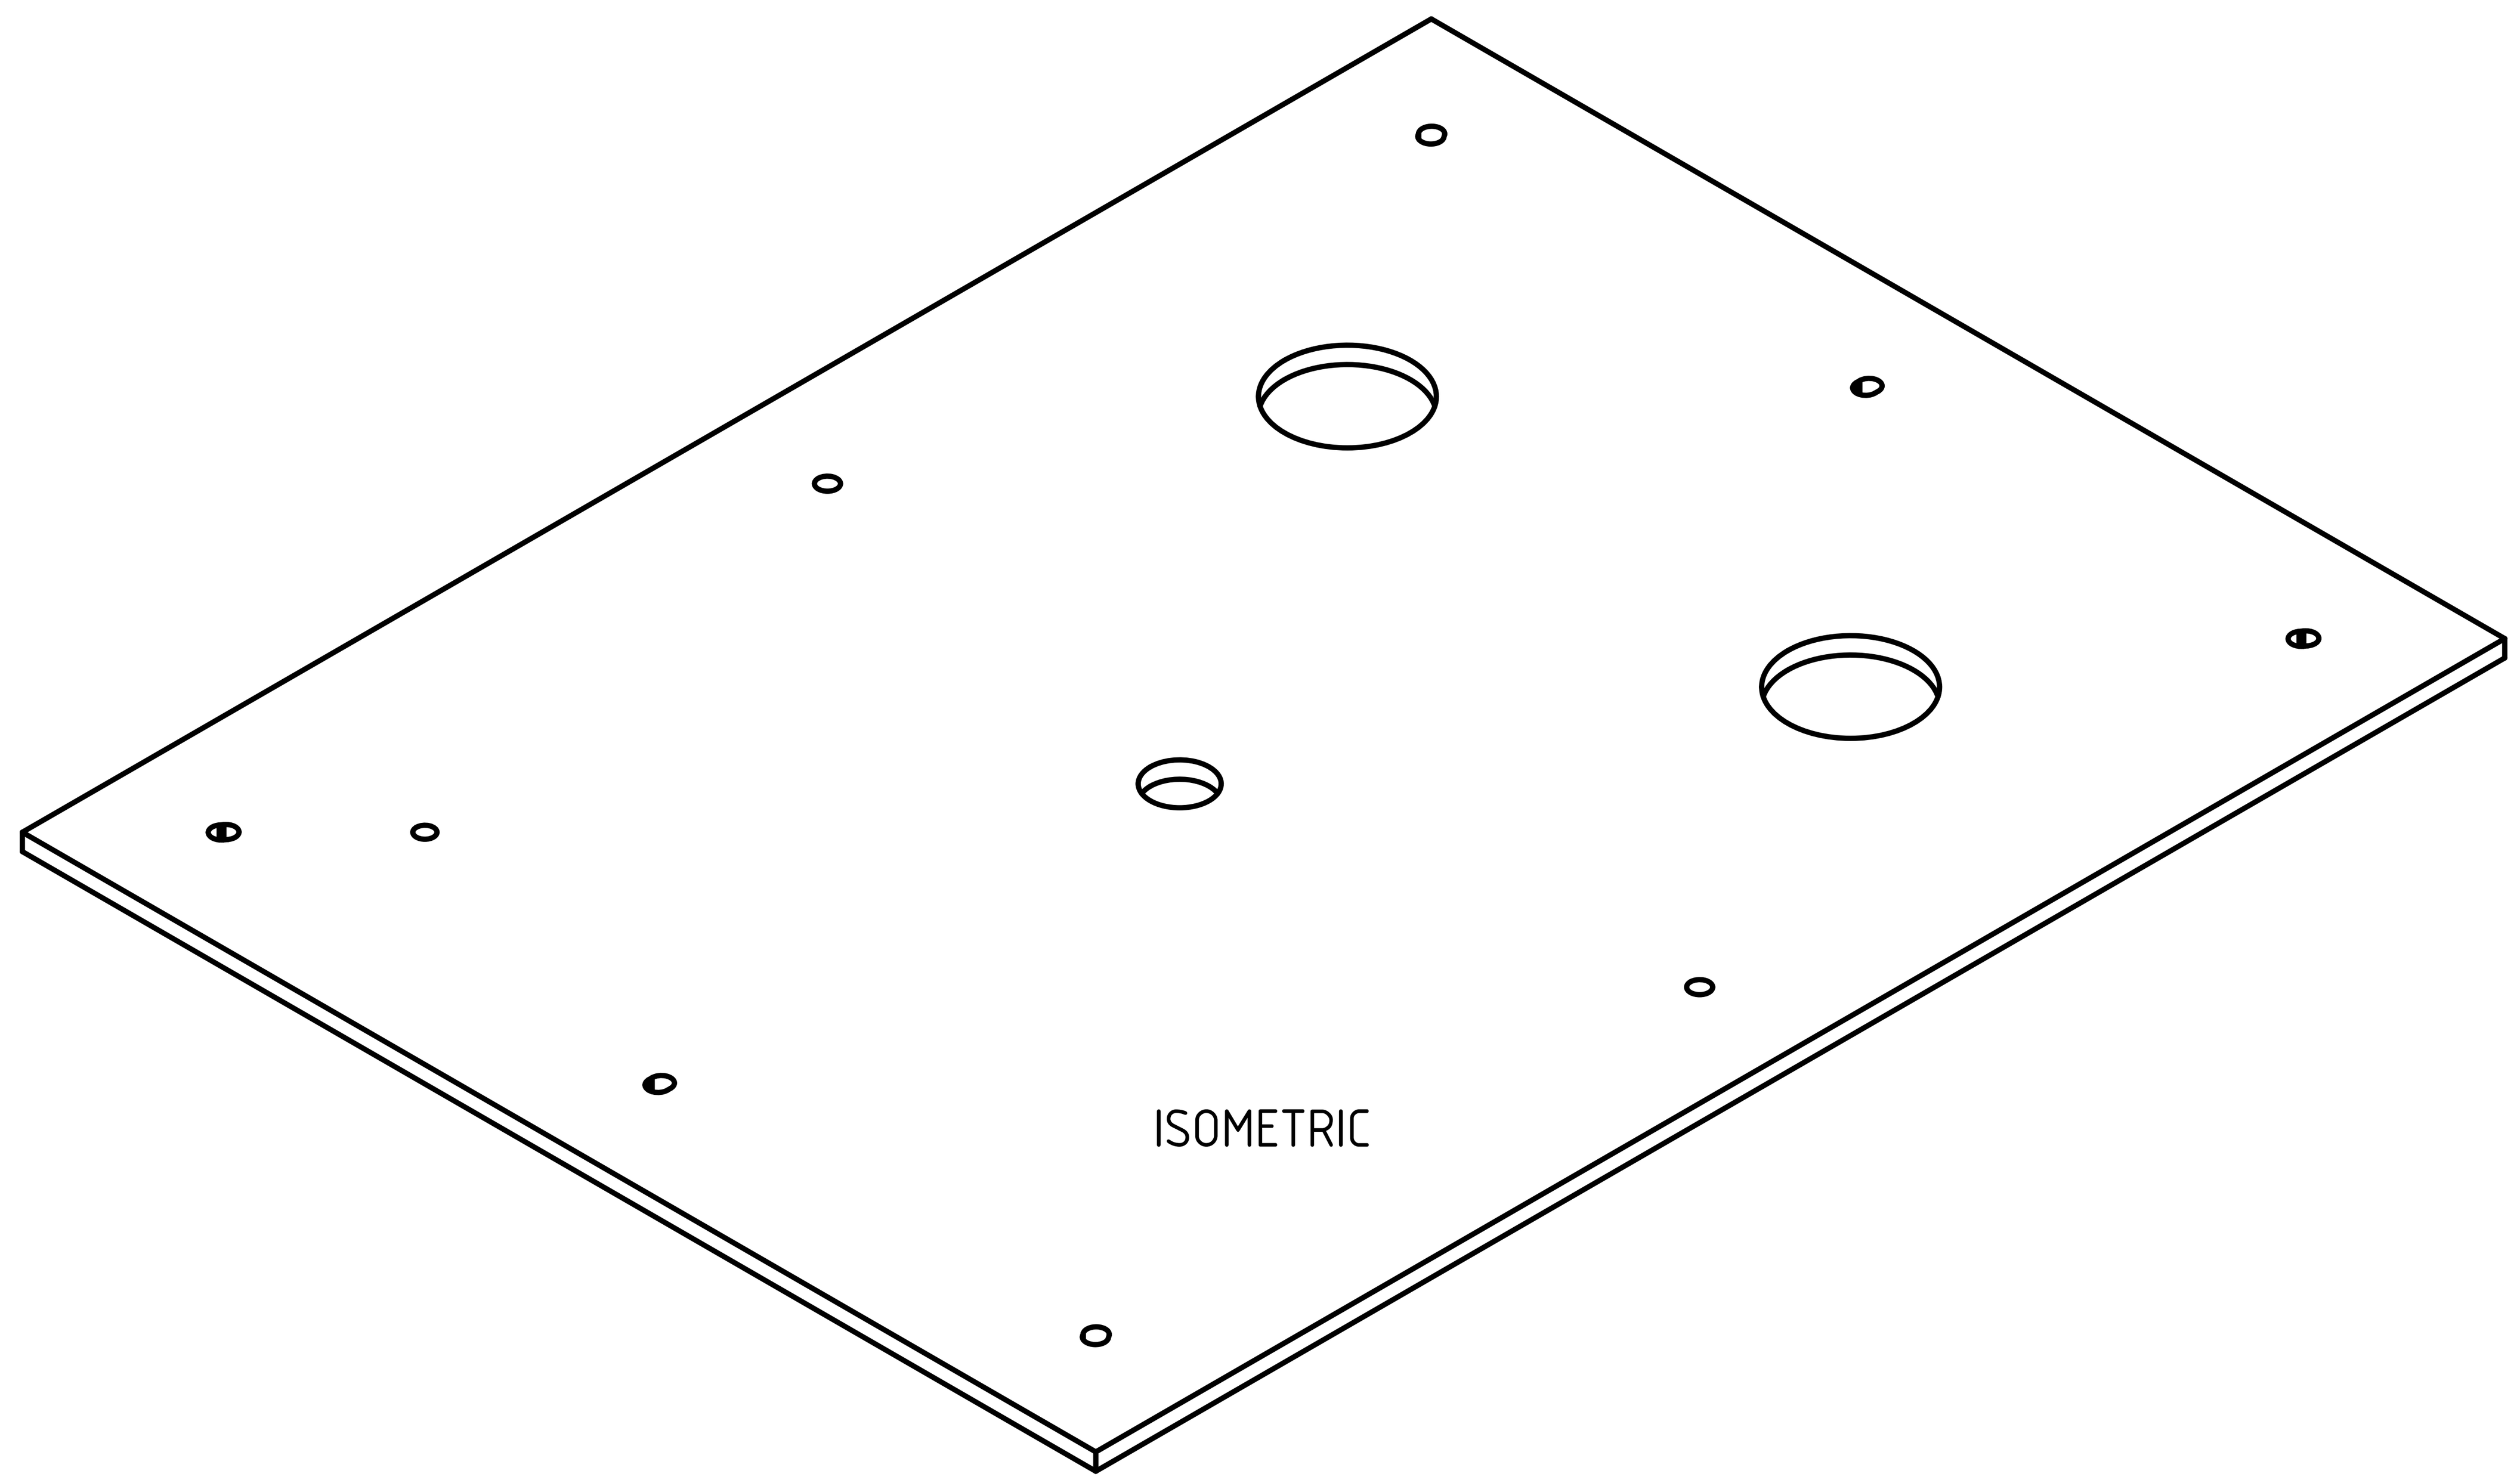

ISOMETRIC

SLOT 13xØ11 H9
RADIAL TOWARD PATTERN CENTER
TYP 6 PLACES
(4 corners + 2 long-axis midpoints)

POSITIONS (FROM DATUM B/C, mm):
PENETRATIONS:
coolant_supply_qd X=-150 Y=+200
coolant_return_qd X=+150 Y=+200
drycooler_comms_conduitX=+0 Y=-50
ground_stud X=-200 Y=-300
BOLTS:
CORNERS (4): X=±260 Y=±360
LONG-AXIS MID (2): X=0 Y=±360
SHORT-AXIS MID (2): X=±260 Y=0

Part Material: 5083-H116 marine grade (ASTM B209)	General tolerances: ISO 2768-m		Scale: 1 : 2	
Title: Interface Plate, Compute-to-Drycooler	Created by: ARCNODE		Owner: ARCNODE Hardware	
Document type: Fab Drawing	Approved by: Joe Narvaez, EIT			
Drawing number: ARC-PLT-CD-001-D	Language: EN	Issue date: 9 May 2026	Revision: 001	Sheet: 0 / 1

A1