


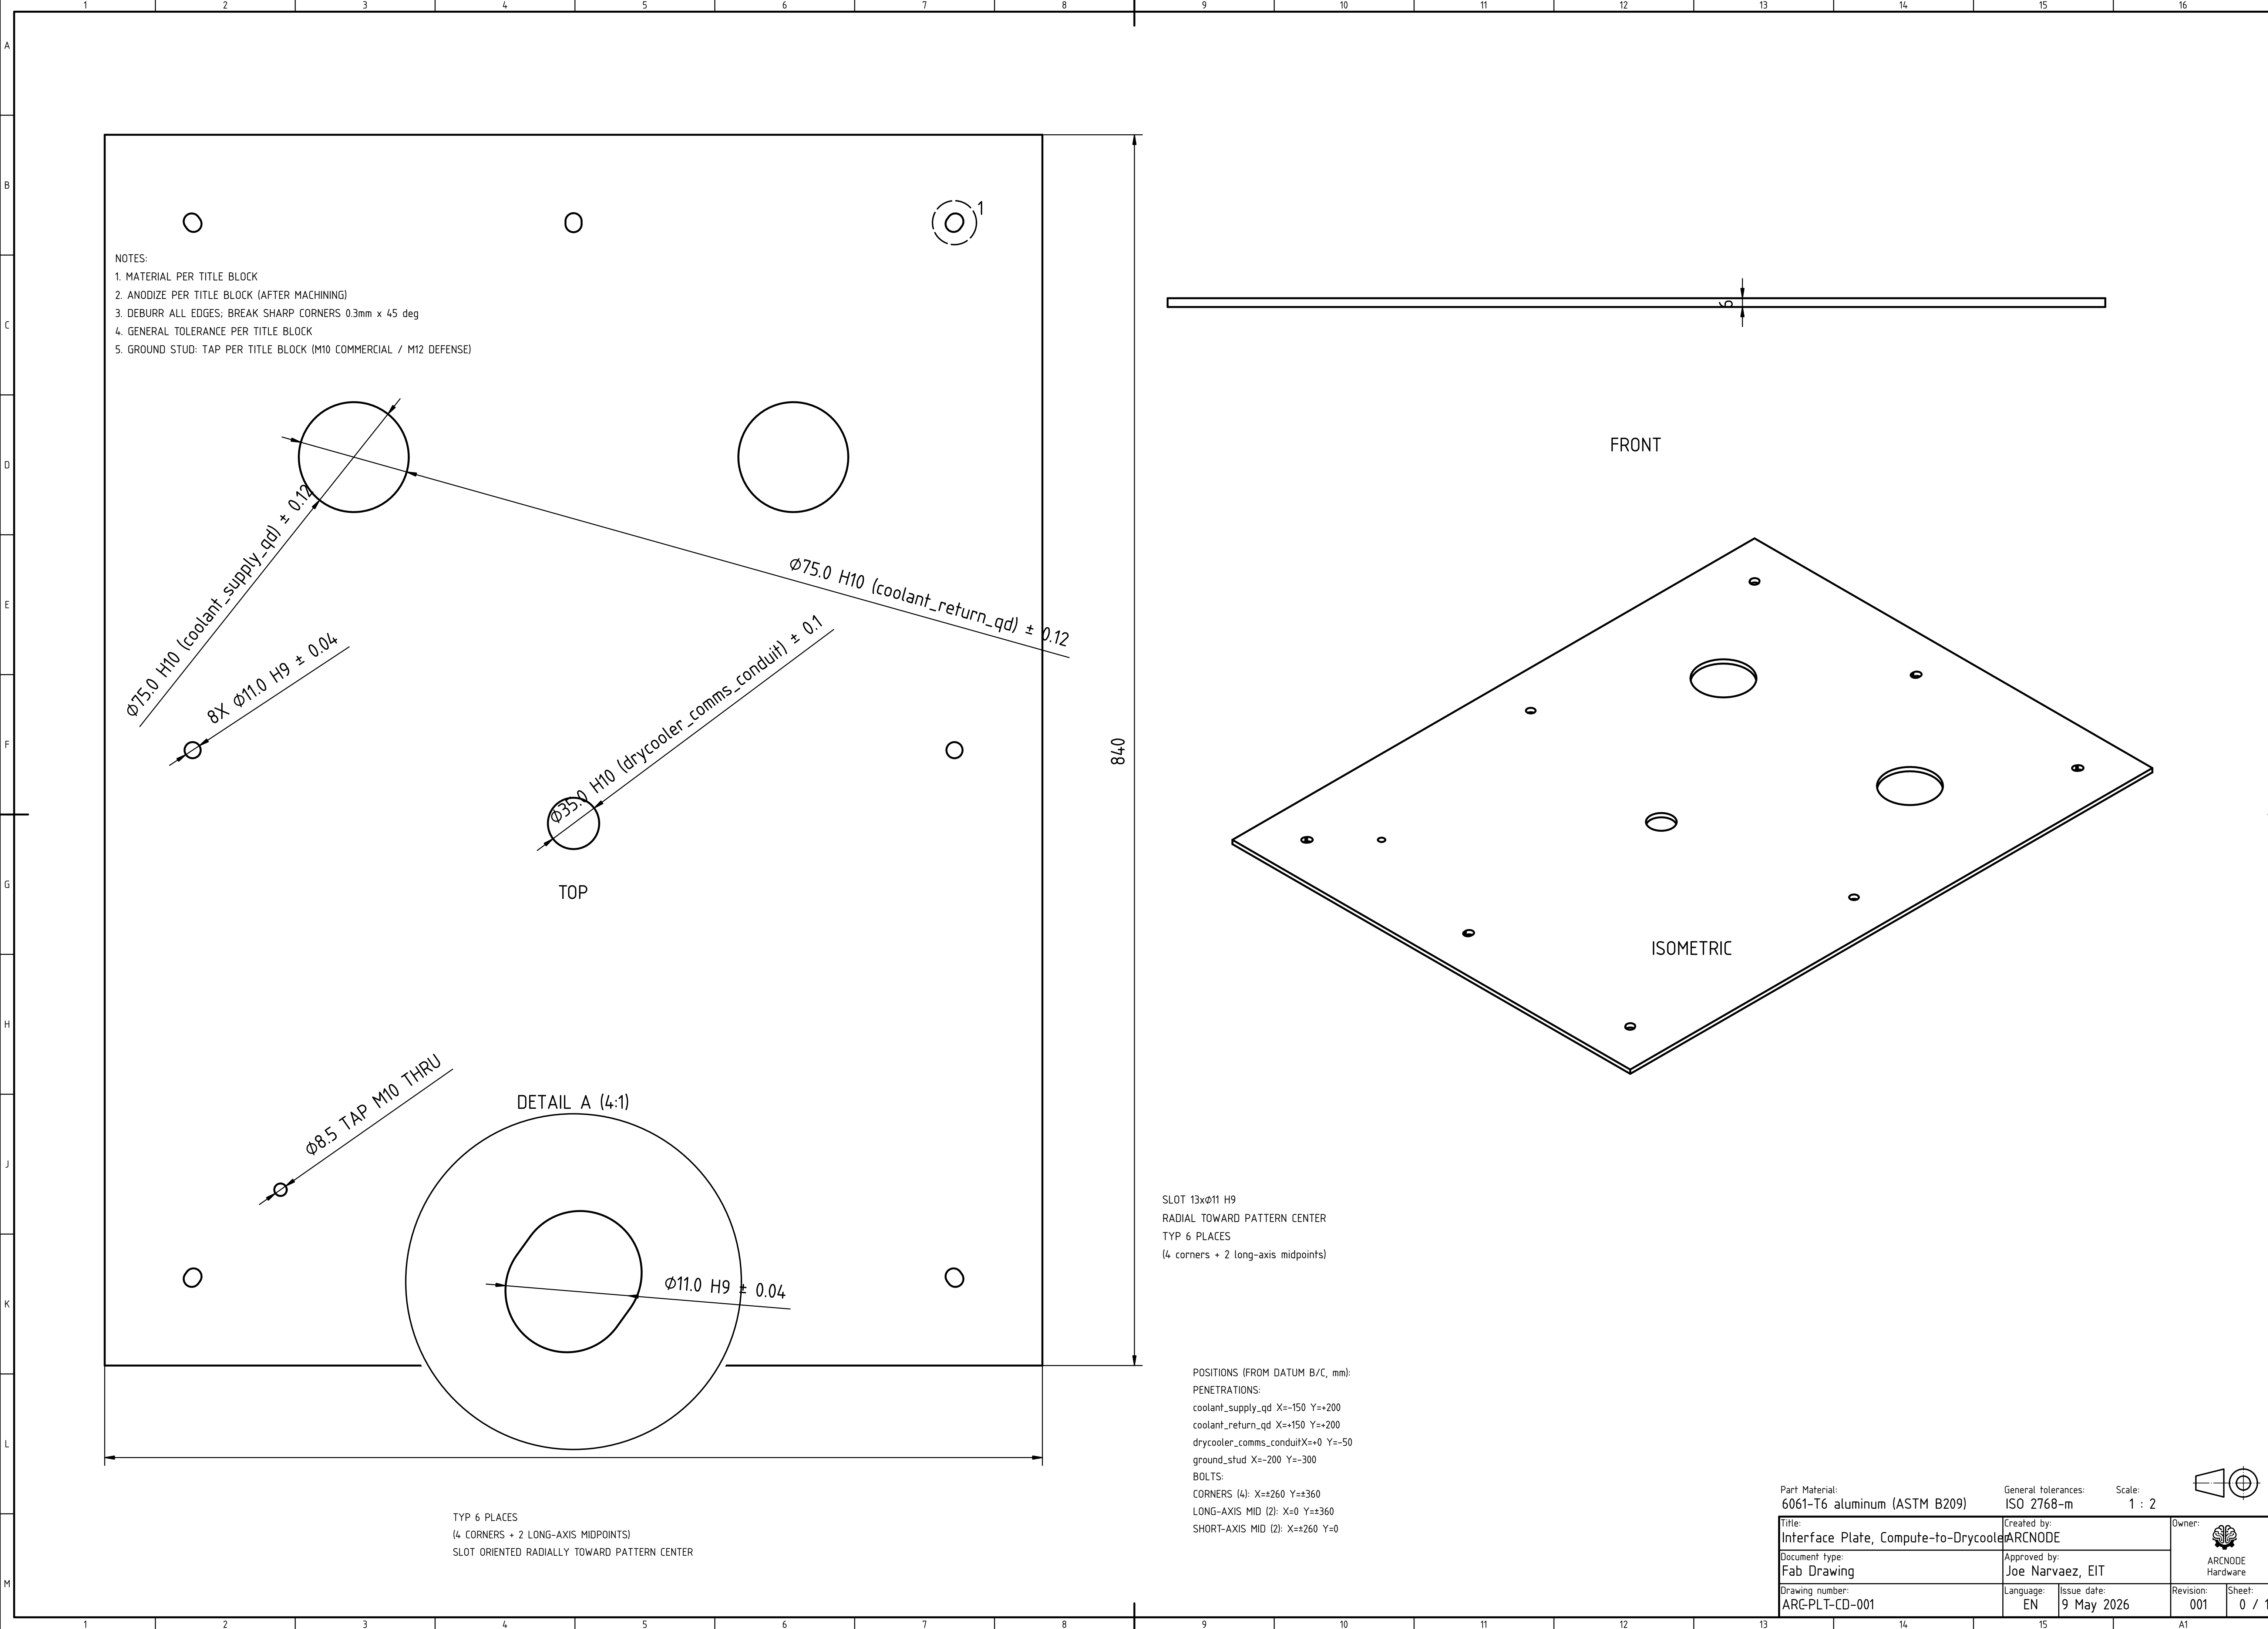

NOTES:
1. MATERIAL PER TITLE BLOCK
2. ANODIZE PER TITLE BLOCK (AFTER MACHINING)
3. DEBURR ALL EDGES; BREAK SHARP CORNERS 0.3mm x 45 deg
4. GENERAL TOLERANCE PER TITLE BLOCK
5. GROUND STUD: TAP PER TITLE BLOCK (M10 COMMERCIAL / M12 DEFENSE)

$\phi 75.0$ H10 (coolant_supply_qd) ± 0.12
 $8 \times \phi 11.0$ H9 ± 0.04
 $\phi 35.0$ H10 (drycooler_comms_conduit) ± 0.1
 $\phi 75.0$ H10 (coolant_return_qd) ± 0.12

TOP

DETAIL A (4:1)

$\phi 8.5$ TAP M10 THRU

$\phi 11.0$ H9 ± 0.04

TYP 6 PLACES
(4 CORNERS + 2 LONG-AXIS MIDPOINTS)
SLOT ORIENTED RADIALLY TOWARD PATTERN CENTER

SLOT 13x $\phi 11$ H9
RADIAL TOWARD PATTERN CENTER
TYP 6 PLACES
(4 corners + 2 long-axis midpoints)

POSITIONS (FROM DATUM B/C, mm):
PENETRATIONS:
coolant_supply_qd X=-150 Y=+200
coolant_return_qd X=+150 Y=+200
drycooler_comms_conduit X=+0 Y=-50
ground_stud X=-200 Y=-300
BOLTS:
CORNERS (4): X= ± 260 Y= ± 360
LONG-AXIS MID (2): X=0 Y= ± 360
SHORT-AXIS MID (2): X= ± 260 Y=0

Part Material: 6061-T6 aluminum (ASTM B209)		General tolerances: ISO 2768-m		Scale: 1 : 2			
Title: Interface Plate, Compute-to-Drycooled				Created by: ARCNODE		Owner: 	
Document type: Fab Drawing				Approved by: Joe Narvaez, EIT			
Drawing number: ARC-PLT-CD-001				Language: EN		Revision: 001	
				Issue date: 9 May 2026		Sheet: 0 / 1	