


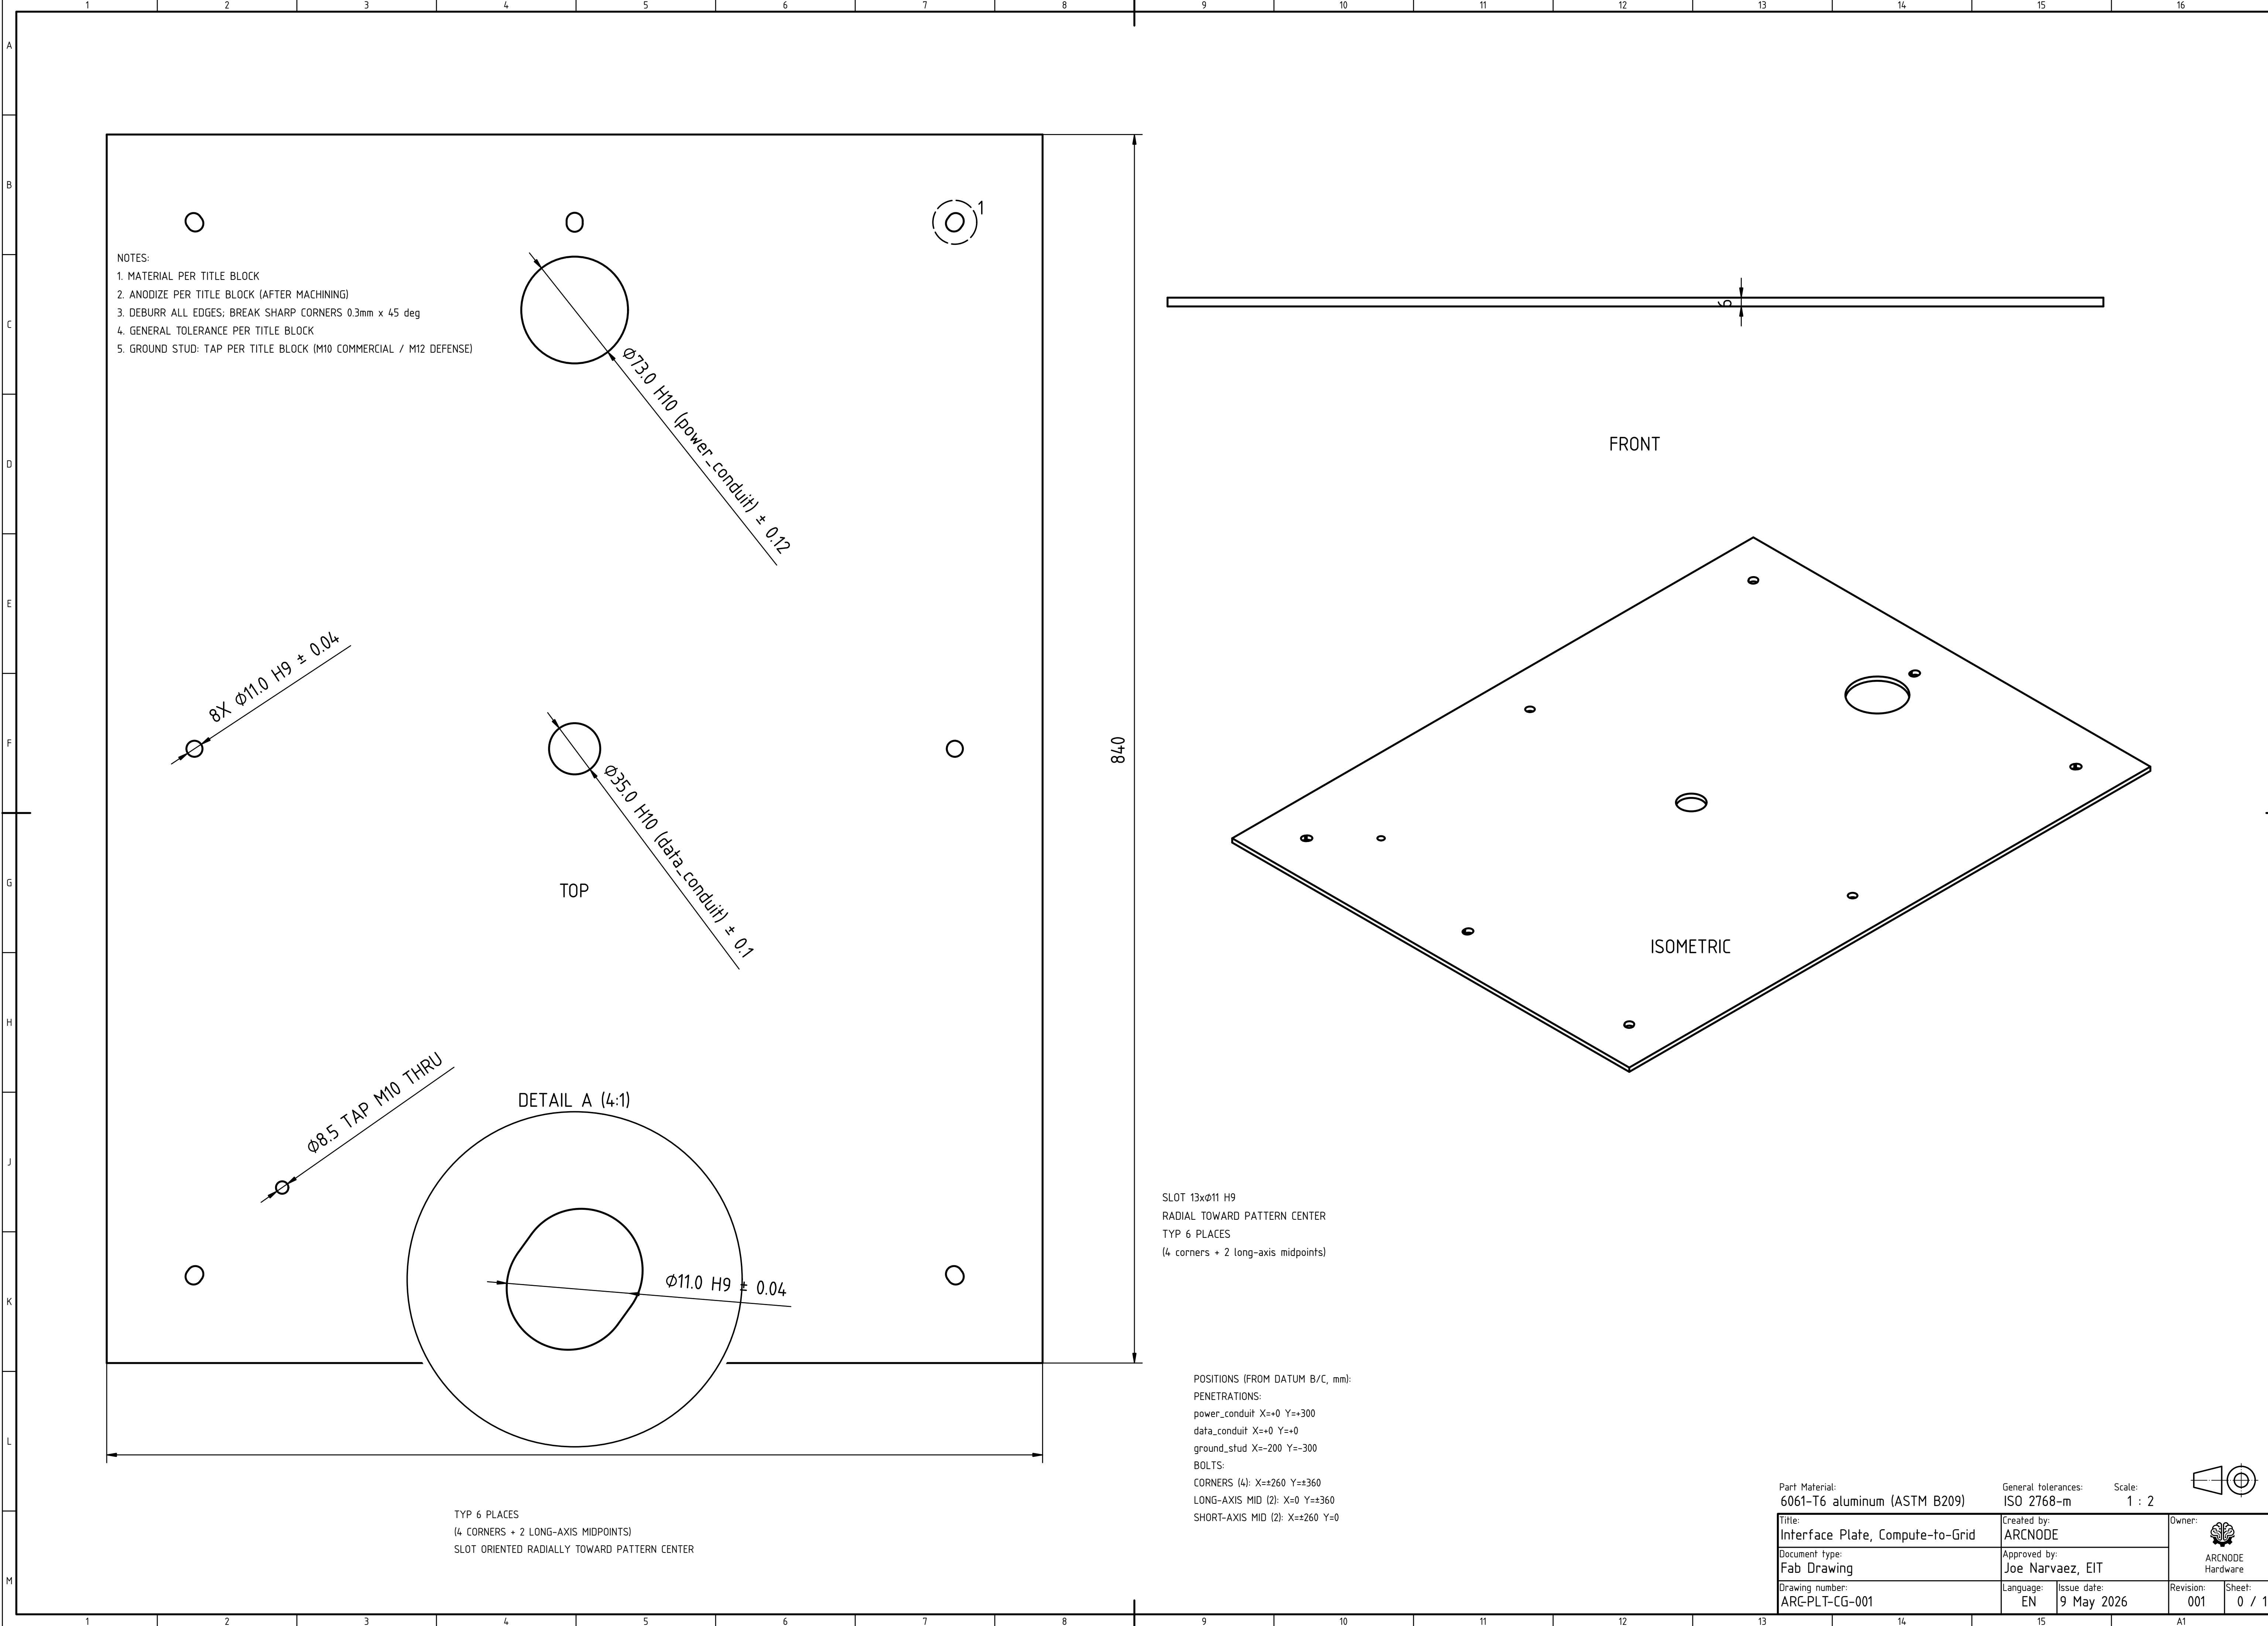

NOTES:
1. MATERIAL PER TITLE BLOCK
2. ANODIZE PER TITLE BLOCK (AFTER MACHINING)
3. DEBURR ALL EDGES; BREAK SHARP CORNERS 0.3mm x 45 deg
4. GENERAL TOLERANCE PER TITLE BLOCK
5. GROUND STUD: TAP PER TITLE BLOCK (M10 COMMERCIAL / M12 DEFENSE)

TOP

FRONT

ISOMETRIC

DETAIL A (4:1)

TYP 6 PLACES
(4 CORNERS + 2 LONG-AXIS MIDPOINTS)
SLOT ORIENTED RADIALLY TOWARD PATTERN CENTER

SLOT 13xØ11 H9
RADIAL TOWARD PATTERN CENTER
TYP 6 PLACES
(4 corners + 2 long-axis midpoints)

POSITIONS (FROM DATUM B/C, mm):
PENETRATIONS:
power_conduit X=+0 Y=+300
data_conduit X=+0 Y=+0
ground_stud X=-200 Y=-300
BOLTS:
CORNERS (4): X=±260 Y=±360
LONG-AXIS MID (2): X=0 Y=±360
SHORT-AXIS MID (2): X=±260 Y=0

Part Material: 6061-T6 aluminum (ASTM B209)		General tolerances: ISO 2768-m		Scale: 1 : 2			
Title: Interface Plate, Compute-to-Grid		Created by: ARCNODE			Owner: 		
Document type: Fab Drawing		Approved by: Joe Narvaez, EIT			ARCNODE Hardware		
Drawing number: ARC-PLT-CG-001		Language: EN	Issue date: 9 May 2026		Revision: 001	Sheet: 0 / 1	