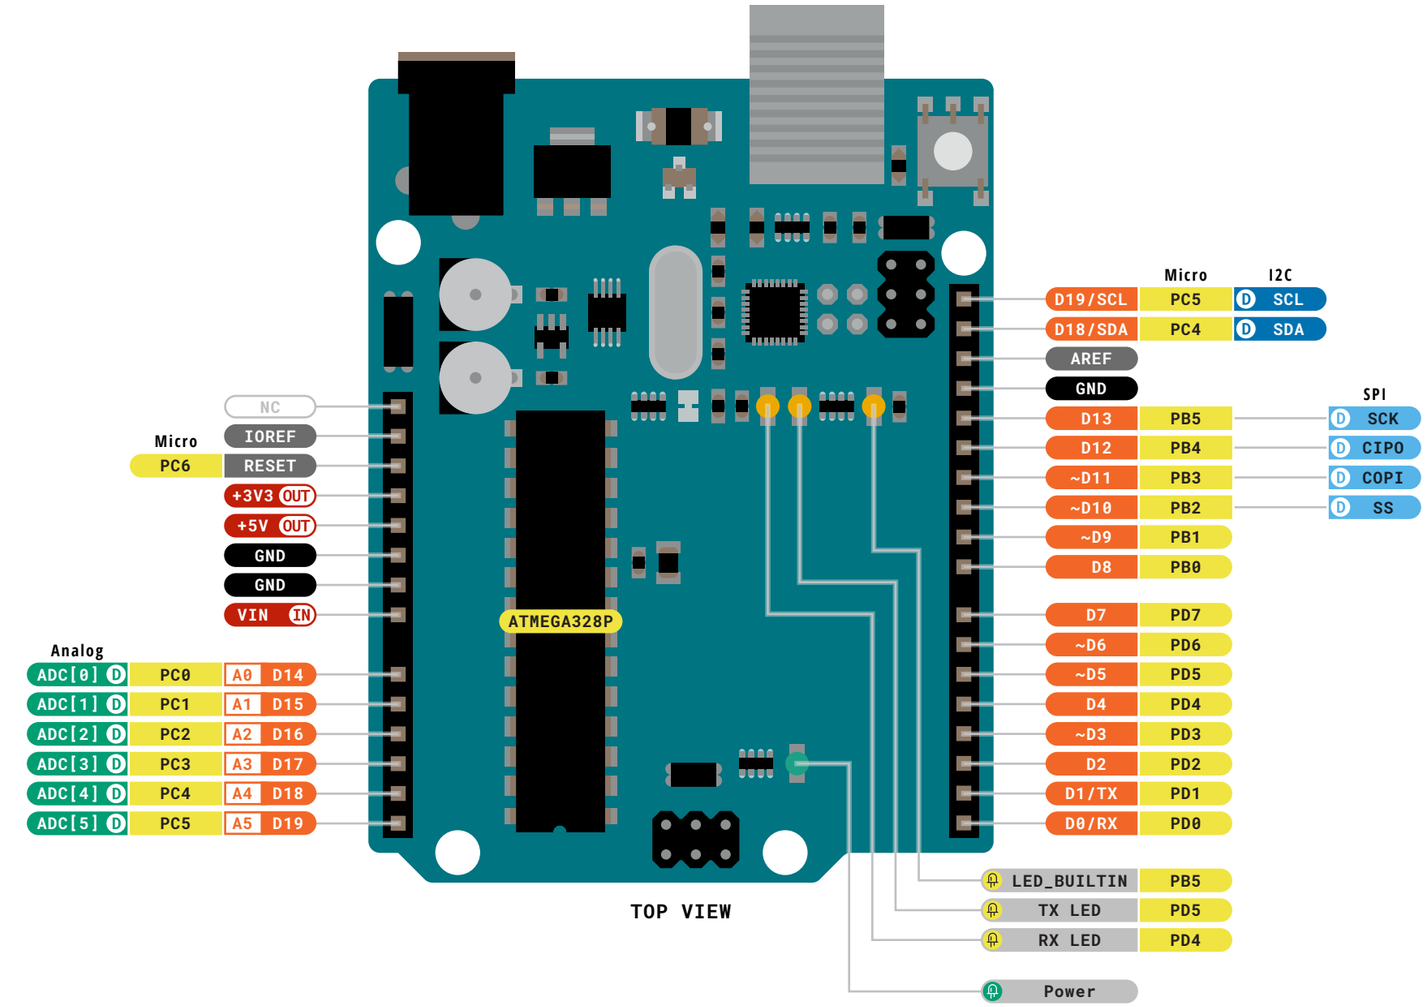


Legend:

- Power
- Ground
- Power Input
- Power Output
- GPIO Digital External
- Analog External
- Main Part
- Secondary Part
- Internal Component
- Other Pins (Reset, System Control, Debugging)
- I2C — Default
- SPI — Default
- UART/USART — Default
- Other SERIAL Communication
- Analog — Default
- PWM/Timer
- LED
- RGB LED
- Other

MAXIMUM current per I/O pin is 20mA

MAXIMUM current per +3.3V pin is 50mA

VIN 7-12V input to the board

CIPO/COPI have previously been referred to as MISO/MOSI

ARDUINO UNO R3 BOARD

SKU code: A000066
Full Pinout - Page 1 of 5
Last update: 12 Nov, 2026


DOCS.ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

WARNING!

Advanced Section

The following information is for advanced use only and may not be officially supported by Arduino software

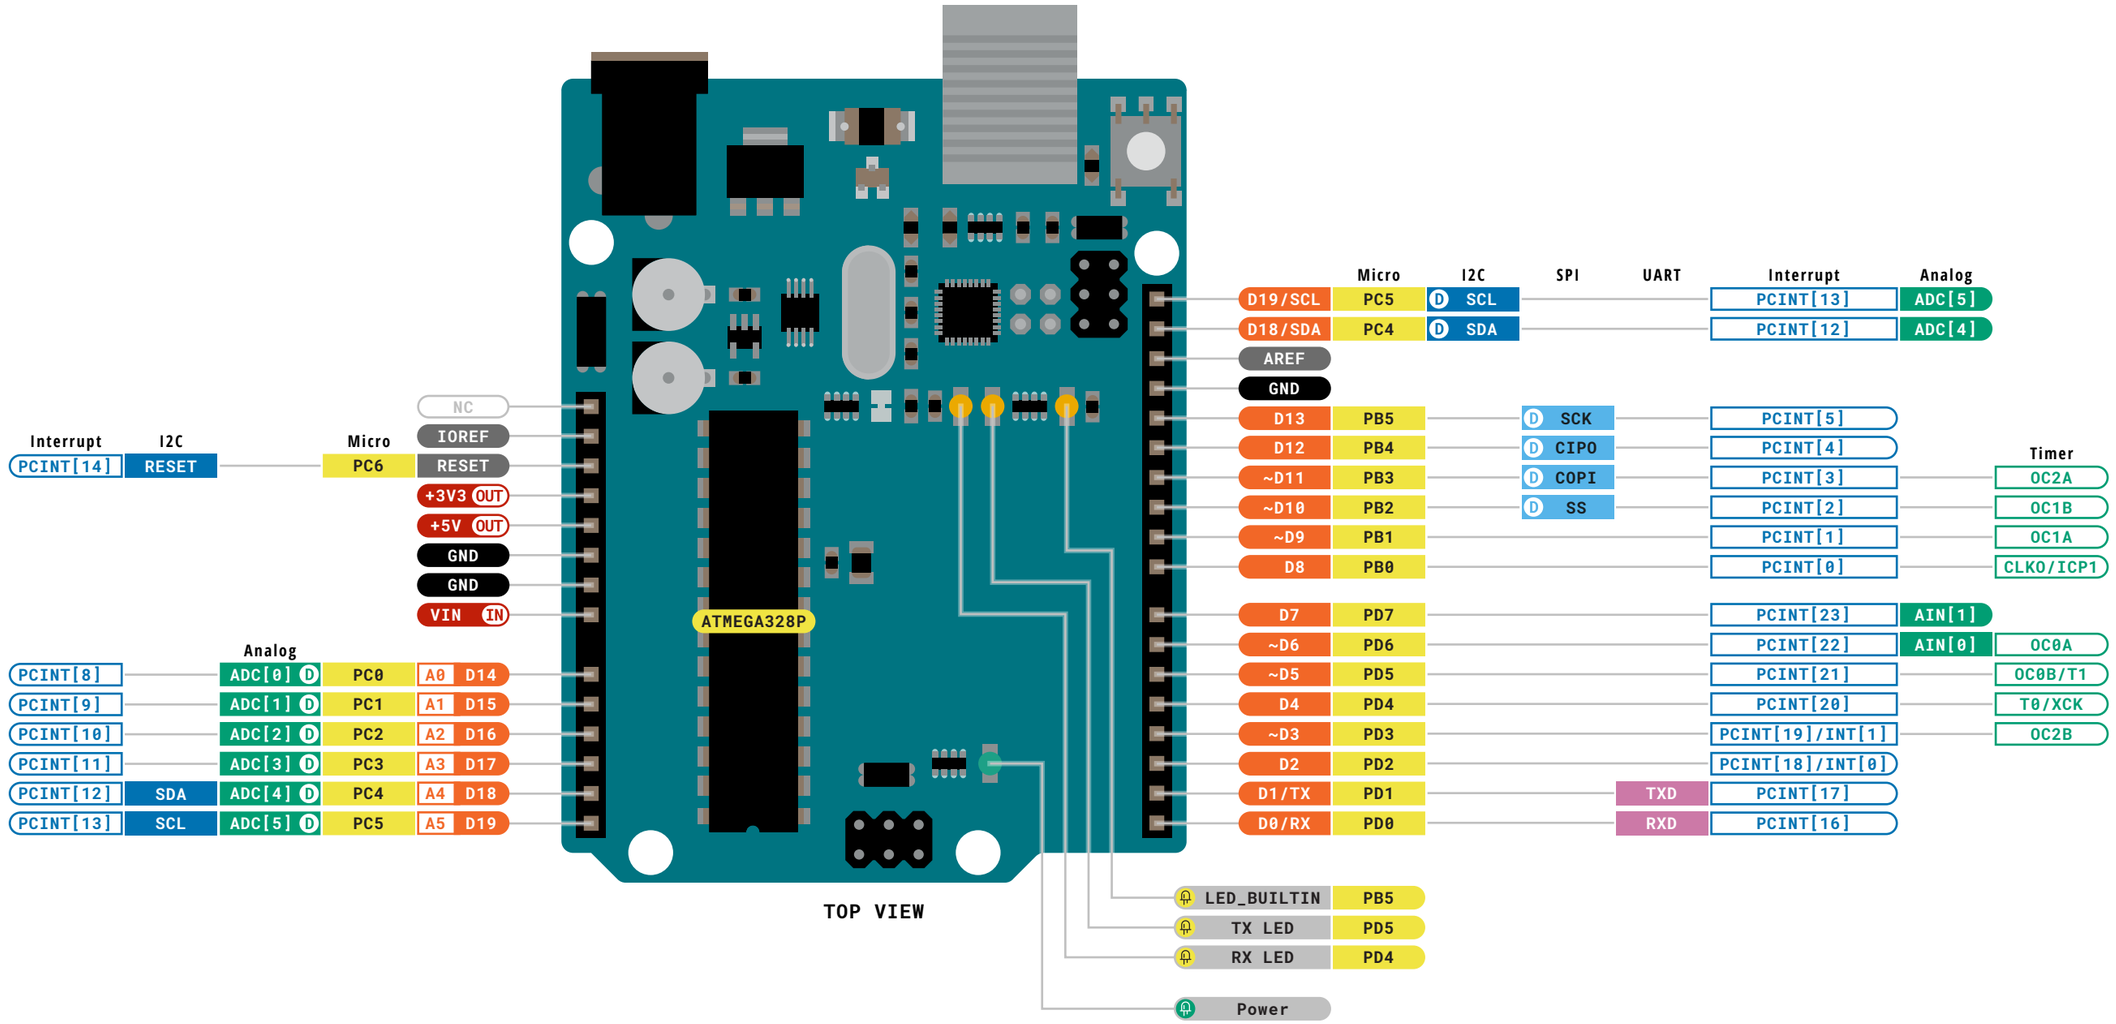

Legend:

- Power
- Ground
- IN Power Input
- OUT Power Output
- GPIO Digital External
- Analog External
- Main Part
- Secondary Part
- Internal Component
- Other Pins (Reset, System Control, Debugging)
- I2C — D Default
- SPI — D Default
- UART/USART — D Default
- Other SERIAL Communication
- Analog — D Default
- PWM/Timer
- LED
- RGB LED
- Other

MAXIMUM current per I/O pin is 20mA

MAXIMUM current per +3.3V pin is 50mA

VIN 7-12V input to the board


CIPO/COPI have previously been referred to as MISO/MOSI

ARDUINO UNO R3 BOARD

SKU code: A000066
Full Pinout - Page 3 of 5
Last update: 12 Nov, 2026

DOCS.ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

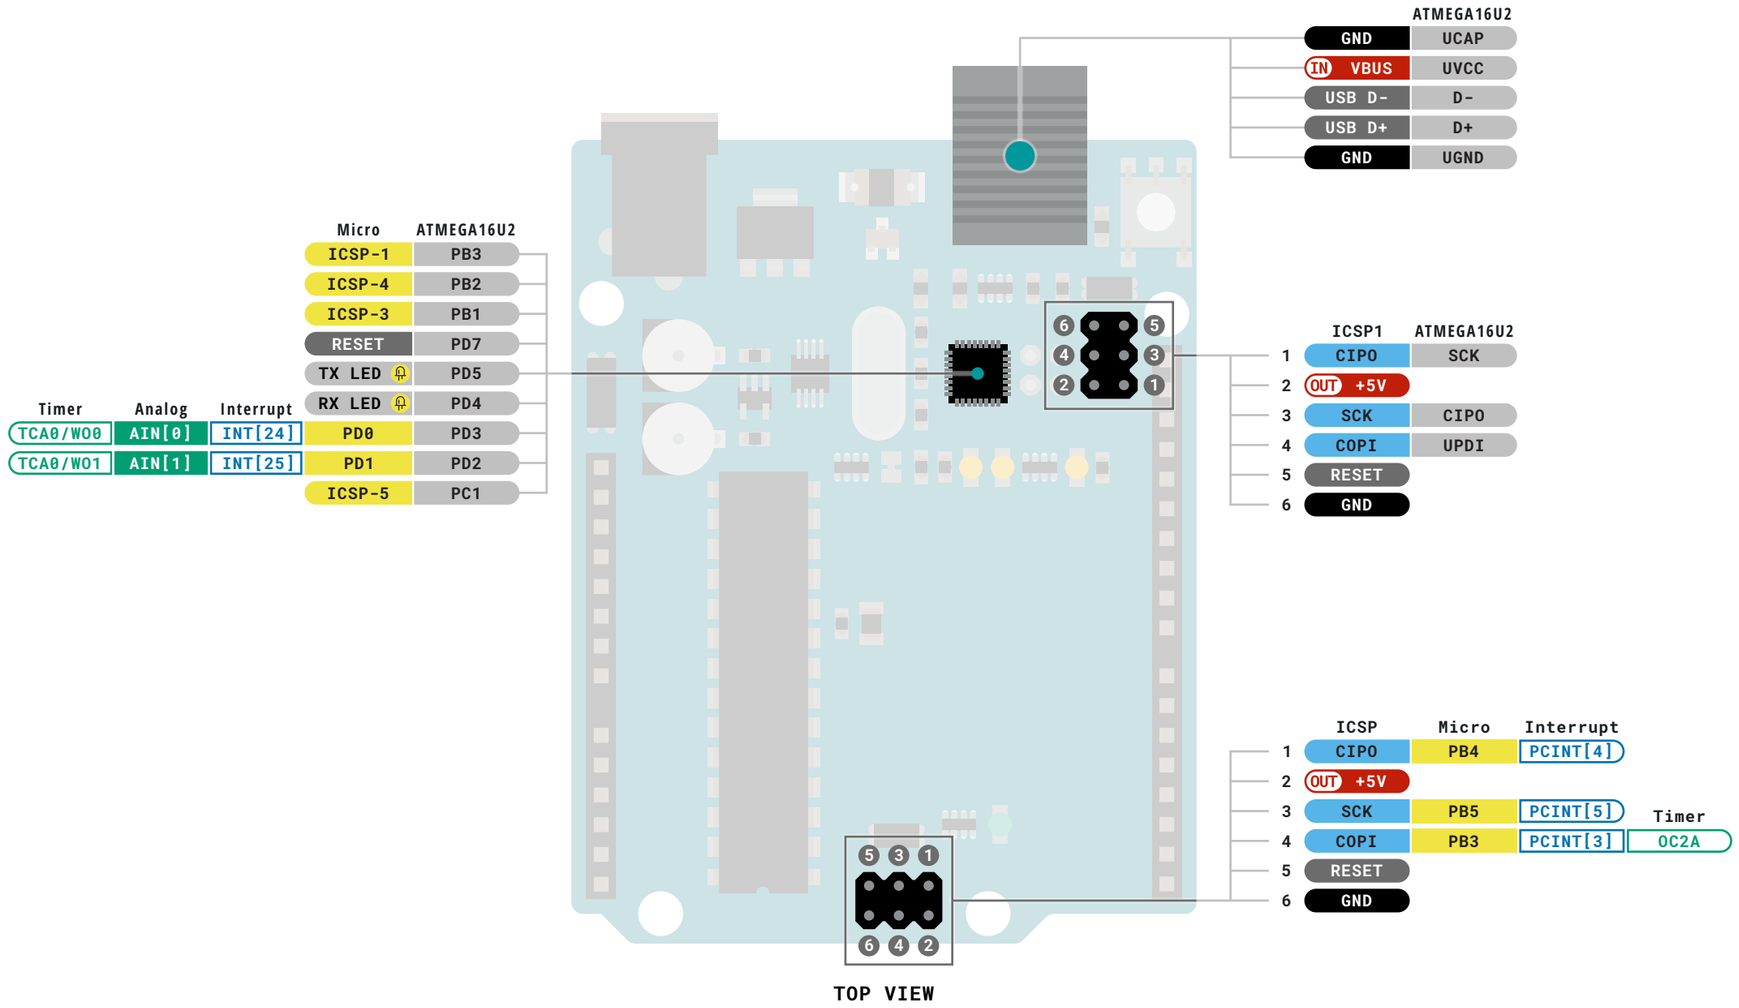

Legend:

- Power
- Ground
- Power Input
- Power Output
- GPIO Digital External
- Analog External
- Main Part
- Secondary Part
- Internal Component
- Other Pins (Reset, System Control, Debugging)
- I2C — Default
- SPI — Default
- UART/USART — Default
- Other SERIAL Communication
- Analog — Default
- PWM/Timer
- LED
- RGB LED
- Other

MAXIMUM current per I/O pin is 20mA

MAXIMUM current per +3.3V pin is 50mA

VIN 7-12V input to the board


CIPO/COPI have previously been referred to as MISO/MOSI

ARDUINO UNO R3 BOARD

SKU code: A000066
Full Pinout - Page 4 of 5
Last update: 12 Nov, 2026

DOCS.ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

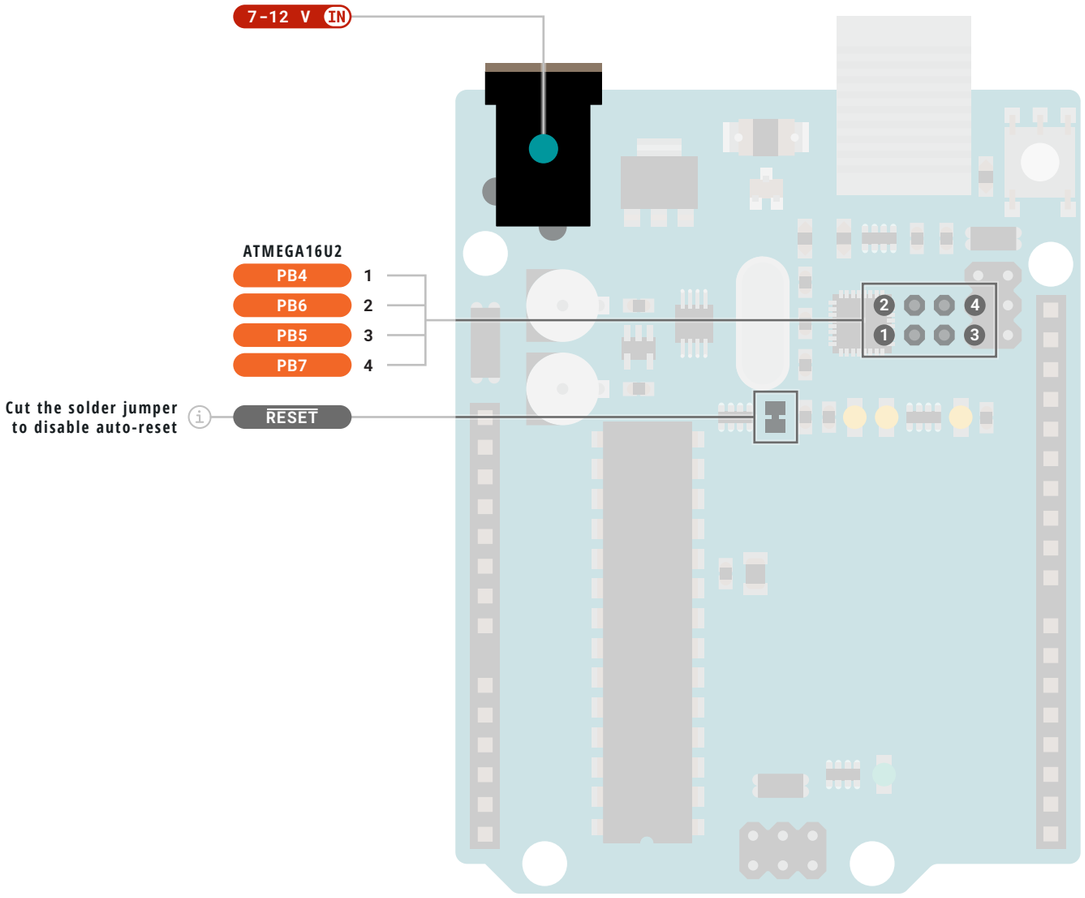

TOP VIEW

Legend:

- Power
- Ground
- Power Input
- Power Output
- GPIO Digital External
- Analog External
- Main Part
- Secondary Part
- Internal Component
- Other Pins (Reset, System Control, Debugging)
- LED
- RGB LED
- Other

MAXIMUM current per I/O pin is 20mA

MAXIMUM current per +3.3V pin is 50mA

VIN 7-12V input to the board

CIPO/COPI have previously been referred to as MISO/MOSI

ARDUINO UNO R3 BOARD

SKU code: A000066
Full Pinout - Page 5 of 5
Last update: 12 Nov, 2026

DOCS.ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.