ZATLA

COMMERCIAL LED LIGHTING DESIGNED FOR INDOOR CULTIVATION




# GROW LIGHT 4X4

AVAILABLE IN

**1000W | 800W | 650W**

The ZATLA Grow Light is built for vertical growers. A sleek, flat body pairs a high photon conversion rate with low heat emission, making it a natural fit for popular two- and three-tier grow racks.

### INTENDED APPLICATIONS

- Multi-tier vertical grow systems
- Indoor cultivation

### RECOMMENDED SET-UP

- **FLOWER** 4' × 4' area · Max 5' × 5' area
- **VEG** 4' × 4' area · Max 6' × 6' area

QUAD CHANNELS | 208–277V INPUT | 0–10V DIMMING | PASSIVE COOLING

## FEATURES & BENEFITS

- 4 adjustable channels for a customizable spectrum.
- Replaceable UV bars.
- Extra-wide bars with algorithmic diode placement for even PPFD.
- Designed for large-scale commercial craft growing.
- 4' × 4' canopy light spread for 4' or 5' wide benches or tents.
- Designed for spectrum crop steering: give your plants the best combination of light throughout the day and at each stage of growth and flowering.
- Plan rooms and preview PPFD in the ZATLA 3D designer.

### ULTRA THIN

Designed to maximize vertical growing space in multi-tier vertical grow set-ups.

### COMMERCIAL GROW IN MIND

Built for commercial grows, supporting 208–277V power.

### EASY ASSEMBLY

Designed for effortless installation with no assembly required. Ready to use upon unpacking.

## SPECTRUM CHANNELS

| | | SHARE OF OUTPUT |
|---|---|---|
| CHANNEL 1 | UVA | **5.5%** |
| CHANNEL 2 | 6200K + 437.5nm Blue | **70%** |
| CHANNEL 3 | 660nm Deep Red | **18%** |
| CHANNEL 4 | 730nm Far Red | **6.5%** |



ZATLA

# 1000W

ZATLA GROW LIGHT 4X4

COMMERCIAL LED LIGHTING DESIGNED FOR INDOOR CULTIVATION

## SPECIFICATIONS

| | |
|---|---|
| WATTAGE | 1000W |
| INPUT VOLTAGE | 208–277V |
| CONTROL | 0–10V DIMMING |
| DAISY CHAIN PORT | RJ-45 |
| POWER FACTOR | >0.9 |
| MOUNTING HEIGHT | 12–24 INCHES ABOVE CANOPY |
| THERMAL MANAGEMENT | PASSIVE |
| WORKING TEMPERATURE | 32°F to 104°F |
| DIODE LIFETIME | L90: >36,000 hrs |
| DRIVER LIFETIME | >50,000 hrs |
| HEAT LOAD PER FIXTURE | 3,410 BTUs |

## MAXIMUM POWER ELECTRICAL DATA

| | 120V | 240V | 277V |
|---|---|---|---|
| AC CURRENT | 8.4A | 4.2A | 3.7A |
| AC POWER | 1023W | 1002W | 995W |
| POWER FACTOR | 0.996 | 0.978 | 0.96 |

## PPFD READING

**12" Height @ 100% (1000W)**


4X4

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 937 | | 1091 | | 1100 | | 1097 | | 905 |
| | 1252 | | | 1350 | | | 1223 | |
| 1024 | | 1503 | | 1730 | | 1565 | | 1087 |
| | | | **1930** | **1917** | **1916** | | | |
| 1245 | 1454 | 1818 | **1944** | **1945** | **1962** | 1799 | 1540 | 1270 |
| | | | **1882** | **1876** | **1918** | | | |
| 1035 | | 1534 | | 1620 | | 1497 | | 1065 |
| | 1276 | | | 1268 | | | 1237 | |
| 952 | | 1096 | | 1105 | | 1078 | | 914 |

## PERFORMANCE DATA — MAX POWER @ 12" H


| | |
|---|---|
| PPF | 3010 µmol/s |
| PPFD | 1962 µmol/m²/s |
| PPE | 3.26 µmol/J |

## FULL SPECTRUM + FAR RED

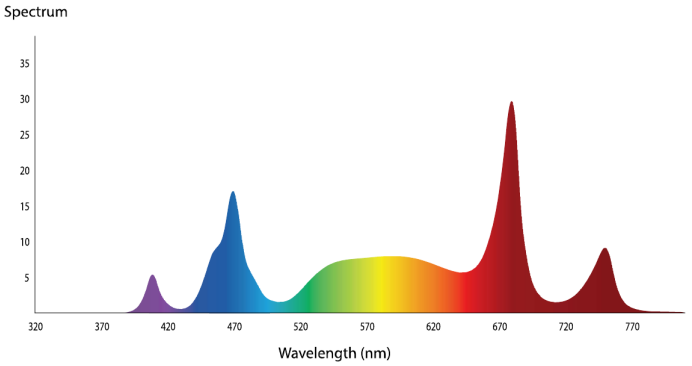


Quad Channel Spectrum Controls

## DIMENSIONS

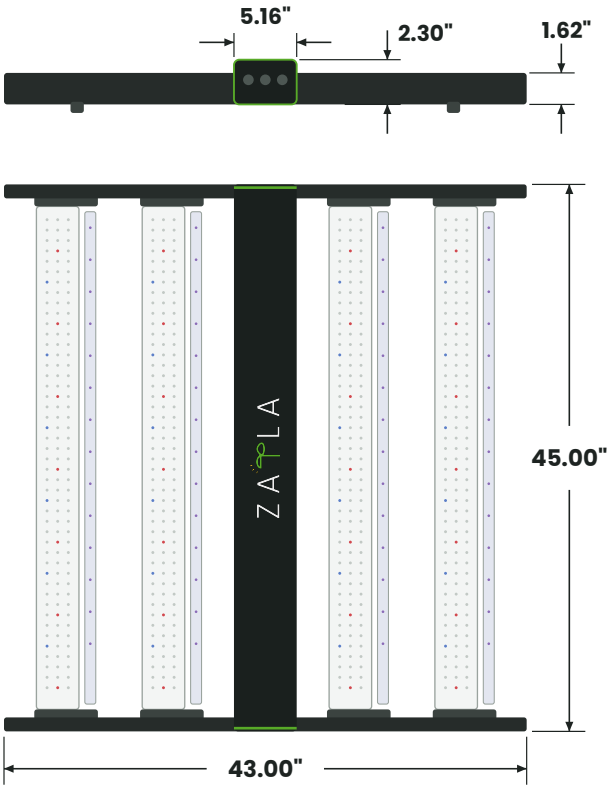


**LIGHT WEIGHT** 28.35 lbs

ZATLA

# 800W

ZATLA GROW LIGHT 4X4

COMMERCIAL LED LIGHTING DESIGNED FOR INDOOR CULTIVATION

## SPECIFICATIONS

| | |
|---|---|
| WATTAGE | 800W |
| INPUT VOLTAGE | 208–277V |
| CONTROL | 0–10V DIMMING |
| DAISY CHAIN PORT | RJ-45 |
| POWER FACTOR | >0.9 |
| MOUNTING HEIGHT | 12–24 INCHES ABOVE CANOPY |
| THERMAL MANAGEMENT | PASSIVE |
| WORKING TEMPERATURE | 32°F to 104°F |
| DIODE LIFETIME | L90: >36,000 hrs |
| DRIVER LIFETIME | >50,000 hrs |
| HEAT LOAD PER FIXTURE | 2,728 BTUs |

## MAXIMUM POWER ELECTRICAL DATA

| | 120V | 240V | 277V |
|---|---|---|---|
| AC CURRENT | 6.7A | 3.4A | 2.9A |
| AC POWER | 836W | 820W | 817W |
| POWER FACTOR | 0.995 | 0.971 | 0.945 |

## PPFD READING

**12" Height @ 100% (800W)**


4X4

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 792 | | 920 | | 935 | | 934 | | 761 |
| | 893 | | | 1157 | | | 861 | |
| 874 | | 1368 | | 1467 | | 1350 | | 918 |
| | | | **1652** | **1631** | **1630** | | | |
| 1060 | 1278 | 1524 | **1672** | **1643** | **1660** | 1523 | 1386 | 1071 |
| | | | **1632** | **1576** | **1594** | | | |
| 877 | | 1321 | | 1374 | | 1251 | | 895 |
| | 878 | | | 1073 | | | 801 | |
| 814 | | 929 | | 941 | | 923 | | 773 |

## PERFORMANCE DATA — MAX POWER @ 12" H


| | |
|---|---|
| PPF | 2507 µmol/s |
| PPFD | 1675 µmol/m²/s |
| PPE | 3.26 µmol/J |

## FULL SPECTRUM + FAR RED

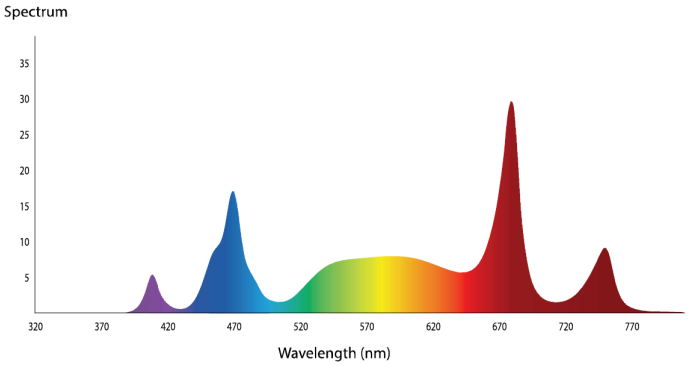


## Quad Channel Spectrum Controls

## DIMENSIONS

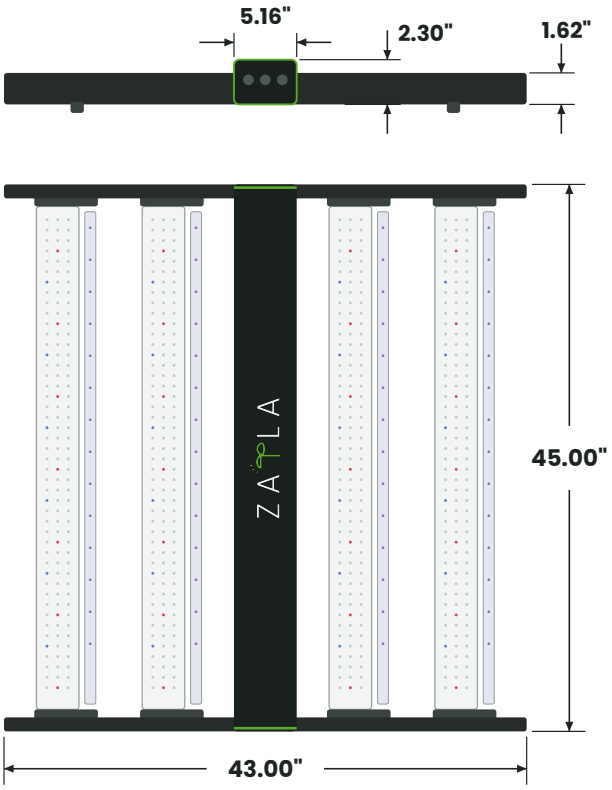


**LIGHT WEIGHT** 28.35 lbs

ZATLA

# 650W

ZATLA GROW LIGHT 4X4

COMMERCIAL LED LIGHTING DESIGNED FOR INDOOR CULTIVATION

## SPECIFICATIONS

| | |
|---|---|
| WATTAGE | 650W |
| INPUT VOLTAGE | 208–277V |
| CONTROL | 0–10V DIMMING |
| DAISY CHAIN PORT | RJ-45 |
| POWER FACTOR | >0.9 |
| MOUNTING HEIGHT | 12–24 INCHES ABOVE CANOPY |
| THERMAL MANAGEMENT | PASSIVE |
| WORKING TEMPERATURE | 32°F to 104°F |
| DIODE LIFETIME | L90: >36,000 hrs |
| DRIVER LIFETIME | >50,000 hrs |
| HEAT LOAD PER FIXTURE | 2,216.5 BTUs |

## MAXIMUM POWER ELECTRICAL DATA

| | 120V | 240V | 277V |
|---|---|---|---|
| AC CURRENT | 5.5A | 2.8A | 2.4A |
| AC POWER | 663W | 653W | 649W |
| POWER FACTOR | 0.993 | 0.958 | 0.926 |

## PPFD READING

**12" Height @ 100% (650W)**


4X4

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 667 | | 784 | | 795 | | 787 | | 651 |
| | 768 | | | 879 | | | 783 | |
| 749 | | 1102 | | 1184 | | 1106 | | 784 |
| | | | **1334** | **1313** | **1326** | | | |
| 897 | 1050 | 1240 | **1361** | **1339** | **1336** | 1237 | 1099 | 910 |
| | | | **1300** | **1258** | **1280** | | | |
| 740 | | 1072 | | 1116 | | 1027 | | 764 |
| | 699 | | | 895 | | | 719 | |
| 691 | | 776 | | 791 | | 788 | | 651 |

## PERFORMANCE DATA — MAX POWER @ 12" H


| | |
|---|---|
| PPF | 2013 µmol/s |
| PPFD | 1361 µmol/m²/s |
| PPE | 3.26 µmol/J |

## FULL SPECTRUM + FAR RED

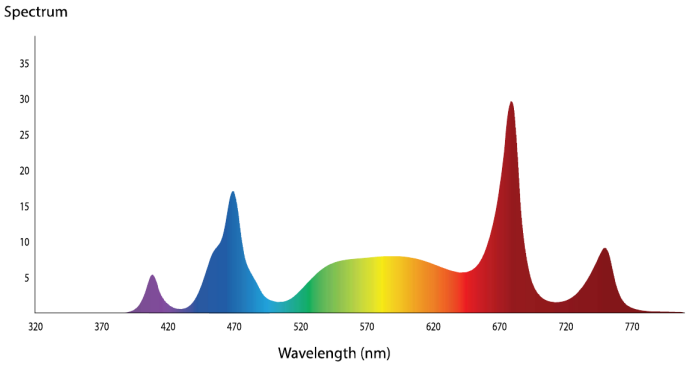


## Quad Channel Spectrum Controls

## DIMENSIONS

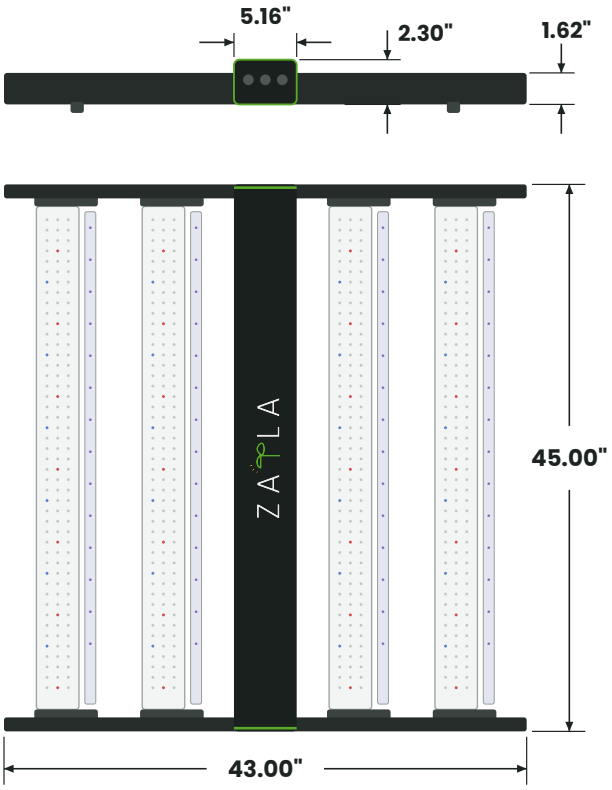


**LIGHT WEIGHT** 28.35 lbs