
ZATLA

COMMERCIAL LED LIGHTING DESIGNED FOR INDOOR CULTIVATION

UNDER CANOPY LIGHT **4FT** **150W**

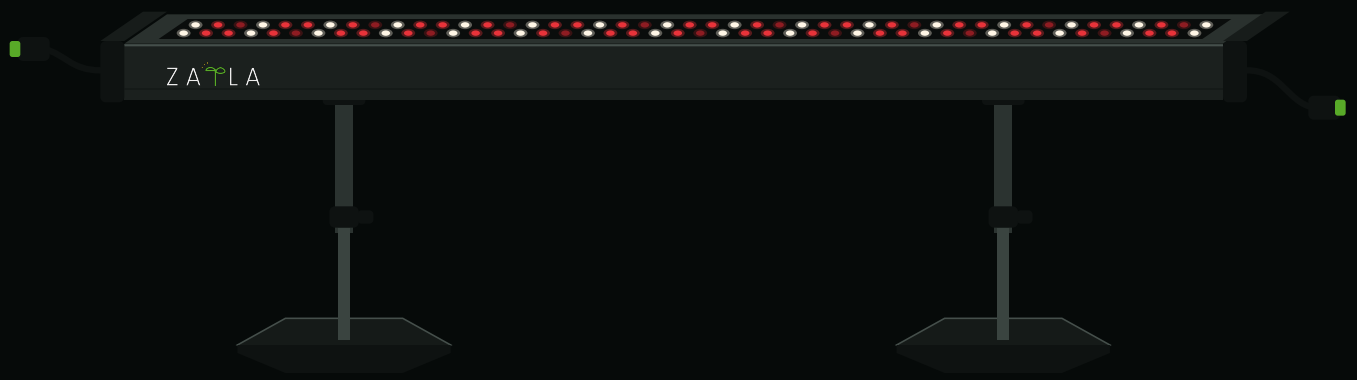

Upgrade your cultivation and leave no buds behind. ZATLA under canopy lights maximize growth and yields by illuminating the previously underlit areas of your plants.

- IP65 WATERPROOF
- 120–277V INPUT
- 0–10V DIMMING
- DAISY CHAIN

FEATURES & BENEFITS

- Improve B-bud size, structure, density and coloring.
- Optimized full spectrum proven by growers: great for veg and exceptional for boosting flower. Includes 4000K, 660nm Deep Red and 730nm Far Red diodes.
- IP65 rated for easy cleaning and protection from IPM sprays, irrigation leaks and stray hits from the watering wand.
- Compact and lightweight: quick to set up, easy to work around at harvest, and quick to remove when working between trellis layers.
- One under canopy light covers 4' in length and 3' in width of under canopy. Add a second row to further increase your yields.

LINK UP MULTIPLE FIXTURES

Power and data chain through the same connections, with no extra wires required.
Daisy chain: 8 pcs @ 120V · 12 pcs @ 208V · 14 pcs @ 220V · 16 pcs @ 240V · 18 pcs @ 277V

RATED IP65

Worry free when spraying.

ALUMINUM HOUSING

Dissipates heat 10x faster than plastic shells.

ADJUSTABLE HEIGHT

Telescopic legs adjust to plant growth for the perfect light coverage, and work with rolling benches.

AT A GLANCE

150W	450 µmol/s	3.0 µmol/J	IP65	4' × 3'
WATTAGE	PPF	PPE	WATERPROOF	COVERAGE

ZATLA

150W

ZATLA UNDER CANOPY LIGHT 4FT

COMMERCIAL LED LIGHTING DESIGNED FOR INDOOR CULTIVATION

SPECIFICATIONS

WATTAGE	150W (Channel 1: 125W R/W) (Channel 2: 25W FR)
INPUT VOLTAGE	120V–277V
CONTROL	0–10V DIMMING
DATA CONNECTION	Waterproof RJ-45
POWER FACTOR	>0.9
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	0°F to 104°F
IP RATING	Waterproof IP65
LIFETIME	L90: >36,000 hrs
HEAT LOAD PER FIXTURE	511 BTUs

PERFORMANCE DATA — MAX POWER

PPE	3.0 µmol/J
PPF	450 µmol/s

MAXIMUM POWER ELECTRICAL DATA

	120V	208V	220V	240V	277V
AC CURRENT	1.27A	0.73A	0.68A	0.63A	0.53A
AC POWER	152W	151W	150.5W	150W	148W
POWER FACTOR	0.99	0.98	0.97	0.96	0.94
DAISY CHAIN	8	12	14	16	18

DIMENSIONS


Side view



Top view




End view




SPECTRUM GRAPHS

CHANNEL 1 · 100%

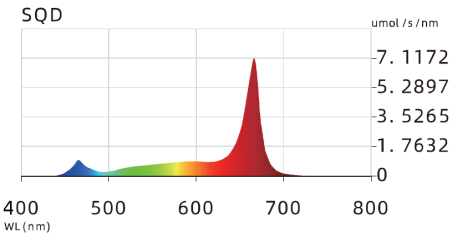


4000K + 660nm Deep Red

CHANNEL 2 · 100%

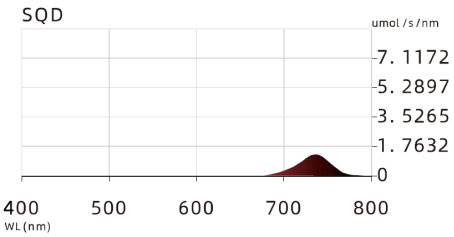

730nm Far Red

ALL CHANNELS · 100%

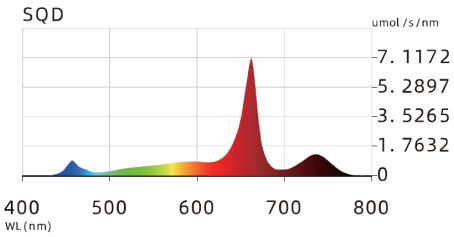

Channels 1 + 2

INSTALLATION AND SAFETY REQUIREMENTS

ZATLA UCL LED lights must be installed on ZATLA light stands or on a stable, nonflammable surface. Maintain at least 6 inches of clearance from all combustible materials, including but not limited to plastic pots, plastic trays, wood, cardboard, ropes and PVC. The fixture must be properly supported and secured to prevent contact with surrounding materials and to reduce stress on cord connections. Failure to follow these installation requirements may result in a fire hazard and will void the limited warranty.