

IPv6 Addressing


Dmytro Zubov, PhD

dmytro.zubov@ucentralasia.org

Naryn, 9:56am, October 30, 2022



Lessons learnt last time

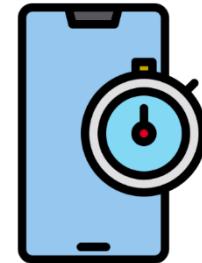

- IPv4 Address Structure: Describe the structure of an IPv4 address including the network portion, the host portion, and the subnet mask
- IPv4 Unicast, Broadcast, and Multicast: Compare the characteristics and uses of the unicast, broadcast and multicast IPv4 addresses
- Types of IPv4 Addresses: Explain public, private, and reserved IPv4 addresses
- Network Segmentation: Explain how subnetting segments a network to enable better communication
- Subnet an IPv4 Network: Calculate IPv4 subnets for a /24 prefix
- VLSM: Variable Length Subnet Mask
- Route Summarization: Route Summarization is basically advertising many routes into one route

What we gonna discuss today?



- IPv4 Issues: Explain the need for IPv6 addressing
- IPv6 Address Representation: Explain how IPv6 addresses are represented
- IPv6 Address Types: Compare types of IPv6 network addresses
- GUA and LLA Static Configuration: Explain how to Configure static global unicast and link-local IPv6 network addresses
- Dynamic Addressing for IPv6 GUAs: Explain how to configure global unicast addresses dynamically
- VLSM (Variable Length Subnet Mask): IPv6 example

IPv4 Issues

- IPv4 Issues

IPv4 Issues



- Need for IPv6
 - IPv4 is running out of addresses. IPv6 is the successor to IPv4. IPv6 has a much larger 128-bit address space.
 - The development of IPv6 also included fixes for IPv4 limitations and other enhancements
 - With an increasing internet population, a limited IPv4 address space, issues with NAT and the IoT, the time has come to begin the transition to IPv6

IPv4 Issues



- IPv4 and IPv6 Coexistence

- Both IPv4 and IPv6 will coexist in the near future and the transition will take several years
- The IETF has created various protocols and tools to help network administrators migrate their networks to IPv6. These migration techniques can be divided into three categories:
 - **Dual stack:** The devices run both IPv4 and IPv6 protocol stacks simultaneously
 - **Tunneling:** A method of transporting an IPv6 packet over an IPv4 network. The IPv6 packet is encapsulated inside an IPv4 packet.
 - **Translation:** Network Address Translation 64 (NAT64) allows IPv6-enabled devices to communicate with IPv4-enabled devices using a translation technique similar to NAT for IPv4

Note: Tunneling and translation are for transitioning to native IPv6 and should only be used where needed. The goal should be native IPv6 communications from source to destination.

IPv6 Address Representation

- IPv6 Address Representation

IPv6 Address Representation



- IPv6 Addressing Formats

- IPv6 addresses are 128 bits in length and written in hexadecimal
- IPv6 addresses are not case-sensitive and can be written in either lowercase or uppercase
- The preferred format for writing an IPv6 address is $x:x:x:x:x:x:x$, with each “x” consisting of four hexadecimal values
- In IPv6, a **hextet** is the unofficial term used to refer to a segment of 16 bits, or four hexadecimal values
- Examples of IPv6 addresses in the preferred format:

2001:0db8:0000:1111:0000:0000:0200

2001:0db8:0000:00a3:abcd:0000:0000:1234

IPv6 Address Representation



- Rule 1 – Omit Leading Zero

- The first rule to help reduce the notation of IPv6 addresses is to omit any leading 0s (zeros). Examples:

- 01ab can be represented as 1ab
 - 0a00 can be represented as a00
 - 00ab can be represented as ab

Note: This rule only applies to leading 0s, NOT to trailing 0s, otherwise the address would be ambiguous

Type	Format
Preferred	2001 : 0 db8 : 0000 : 1111 : 0000 : 0000 : 0000 : 0200
No leading zeros	2001 : db8 : 0 : 1111 : 0 : 0 : 0 : 200

IPv6 Address Representation



- Rule 2 – Double Colon

- A double colon (:) can replace any single, contiguous string of one or more 16-bit hexets consisting of all zeros. Example:

- 2001:db8:cafe:1:0:0:1 (leading 0s omitted) could be represented as 2001:db8:cafe:1::1

Note: The double colon (:) can only be used once within an address, otherwise there would be more than one possible resulting address

Type	Format
Preferred	2001 : 0db8 : 0000 : 1111 : 0000 : 0000 : 0000 : 0200
Compressed	2001:db8:0:1111::200

IPv6 Address Types

- IPv6 Address Types

IPv6 Address Types




- Unicast, Multicast, Anycast
 - There are three broad categories of IPv6 addresses:
 - **Unicast:** Unicast uniquely identifies an interface on an IPv6-enabled device
 - **Multicast:** Multicast is used to send a single IPv6 packet to multiple destinations
 - **Anycast:** This is any IPv6 unicast address that can be assigned to multiple devices. A packet sent to an anycast address is routed to the nearest device having that address.

Note: Unlike IPv4, IPv6 does not have a broadcast address. However, there is an IPv6 all-nodes multicast address that essentially gives the same result.

IPv6 Address Types

- IPv6 Prefix Length

- Prefix length is represented in slash notation and is used to indicate the network portion of an IPv6 address
- The IPv6 prefix length can range from 0 to 128. The recommended IPv6 prefix length for LANs and most other types of networks is /64

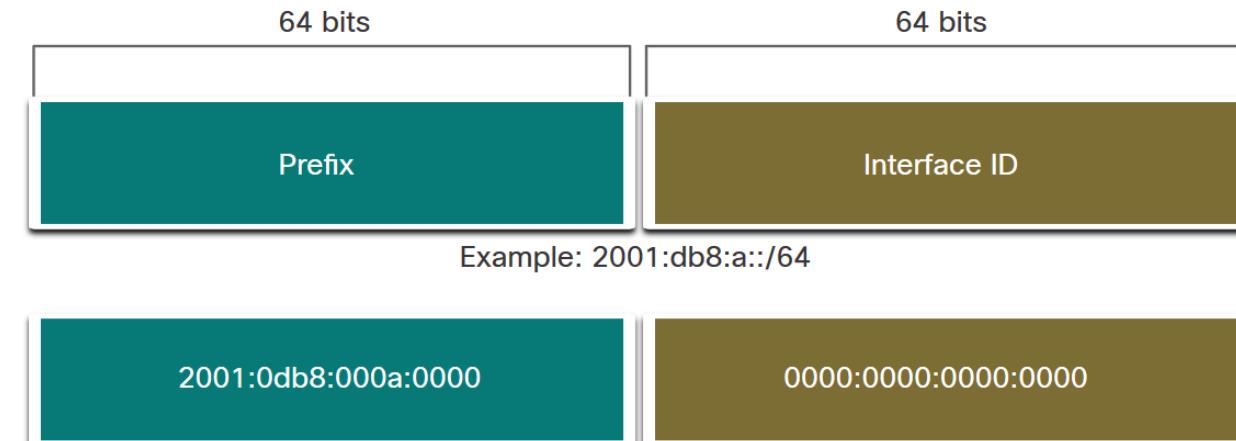

Note: It is strongly recommended to use a 64-bit Interface ID for most networks. This is because stateless address autoconfiguration (SLAAC) uses 64 bits for the Interface ID. It also makes subnetting easier to create and manage.


IPv6 Address Types

- Types of IPv6 Unicast Addresses

- Unlike IPv4 devices that have only a single address, IPv6 addresses typically have two unicast addresses:

- **Global Unicast Address (GUA):** This is similar to a public IPv4 address. These are globally unique, Internet-routable addresses.

- **Link-local Address (LLA):** Required for every IPv6-enabled device and used to communicate with other devices on the same local link. LLAs are not routable and are confined to a single link.

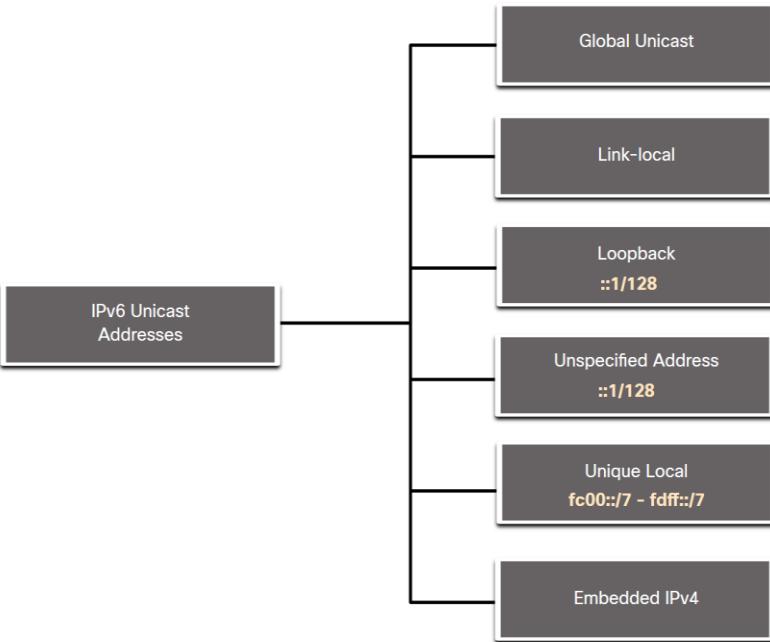

IPv6 Address Types



- A Note About the Unique Local Address (ULA)
 - The IPv6 unique local addresses (range fc00::/7 to fdff::/7) have some similarity to RFC 1918 private addresses for IPv4, but there are significant differences:
 - Unique local addresses are used for local addressing within a site or between a limited number of sites
 - Unique local addresses can be used for devices that will never need to access another network
 - Unique local addresses are not globally routed or translated to a global IPv6 address


Note: Many sites use the private nature of RFC 1918 addresses to attempt to secure or hide their network from potential security risks. This was never the intended use of ULAs.

IPv6 Address Types

- IPv6 GUA

- IPv6 global unicast addresses (GUAs) are globally unique and routable on the IPv6 internet

- Currently, only GUAs with the first three bits of 001 or 2000::/3 are being assigned
- Currently available GUAs begins with a decimal 2 or a 3 (This is only 1/8th of the total available IPv6 address space)

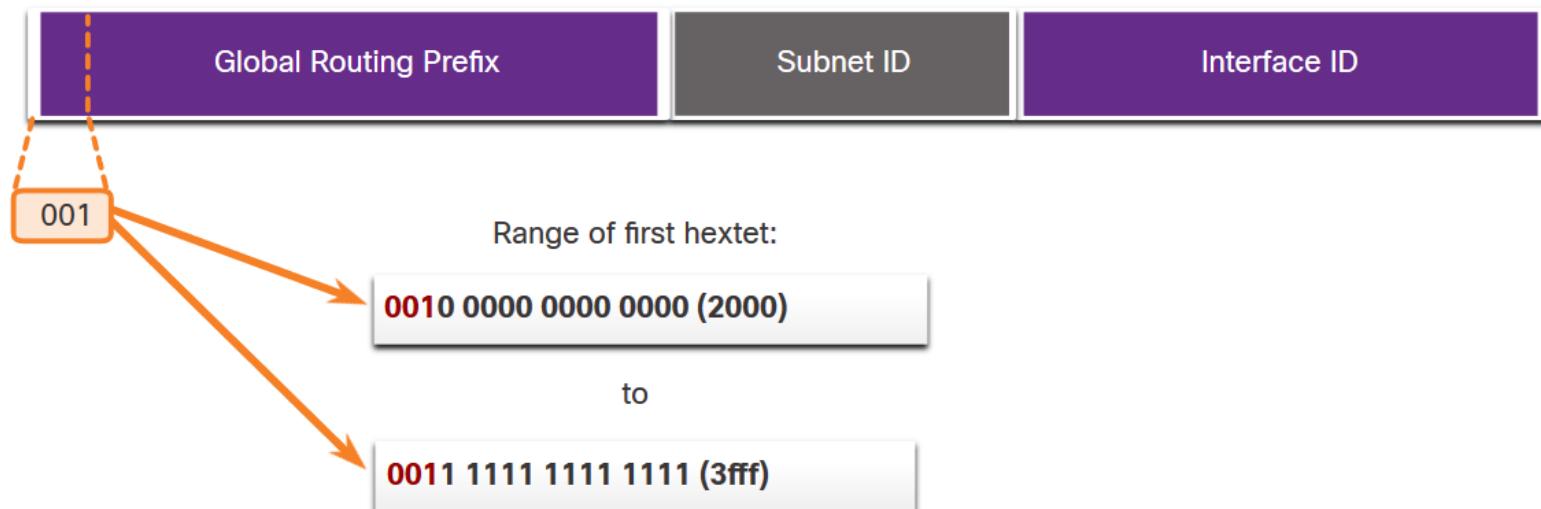

IPv6 Address Types



- IPv6 GUA (global unicast address) Structure

- Global Routing Prefix:

- The global routing prefix is the prefix, or network, portion of the address that is assigned by the provider, such as an ISP, to a customer or site. The global routing prefix will vary depending on ISP policies.

- Subnet ID:

- The Subnet ID field is the area between the Global Routing Prefix and the Interface ID. The Subnet ID is used by an organization to identify subnets within its site.

- Interface ID:


- The IPv6 interface ID is equivalent to the host portion of an IPv4 address. It is strongly recommended that in most cases /64 subnets should be used, which creates a 64-bit interface ID.

IPv6 Address Types

- IPv6 LLA

- An IPv6 link-local address (LLA) enables a device to communicate with other IPv6-enabled devices on the same link and only on that link (subnet):

- Packets with a source or destination LLA cannot be routed
- Every IPv6-enabled network interface must have an LLA
- If an LLA is not configured manually on an interface, the device will automatically create one
- IPv6 LLAs are in the fe80::/10 range

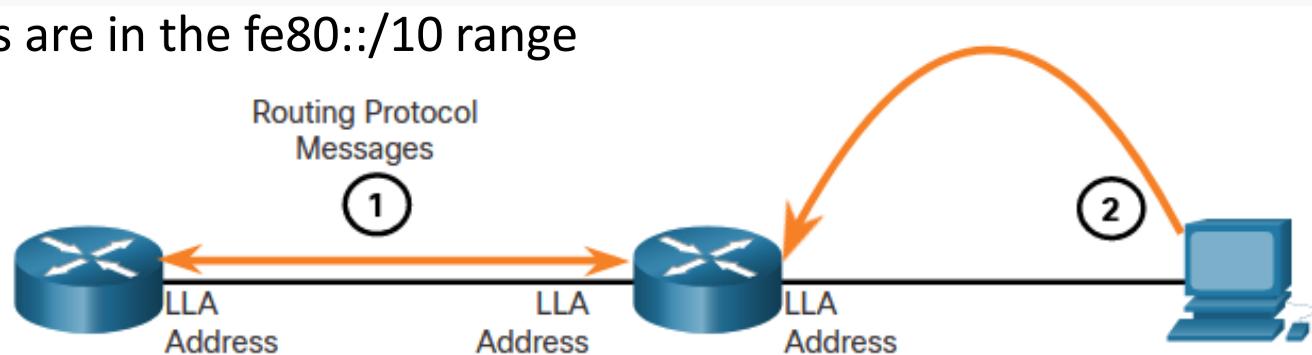

1. Routers use the LLA of neighbor routers to send routing updates.

2. Hosts use the LLA of a local router as the default-gateway.

GUA and LLA Static Configuration

- GUA and LLA Static Configuration

Static GUA Configuration on a Router



- Determining the Network: Logical AND
 - Most IPv6 configuration and verification commands in the Cisco IOS are similar to their IPv4 counterparts. In many cases, the only difference is the use of **ipv6** in place of **ip** within the commands.
 - The command to configure an IPv6 GUA on an interface is:
ipv6 address ipv6-address/prefix-length
 - The example shows commands to configure a GUA on the G0/0/0 interface on R1:


```
R1(config)# interface gigabitethernet 0/0/0
R1(config-if)# ipv6 address 2001:db8:acad:1::1/64
R1(config-if)# no shutdown
R1(config-if)# exit
```

GUA and LLA Static Configuration

- Static GUA Configuration on a Windows Host

- Manually configuring the IPv6 address on a host is similar to configuring an IPv4 address
- The GUA or LLA of the router interface can be used as the default gateway. Best practice is to use the LLA.

Note: When DHCPv6 or SLAAC is used, the LLA of the router will automatically be specified as the default gateway address.

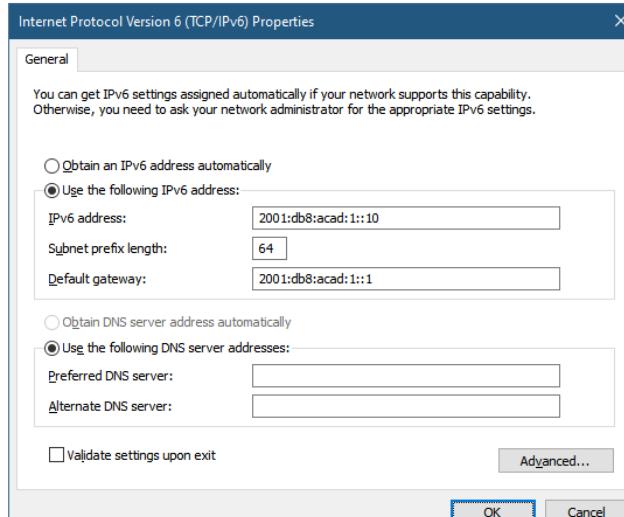

GUA and LLA Static Configuration



- Static GUA Configuration of a Link-Local Unicast Address

- Configuring the LLA manually lets us create an address that is recognizable and easier to remember
- LLAs can be configured manually using the command:
ipv6 address *ipv6-link-local-address* link-local
- The example shows commands to configure a LLA on the G0/0/0 interface on R1

```
R1 (config)# interface gigabitethernet 0/0/0
R1 (config-if)# ipv6 address fe80::1:1 link-local
R1 (config-if)# no shutdown
R1 (config-if)# exit
```

Note: The same LLA can be configured on each link as long as it is unique on that link. Common practice is to create a different LLA on each interface of the router to make it easy to identify the router and the specific interface.

Dynamic Addressing for IPv6 GUAs

- Dynamic Addressing for IPv6 GUAs


Dynamic Addressing for IPv6 GUAs



- RS (Router Solicitation) and RA (Router Advertisement) Messages
 - Devices obtain GUAs dynamically through Internet Control Message Protocol version 6 (ICMPv6) messages
 - Router Solicitation (RS) messages are sent by host devices to discover IPv6 routers
 - Router Advertisement (RA) messages are sent by routers to inform hosts on how to obtain an IPv6 GUA and provide useful network information such as:
 - Network prefix and prefix length
 - Default gateway address
 - DNS addresses and domain name
 - The RA can provide three methods for configuring an IPv6 GUA: SLAAC, SLAAC with stateless DHCPv6 server, Stateful DHCPv6 (no SLAAC)

Dynamic Addressing for IPv6 GUAs


- Method 1: SLAAC (Stateless Address AutoConfiguration)
 - SLAAC allows a device to configure a GUA without the services of DHCPv6
 - Devices obtain the necessary information to configure a GUA from the ICMPv6 RA (Router Advertisement) messages of the local router
 - The prefix is provided by the RA and the device uses either the EUI-64 or random generation method to create an interface ID

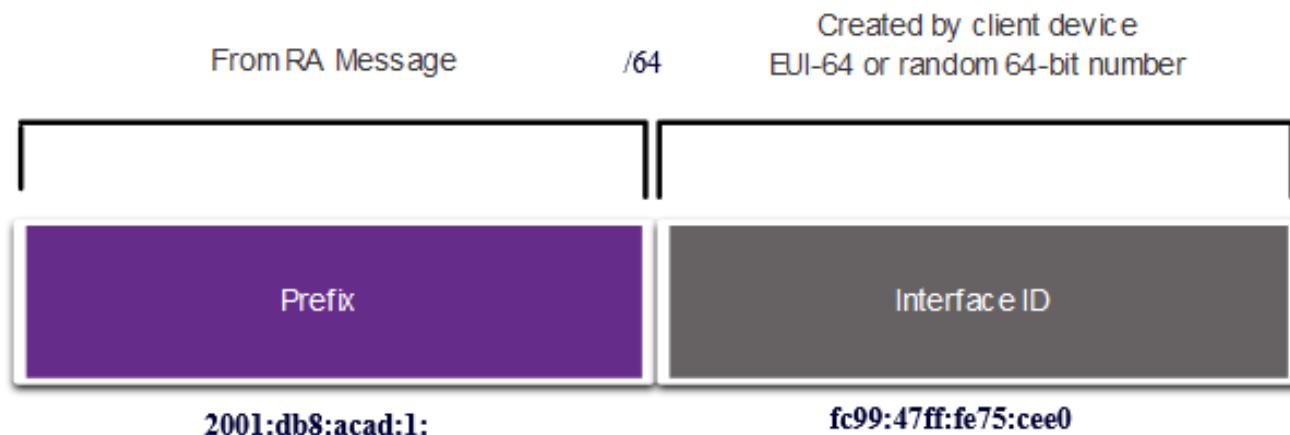

Dynamic Addressing for IPv6 GUAs

- Understanding IPv6 EUI-64 Bit Address


- Extended Unique Identifier (EUI), as per RFC2373, allows a host to assign itself a unique 64-Bit IPv6 interface identifier (EUI-64). This feature is a key benefit over IPv4 as it eliminates the need of manual configuration or DHCP as in the world of IPv4. The IPv6 EUI-64 format address is obtained through the 48-bit MAC address. The MAC address is first separated into two 24-bits, with one being OUI (Organizationally Unique Identifier) and the other being NIC specific. The 16-bit 0xFFE is then inserted between these two 24-bits for the 64-bit EUI address. IEEE has chosen FFFE as a reserved value which can only appear in EUI-64 generated from an EUI-48 MAC address.

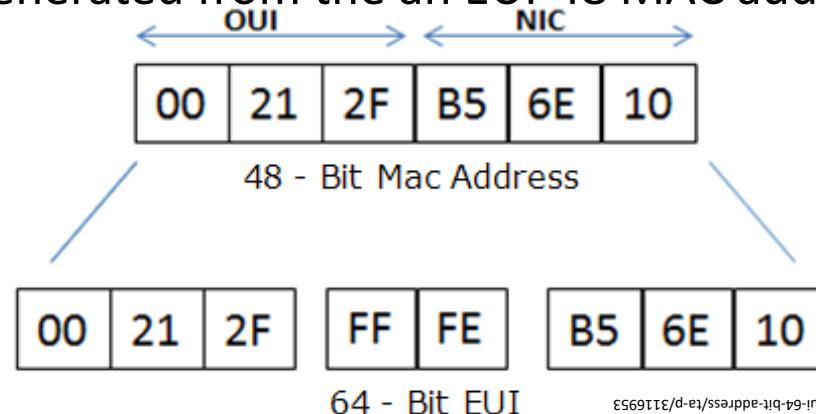

Dynamic Addressing for IPv6 GUAs

- Understanding IPv6 EUI-64 Bit Address (cont.)

- Next, the 7th bit from the left, or the universal/local (U/L) bit, needs to be inverted. This bit identifies whether this interface identifier is universally or locally administered. If 0, the address is locally administered, and if 1, the address is globally unique. It is worth noticing that in the OUI portion, the globally unique addresses assigned by the IEEE, 7th bit has always been set to 0 whereas the locally created addresses has 1 configured. Therefore, when the bit is inverted, it maintains its original scope (global unique address is still global unique and vice versa).

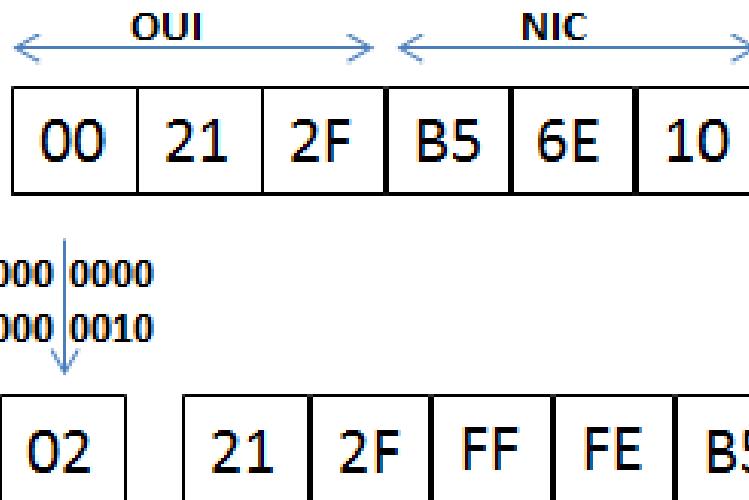

Dynamic Addressing for IPv6 GUAs



- Understanding IPv6 EUI-64 Bit Address (cont.)


```
Rack1R1#sh int gig 0/0
GigabitEthernet0/0 is up, line protocol is up
  Hardware is BCM1125 Internal MAC, address is 001f.9efc.7ad0 (bia
001f.9efc.7ad0)
  MTU 1500 bytes, BW 1000000 Kbit/sec, DLY 10 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
```

```
Rack1R1#sh ipv6 int gig 0/0
GigabitEthernet0/0 is up, line protocol is up
  IPv6 is enabled, link-local address is FE80::21F:9EFF:FEFC:7AD0
  No Virtual link-local address(es):
  Global unicast address(es):
    2012:ABC::21F:9EFF:FEFC:7AD0, subnet is 2012:ABC::/64 [EUI]
```

Dynamic Addressing for IPv6 GUAs

- Method 2: SLAAC and Stateless DHCP


- An RA can instruct a device to use both SLAAC and stateless DHCPv6
- The RA message suggests devices use the following:
 - ° SLAAC to create its own IPv6 GUA
 - ° The router LLA, which is the RA source IPv6 address, as the default gateway address
 - ° A stateless DHCPv6 server to obtain other information such as a DNS server address and a domain name

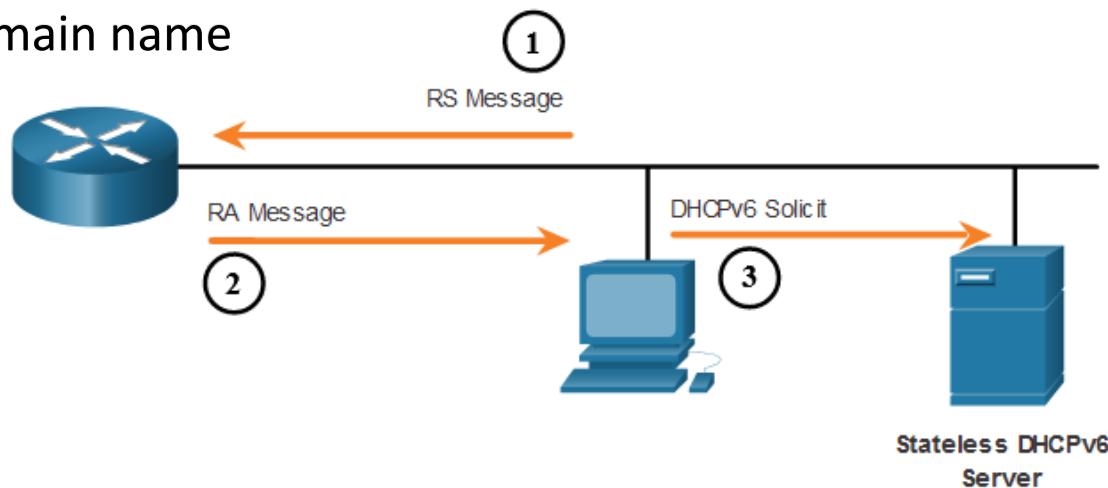

Dynamic Addressing for IPv6 GUAs


- Method 3: Stateful DHCPv6

- An RA can instruct a device to use stateful DHCPv6 only
- Stateful DHCPv6 is similar to DHCP for IPv4. A device can automatically receive a GUA, prefix length, and the addresses of DNS servers from a stateful DHCPv6 server.
- The RA message suggests devices use the following:
 - ° The router LLA, which is the RA source IPv6 address, for the default gateway address
 - ° A stateful DHCPv6 server to obtain a GUA, DNS server address, domain name and other necessary information

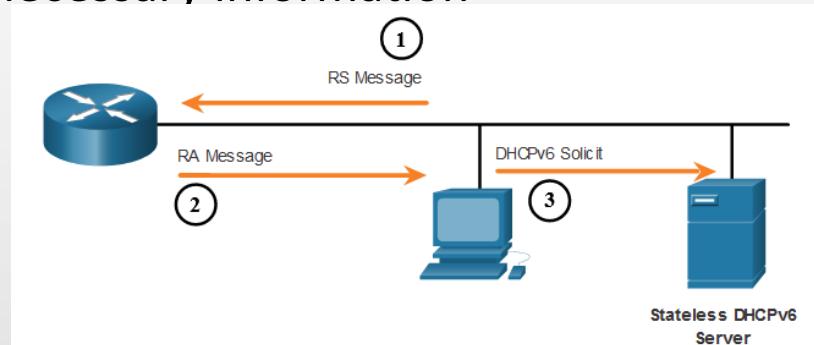

Dynamic Addressing for IPv6 GUAs

- EUI-64 Process vs. Randomly Generated
 - When the RA message is either SLAAC or SLAAC with stateless DHCPv6, the client must generate its own interface ID
 - The interface ID can be created using the EUI-64 process or a randomly generated 64-bit number

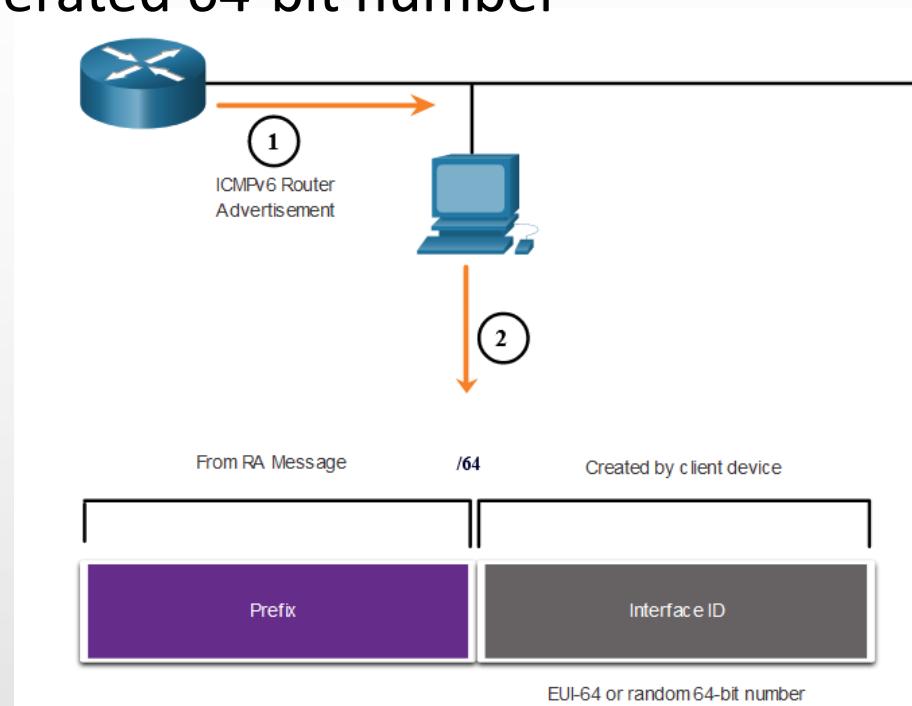

Dynamic Addressing for IPv6 GUAs

- Randomly Generated Interface IDs
 - Depending upon the operating system, a device may use a randomly generated interface ID instead of using the MAC address and the EUI-64 process
 - **Beginning with Windows Vista, Windows uses a randomly generated interface ID instead of one created with EUI-64**

```
C:\> ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IPv6 Address . . . . . : 2001:db8:acad:1:50a5:8a35:a5bb:66e1
Link-local IPv6 Address . . . . : fe80::50a5:8a35:a5bb:66e1
Default Gateway . . . . . : fe80::1
C:\>
```

Note: To ensure the uniqueness of any IPv6 unicast address, the client may use a process known as Duplicate Address Detection (DAD). This is similar to an ARP request for its own address. If there is no reply, then the address is unique.


Dynamic Addressing for IPv6 LLAs

- Dynamic Addressing for IPv6 LLAs

Dynamic Addressing for IPv6 LLAs

- Dynamic LLAs

- All IPv6 interfaces must have an IPv6 LLA
- Like IPv6 GUAs, LLAs can be configured dynamically
- The figure shows the LLA is dynamically created using the fe80::/10 prefix and the interface ID using the EUI-64 process, or a randomly generated 64-bit number

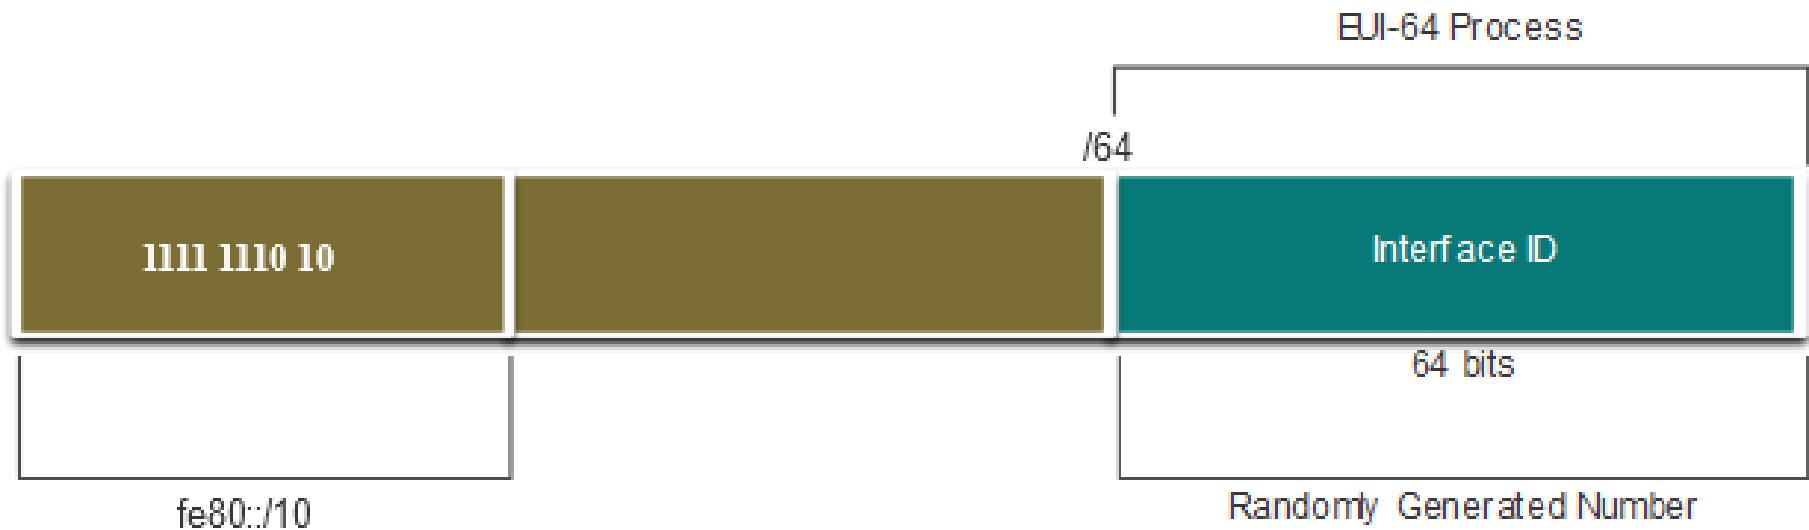

Dynamic Addressing for IPv6 LLAs

- Dynamic LLAs on Windows

- Operating systems, such as Windows, will typically use the same method for both a SLAAC-created GUA and a dynamically assigned LLA

EUI-64 Generated Interface ID:

```
C:\> ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IPv6 Address. . . . . : 2001:db8:acad:1:fc99:47ff:fe75:cee0
Link-local IPv6 Address . . . . : fe80::fc99:47ff:fe75:cee0
Default Gateway . . . . . : fe80::1
C:\>
```

Random 64-bit Generated Interface ID:

```
C:\> ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IPv6 Address. . . . . : 2001:db8:acad:1:50a5:8a35:a5bb:66e1
Link-local IPv6 Address . . . . : fe80::50a5:8a35:a5bb:66e1
Default Gateway . . . . . : fe80::1
C:\>
```

Dynamic Addressing for IPv6 LLAs



- Dynamic LLAs on Cisco Routers

- Cisco routers automatically create an IPv6 LLA whenever a GUA is assigned to the interface. By default, Cisco IOS routers use EUI-64 to generate the interface ID for all LLAs on IPv6 interfaces.
- Here is an example of a LLA dynamically configured on the G0/0/0 interface of R1:

```
R1# show interface gigabitEthernet 0/0/0
GigabitEthernet0/0/0 is up, line protocol is up
Hardware is ISR4221-2x1GE, address is 7079.b392.3640 (bia 7079.b392.3640)
(Output omitted)
R1# show ipv6 interface brief
GigabitEthernet0/0/0 [up/up]
FE80::7279:B3FF:FE92:3640
2001:DB8:ACAD:1::1
```

IPv6 Multicast Addresses

- IPv6 Multicast Addresses

IPv6 Multicast Addresses



- Assigned IPv6 Multicast Addresses
 - IPv6 multicast addresses have the prefix ff00::/8. There are two types of IPv6 multicast addresses:
 - Well-Known multicast addresses
 - Solicited node multicast addresses

Note: Multicast addresses can only be destination addresses and not source addresses.

IPv6 Multicast Addresses



- Determining the Network: Logical AND
 - Well-known IPv6 multicast addresses are assigned and are reserved for predefined groups of devices
 - There are two common IPv6 Assigned multicast groups:
 - **ff02::1 All-nodes multicast group** - This is a multicast group that all IPv6-enabled devices join. A packet sent to this group is received and processed by all IPv6 interfaces on the link or network
 - **ff02::2 All-routers multicast group** - This is a multicast group that all IPv6 routers join. A router becomes a member of this group when it is enabled as an IPv6 router with the **ipv6 unicast-routing** global configuration command

IPv6 Multicast Addresses




- Solicited-Node IPv6 Multicast

- A solicited-node multicast address is similar to the all-nodes multicast address
- A solicited-node multicast address is mapped to a special Ethernet multicast address
- The Ethernet NIC can filter the frame by examining the destination MAC address without sending it to the IPv6 process to see if the device is the intended target of the IPv6 packet

IPv6 Multicast Addresses

- Solicited-Node IPv6 Multicast (cont.)

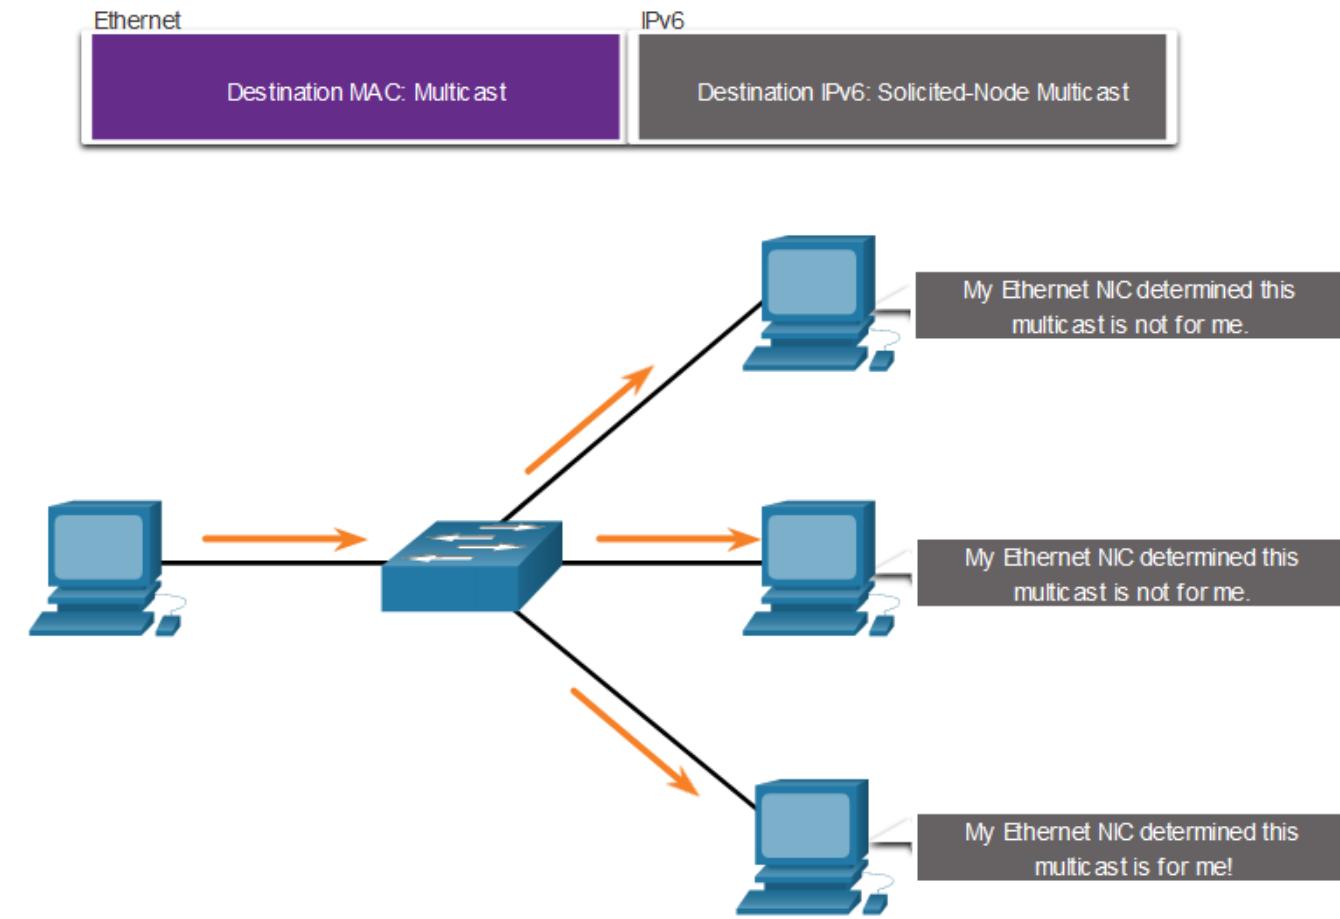


Subnet an IPv6 Network

- Subnet an IPv6 Network

Subnet an IPv6 Network

- Subnet Using the Subnet ID

- IPv6 was designed with subnetting in mind
 - A separate subnet ID field in the IPv6 GUA is used to create subnets
 - The subnet ID field is the area between the Global Routing Prefix and the interface ID

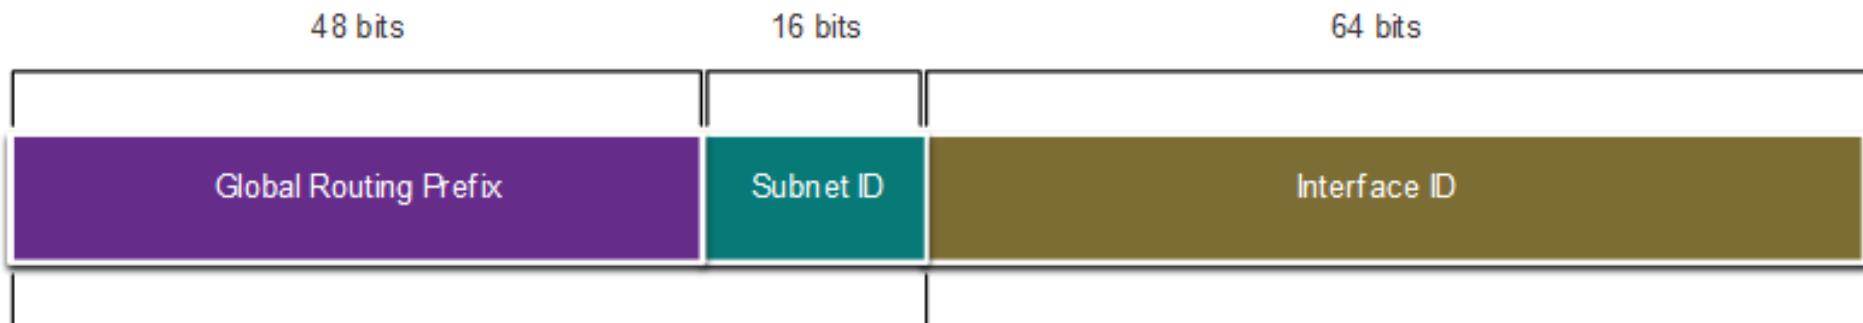

A /48 routing prefix + 16 bit Subnet ID = /64 prefix

Subnet an IPv6 Network

• IPv6 Subnetting Example

- Given the
2001:db8:acad::/48
global routing prefix
with a 16-bit subnet ID
 - ° Allows 65,536 /64 subnets
 - ° The global routing prefix is the same for all subnets
 - ° Only the subnet ID hextet is incremented in hexadecimal for each subnet


Increment subnet ID to create 65,536 subnets

2001:db8:acad:**0000**::/64
2001:db8:acad:**0001**::/64
2001:db8:acad:**0002**::/64
2001:db8:acad:**0003**::/64
2001:db8:acad:**0004**::/64
2001:db8:acad:**0005**::/64
2001:db8:acad:**0006**::/64
2001:db8:acad:**0007**::/64
2001:db8:acad:**0008**::/64
2001:db8:acad:**0009**::/64
2001:db8:acad:**000a**::/64
2001:db8:acad:**000b**::/64
2001:db8:acad:**000c**::/64
Subnets 13 – 65,534 not shown
2001:db8:acad:**ffff**::/64

Subnet an IPv6 Network

● IPv6 Subnet Allocation

- The example topology requires five subnets, one for each LAN as well as for the serial link between R1 and R2
- The five IPv6 subnets were allocated, with the subnet ID field 0001 through 0005. Each /64 subnet will provide more addresses than will ever be needed.

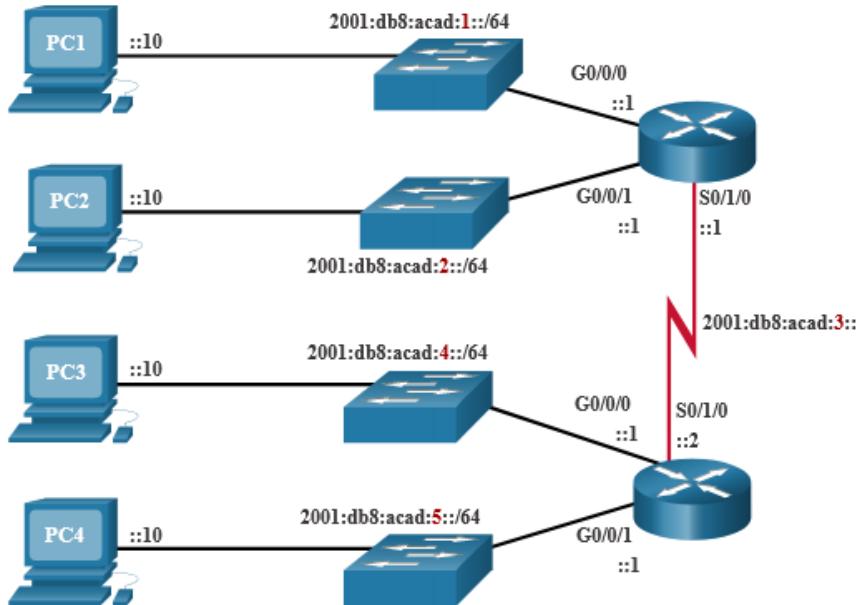

5 subnets allocated from 65,536 available subnets

Address Block	2001:0db8:acad:/48
2001:db8:acad:0000::/64	
2001:db8:acad:0001::/64	
2001:db8:acad:0002::/64	
2001:db8:acad:0003::/64	
2001:db8:acad:0004::/64	
2001:db8:acad:0005::/64	
2001:db8:acad:0006::/64	
2001:db8:acad:0007::/64	
2001:db8:acad:0008::/64	
2001:db8:acad:ffff::/64	

Subnet an IPv6 Network



- Router Configured with IPv6 Subnets

- The example shows that each of the router interfaces on R1 has been configured to be on a different IPv6 subnet

```
R1(config)# interface gigabitethernet 0/0/0
R1(config-if)# ipv6 address 2001:db8:acad:1::1/64
R1(config-if)# no shutdown
R1(config-if)# exit
R1(config)# interface gigabitethernet 0/0/1
R1(config-if)# ipv6 address 2001:db8:acad:2::1/64
R1(config-if)# no shutdown
R1(config-if)# exit
R1(config)# interface serial 0/1/0
R1(config-if)# ipv6 address 2001:db8:acad:3::1/64
R1(config-if)# no shutdown
```

VLSM (Variable Length Subnet Mask): IPv6 example

- VLSM (Variable Length Subnet Mask): IPv6 example

VLSM (Variable Length Subnet Mask): IPv6 example

- VLSM: IPv6 example

- You design a network with three subnets A (100 hosts), B (200 hosts), and C (17 hosts). The network address of the largest network is FC00:::

- Descending sort of networks and finding prefixes:

- B (200 hosts): /120 ($2^8=256$)

- A (100 hosts): /121 ($2^7=128$)

- C (17 hosts): /123 ($2^5-2=30$)

Network B:	<u>FC00::0000000000000000</u>	Network address (FC00::) – 1 st usable address
	<u>FC00::0000000011111111</u>	Last usable address (FC::FF)

Do you have any
questions or
comments?





Thank you
for your attention !

In this presentation:

- Some icons were downloaded from flaticon.com and iconscount.com