

Dynamic Transition Analysis with TIMES: I²CNER Initiative on Challenges in Energy Assessment and Energy Transitions

Anshuman Chaube, James Stubbins, **Kathryn Huff**

University of Illinois at Urbana-Champaign, Department of Nuclear, Plasma, and Radiological Engineering, Urbana, IL 61801

Objectives

- Evaluate potential impact of novel energy technologies within Japan's energy system. Specifically:
- Guide practical near term (2010-2050) transition strategies.
 - Minimize carbon emissions within realistic constraints.
 - Identify high impact technologies.
 - Assess role of technology readiness.
 - Predict impediments to strategically optimal technology deployment.
 - Identify ideal timelines for energy system deployment, infrastructure development, high impact R&D investment.

Introduction

Previous work has compared the impact of innovative energy technologies in various world regions using **static** scenario analyses [1, 2, 4, 5, 7, 8]. We will simulate **dynamic** transition scenarios [3, 9] aimed at minimizing carbon emissions in Japan by 2050. These scenarios will include realistic constraints regarding technology readiness (in terms of generation, transmission & storage) and will combine multiple technologies in a single heterogeneous system model.

Methodology

The Integrated MARKAL-EFOM System (TIMES) model generator [6] [10] optimizes energy systems using linear and mixed-linear algorithms. A user-defined objective function (such as minimizing carbon emissions or costs) is solve within user defined constraints such as energy generation demand.

Anticipated Results

- Analysis results can be filtered by sector (commercial, industrial, residential, building etc) or by region.
- Many metrics are automatically postprocessed- such as energy intensity, thermal energy efficiency, transmission capacity.
- Technology deployment transitions driven by constrained optimization will have valuable strategic value.

Impact

- Results will:
- Optimize realistic decarbonization roadmaps.
 - Identify potential transition bottlenecks.
 - Help Japan's policymakers create timelines for R&D investment and infrastructure development.
 - Quantify system sensitivity to technology readiness.

Challenges

Reliable data for each technology's deployment and operation is required, such as:

Summary

- Dynamic simulation of Japan's energy system in TIMES model generator using a heterogeneous model and realistic constraints will help develop near-term decarbonization strategies.
- Policymakers will benefit from identification of high impact technologies, and creation of R&D investment and infrastructure development timelines.
- Simulations will quantify system sensitivity to technology readiness, and also account for secondary scenarios where decarbonization is not the main priority.

References

- [1] K. Chyong Chi, W. J. Nuttall, and D. M. Reiner. Dynamics of the UK natural gas industry: System dynamics modelling and long-term energy policy analysis. *Technological Forecasting and Social Change*, 76(3):339–357, Mar. 2009.
- [2] Y. Y. Feng, S. Q. Chen, and L. X. Zhang. System dynamics modeling for urban energy consumption and CO₂ emissions: A case study of Beijing, China. *Ecological Modelling*, 252(Supplement C):44–52, Mar. 2013.
- [3] S. Jebaraj and S. Iniyan. A review of energy models. *Renewable and Sustainable Energy Reviews*, 10(4):281–311, Aug. 2006.
- [4] Y. Kikuchi. Simulation-Based Approaches for Design of Smart Energy System: A Review Applying Bibliometric Analysis. *Journal of Chemical Engineering of Japan*, 50(6):385–396, 2017.
- [5] L. Li, C. Chen, S. Xie, C. Huang, Z. Cheng, H. Wang, Y. Wang, H. Huang, J. Lu, and S. Dhakal. Energy demand and carbon emissions under different development scenarios for Shanghai, China. *Energy Policy*, 38(9):4797–4807, Sept. 2010.
- [6] R. Loulou, U. Remme, A. Kanudia, A. Lehtila, and G. Goldstein. Documentation for the TIMES Model Part II. *Energy technology systems analysis programme (ETSAP)*, 2005.
- [7] N. A. Pambudi, K. Itaoka, A. Kurosawa, and N. Yamakawa. Impact of Hydrogen fuel for CO₂ Emission Reduction in Power Generation Sector in Japan. *Energy Procedia*, 105(Supplement C):3075–3082, May 2017.
- [8] N. A. Pambudi, K. Itaoka, N. Yamakawa, and A. Kurosawa. Future Japan power generation sector by introducing hydrogen plant with 80% CO₂ emission reduction target: A preliminary analysis. In *Sustainable Energy Engineering and Application (ICSEEA)*, 2016 International Conference on, pages 66–69. IEEE, 2016.
- [9] S. Pfenniger, A. Hawkes, and J. Keirstead. Energy systems modeling for twenty-first century energy challenges. *Renewable and Sustainable Energy Reviews*, 33(Supplement C):74–86, May 2014.
- [10] A. J. Seebregts, G. A. Goldstein, and K. Smekens. Energy/Environmental Modeling with the MARKAL Family of Models. In *Operations Research Proceedings 2001*, Operations Research Proceedings 2001, pages 75–82. Springer, Berlin, Heidelberg, 2002. DOI: 10.1007/978-3-642-50282-8_10.

Contact Information

- Web: arfc.github.io
- Email: kdhuff@illinois.edu

Acknowledgements

This research is being performed using funding received from the International Institute for Carbon Neutral Energy Research (I²CNER) Initiative on Challenges in Energy Assessment and Energy Transitions at the University of Illinois under Director Petros Sofronis.

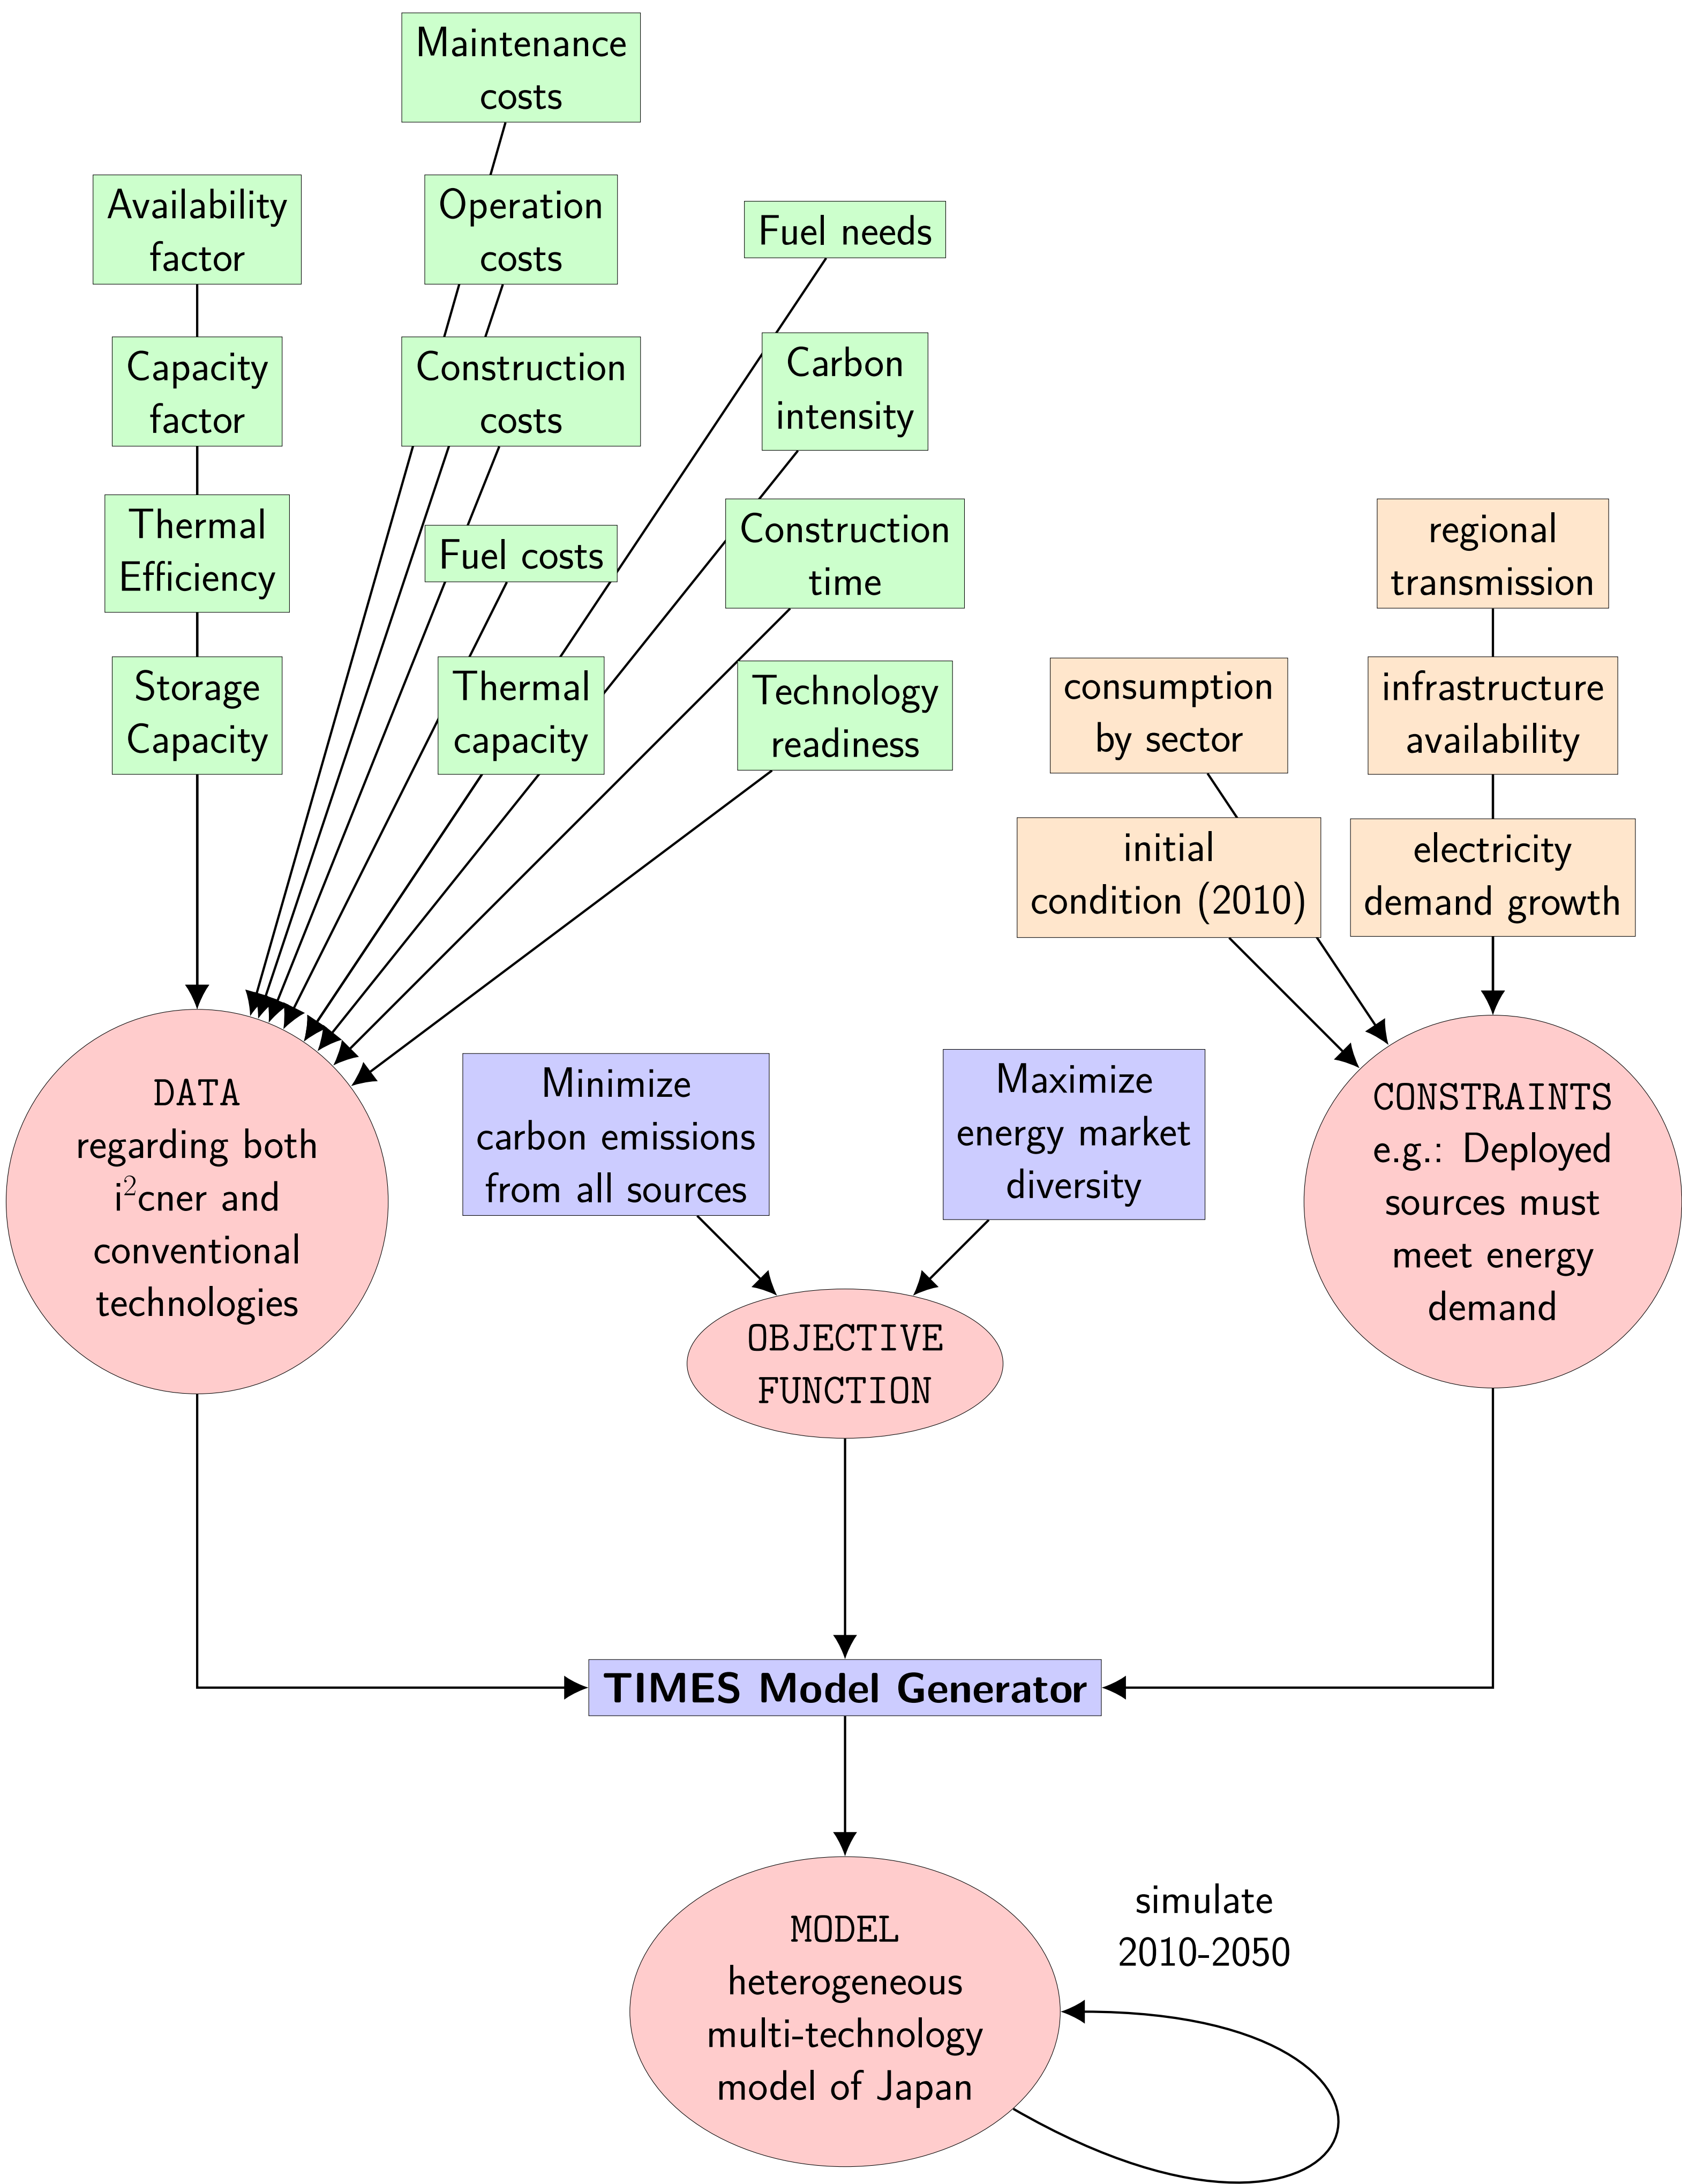


Figure: Basic methodology for dynamic simulation of Japan's energy system.