




Internet Protocol

Complete Course on Computer Networks - Part I

Ravindrababu RAVULA • Lesson 8 • Jan 26, 2021

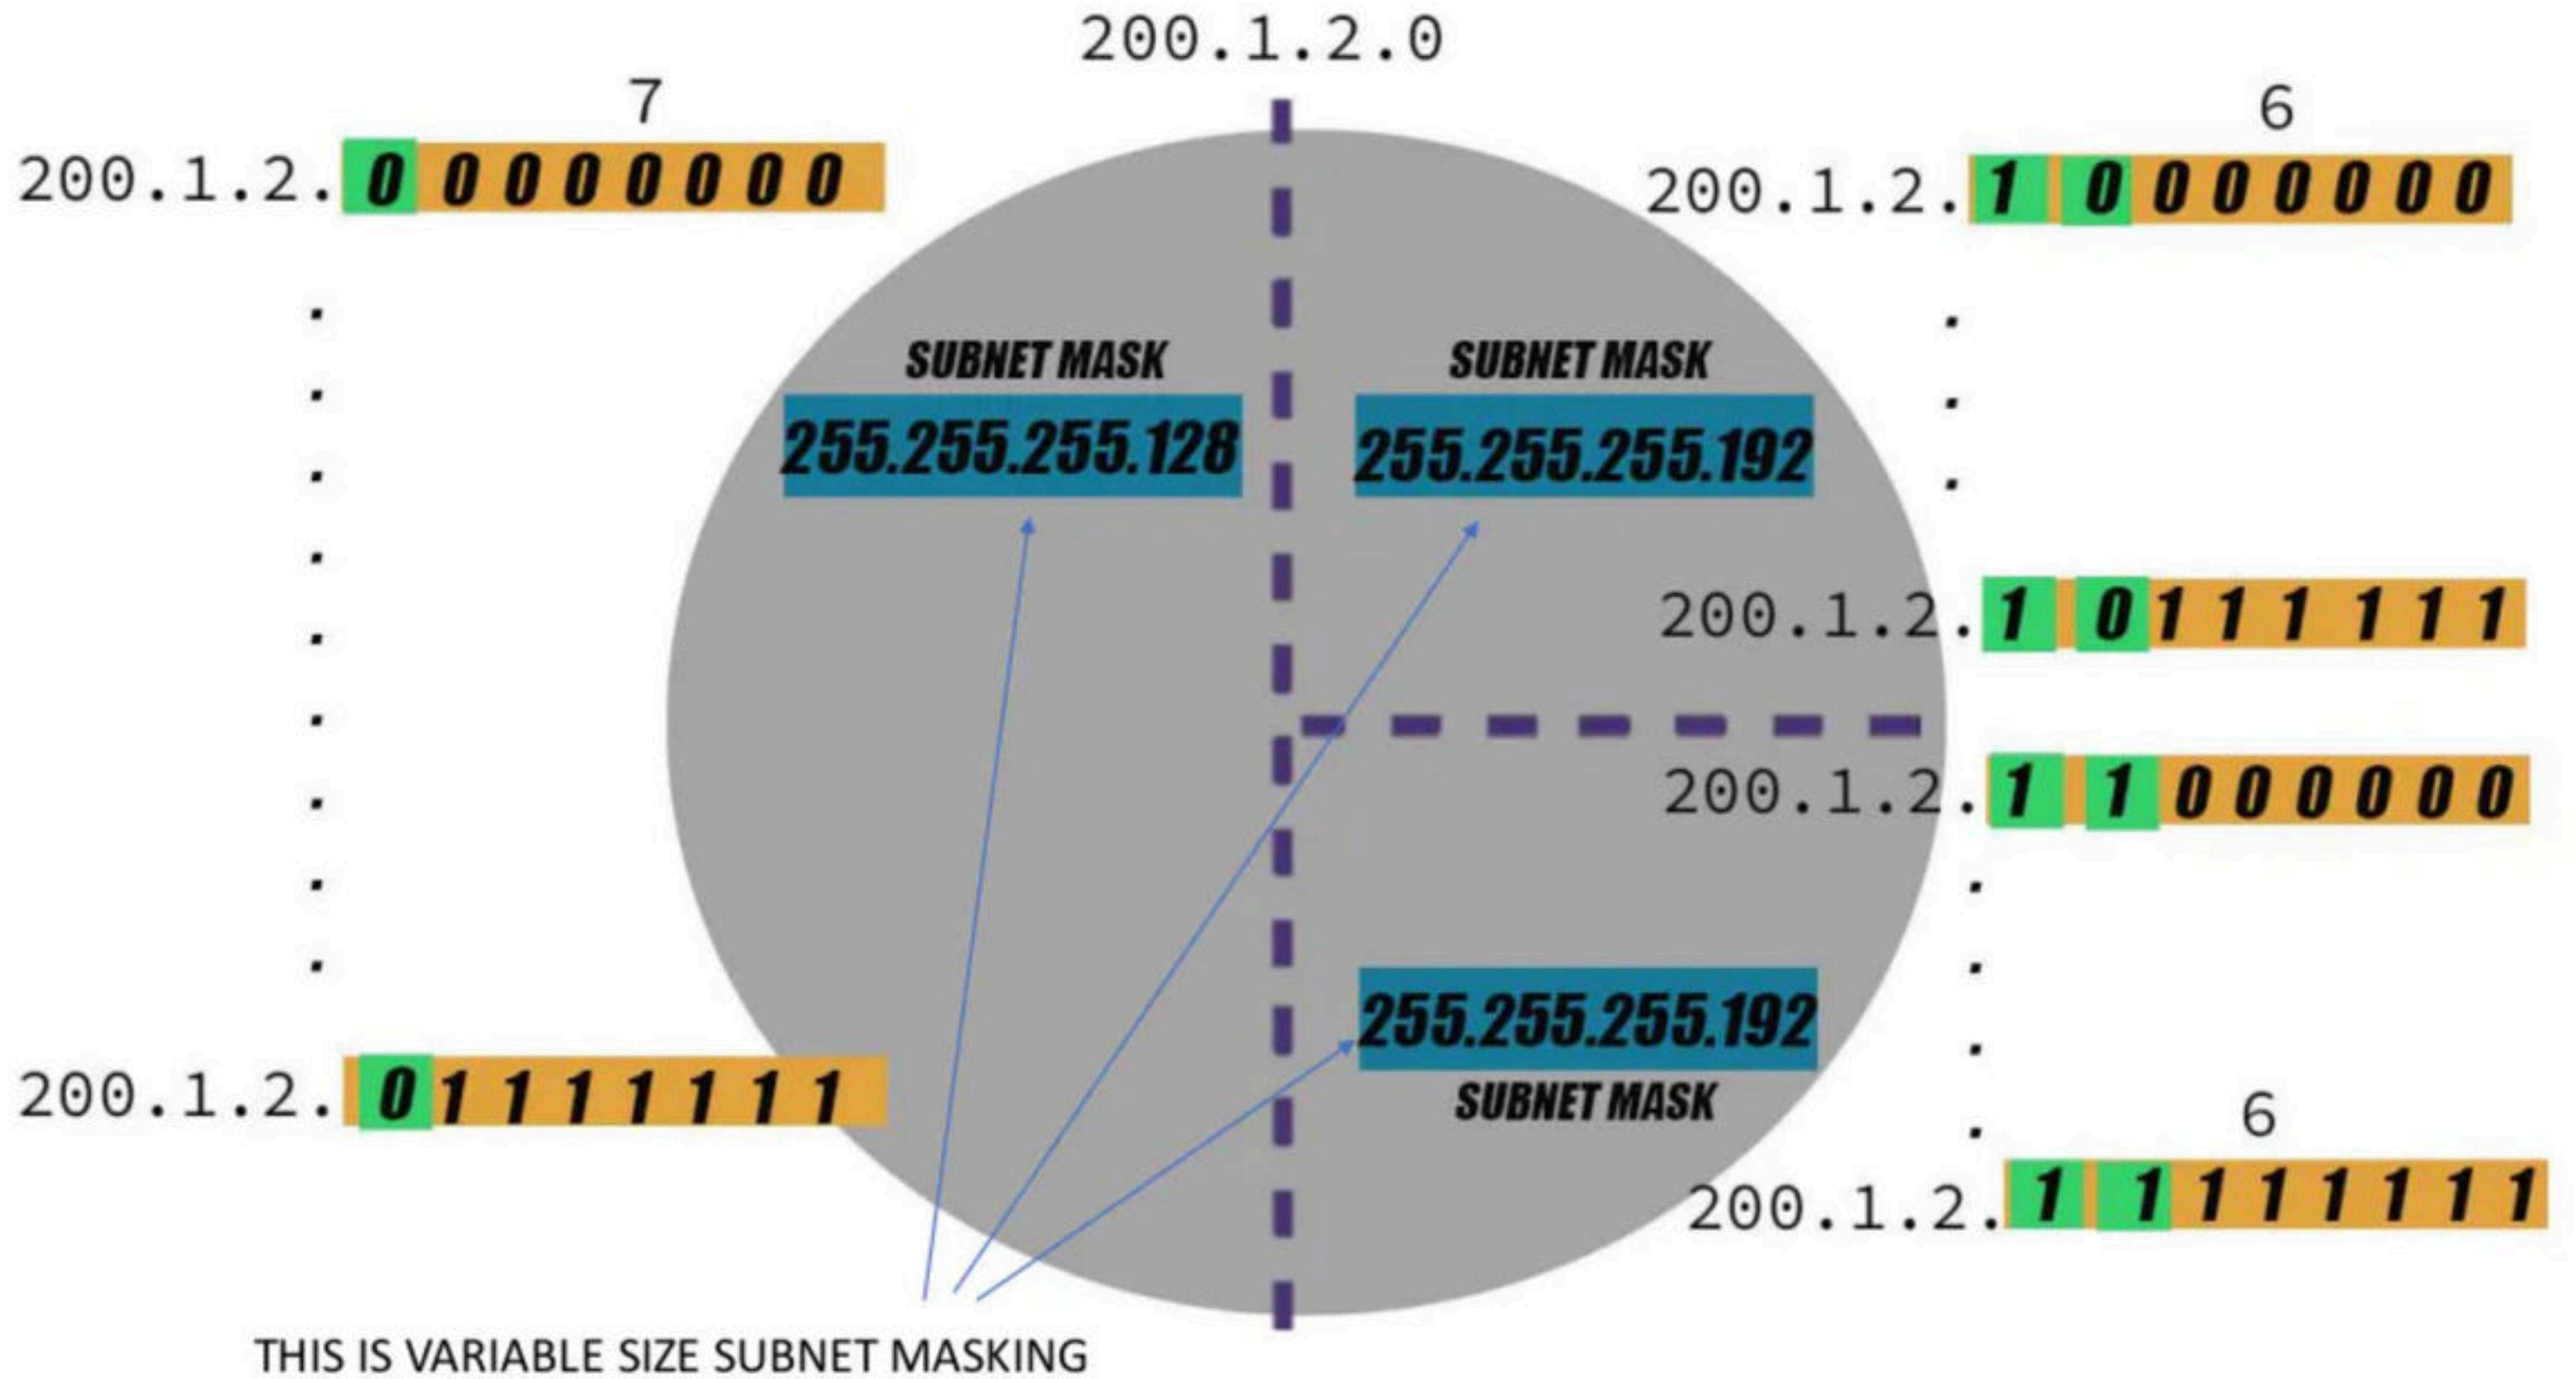

200.1.2.0

00

A: $24+2=26$

255.255.255.192

B: $24+3=27$

255.255.255.224

C: $24+4=28$

255.255.255.240

D: --- 0_10

E: $24+1=25$
255.255.255.128



A: $200.1.2.0 - \underline{\quad} \underline{\quad} \underline{\quad} \underline{\quad}$

i i i i i

B: $200.1.2.0 - \underline{\quad} \underline{\quad} \underline{\quad} \underline{\quad}$

64
31
95

C: $200.1.2.0110 - \underline{\quad} \underline{\quad} \underline{\quad}$



64
32
96
15

D: $200.1.2.0111 - \underline{\quad} \underline{\quad} \underline{\quad}$

64
32
16
15

E: $200.1.2.1 - \underline{\quad} \underline{\quad} \underline{\quad} \underline{\quad}$

i i i i i

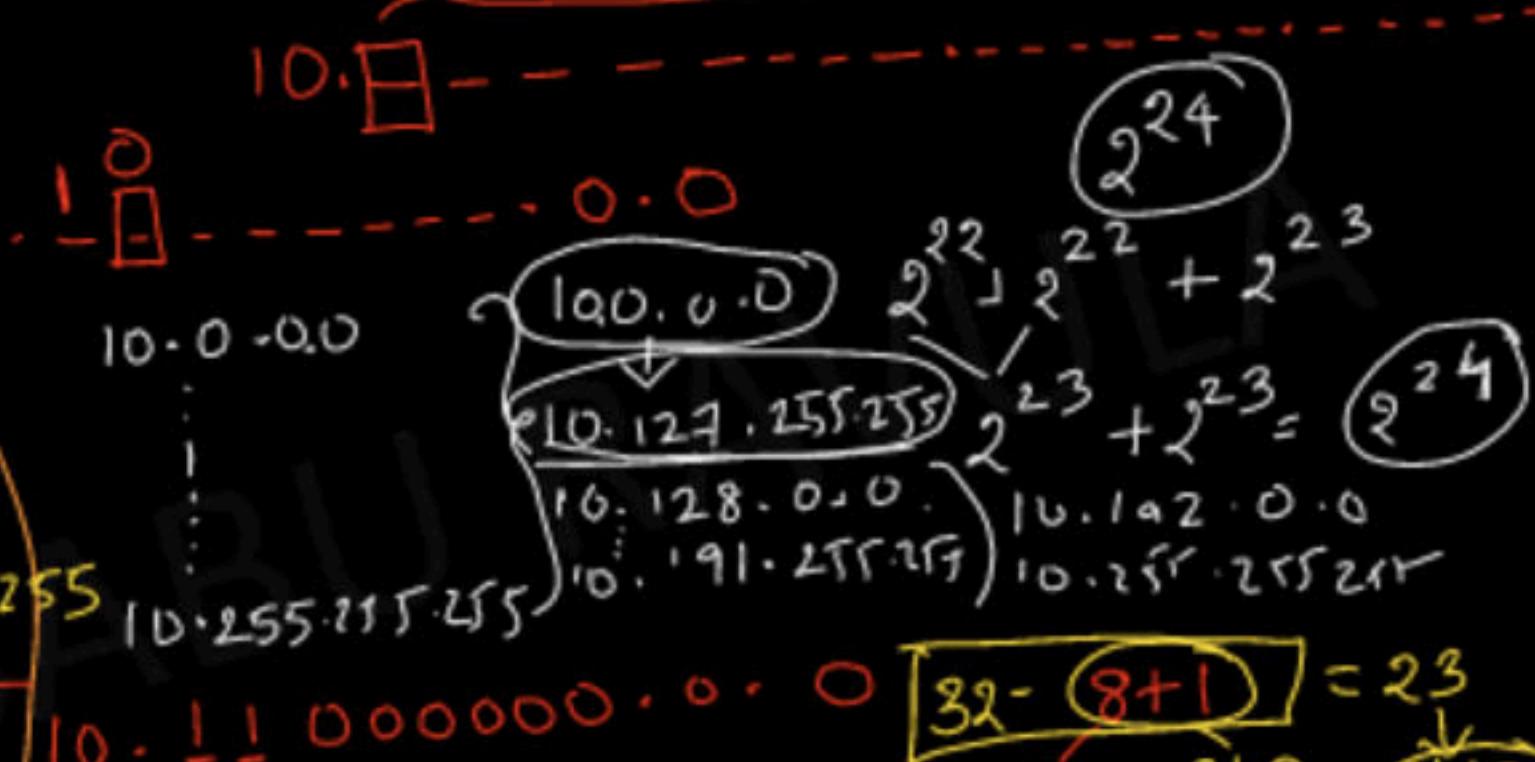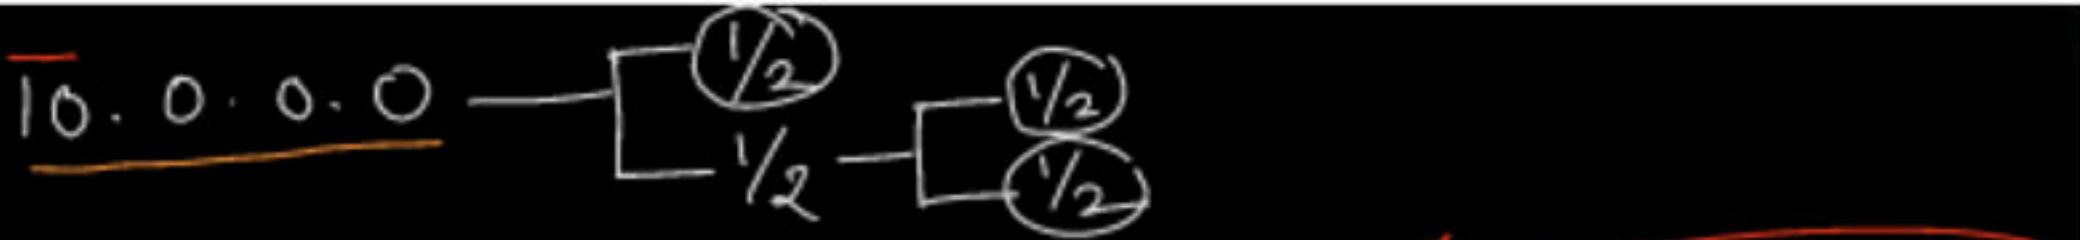


(A) \rightarrow 10.0-----0.0 → 10.0111111.1111111111111111


(B) \rightarrow 10.10-----000000 → 10.11111111111111111111111111111111

(C) 10.11-----000000 → 10.11111111111111111111111111111111

200.1.2.0

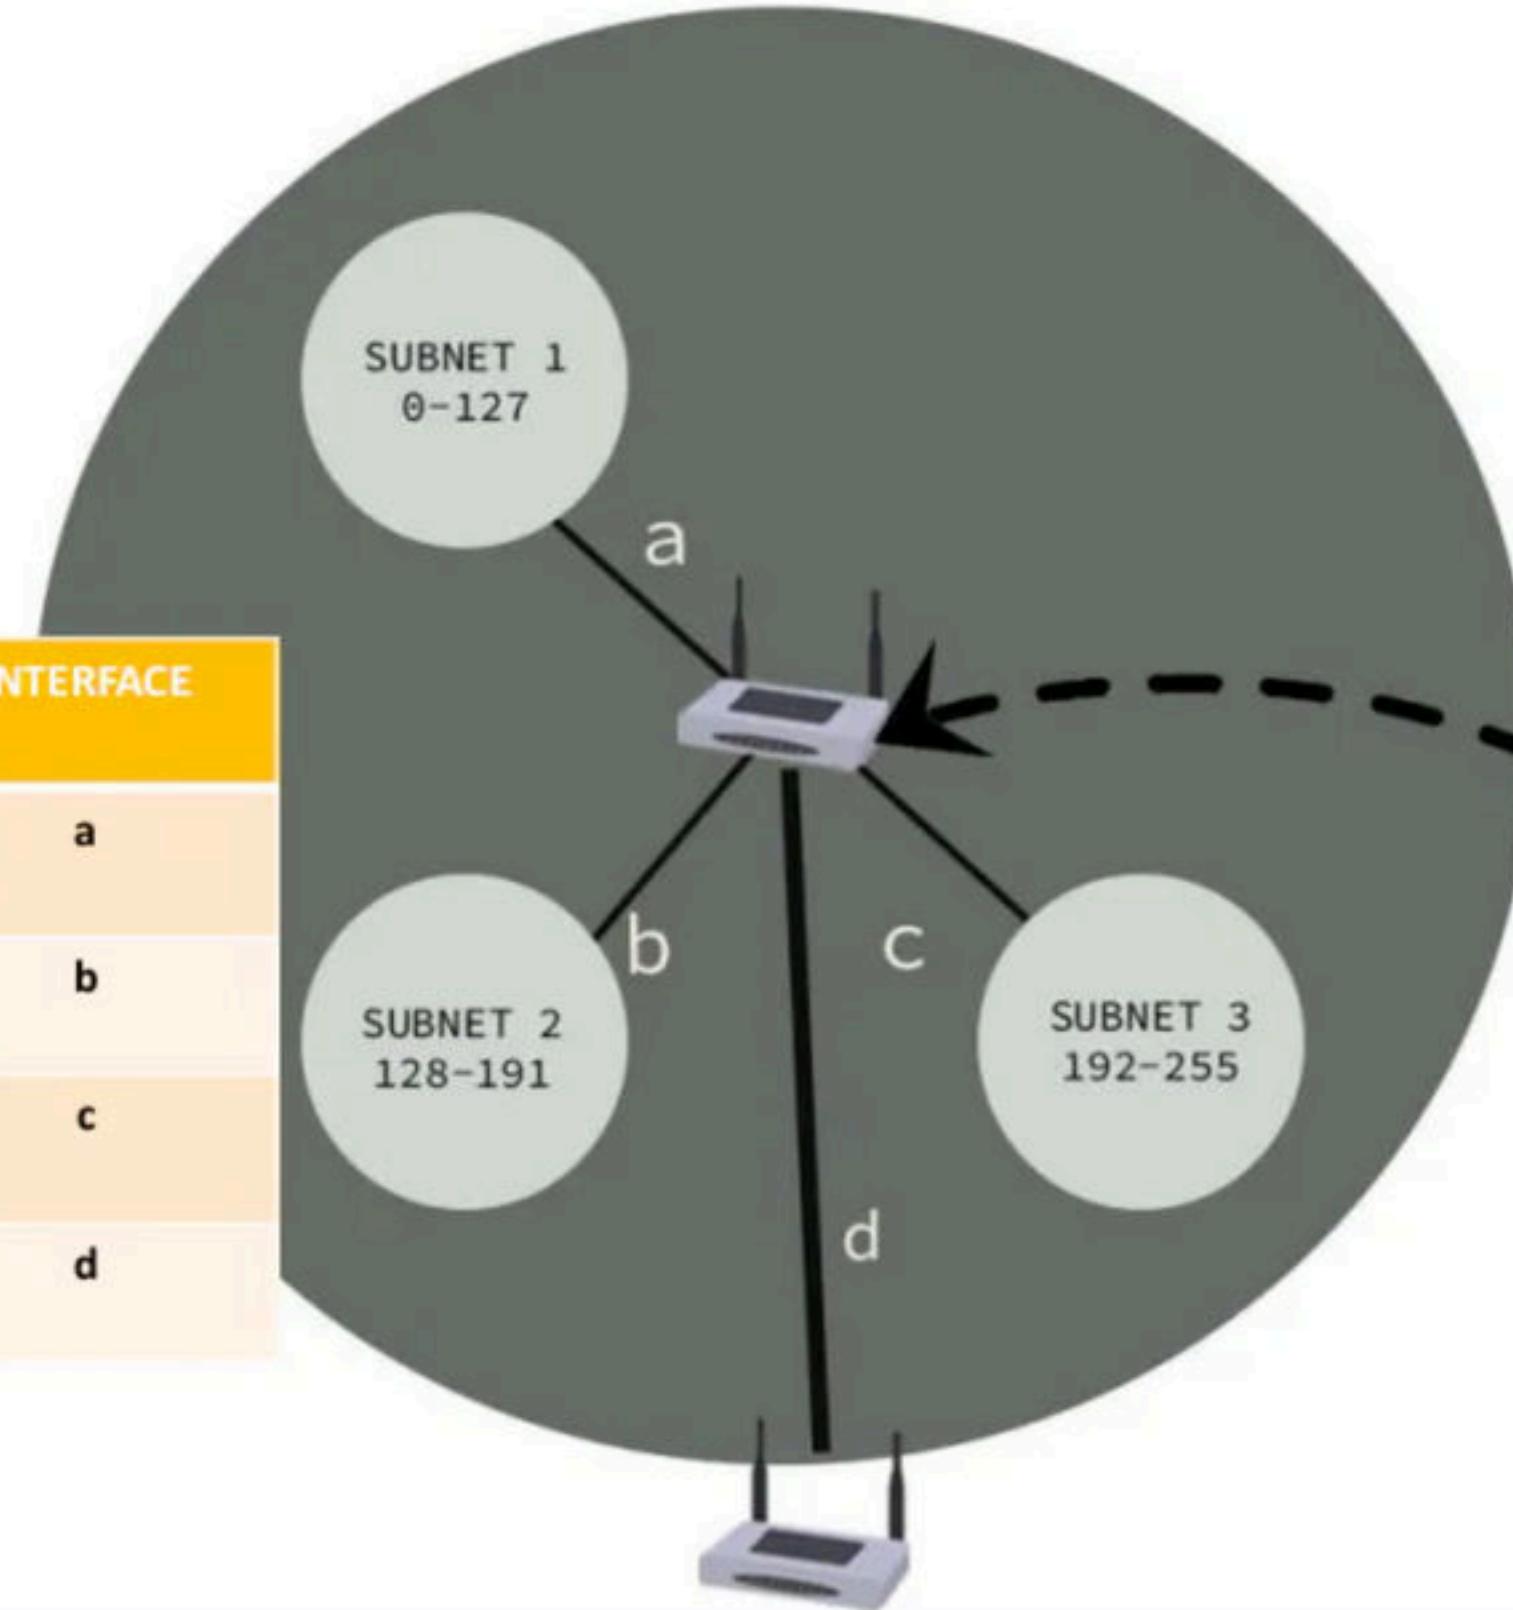

NID	SUBNET MASK	INTERFACE
200.1.2.0	255.255.255.128	a
200.1.2.128	255.255.255.192	b
200.1.2.192	255.255.255.192	c
0.0.0.0	0.0.0.0	d

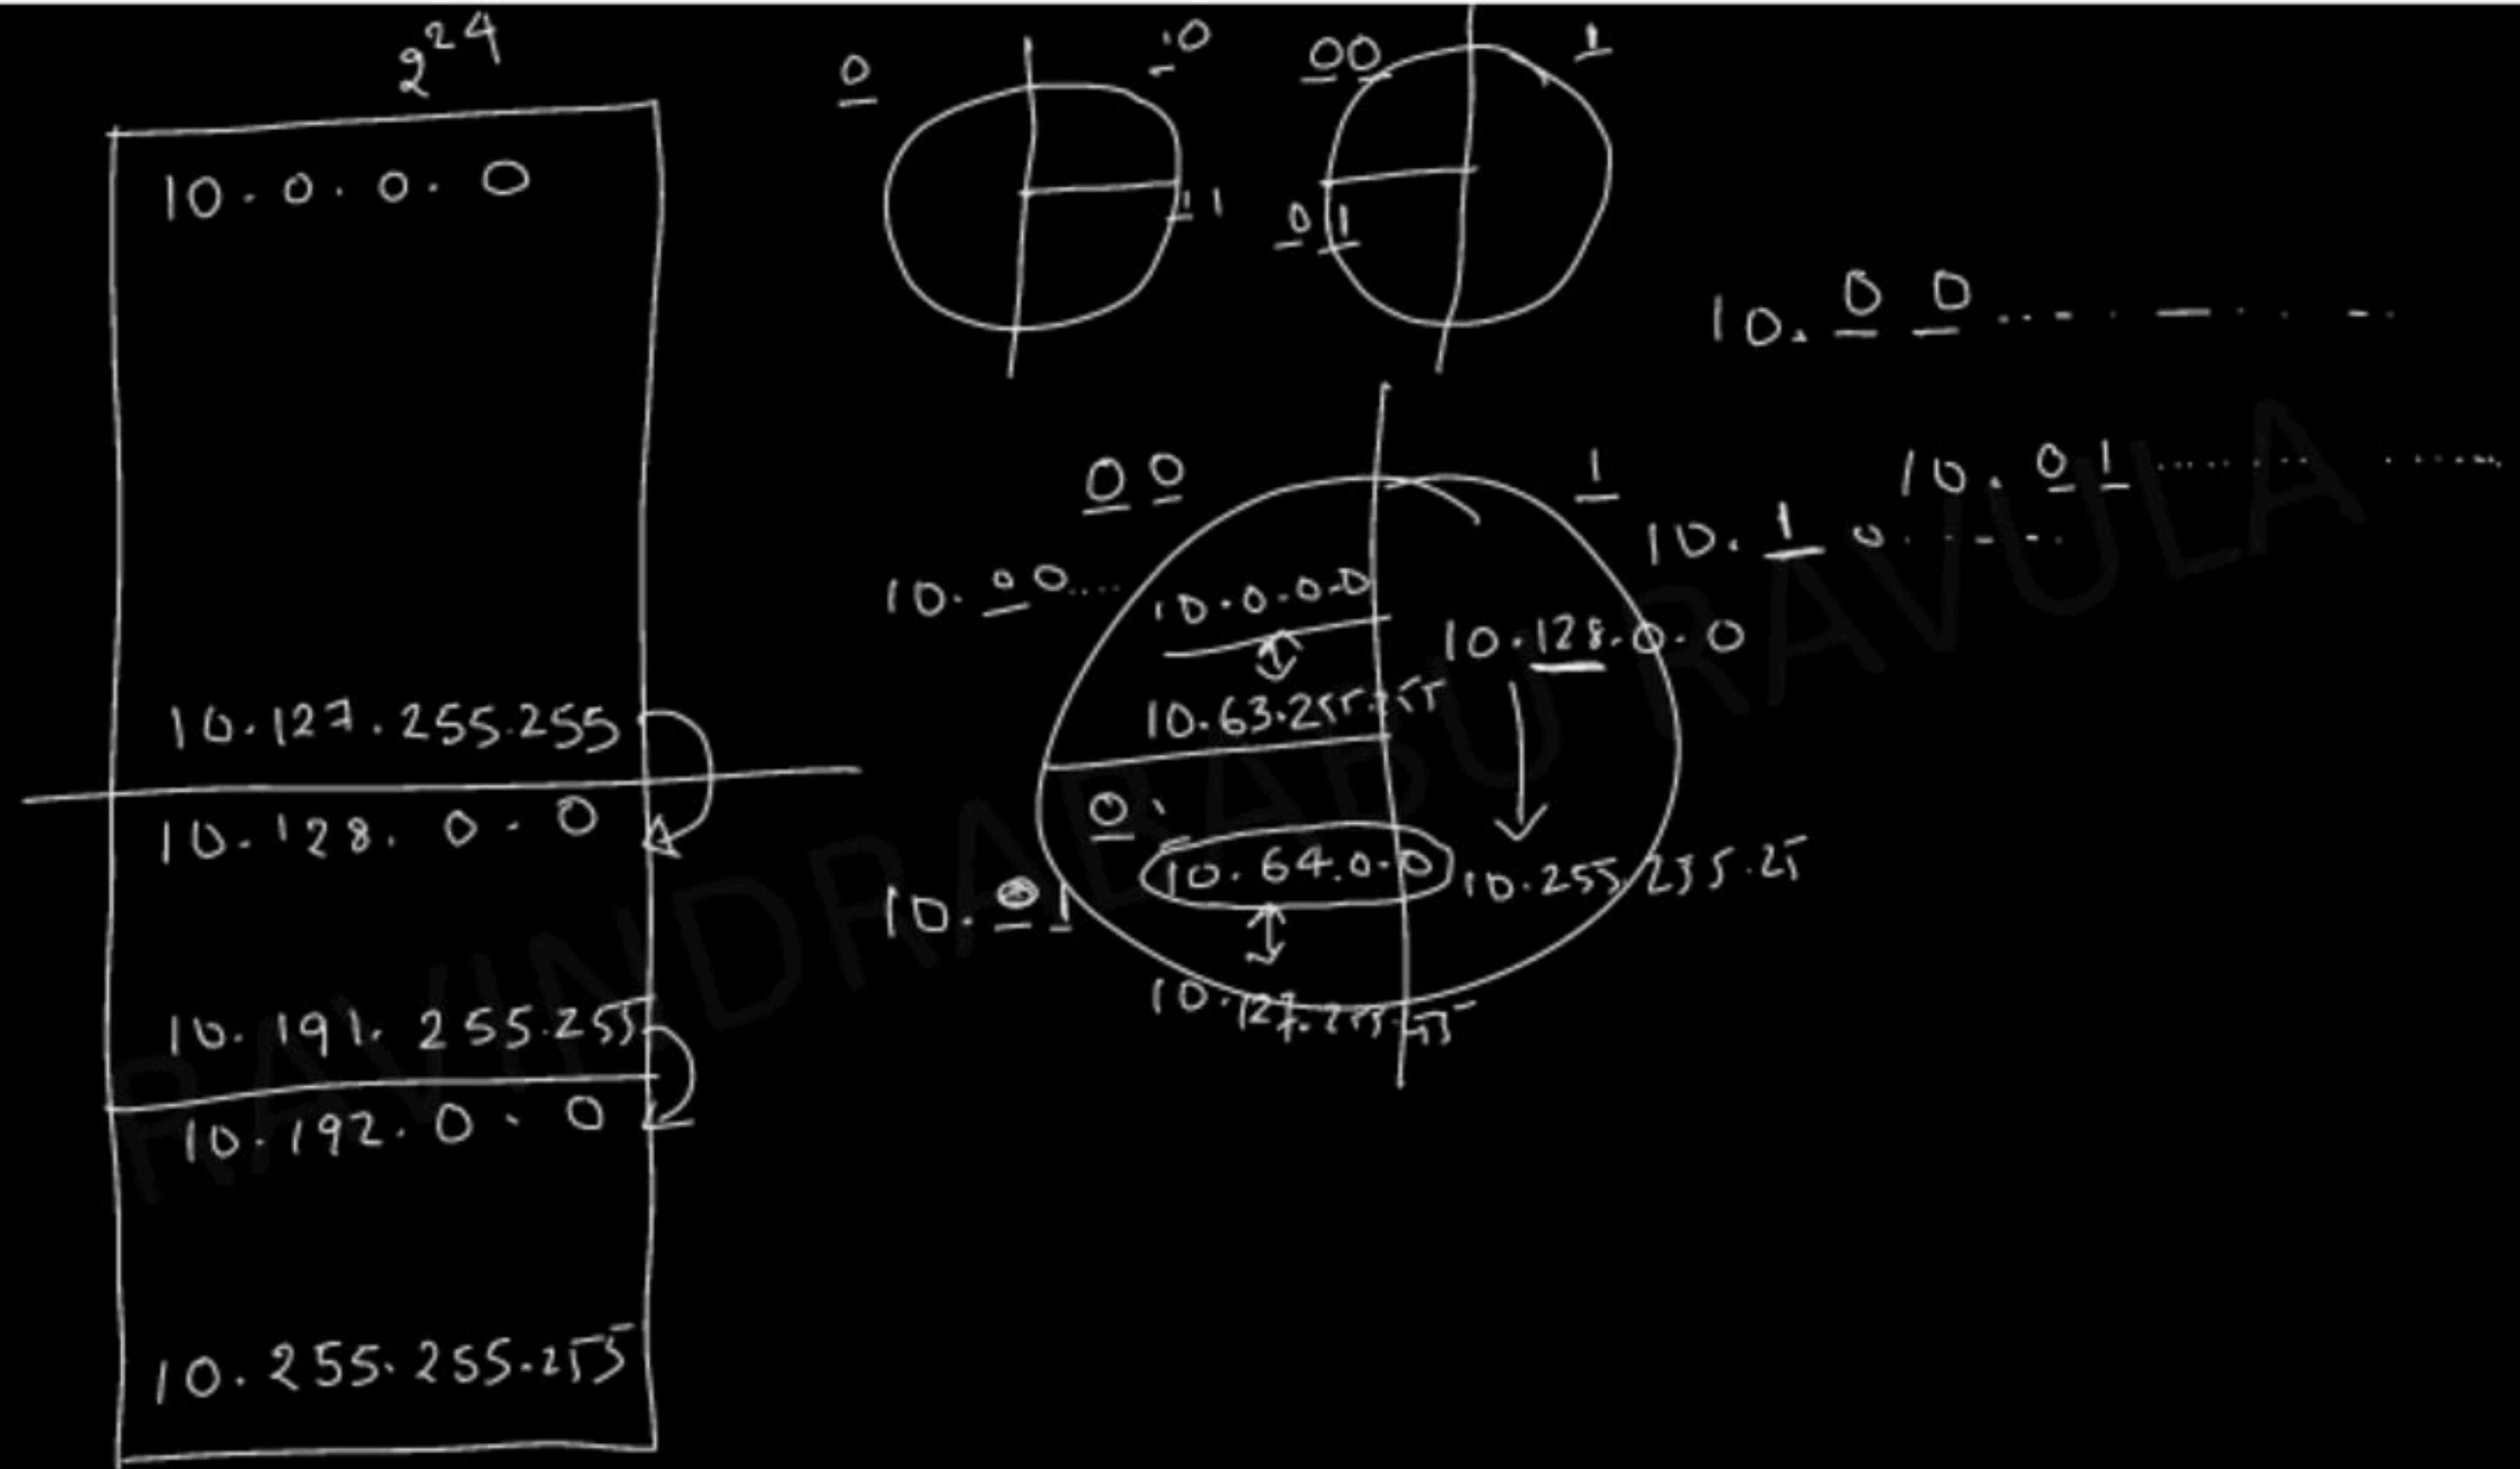



NOTE:

In order to find out the SID (Subnet id) or No of subnets, we must know either the Class of that network or NID

We can find out the HID even if
The class of the network is not known

For example:

If Subnet mask = 255.255.255.192, And it known to be of Class A then,

We know that,

NID + SID = No of 1's

HID = No of 0's

No of 1's = 26

NID In class A = 8 bits

$8 + SID = 26$

SID = 18

No of subnets = 2^{18}

No of 0's = 6

HID = 6

IP/network = 2^6

Hosts/subnet = $2^6 - 2$

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

QUESTION:

If the subnet mask 255.255.255.128 belongs to class C, find-

1. Number of subnets
2. Number of hosts in each subnet

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

SOLUTION:

Given subnet mask= 255.255.255.128
= 11111111.11111111.11111111.10000000

Since 25 bits contain the value 1 and 7 bits contain the value 0, so-

- Number of NID bits + Number of Subnet ID bits = 25
- Number of HID bits = 7

Now,

- It is given that subnet mask belongs to class C.
- So, Number of NID bits = 24.

Substituting in the above equation, we get-

Number of Subnet ID bits

$$= 25 - 24$$

$$= 1$$

Number of subnets = $2^1 = 2$

Since number of HID bits = 7, so-

Number of hosts per subnet = $2^7 - 2 = 126$

RAVINDRABABU RAVULA

GATE 2008

If a class B network on the Internet has a subnet mask of 255.255.248.0, what is the maximum number of hosts per subnet?

- (A) 1022
- (B) 1023
- (C) 2046
- (D) 2047

RAVINDRABABU RAVULA

Answer (C)

The binary representation of subnet mask is

11111111.11111111.1111000.00000000.

There are 21 bits set in subnet.

So 11 bits are left for host ids.

Total possible values of host ids is $2^{11} = 2048$.

Out of these 2048 values, 2 addresses are reserved.

The address with all bits as 1 is reserved as broadcast address and address with all host id bits as 0 is used as network address of subnet.


In general, the number of addresses usable for addressing specific hosts in each network is always $2^N - 2$ where N is the number of bits for host id.

Therefore, maximum no of hosts per subnet = $2048 - 2 = 2046$

Computer Networks

Classless Inter Domain Routing (CIDR)


WE CAN DIVIDE A CLASS A NETWORK INTO SUBNETS
OF EACH NETWORK SIZE IS 2^{24}
CLASS B NETWORK INTO SUBNETS
OF EACH NETWORK SIZE IS 2^{16}
CLASS C NETWORK INTO SUBNETS
OF EACH NETWORK SIZE IS 2^8

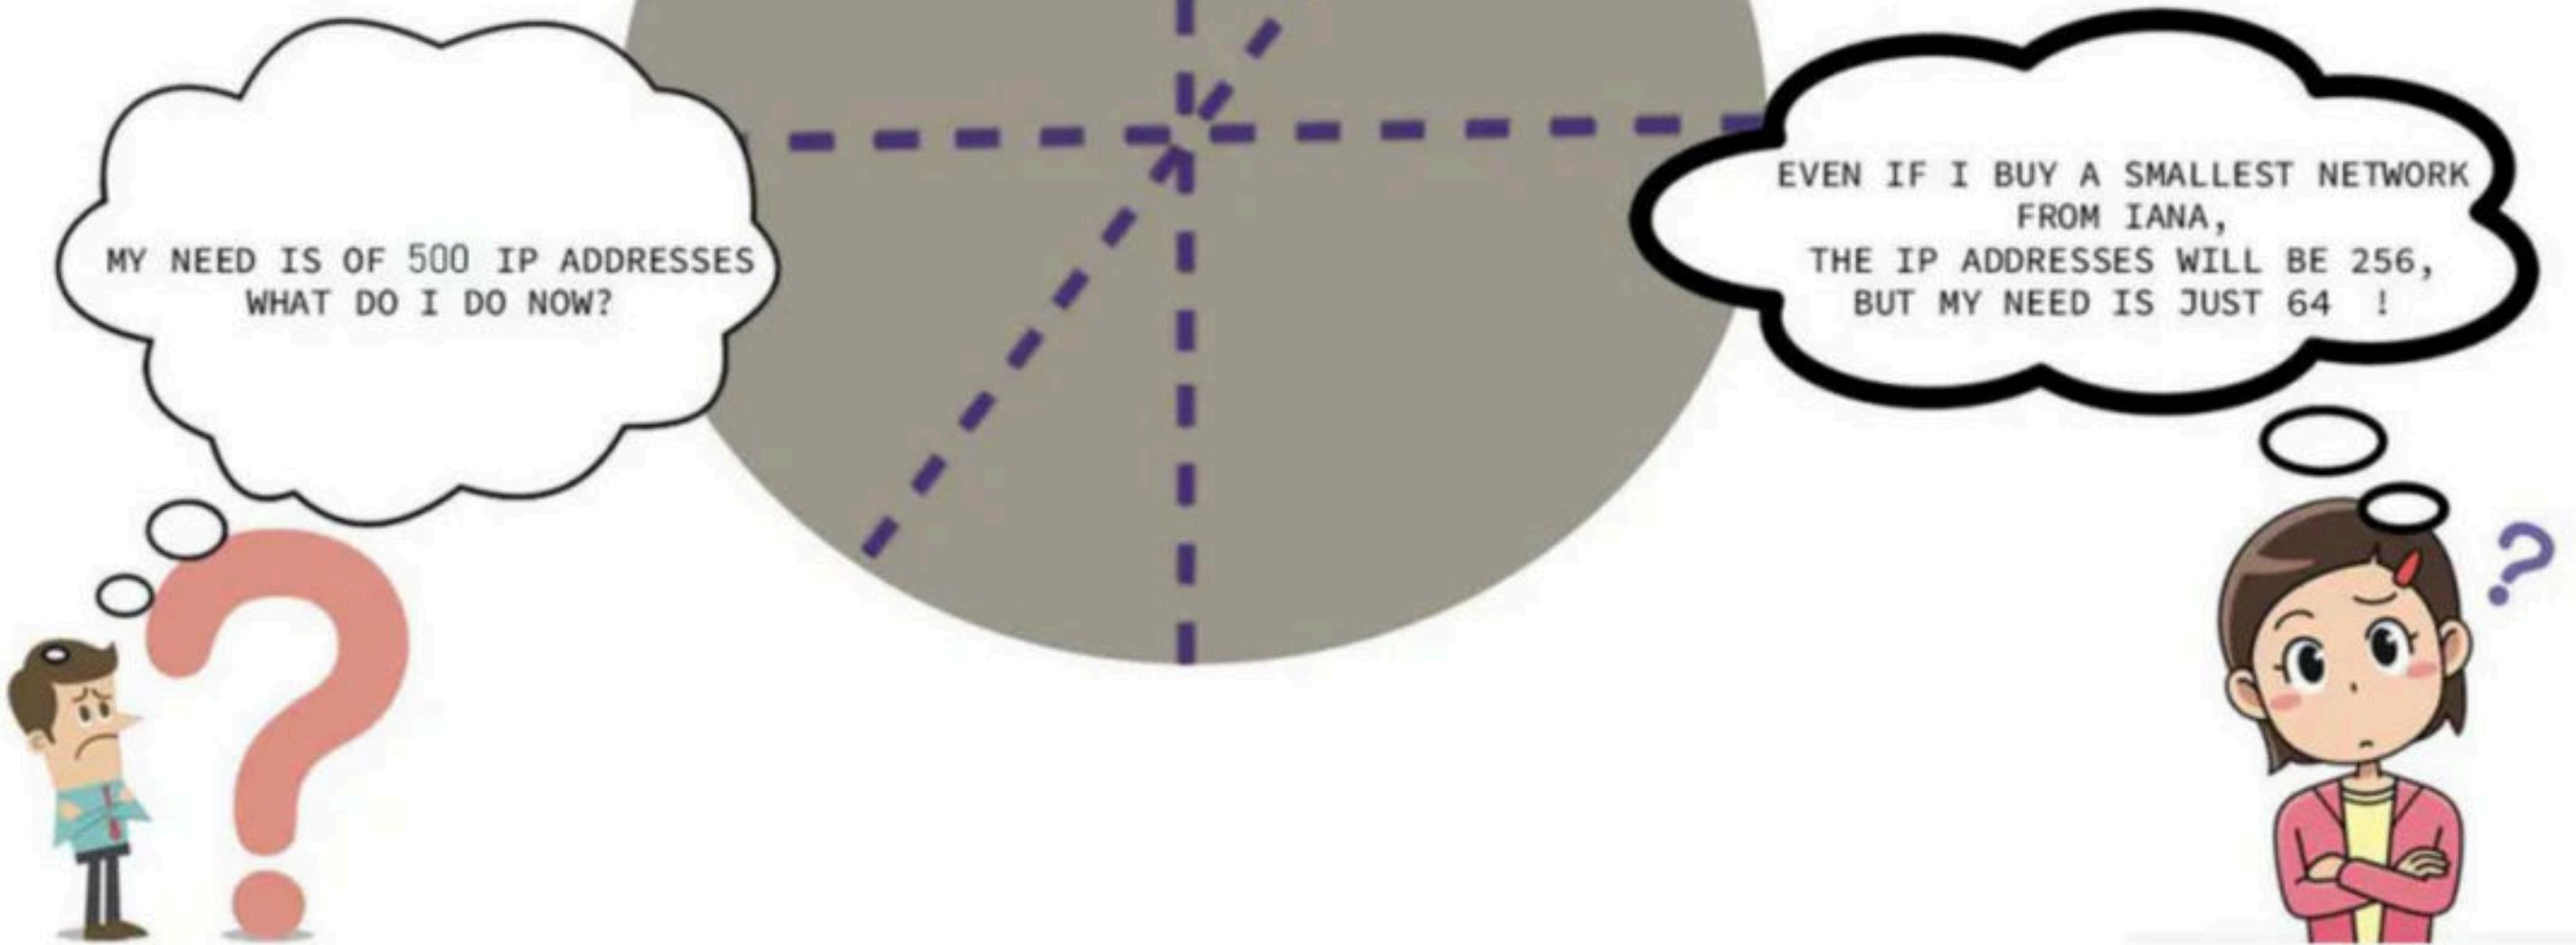

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

CLASSLESS INTER DOMAIN ROUTING CIDR

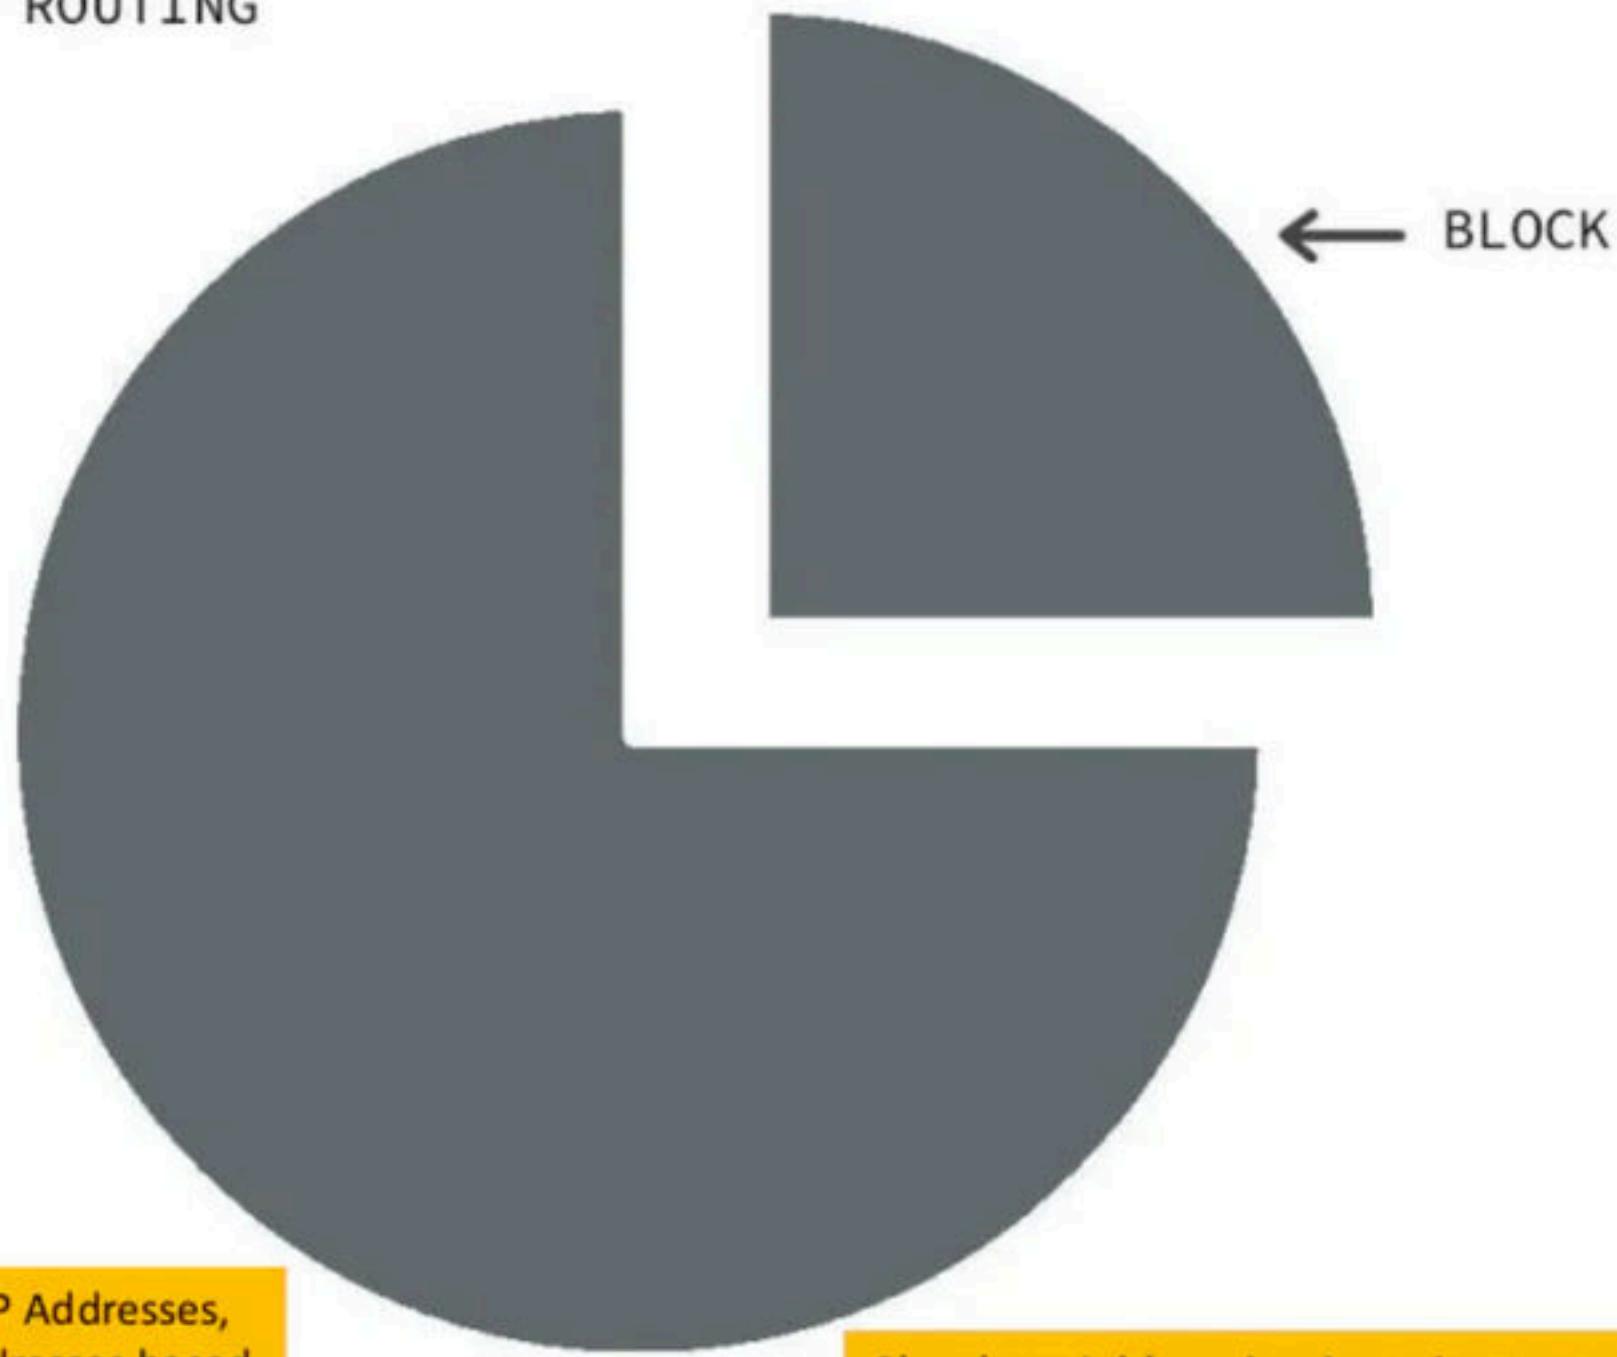

When a user asks for specific number of IP Addresses, CIDR dynamically assigns a block of IP Addresses based on certain rules.

This block contains the required number of IP Addresses as demanded by the user.


This block of IP Addresses is called as a CIDR block.

Classless Addressing is an improved IP Addressing system. It makes the allocation of IP Addresses more efficient. It replaces the older classful addressing system based on classes. It is also known as Classless Inter Domain Routing (CIDR)

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA


CLASSLESS INTER DOMAIN ROUTING CIDR

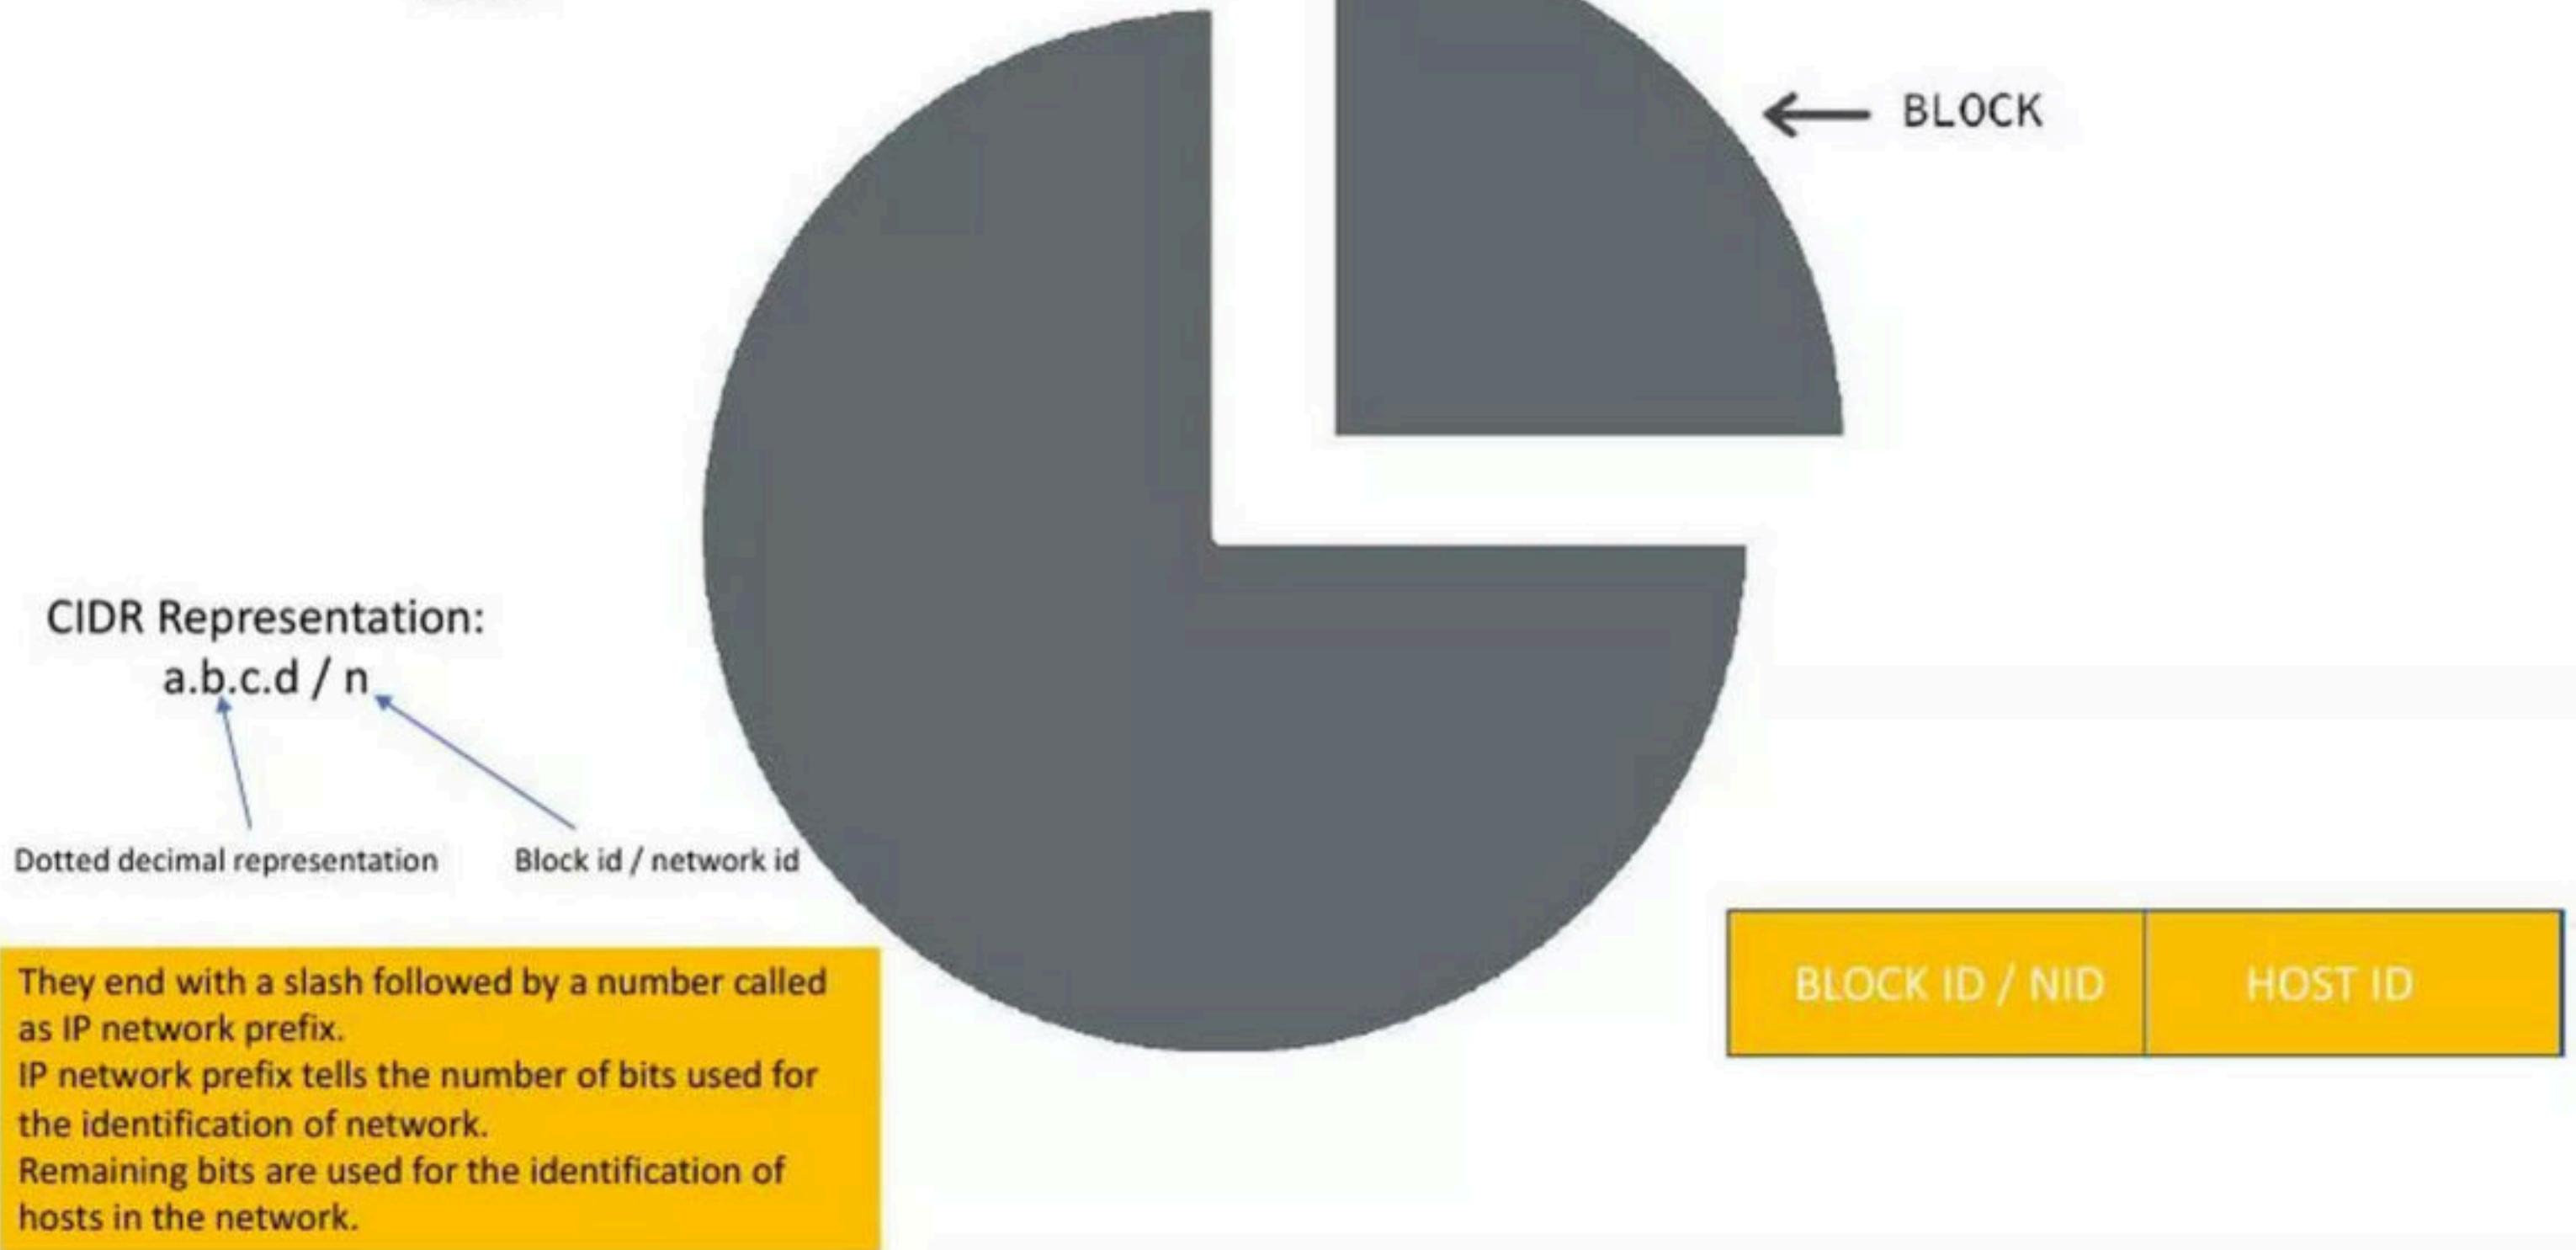

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

CLASSLESS INTER DOMAIN ROUTING CIDR

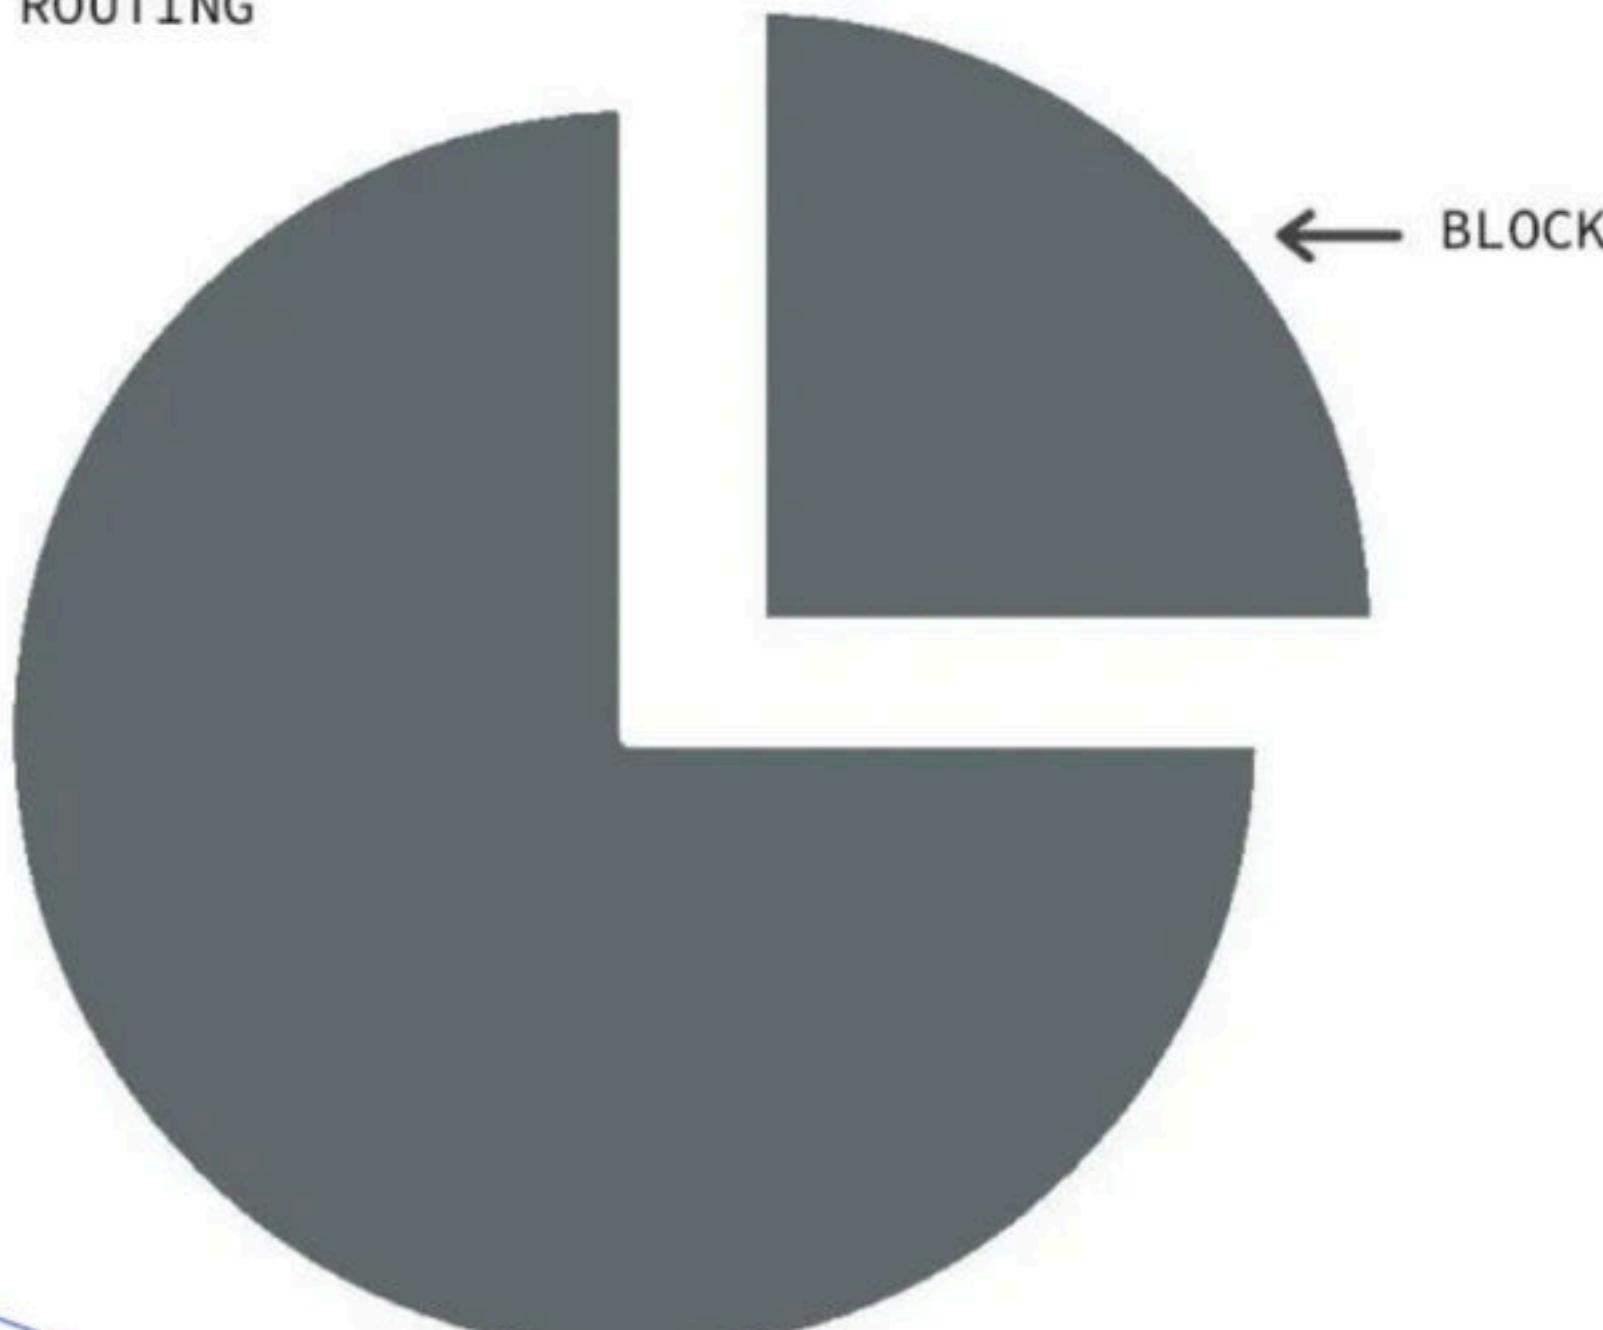

CIDR Representation:
a.b.c.d / n

Example:
20.10.50.100/20

$$\begin{aligned} \text{BID or NID} &= 20 \\ \text{HID} &= 32 - 20 = 12 \end{aligned}$$

Note: Even if the IP looks like it belongs to Class A but it is not.
Since there are no Classes in CIDR

RAVINDRABABU RAVULA


RAVINDRABABU RAVULA

Rules of CIDR blocks

- 1.) All IP addresses should be contiguous**
- 2.) Block size should be a power of 2
- 3.) First Ip address of the block must be evenly divisible by the size of the block.

To form a Block

You cannot take some part from here and some from here

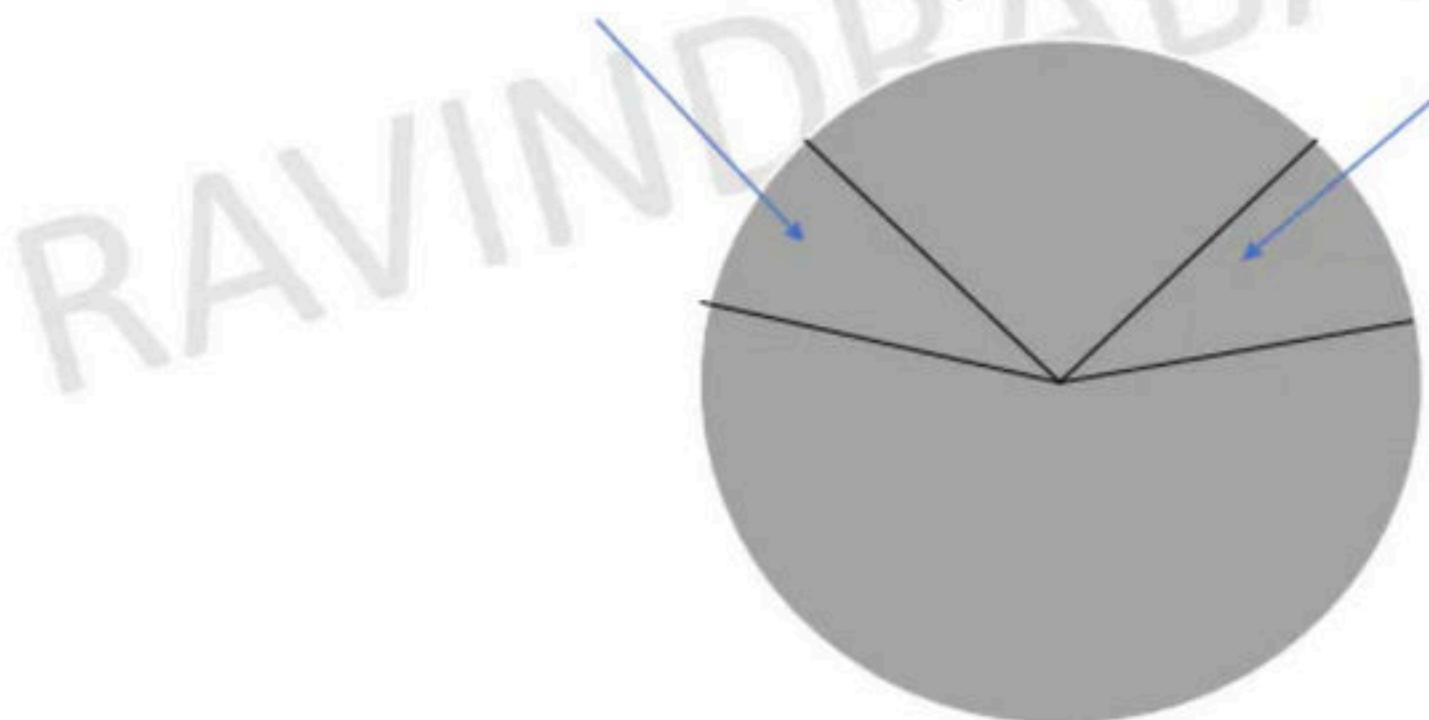

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Rules of CIDR blocks

- 1.) All IP addresses should be contiguous
- 2.) **Block size should be a power of 2**
- 3.) First Ip address of the block must be evenly divisible by the size of the block.

If any binary pattern consisting of $(m + n)$ bits is divided by 2^n , then-

- Remainder is least significant n bits
- Quotient is most significant m bits

So, any binary pattern is divisible by 2^n , if and only if its least significant n bits are 0.

Examples-

Consider a binary pattern-

01100100.00000001.00000010.01000000
(represented as 100.1.2.64)

- It is divisible by 2^5 since its least significant 5 bits are zero.
- It is divisible by 2^6 since its least significant 6 bits are zero.
- It is not divisible by 2^7 since its least significant 7 bits are not zero.


RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Rules of CIDR blocks

- 1.) All IP addresses should be contiguous
- 2.) Block size should be a power of 2
- 3.) First Ip address of the block must be evenly divisible by the size of the block.**

$32 = 2^5$ = least significant 5 bits are zero

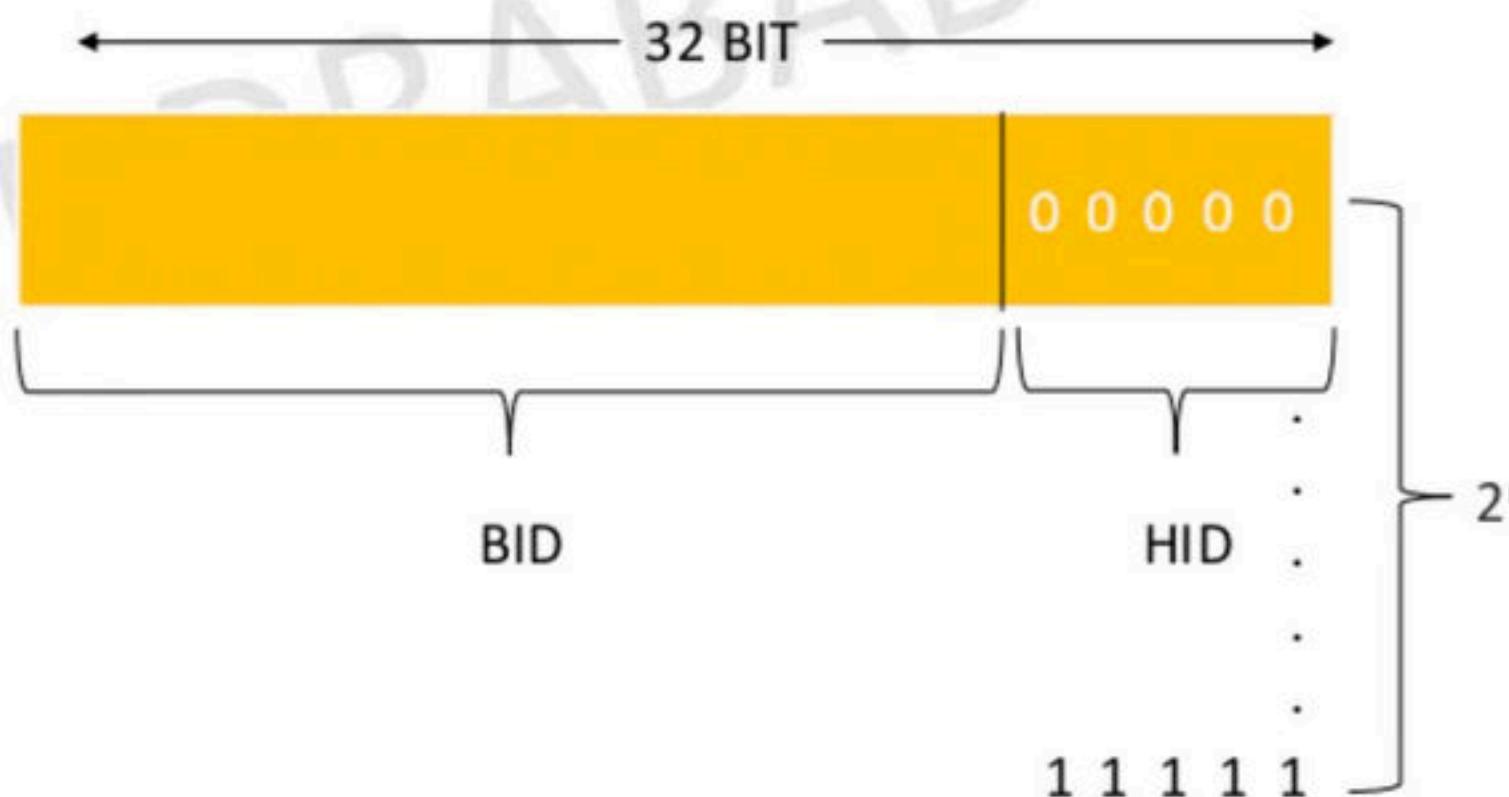

We can use First IP address
As the Block id

Note : If the First Ip does not
have Rule 3
Then we wont get 2^n IP
addresses.

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Rules of CIDR blocks

- 1.) All IP addresses should be contiguous
- 2.) Block size should be a power of 2
- 3.) First Ip address of the block must be evenly divisible by the size of the block.

Example: 100.1.2.32
 100.1.2.33

.

.

.

100.1.2.47

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Rules of CIDR blocks

- ✓ 1.) All IP addresses should be contiguous
- 2.) Block size should be a power of 2
- 3.) First Ip address of the block must be evenly divisible by the size of the block.

Example:

100.1.2.32
100.1.2.33

.

.

.

100.1.2.47

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Rules of CIDR blocks

- ✓ 1.) All IP addresses should be contiguous
- ✓ 2.) Block size should be a power of 2
- 3.) First Ip address of the block must be evenly divisible by the size of the block.

Example:

100.1.2.32
100.1.2.33
.
.
.
100.1.2.47

$$16 = 2^4$$

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Rules of CIDR blocks

- ✓ 1.) All IP addresses should be contiguous
- ✓ 2.) Block size should be a power of 2
- ✓ 3.) First Ip address of the block must be evenly divisible by the size of the block.

Example:

100.1.2.32

100.1.2.33

.

.

.

100.1.2.47

If any n bit number has to be divided by 2^4
Then the remainder will be last 4 Least Significant Bits

100.1.2.00100000 / 2^4

0 is remainder
Therefore, divisible!

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

100.1.2.32

100.1.2.33

100.1.2.47

16 = 2^4 IP ADDRESSES

Therefore, the number of bits used for HID = 4

So, BID = 28 bits

Any above IP address can be represented in CIDR

Ex: 100.1.2.32 / 28

Where 28 represents the BID

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Q.) Consider a block of IP Addresses ranging from 150.10.20.64 to 150.10.20.127.

Is it a CIDR block? If yes, give the CIDR representation.

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Q.) Consider a block of IP Addresses ranging from 150.10.20.64 to 150.10.20.127.

Is it a CIDR block? If yes, give the CIDR representation.

Solution:

Rule-01:

According to Rule-01, all the IP Addresses must be contiguous.

Clearly, all the given IP Addresses are contiguous.

So, Rule-01 is satisfied.

Rule-02:

According to Rule-02, size of the block must be presentable as 2^n .

Number of IP Addresses in given block = $127 - 64 + 1 = 64$.

Size of the block = 64 which can be represented as 2^6 .

So, Rule-02 is satisfied.

Rules of CIDR blocks

- 1.) All IP addresses should be contiguous
- 2.) Block size should be a power of 2
- 3.) First Ip address of the block must be evenly divisible by the size of the block.

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Q.) Consider a block of IP Addresses ranging from 150.10.20.64 to 150.10.20.127.

Is it a CIDR block? If yes, give the CIDR representation.

Rule-03:

Rules of CIDR blocks

- 1.) All IP addresses should be contiguous
- 2.) Block size should be a power of 2
- 3.) First Ip address of the block must be evenly divisible by the size of the block.

According to Rule-03, first IP Address must be divisible by size of the block.

So, 150.10.20.64 must be divisible by 26.

$150.10.20.64 = 150.10.20.01000000$ is divisible by 26 since its 6 least significant bits are zero.

So, Rule-03 is satisfied.

Since all the rules are satisfied, therefore given block is a CIDR block.

CIDR Representation-

We have-

Size of the block = Total number of IP Addresses = 26.

To have 26 total number of IP Addresses, 6 bits are required in the Host ID part.

So, Number of bits in the Network ID part = $32 - 6 = 26$.

Thus,

CIDR Representation = 150.10.20.64 / 26

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Q.) Given the CIDR representation 20.10.30.35 / 27. Find the range of IP Addresses in the CIDR block.

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Q.) Given the CIDR representation 20.10.30.35 / 27. Find the range of IP Addresses in the CIDR block.

Solution:

Given CIDR representation is 20.10.30.35 / 27.

It suggests-

27 bits are used for the identification of network.

Remaining 5 bits are used for the identification of hosts in the network.

Given CIDR IP Address may be represented as-

00010100.00001010.00011110.00100011 / 27

So,

First IP Address = 00010100.00001010.00011110.00100000 = 20.10.30.32

Last IP Address = 00010100.00001010.00011110.00111111 = 20.10.30.63

Thus, Range of IP Addresses = [20.10.30.32 , 20.10.30.63]

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Q.) Given the CIDR representation 100.1.2.35 / 20. Find the range of IP Addresses in the CIDR block.

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Q.) Given the CIDR representation 100.1.2.35 / 20. Find the range of IP Addresses in the CIDR block.

Solution-

Given CIDR representation is 100.1.2.35 / 20.

It suggests-

20 bits are used for the identification of network.

Remaining 12 bits are used for the identification of hosts in the network.

Given CIDR IP Address may be represented as-

01100100.00000001.00000010.00100011 / 20

So,

First IP Address = 01100100.00000001.00000000.00000000 = 100.1.0.0

Last IP Address = 01100100.00000001.00001111.11111111 = 100.1.15.255

Thus, Range of IP Addresses = [100.1.0.0 , 100.1.15.255]

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Computer Networks

Subnetting in CIDR, VLSM in CIDR

20.30.40.10/25 ← DIVIDING INTO 2 SUBNETS

20.30.40.00001010

25

20.30.40.00000000


20.30.40.01000000

SUBNET 1

SUBNET 2

20.30.40.00111111

20.30.40.01111111

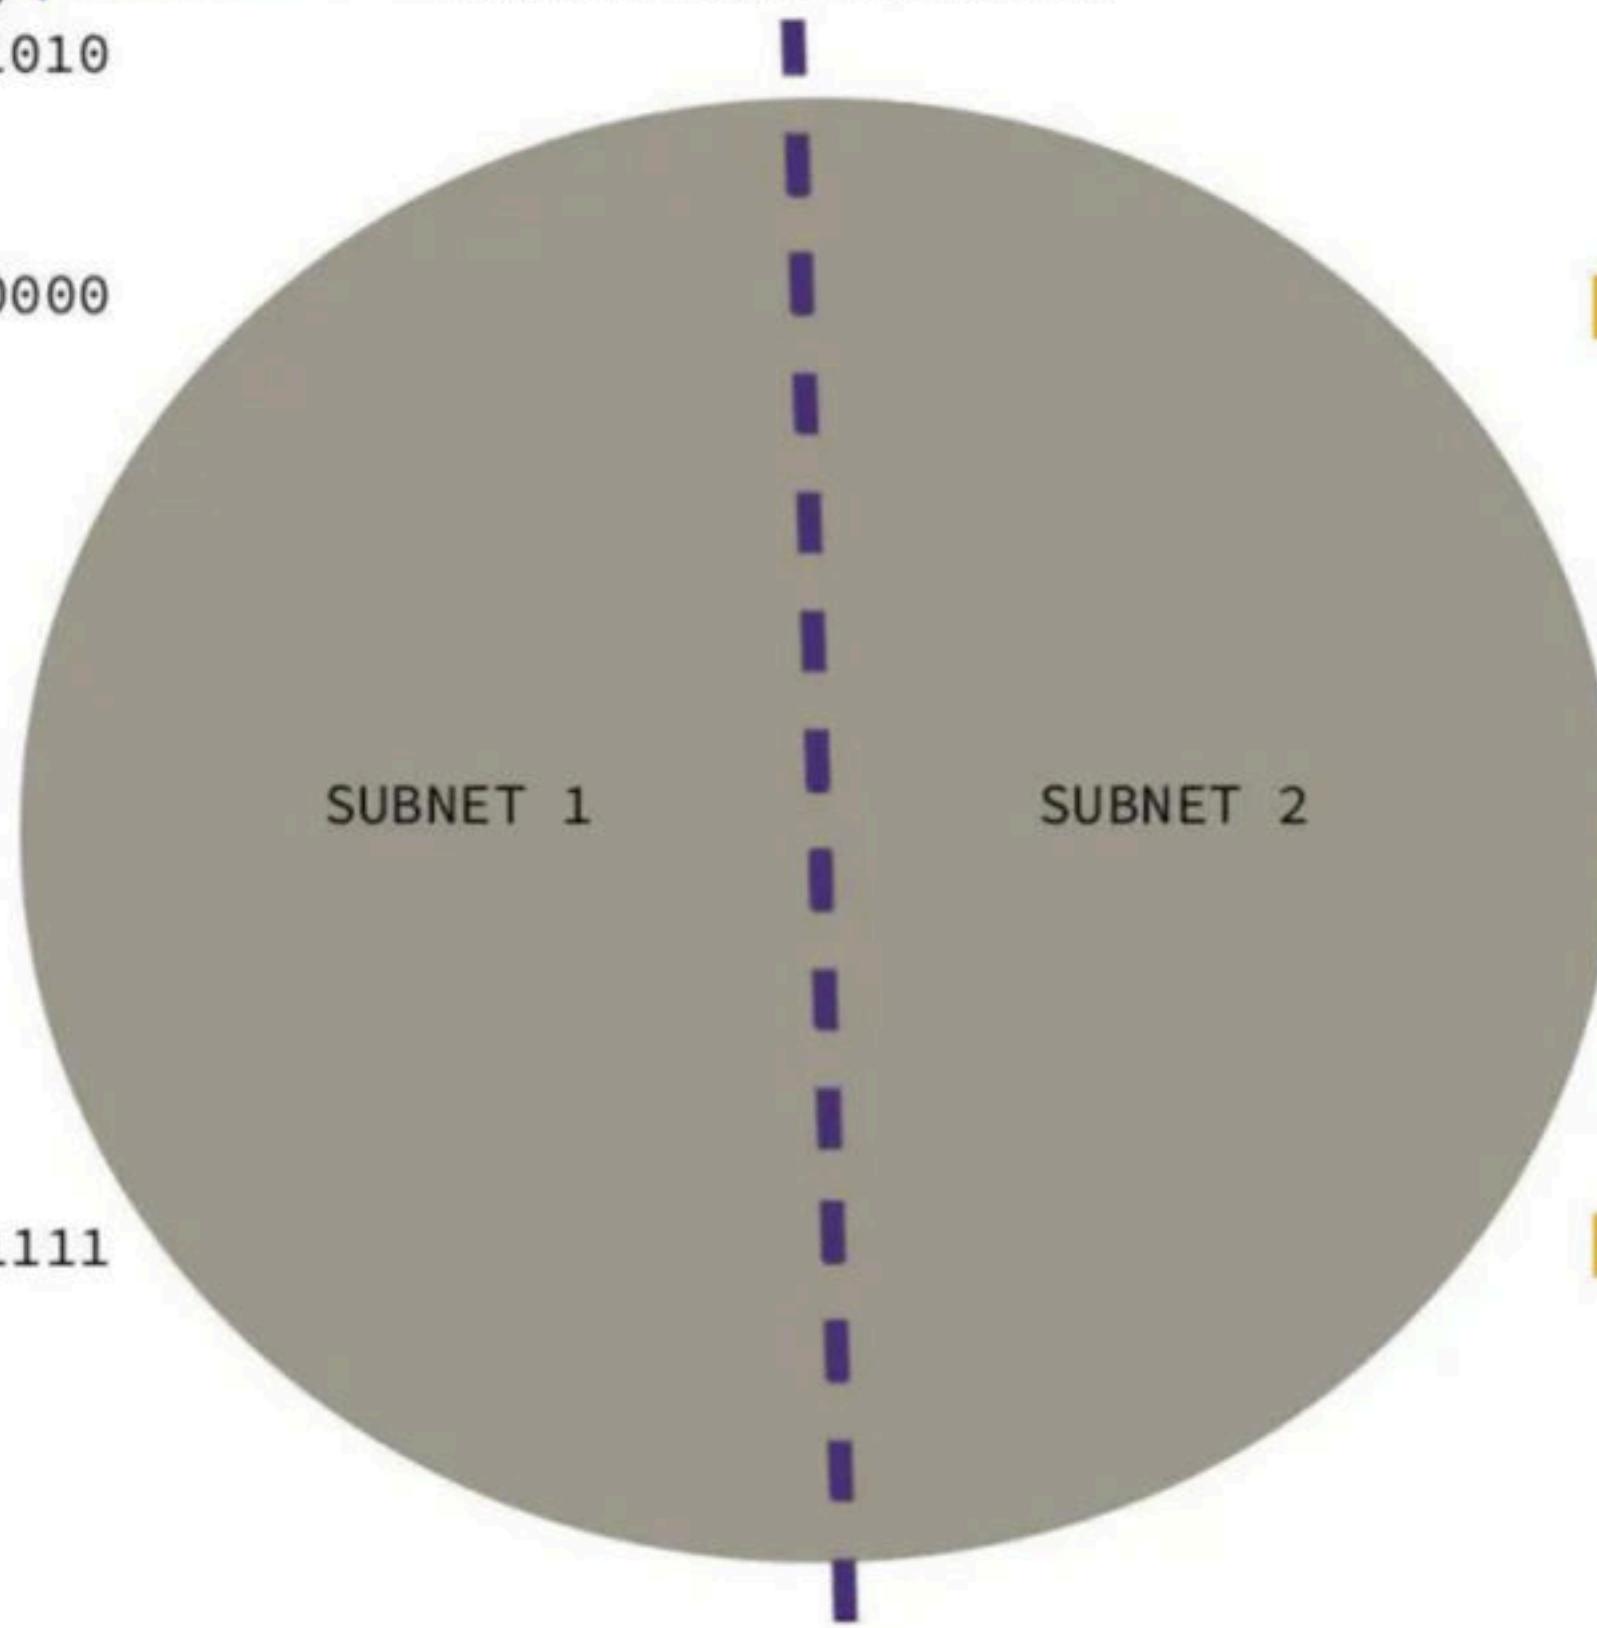

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

20.30.40.10/25
20.30.40.00001010
25

20.30.40.00000000

20.30.40.64

20.30.40.01000000

20.30.40.0

•
•
•
•
•
•
•
•
•

20.30.40.00111111

20.30.40.63

20.30.40.01111111

20.30.40.0 / 26

20.30.40.64 / 26



RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

$20.30.40.10/25$
 $20.30.40.00001010$
25

$20.30.40.00000000$

$20.30.40.64$

$20.30.40.01000000$

$20.30.40.0$

•
•
•
•
•
•
•
•
•

$20.30.40.00111111$

$20.30.40.63$

$20.30.40.01111111$

$20.30.40.0 / 26$

Denotes the subnet mask too
With 26 1's followed by 6 0's

$20.30.40.64 / 26$

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

20.30.40.10/25 ← Diving into 4 subnets

20.30.40.00001010

25

20.30.40.00000000

20.30.40.0/27

.31

20.30.40.64/27

.95

20.30.40.00100000

20.30.40.32/27

.63

20.30.40.96/27

.127

20.30.40.01000000

•
•
•
•
•
•

20.30.40.01100000

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

FROM THE PREVIOUS 2 EXAMPLES

DIVING THE NETWORK INTO 2 SUBNETS:

$$/25 \rightarrow 2^7$$

$$/26 \rightarrow 2^6$$

$$/26 \rightarrow 2^6$$

DIVING THE NETWORK INTO 4 SUBNETS:

$$/25 \rightarrow 2^7$$


$$\begin{array}{cccc} /27 & /27 & /27 & /27 \\ \rightarrow 2^5 & \rightarrow 2^5 & \rightarrow 2^5 & \rightarrow 2^5 \end{array}$$

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

VLSM IN CIDR BLOCKS

LET US ASSUME A SCENARIO IN WHICH AN ISP HAS A BLOCK 20.30.40.10/25 AND THEY WISH TO DIVIDE IT INTO 3 SUBNETS IN A FOLLOWING WAY:

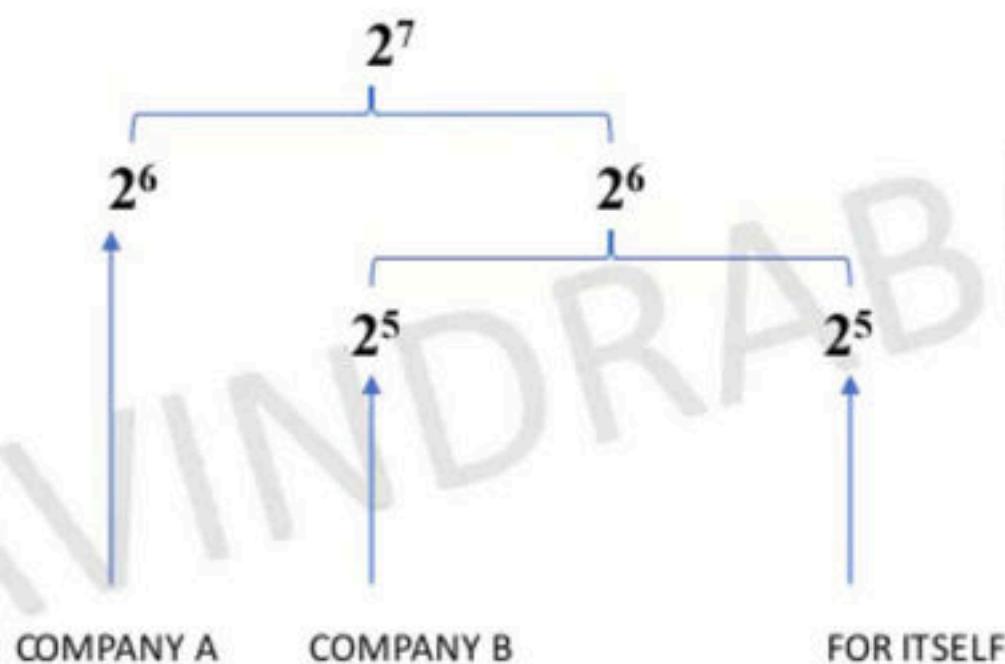

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

20.30.40.10/25 Diving into 3 subnets

20.30.40.00001010

25

20.30.40.00000000

.

.

.

.

.

.

.

.

.

20.30.40.00111111

20.30.40.0/26

20.30.40.63/26

20.30.40.64/27

.95

20.30.40.96/27

.127

20.30.40.01000000

20.30.40.01100000

THIS COULD BE ONE POSSIBILITY

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

20.30.40.10/25 Diving into 3 subnets

20.30.40.00001010

25

20.30.40.00000000

.

.

.

.

.

.

.

.

20.30.40.00111111

COMPANY A

20.30.40.0/26

20.30.40.63/26

20.30.40.64/27

.95

20.30.40.96/27

.127

20.30.40.01000000

COMPANY B

20.30.40.01100000

ITSELF

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

$20.30.40.10/25$ ← Diving into 3 subnets

$20.30.40.00001010$

25

$20.30.40.01000000$

.

.

.

.

.

.

.

.

.

$20.30.40.01111111$

$20.30.40.64/26$

.

$20.30.40.127/26$

$20.30.40.0/27$

.31

$20.30.40.32/27$

.63

$20.30.40.00000000$

$20.30.40.00100000$

THIS COULD BE ANOTHER POSSIBLE SOLUTION

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

20.30.40.10/25 Diving into 3 subnets

20.30.40.00001010

25

20.30.40.01000000

.

.

.

.

.

.

.

.

.

.

.

20.30.40.01111111

COMPANY A

20.30.40.64/26

20.30.40.127/26

20.30.40.0/27

.31

20.30.40.32/27

.63

20.30.40.00000000

COMPANY B

20.30.40.00100000


ITSELF

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

LET'S CHECK OUT ONE MORE EXAMPLE

LET US ASSUME A SCENARIO IN WHICH AN ISP HAS A BLOCK 40.30.10.10/20 AND THEY WISH TO DIVIDE IT INTO 3 SUBNETS IN A FOLLOWING WAY:

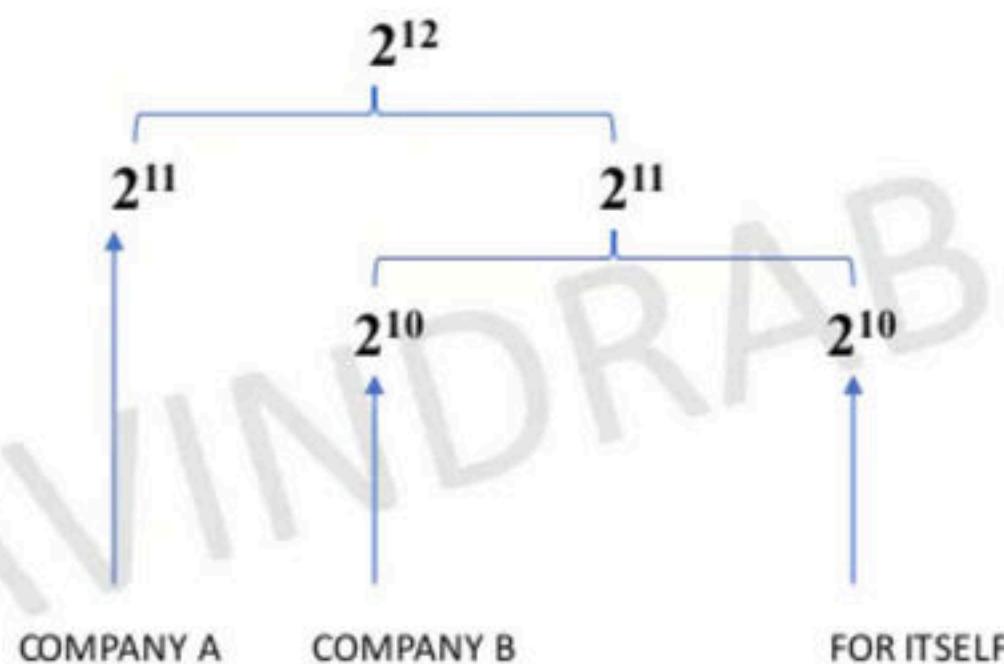


RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

40.30.10.10/20 ← Diving into 3 subnets

40.30.00001010.00001010

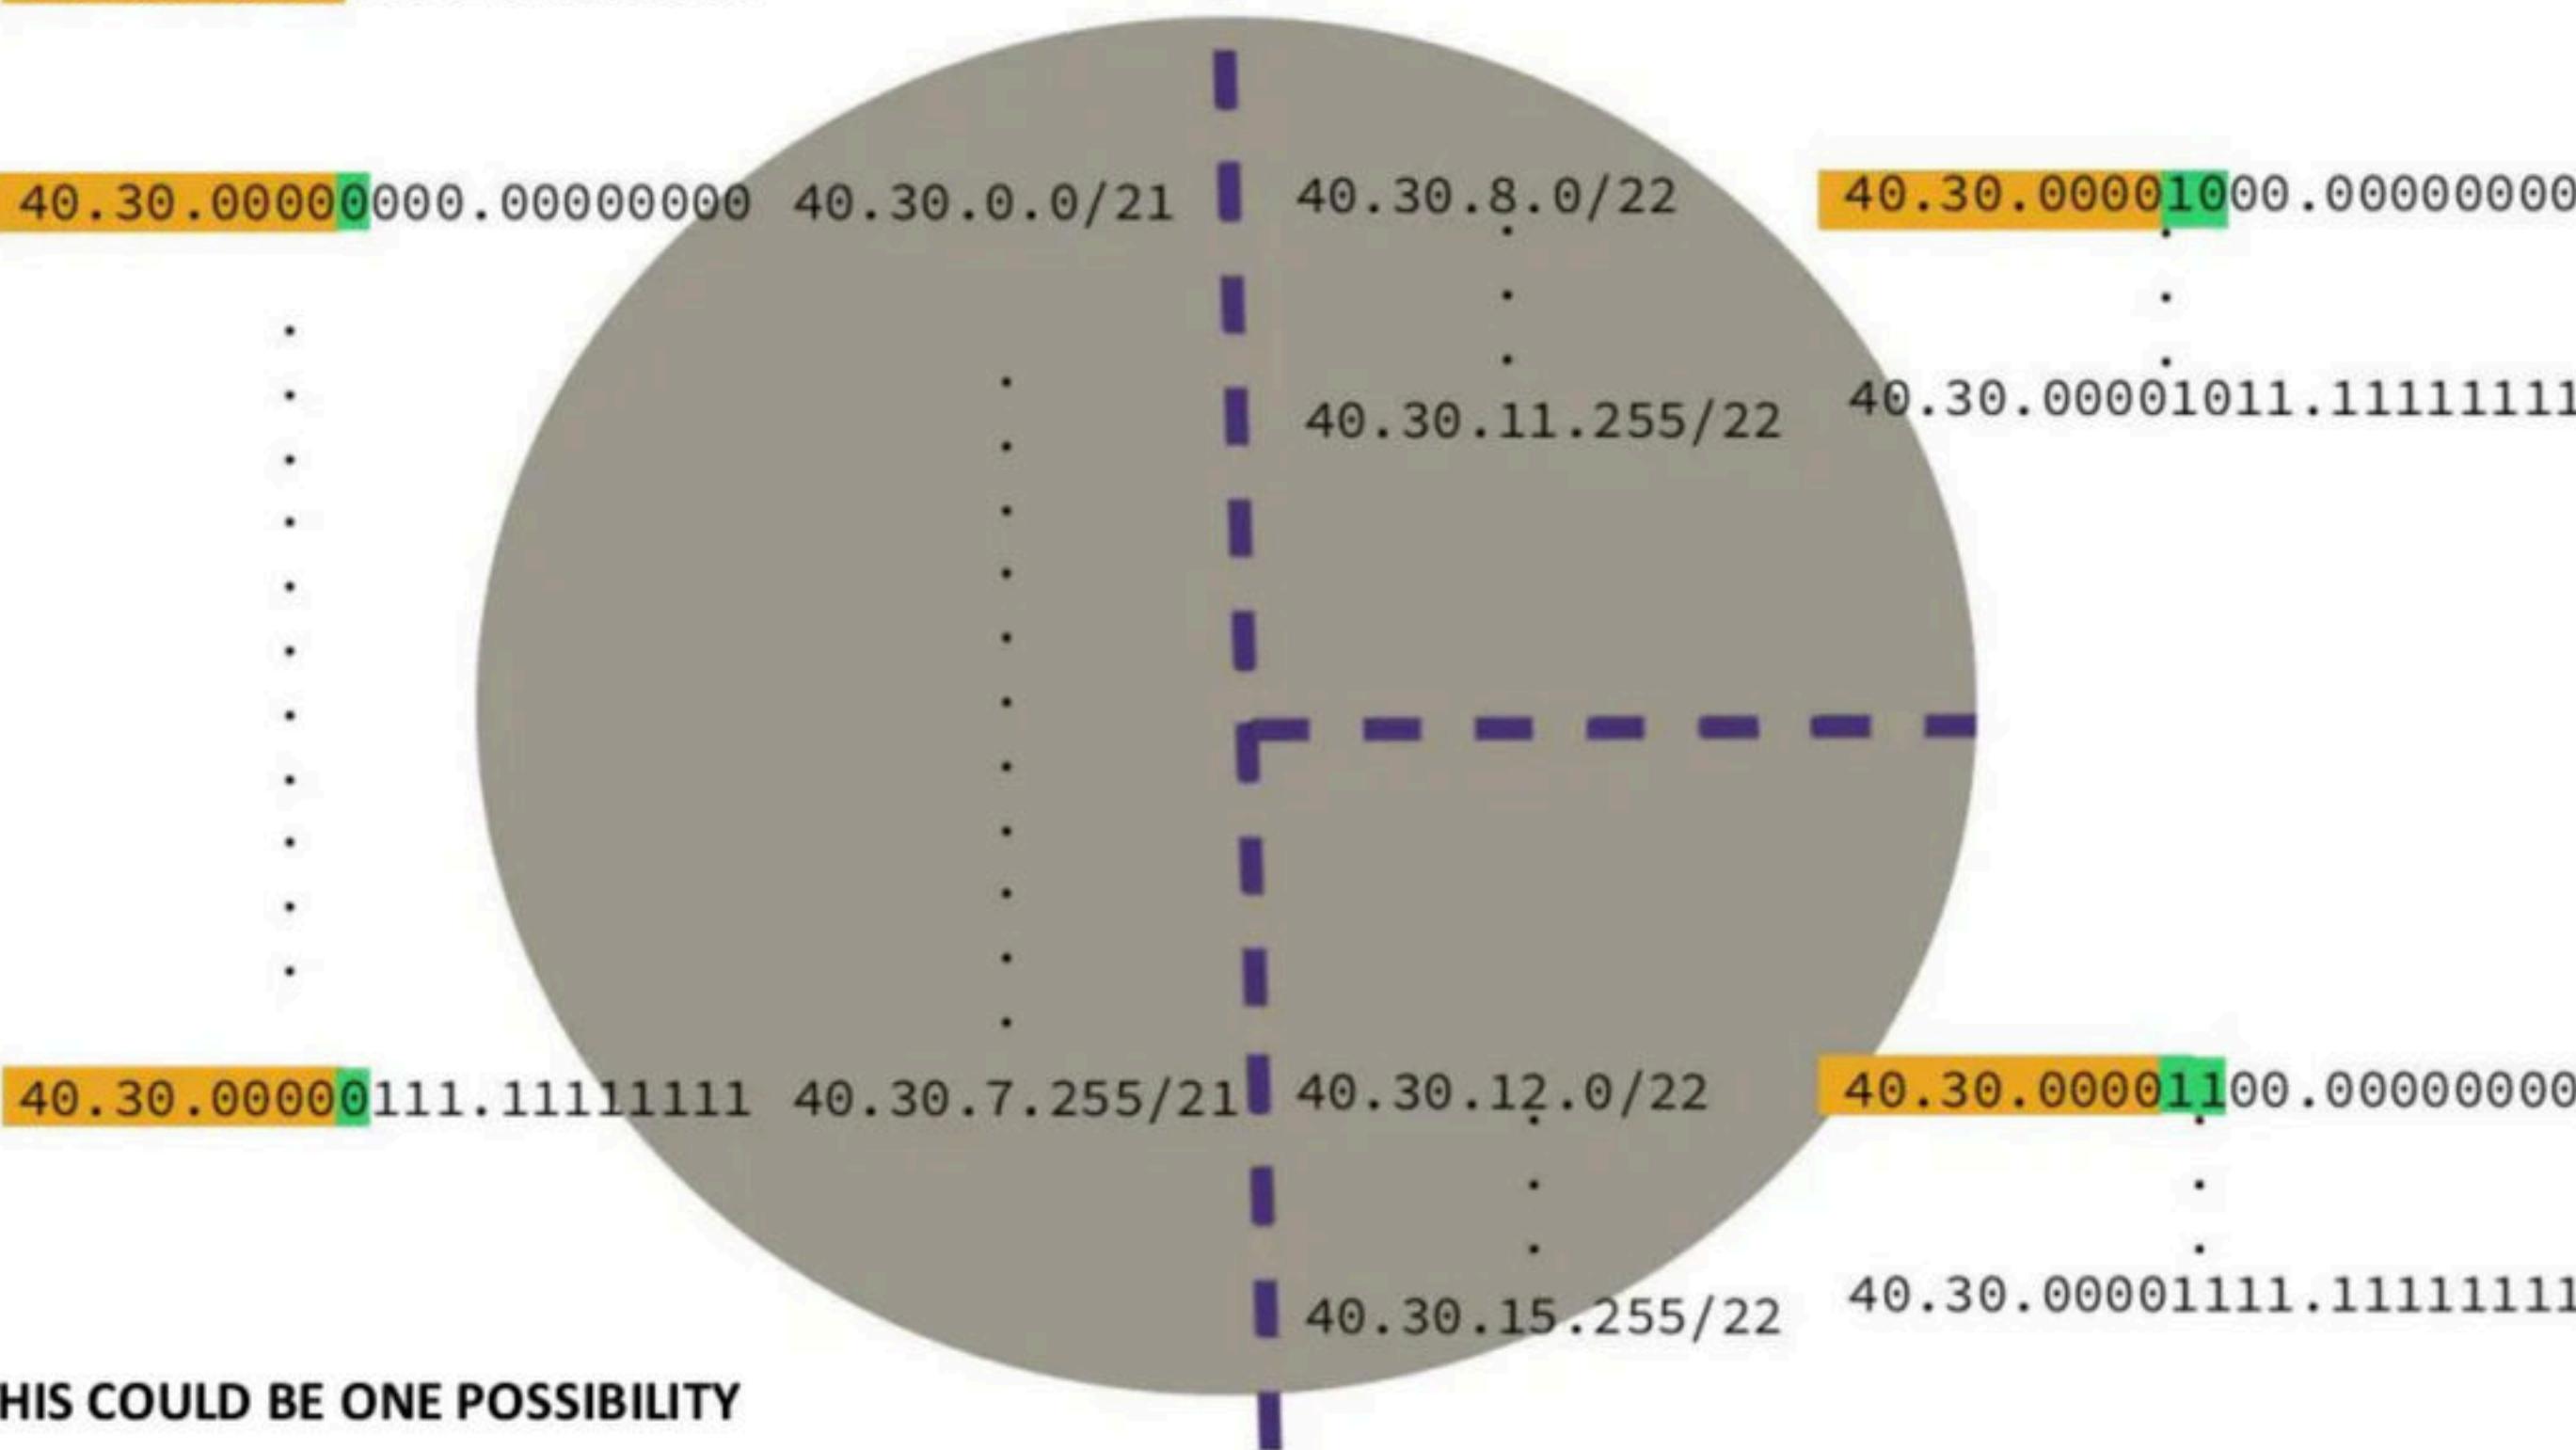

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

40.30.10.10/20 ← Diving into 3 subnets

40.30.00001010.00001010

40.30.00001000.00000000 40.30.8.0/21

40.30.0.0/22

40.30.00000000.00000000

40.30.3.255/22 40.30.0000011.1111111

40.30.00001111.11111111 40.30.15.255/21

40.30.4.0/22

40.30.0000100.00000000

40.30.7.255/22 40.30.0000111.1111111

THIS COULD BE ANOTHER POSSIBILITY

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

40.30.10.10/20 Diving into 3 subnets

40.30.00001010.00001010

40.30.00001000.00000000 40.30.8.0/21

40.30.0.0/22

40.30.00000000.00000000

40.30.3.255/22

40.30.00000011.11111111

COMPANY B

40.30.00001111.11111111 40.30.15.255/21

40.30.4.0/22

40.30.0000100.00000000

40.30.7.255/22

40.30.0000111.11111111

ITSELF

COMPANY A

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Computer Networks

Supernetting OR Aggregation

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

In subnetting, a single network is divided into multiple smaller subnetworks.

In Supernetting/Aggregation, multiple networks are combined into a bigger network termed as a Super network or Supernet.

Rules for Aggregation :

1. All the Networks should be contiguous.
2. The block size of every networks should be equal and must be in form of 2^n .
3. First Network id should be exactly divisible by whole size of supernet.

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Points to be checked before aggregation :

- 1. All the Networks should be contiguous.
- 2. The block size of every networks should be equal and must be in form of 2^n .
- 3. First Network id should be exactly divisible by whole size of supernet.

Example:


200.1.0.0 / 24
200.1.1.0 / 24
200.1.2.0 / 24
200.1.3.0 / 24

Total size of the supernet = $4 \times 2^8 = 2^{10}$
Dividing the First Network id with 2^{10}
Has 0 in last 10 bits. Therefore Divisible.

All are satisfied, hence we can move forward with aggregation.

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

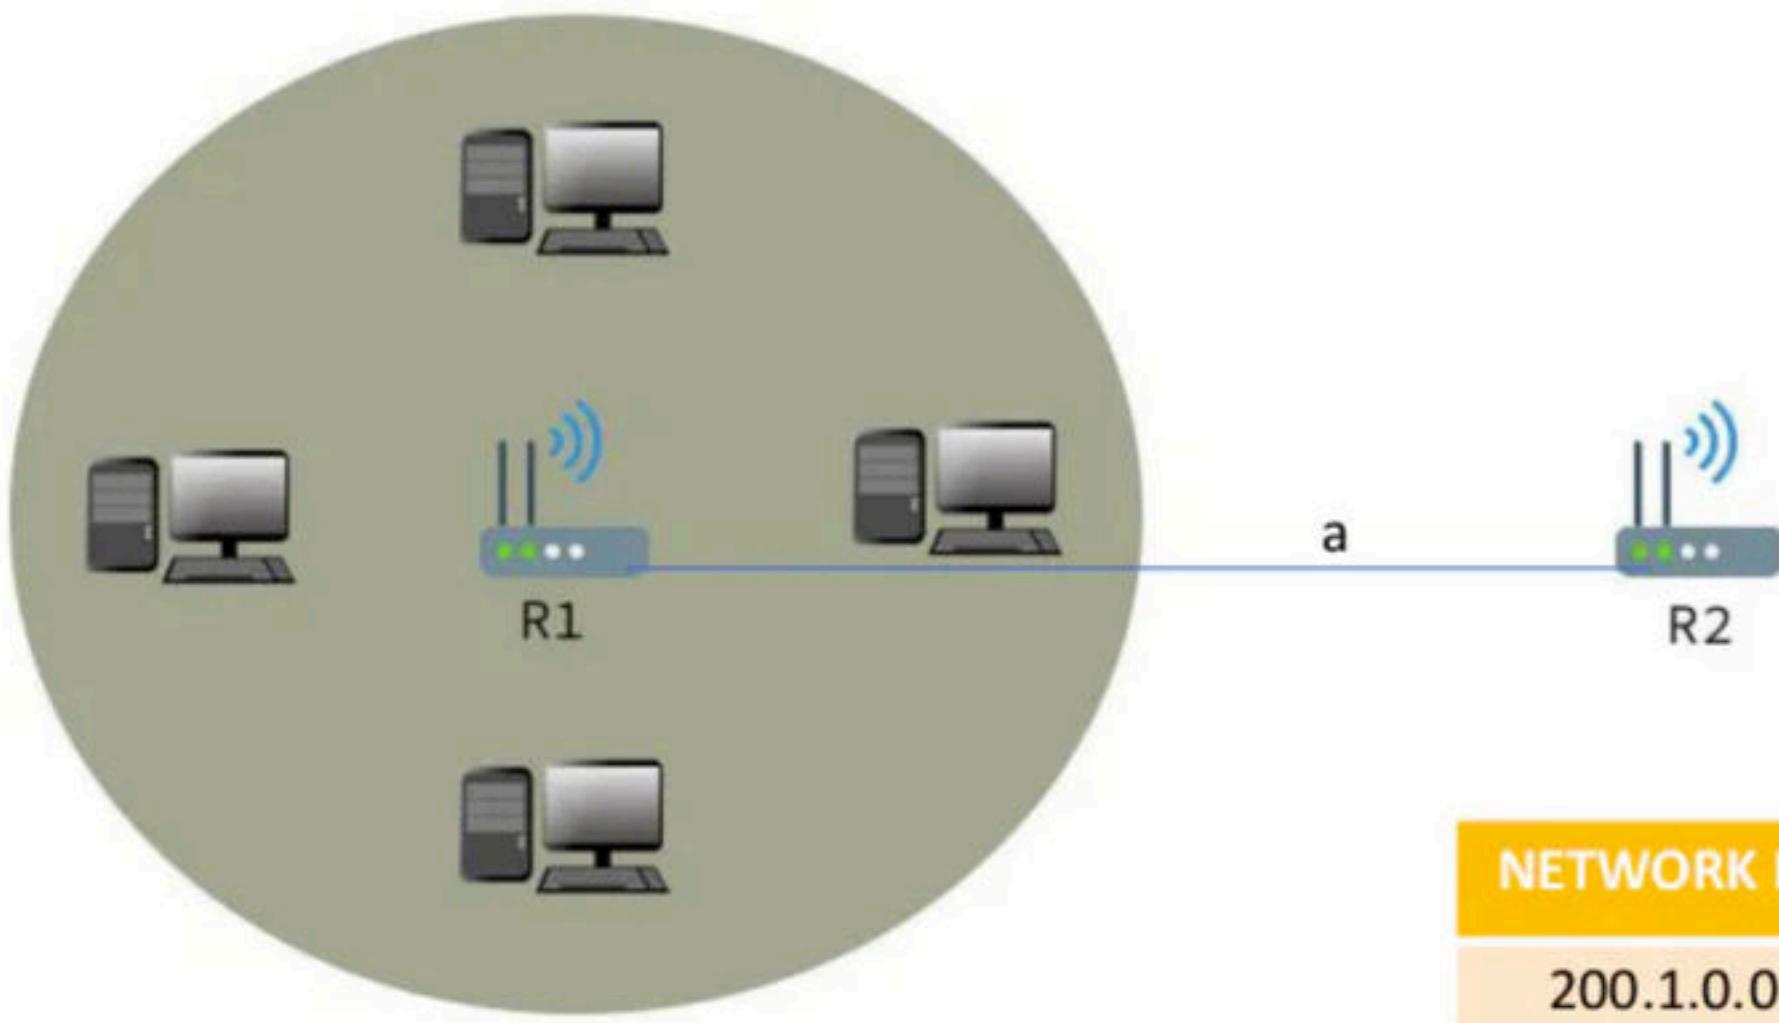

Instead of having 4 entries
We want just one entry in R2
having a single supernet id

ROUTING TABLE AT R2

NETWORK ID	SUBNET MASK	INTERFACE
200.1.0.0	255.255.255.0	a
200.1.1.0	255.255.255.0	a
200.1.2.0	255.255.255.0	a
200.1.3.0	255.255.255.0	a

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Finding the Supernet mask:

It is 32 bit number

In Supernetting, the Number of 1's represent the Fixed part
And Number of 0's represent the Variable part

200.1.00000000.00000000	
200.1.00000001.00000000	
200.1.00000010.00000000	
200.1.00000011.00000000	

Fixed Variable

Replacing the fixed part with 1's and variable with 0's
We get the supernet mask,

255.255.252.0

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

Finding the Supernet mask:

It is 32 bit number

In Supernetting, the Number of 1's represent the Fixed part
And Number of 0's represent the Variable part

200.1.00000000.00000000	
200.1.00000001.00000000	
200.1.00000010.00000000	
200.1.00000011.00000000	

Fixed Variable

Replacing the fixed part with 1's and variable with 0's
We get the supernet mask,

255.255.252.0

SHORTCUT TO FIND THE SUPERNET ID AND SUPERNET MASK

If the network id's follow the Rules then,
The first IP address is always the Supernet id.

Add the network size of all the networks given
The total denotes the host if part of the subnet mask .

From the example:

$$\text{Network size of all} = 2^8 + 2^8 + 2^8 + 2^8 = 2^{10}$$


Therefore the subnet mask contains
10 bits in host id part.

And the network id part will contain 22 bits.

That is what is the subnet mask

RAVINDRABABU RAVULA

RAVINDRABABU RAVULA

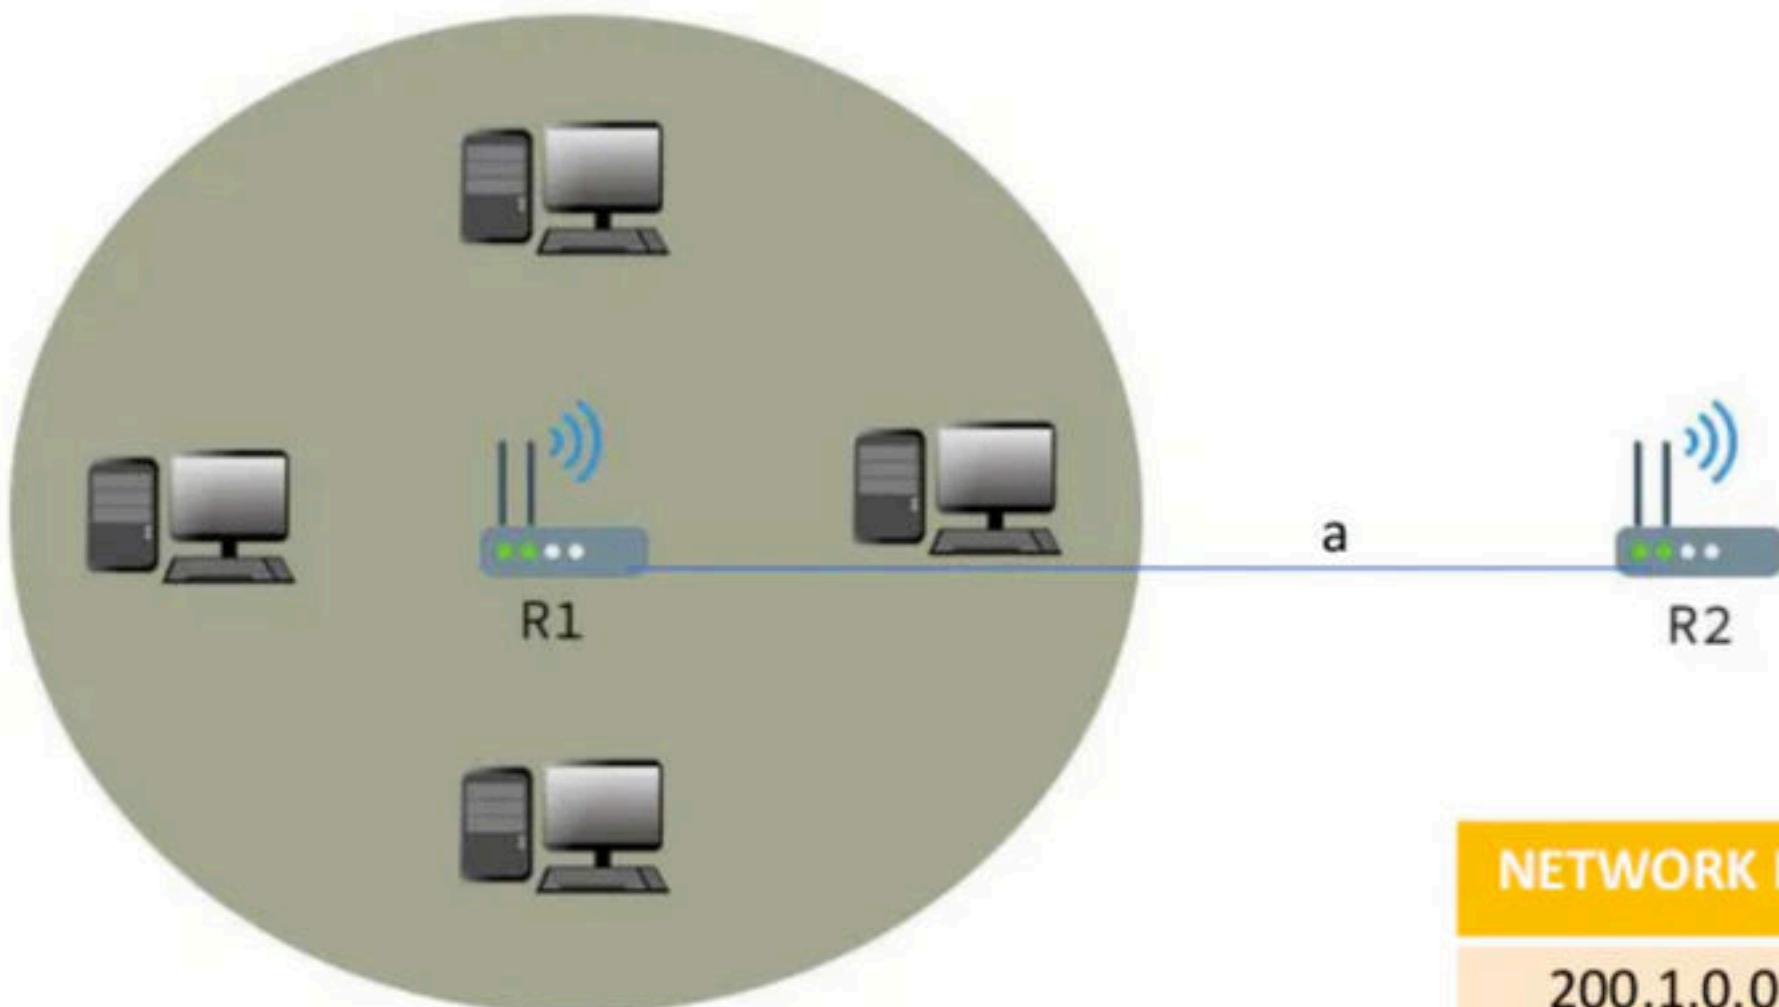

Revised Routing table

ROUTING TABLE AT R2

NETWORK ID	SUBNET MASK	INTERFACE
200.1.0.0	255.255.252.0	a

Note : In case of R1, we need all the 4 entries