



First microcontroller

Power Supply

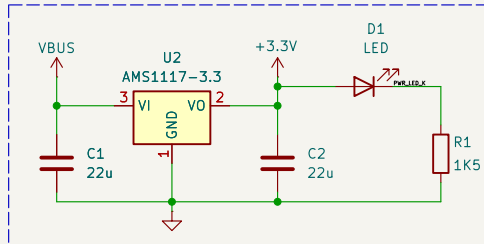


VBUS from USB connector (normally at 5v) Min. 22uF inp./outp. caps

Mounting Holes



M2

Microcontroller (and USB)

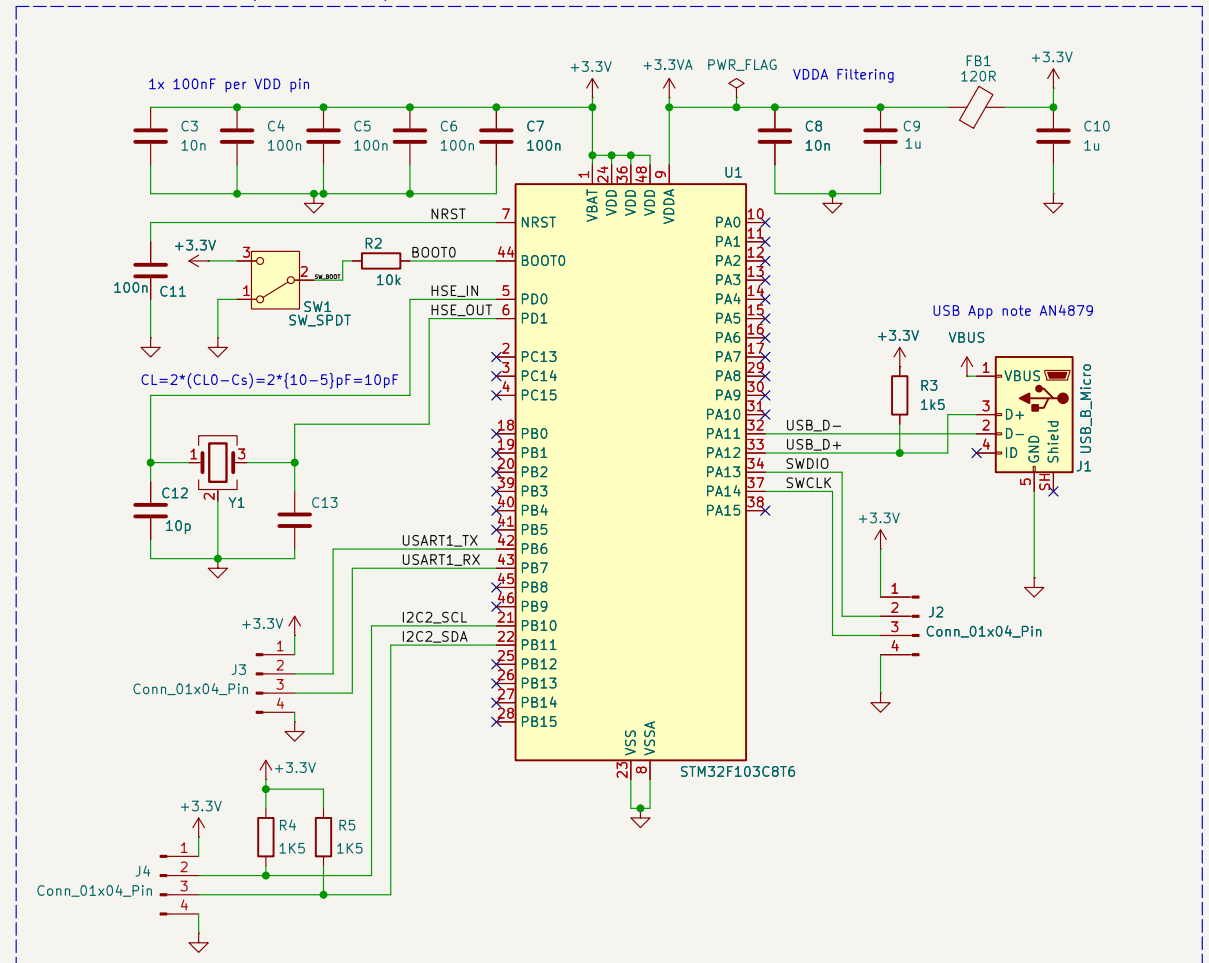

Pin-out using STM32CubeIDE and STM32CubeMX

Sheet: /

File: newnew.kicad_sch

Title: First Microcontroller

Size: A4 Date: 2026-07-25

KiCad E.D.A. 10.0.5

Rev: 0.1

Id: 1/1