

Alvin Hsieh

Engineering Portfolio


UW-Madison: Engineering Mechanics and Aerospace

arhsieh@wisc.edu | (608) 304-4001


Wisconsin Racing FSAE: Accumulator Cooling

(Fall 2024 - Current)


- Introduced active air-cooled package into the HV Accumulator to keep cells under 45°C charging temperature limit due to the introduction of regenerative braking
- Identified chosen blower fan based on 1D thermal analysis and simulated heat transfer coefficient
- Design and tested inertial separator component to prevent water ingress into accumulator
- Led module thermal testing for characterization of air-cooled (11s3p) module temperatures vs SOC

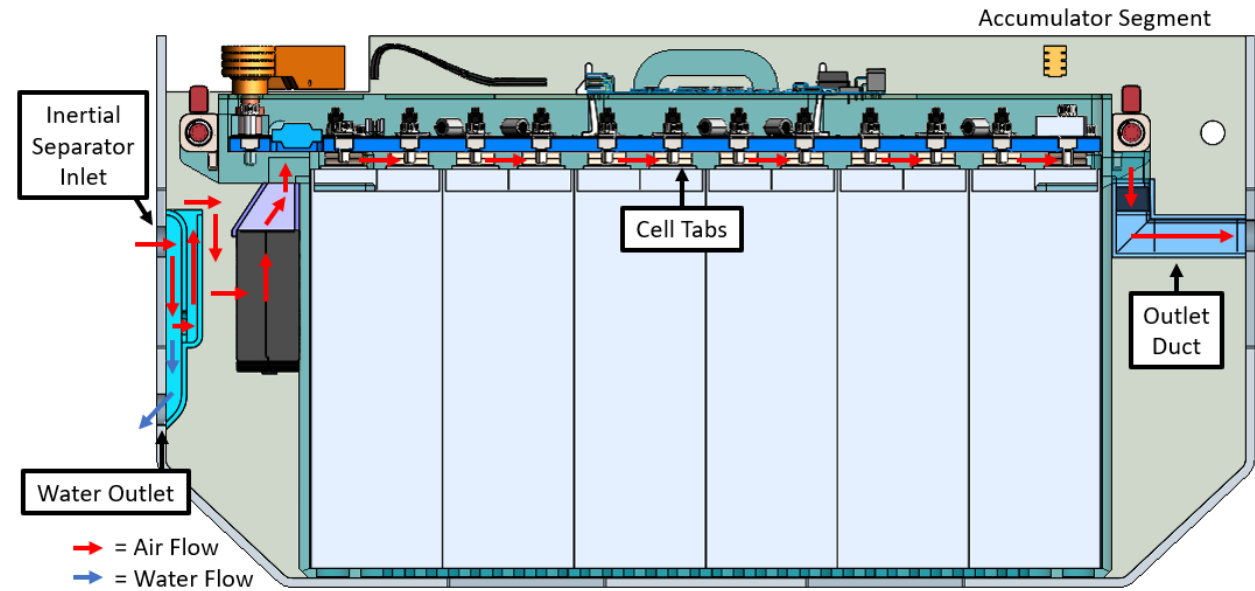

Accumulator Cooling Design and Module Air Flow Path

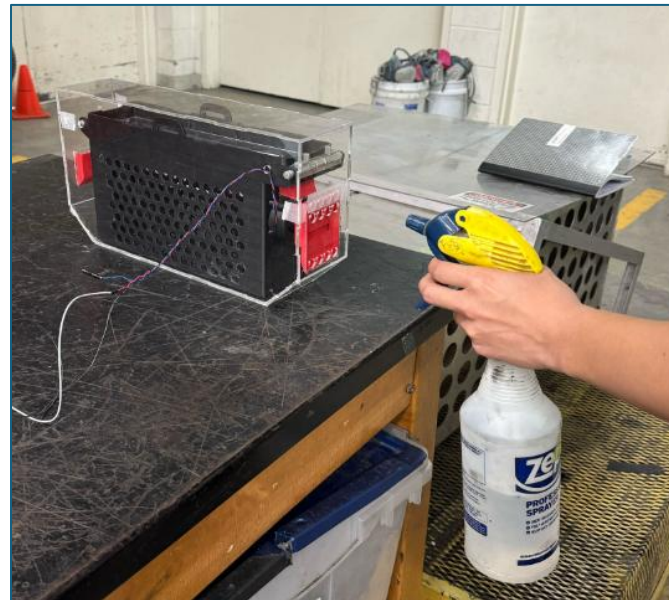

Inertial Separator Testing

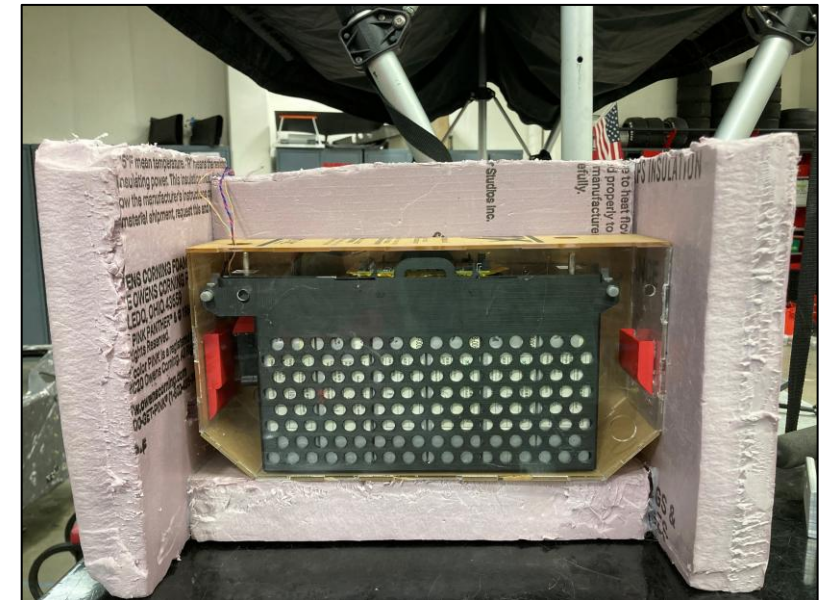

Module Thermal Testing


Wisconsin Racing FSAE: Monocoque Modal Tap Test

(Spring 2024)

- Conducted modal tap test for correlation of CFRP monocoque test modes to FEM modes
- Developed Python code for LabJack DAQ to record time domain data at 10 kHz, resolving frequencies up to 1 kHz
- Developed WR-TapTest, a Python package designed to post-process tap testing data
 - Trial run averaging
 - Take time domain forcing and response data to FRFs, storing in 3D tensor
 - Compare test modes to FEM modes with modal assurance criterion (MAC)
- Correlation of modes in 200 – 600 Hz range




Free-free Boundary Condition Test Set-up

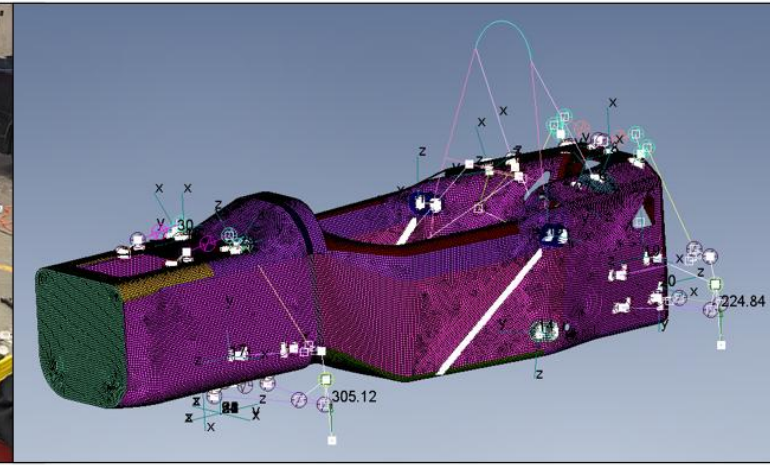

Monocoque Finite Element Model



Recording Forcing and Response Time Histories

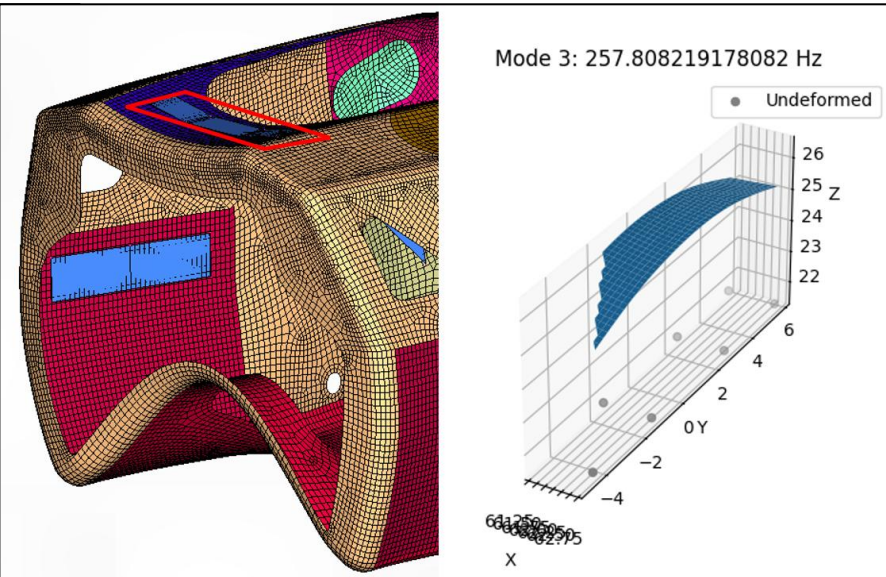


Comparing FEM Modes (left) to Test Modes (right)


Wisconsin Racing FSAE: End Plate Mass Optimization

(Spring 2024)


- Utilized Siemens NX and FEMAP as well as the NASTRAN finite element solver to optimize the mass of the rear wing endplates
- Plate meshed carbon fiber composites with PCOMP laminate card
- Mapped rear wing pressure loading from CFD simulation of the car's top speed to the finite element model
- Static design sweep resulted in 2.42 lbm decrease from original design
 - Global laminate: 2 ply [0, 45]
 - Global core density: 2.0 pcf
 - Chassis bolted connection core density: 6.0 pcf
 - Endcap bolted connection core density: 3.0 pcf
 - Positive margins for core shear and Tsai-Wu failure criterion

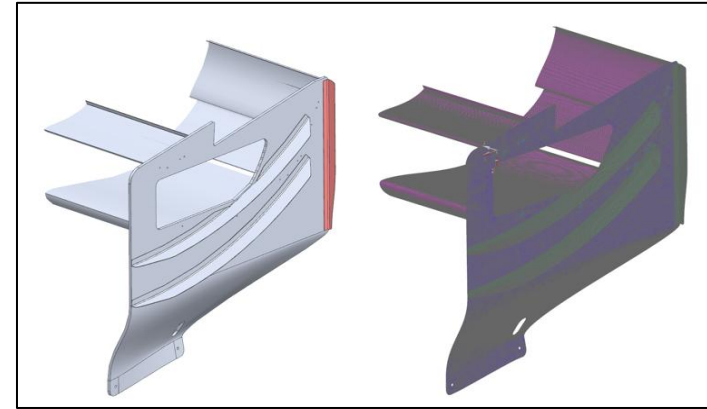


Geometry & Meshed Endplate under Symmetry BC

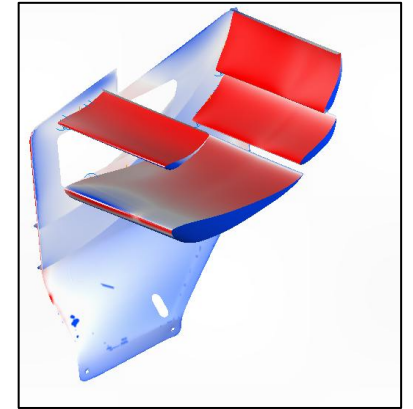


Pressure Mapping to FEM

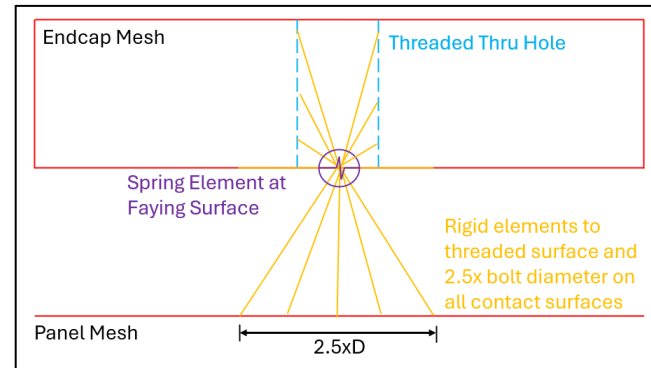

Panel to Endcap RBE Connection

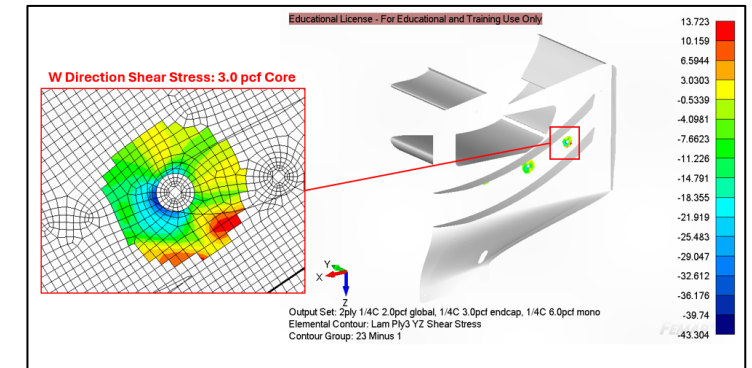

Driving Core Shear in End Cap Connection

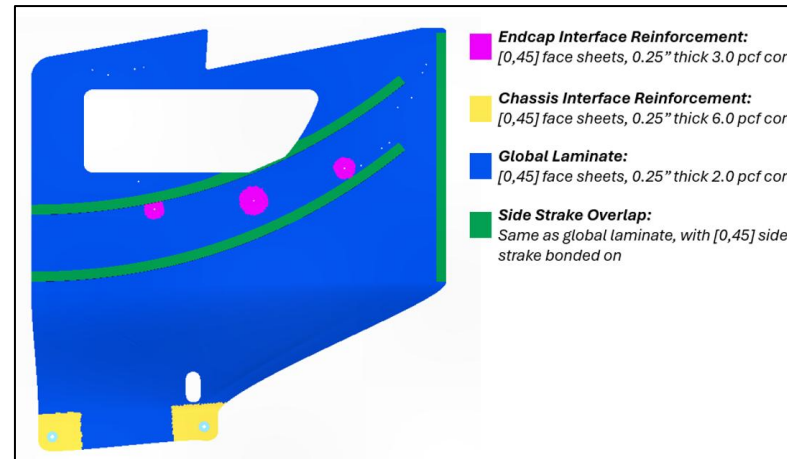

Final Design Sweep Laminate and Core Specifications




224C Rear Wing


Wisconsin Racing FSAE: Cooling Loop Thermal Analysis

(Fall 2023 - Current)


- Introduced Conjugate Heat Transfer (CHT) CFD simulations to Wisconsin Racing to analyze heat transfer within the cooling loop
 - Updated cooling jacket pressure drop for 1D Simulink cooling loop model
 - Worked with cooling design team to present optimized flow rate for the pump
- Utilized high performance computing (HPC) clusters to run simulations
- Developed StarCCM+ Java macros, batch scripts, and Python scripts to improve parallel computing for sweeps and to decrease post-processing time

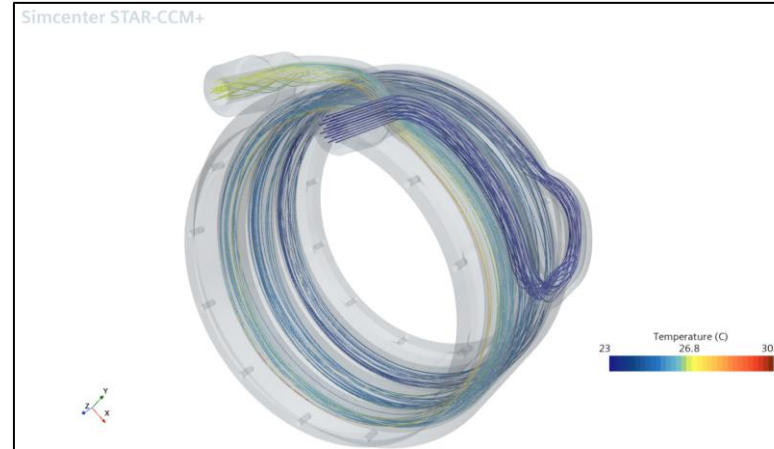

Cooling Jacket Heat Transfer & Pressure Drop

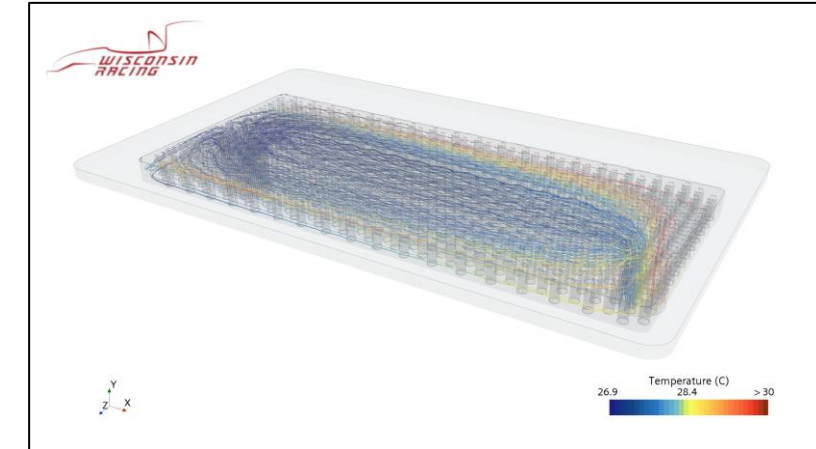


Cold Plate Heat Transfer Simulation

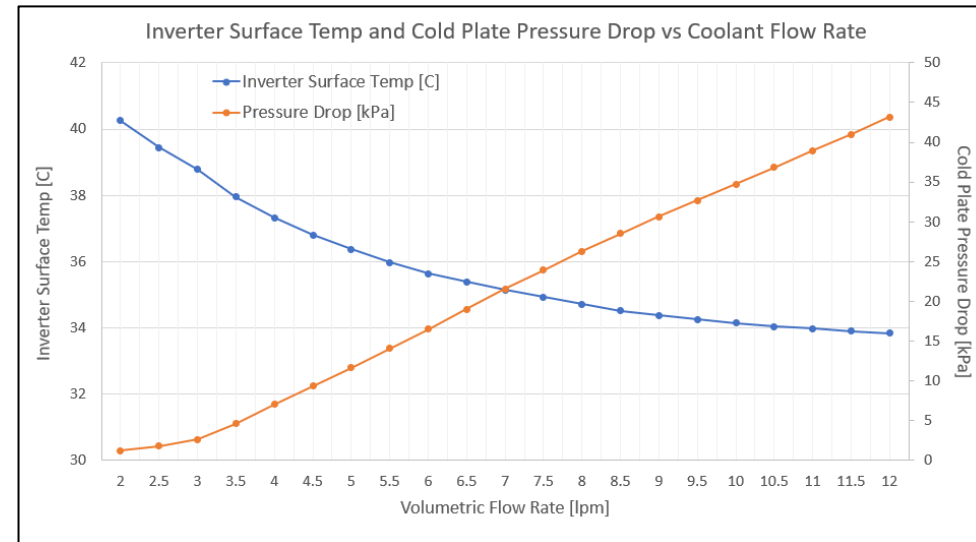


Cold Plate Flow Rate Optimization Study


Wisconsin Racing FSAE: Other Analysis Projects

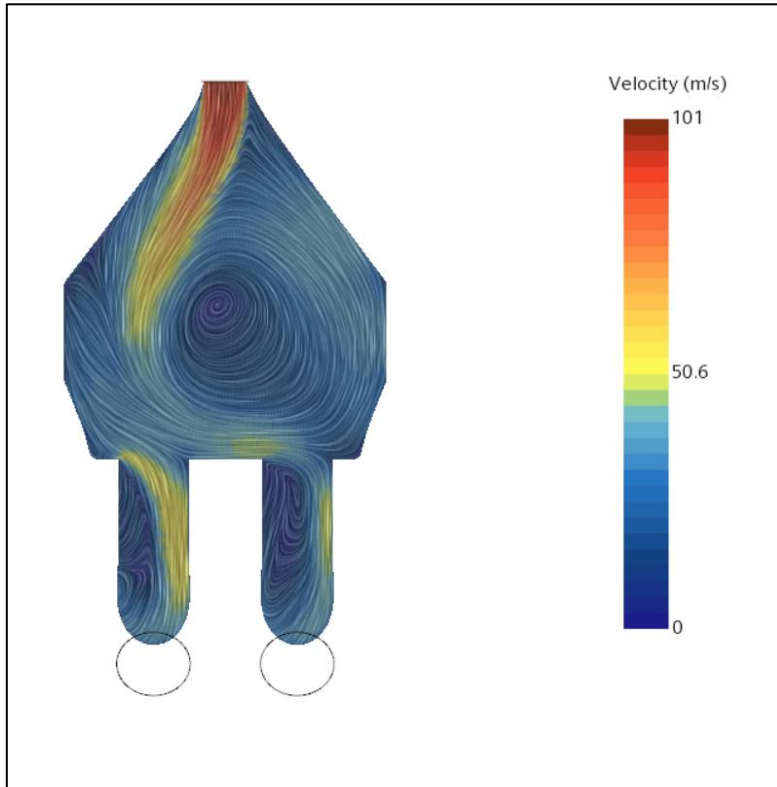

Custom Intake CFD Support

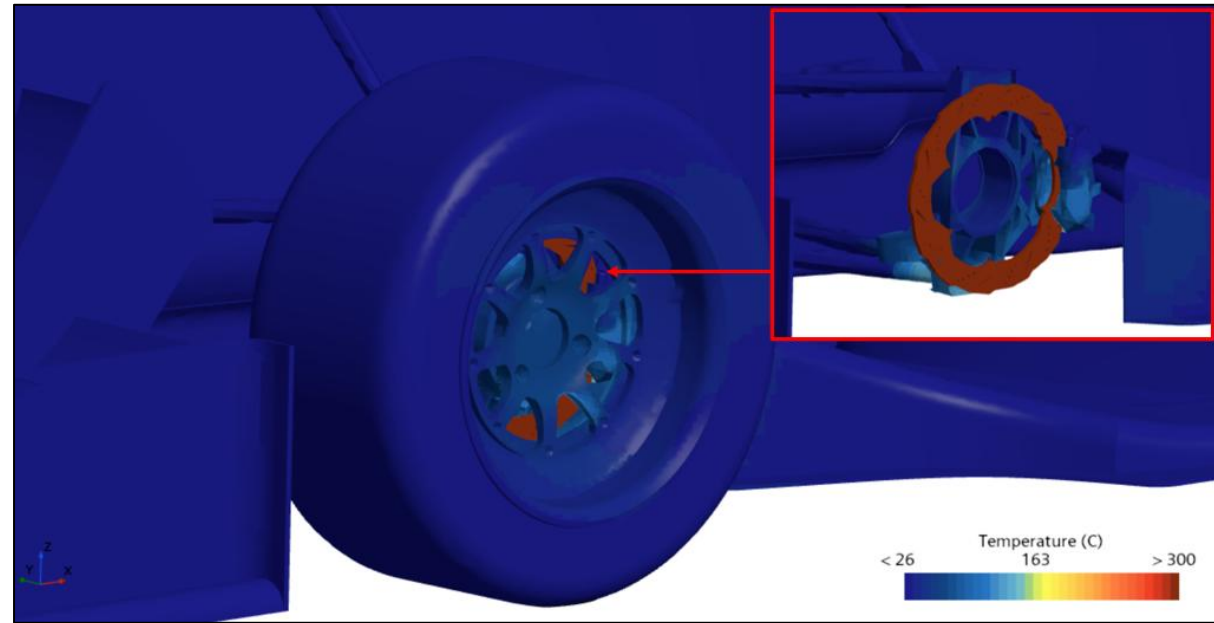

Brake Rotor Heat Transfer Coefficient Study

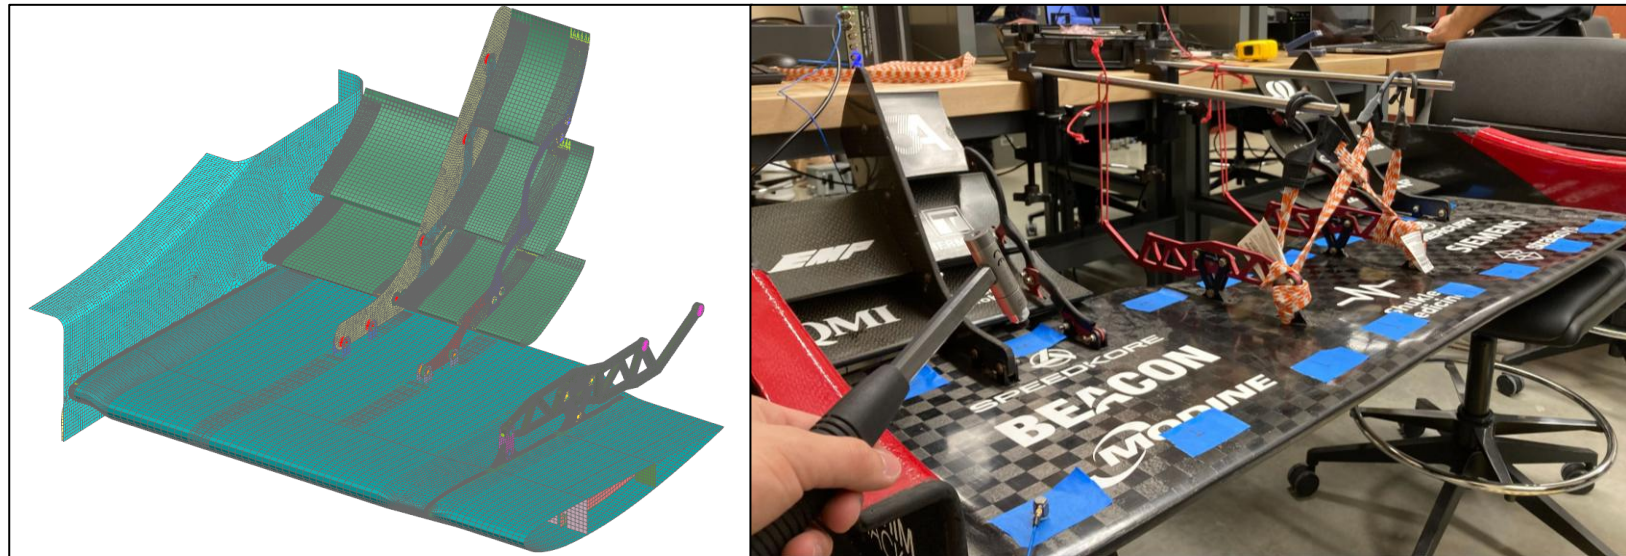

Front Wing Modal Tap Test Initial Correlation

Wisconsin Racing FSAE: Manufacturing & Testing




Monocoque Plug Gel Coat




Monocoque Mold Wet Lay



Radiator Wind Tunnel Testing

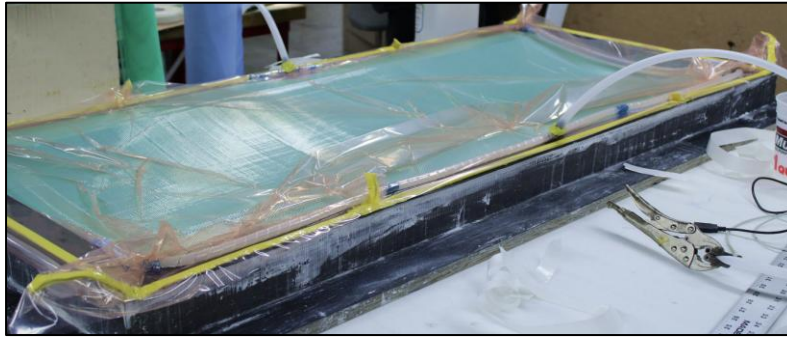

Front Wing Main Plane Element Infusion

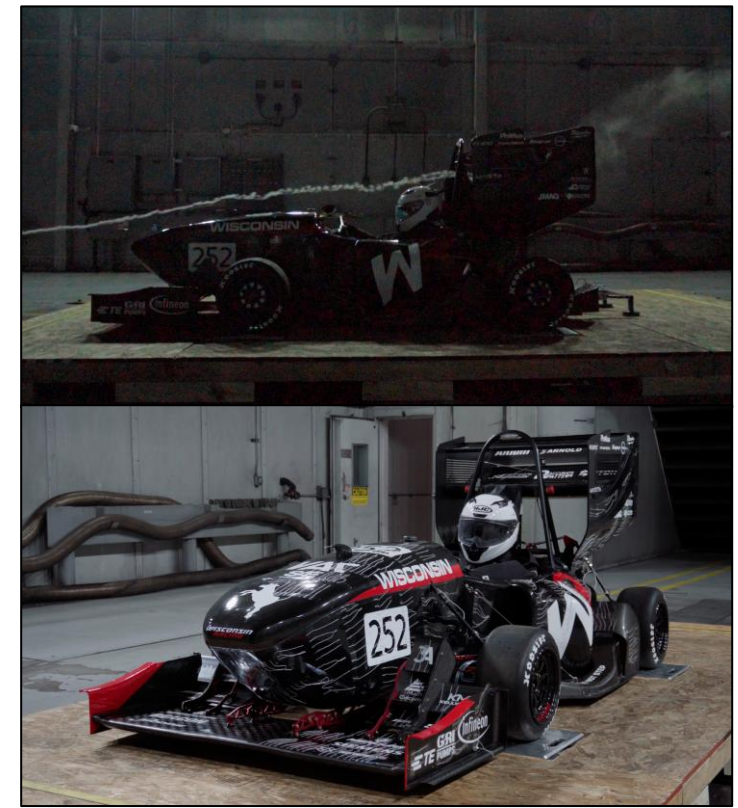

Aerodynamics Package Wind Tunnel Testing



Carbon Fiber Monocoque Lay-Up, Bag, Cure, and De-Molding