

# AMB Design Spreadsheet Equations

Ari Meles-Braverman

Version 1.2

## Contents

1	General Motor Equations	2
2	Mechanism Gear Ratio Calculator	3
3	Gear Options Calculator	5
4	Chain/Belt C-C Calculator	5
5	Drivetrain Calculator	6
6	Projectile Trajectory Calculator	7
7	Pneumatics Calculator	8
8	Pneumatic Linkage Calculator	9
9	Lead Screw Calculator	10
10	Beam Bend Calculator	11
A	Maximum Efficiency Derivation	15
B	Chain Length Derivation	16
C	Optimal Shifting Speed Derivation	17
D	Projectile Equation Derivations	18
E	Pneumatics Simulation Derivation	19
F	Equivalent Radius/Load Derivation	20

# 1 General Motor Equations

## 1.1 Motor System Equations

$\tilde{x}$  denotes the property of a system of equivalent motors connected 1:1 in a gearbox

$$\tilde{\omega}_f = \omega_f \cdot \left( \frac{V}{V_{spec}} \right) \quad (1)$$

$$\tilde{\tau}_s = \tau_s \cdot \eta n \left( \frac{V}{V_{spec}} \right) \quad (2)$$

$$\tilde{i}_f = i_f \cdot n \left( \frac{V}{V_{spec}} \right) \quad (3)$$

$$\tilde{i}_s = i_s \cdot n \left( \frac{V}{V_{spec}} \right) \quad (4)$$

$$P = \frac{2\pi\omega_f \cdot \tau_s}{4} \quad (5)$$

$$\tilde{P} = \frac{2\pi\tilde{\omega}_f \cdot \tilde{\tau}_s}{4} = P \cdot \eta n \left( \frac{V}{V_{spec}} \right)^2 \quad (6)$$

$$K_T = \frac{\tilde{\tau}_s}{\tilde{i}_s - \tilde{i}_f} \quad (7)$$

$\omega_f$  = Motor Free Speed

$\tilde{\omega}_f$  = Adjusted Free Speed

$\tau_s$  = Motor Stall Torque

$\tilde{\tau}_s$  = Adjusted Stall Torque

$i_f$  = Motor Free Current

$\tilde{i}_f$  = Adjusted Free Current

$i_s$  = Motor Stall Current

$\tilde{i}_s$  = Adjusted Stall Current

$P$  = Motor Power

$\tilde{P}$  = Adjusted Motor Power

$n$  = # of Motors

$\eta$  = Gearbox Efficiency

$V$  = Applied Voltage

$V_{spec}$  = Specification Voltage (Almost Always 12)

$K_T$  = Motor Torque Constant

## 1.2 Instantaneous Motor Equations

$$\omega = \tilde{\omega}_f \cdot \left( 1 - \frac{\tau}{\tilde{\tau}_s} \right) \quad (8)$$

$$i = (\tilde{i}_s - \tilde{i}_f) \frac{\tau}{\tilde{\tau}_s} + \tilde{i}_f \quad (9)$$

$$\eta_{motor} = \frac{W_{out}}{W_{in}} = \frac{\tau \cdot \omega(\tau)}{V \cdot i(\tau)} = \frac{\tau(\tilde{\tau}_s - \tau)\tilde{\omega}_f}{V(\tilde{i}_s\tau + \tilde{i}_f(\tilde{\tau}_s - \tau))} \quad (10)$$

$\omega$  = Instantaneous Motor Speed

$\tau$  = Instantaneous Motor Torque

$i$  = Instantaneous Motor Current

$\eta_{motor}$  = Instantaneous Motor Efficiency

## 2 Mechanism Gear Ratio Calculator

### 2.1 General Equations

$$\omega_{free} = \frac{\tilde{\omega}_f}{G} \quad (11)$$

$$F_s = \frac{\tilde{\tau}_s G}{r} \quad (12)$$

$$\omega_{load} = \omega_{free} \cdot \left(1 - \frac{F}{F_s}\right) \quad (13)$$

$$v_{free} = \omega_{free} \cdot 2\pi r \quad (14)$$

$$v_{load} = \omega_{load} \cdot 2\pi r \quad (15)$$

$$i = \frac{rF}{K_T G n} + \frac{\tilde{i}_f}{n} \quad (16)$$

$$V_s = V_{spec} \frac{rF}{\tilde{\tau}_s \eta n G} \quad (17)$$

$G$  = Gear Ratio

$\eta$  = Gearbox Efficiency

$n$  = # of Motors

$F$  = Load Applied

$r$  = Load Radius

$\omega_{free}$  = Output Rotational Free Speed

$\omega_{load}$  = Output Rotational Loaded Speed

$v_{free}$  = Output Linear Free Speed

$v_{load}$  = Output Linear Loaded Speed

$i$  = Current Per Motor

$F_s$  = Stall Load

$V_s$  = Stall Voltage

### 2.2 Gear Ratio Calculations

#### 2.2.1 Maximum Power

$$F_s = 2F \quad (18)$$

Substituting into (12) and solving for  $G$  gives:

$$G = \frac{2rF}{\tilde{\tau}_s} \quad (19)$$

#### 2.2.2 Maximum Efficiency

$$G = \frac{rF}{\tilde{\tau}_s} \left(1 + \sqrt{\frac{\tilde{i}_s}{\tilde{i}_f}}\right) \quad (20)$$

For derivation, see Appendix [A](#)

### 2.2.3 At Stall

$$F_s = F \quad (21)$$

Substituting into (12) and solving for  $G$  gives:

$$G = \frac{rF}{\tilde{\tau}_s} \quad (22)$$

### 2.2.4 By Rotational Speed ( $\omega_{load}$ )

We can substitute (8) and (9) into (10):

$$\omega_{load} = \frac{\tilde{\omega}_f}{G} \cdot \left(1 - \frac{F}{\tilde{\tau}_s G}\right) \quad (23)$$

Solving for  $G$ , we get:

$$G = \frac{\tilde{\omega}_f}{2\omega_{load}} \left(1 + \sqrt{1 - 4rF \frac{\omega_{load}}{\tilde{\tau}_s \tilde{\omega}_f}}\right) \quad (24)$$

### 2.2.5 By Linear Speed ( $v_{load}$ )

We can solve (15) for  $\omega_{load}$ :

$$\omega_{load} = \frac{v_{load}}{2\pi r} \quad (25)$$

Now knowing  $\omega_{load}$  we can use (24) to calculate  $G$

### 2.2.6 By Per-Motor Current ( $i$ )

Solving (16) for  $G$ , we get:

$$G = \frac{rF}{K_T(ni - \tilde{i}_f)} \quad (26)$$

### 2.2.7 By Stall Load ( $F_s$ )

We can solve (12) for  $G$ :

$$G = \frac{rF_s}{\tilde{\tau}_s} \quad (27)$$

### 2.2.8 By Stall Voltage ( $V_s$ )

Solving (17) for  $G$ , we get:

$$G = 12 \frac{rF}{\tau_s \eta n V_s} \quad (28)$$

### 3 Gear Options Calculator

This calculator uses a brute-force search algorithm to find combinations of gears that meet the set criteria. All gears in the list must have  $dp = 20$ . The formulas used to check the criteria are:

$$OD_x = \frac{n_x + 2}{20} [\text{in}] \quad (29)$$

$$\text{C-C}_{xy} = \frac{n_x + n_y}{40} [\text{in}] \quad (30)$$

$$\text{clearance}_{xyz} = \text{C-C}_{xy} - \frac{1}{2}OD_z \quad (31)$$

$n_x$  = Number of teeth of gear  $x \in [1, 2, 3, 4]$

$G$  = Total gear ratio

$OD_x$  = Outer diameter of gear  $x$

$\text{C-C}_{xy}$  = Center-to-center distance between gears  $x$  and  $y$

$\text{clearance}_{xyz}$  = Clearance distance of gear  $x$  shaft

### 4 Chain/Belt C-C Calculator

This method of solving for  $D$  is inspired by and based on the formulas used in [Clem1640's Chain/Belt Calculator](#). The language in this section will only reference chain, sprockets, and chain links; but all equations also apply to belts, pulleys, and belt teeth, respectively.

First we start with basic equations for chain and sprockets:

$$2\pi r_i = n_i p \quad (32)$$

$$L = lp \quad (33)$$

$$C = D - (r_1 + r_2) \quad (34)$$

We can construct an equation to represent the path length of the chain relative to the center-to-center distance. A derivation of this equation can be found in [Appendix B](#).

$$L = 2\sqrt{D^2 - (r_1 - r_2)^2} + 2(r_1 + r_2) \cos^{-1} \left( \frac{r_1 - r_2}{D} \right) + 2\pi r_2 \quad (35)$$

Unfortunately we cannot solve this equation analytically to get  $D$ , even with the help of a computer. So we solve the function numerically using the Newton-Raphson Method. For the forward calculation our initial guess for  $D$  is  $\frac{L}{2}$ , which would be the case if both sprockets had diameters of 0. For the reverse calculation, we use the estimated value of  $D$  as the initial guess. The Newton-Raphson Method then improves the accuracy of  $D$  to the correct solution until the error is less than  $10^{-12}$ .

$L$  = Chain Length

$l$  = # of Links

$D$  = Center to Center Distance

$n_i$  = # of Teeth on Sprocket  $i \in [1, 2]$

$r_i$  = Radius of Sprocket  $i \in [1, 2]$

$p$  = Chain Pitch

$C$  = Clearance

## 5 Drivetrain Calculator

### 5.1 Forward Calculation

Equations taken from [JVN's Mechanical Design Calculator](#).

$$v_{free} = \frac{\tilde{\omega}_f \cdot \pi d}{G} \quad (36)$$

$$v_{adj} = v_{free} \cdot k_{SL} \quad (37)$$

$$i_{slip} = \frac{\tilde{W} \mu d}{2K_T \cdot nG} + \frac{\tilde{i}_f}{n} \quad (38)$$

### 5.2 Reverse Calculation

$$i_{tot} = \frac{V_{batt} - V_{min}}{R_{batt} + R_{main} + \frac{1}{n}R_{br}} \quad (39)$$

$$G_{slip} = \frac{\mu d \tilde{W}}{2K_T (i_{tot} - \tilde{i}_f)} \quad (40)$$

Formulas for  $v_{free}$  and  $v_{adj}$  are the same as for the Forward Calculation – (36) and (37) respectively

$v_{free}$  = Free Speed

$v_{adj}$  = Adjusted Speed

$i_{slip}$  = Wheel Slip Current

$i_{tot}$  = Maximum Total Current Draw

$G_{slip}$  = Maximum Gear Ratio to Slip Wheels above  $V_{min}$

$K_T$  = Motor Torque Constant

$\omega_f$  = Motor Free Speed

$i_f$  = Motor Free Current

$d$  = Wheel Diameter

$\mu$  = Wheel Coefficient of Friction

$\tilde{W}$  = Adjusted Robot Weight (i.e. weight resting on driven wheels)

$G$  = Total Gear Ratio

$k_{SL}$  = Speed Loss Constant

$V_{batt}$  = Battery Resting Voltage

$V_{min}$  = Minimum Allowable System Voltage

$R_{batt}$  = Battery Internal Resistance

$R_{main}$  = Resistance of Main Power Wiring

$R_{br}$  = Resistance of Each Branch Circuit

## 6 Projectile Trajectory Calculator

### 6.1 Forward Calculation

$$h_f = h_i + d \tan \theta_i - \frac{g \cdot d^2}{2v_i^2 \cos^2 \theta_i} \quad (41)$$

$$\theta_f = \tan^{-1} \left( 2 \frac{h_f - h_i}{d} - \tan \theta_i \right) \quad (42)$$

### 6.2 Reverse Calculation

$$\theta_i = \tan^{-1} \left( 2 \frac{h_f - h_i}{d} - \tan \theta_f \right) \quad (43)$$

$$v_i = \sec \theta_i \cdot \sqrt{\frac{g \cdot d}{|\tan \theta_i - \tan \theta_f|}} \quad (44)$$

$h_i$  = Release (Initial) Height

$h_f$  = Target (Final) Height

$\theta_i$  = Release (Initial) Angle

$\theta_f$  = Target (Final) Angle

$v_i$  = Release (Initial) Velocity

$d$  = Horizontal Distance to Target

$g$  = Acceleration Due to Gravity

For derivation see [Appendix D](#).



## 7 Pneumatics Calculator

The "simulation" is run at timesteps of  $dt = 1$  second for a duration of 150 seconds.

The pressure at the current step of the simulation can be calculated by:

$$P_{n+1} = P_n + \frac{W_{comp} - \sum W_{cyl}}{V} \quad (45)$$

$$W_{comp} = \dot{V}_{comp}(P) \cdot dt \cdot 1\text{atm} \quad (46)$$

$$W_{cyl} = \left( \frac{\pi D^2}{4} P_{push} + \frac{\pi(D^2 - d^2)}{4} P_{pull} \right) L \cdot m \quad (47)$$

$\dot{V}_{comp}(P)$  is the compressor flow-rate as a function of the output pressure, taken from a fourth-degree polynomial interpolation of the data provided online. The volume of air is measured at atmospheric pressure, not at system pressure.  $m$  is the number of actuations per second (can be 0 when not firing, 1 when firing, or  $m > 1$  if firing more than once per second).

Derivations of these equations can be found in Appendix [E](#).

We can also calculate the pushing and pulling force of each cylinder using the formulas:

$$F_{push} = \frac{\pi D^2}{4} P_{push} \quad (48)$$

$$F_{pull} = \frac{\pi(D^2 - d^2)}{4} P_{pull} \quad (49)$$

$P_n$  = System Pressure at Step  $n$

$V$  = System Volume

$W_{comp}$  = Work Done by the Compressor

$W_{cyl}$  = Work Done by Each Cylinder

$D$  = Cylinder Diameter

$d$  = Cylinder Rod Diameter

$L$  = Cylinder Length


$P_{push}$  = Pushing Pressure

$P_{pull}$  = Pulling Pressure

$F_{push}$  = Pushing Force

$F_{pull}$  = Pulling Force

## 8 Pneumatic Linkage Calculator

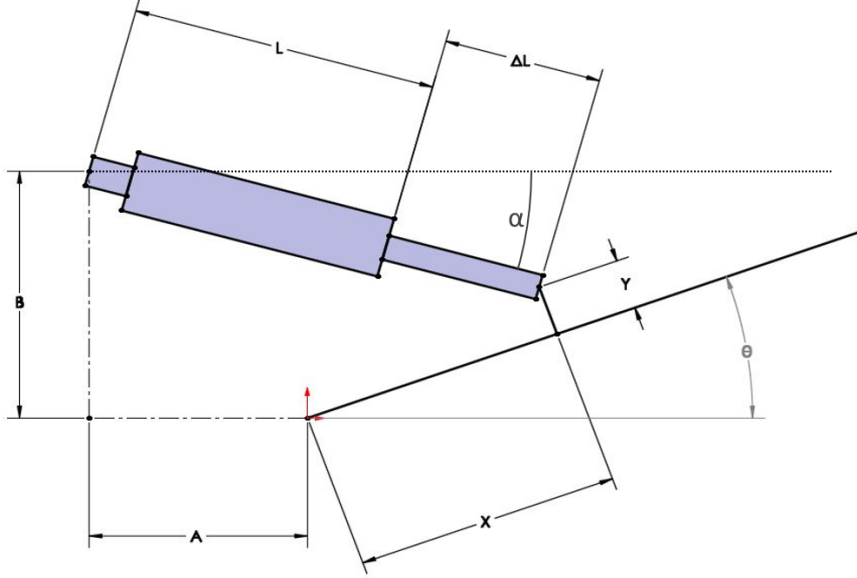

Let  $\theta_1$  and  $\alpha_1$  represent the system when the cylinder is retracted, and  $\theta_2$  and  $\alpha_2$  represent it when extended.

In the horizontal direction we have:

$$A + X \cos \theta_1 - Y \sin \theta_1 = L \cos \alpha_1 \quad (50)$$

$$A + X \cos \theta_2 - Y \sin \theta_2 = (L + \Delta L) \cos \alpha_2 \quad (51)$$

And in the vertical direction we have:

$$X \sin \theta_1 + Y \cos \theta_1 = B - L \sin \alpha_1 \quad (52)$$

$$X \sin \theta_2 + Y \cos \theta_2 = B - (L + \Delta L) \sin \alpha_2 \quad (53)$$

We can combine (50) and (53) to remove  $\alpha_1$  and get:

$$L^2 = A^2 + B^2 + X^2 + Y^2 + 2AX \cos \theta_1 - 2BY \cos \theta_1 - 2BX \sin \theta_1 - 2AY \sin \theta_1 \quad (54)$$

And combine (51) and (53) to remove  $\alpha_2$  and get:

$$(L + \Delta L)^2 = A^2 + B^2 + X^2 + Y^2 + 2AX \cos \theta_2 - 2BY \cos \theta_2 - 2BX \sin \theta_2 - 2AY \sin \theta_2 \quad (55)$$

To derive the forward formulas, you can solve (54) and (55) separately to get expressions for  $\theta_1$  and  $\theta_2$ . To derive the reverse formulas, you can solve (54) and (55) as a system of equations to get expressions for  $A$  and  $B$ . I will not include these expressions in this document, because they are extremely long.

## 9 Lead Screw Calculator

The basic transformation between rotational and linear motion is given by:

$$v = \omega \cdot np \quad (56)$$

Force & torque equations are taken from [Shigley's Mechanical Engineering](#) §8-2

$$d_m = d - \frac{p}{2} \quad (57)$$

$$T_R = \frac{F d_m}{2} \left( \frac{\pi \mu d_p + np \cos(\alpha)}{\pi d_p \cos(\alpha) - \mu np} \right) \quad (58)$$

$$T_L = \frac{F d_m}{2} \left( \frac{\pi \mu d_p - np \cos(\alpha)}{\pi d_p \cos(\alpha) + \mu np} \right) \quad (59)$$

Backdrive-able if  $T_L < 0$ .

$$\eta = \frac{T_R|_{\mu=0}}{T_R} = \frac{np}{\pi d_p} \cdot \frac{\pi d_p \cos(\alpha) - \mu np}{\pi \mu d_p + np \cos(\alpha)} \quad (60)$$

Equivalent radius/load formulas are designed to allow for lead screws as outputs in the Mechanism Gear Ratio Calculator. Derivations can be found in Appendix F.

$$r_{eq} = \frac{np}{2\pi} \quad (61)$$

$$L_{R,eq} = \frac{T_R}{r_{eq}} \quad (62)$$

$$L_{L,eq} = \frac{T_L}{r_{eq}} \quad (63)$$

$d$  = Screw Diameter

$p$  = Screw Pitch

$n$  = # of Starts

$\alpha$  = Half Thread Angle (i.e.  $\frac{\text{thread angle}}{2}$ )

$\mu$  = Coefficient of Friction of Screw

$F$  = Applied Force

$v$  = Instantaneous Linear Speed

$\omega$  = Instantaneous Rotational Speed

$d_m$  = Mean (Average) Diameter

$T_R$  = Raise Torque

$T_L$  = Lower Torque

$\eta$  = Efficiency

$r_{eq}$  = Equivalent Radius

$L_{R,eq}$  = Equivalent Raise Load

$L_{L,eq}$  = Equivalent Lower Load

$v_{free}$  = Free Speed

$v_{adj}$  = Adjusted Speed

$i_{slip}$  = Wheel Slip Current

$i_{tot}$  = Maximum Total Current Draw

$G_{slip}$  = Maximum Gear Ratio to Slip Wheels above  $V_{min}$

$K_T$  = Motor Torque Constant  
 $\omega_f$  = Motor Free Speed  
 $i_f$  = Motor Free Current  
 $d$  = Wheel Diameter  
 $\mu$  = Wheel Coefficient of Friction  
 $\tilde{W}$  = Adjusted Robot Weight (i.e. weight resting on driven wheels)  
 $G$  = Total Gear Ratio  
 $k_{SL}$  = Speed Loss Constant

$$v_{shift} = \frac{v_1 v_2}{v_1 + v_2} \quad (64)$$

$v_{shift}$  = Optimal Shifting Speed  
 $v_2$  = Gear 1 Free Speed  
 $v_2$  = Gear 2 Free Speed

For derivation see Appendix C.

## 9.1 Reverse Calculation

$$i_{tot} = \frac{V_{batt} - V_{min}}{R_{batt} + R_{main} + \frac{1}{n}R_{br}} \quad (65)$$

$$G_{slip} = \frac{\mu d \tilde{W}}{2K_T (i_{tot} - \tilde{i}_f)} \quad (66)$$

Formulas for  $v_{free}$  and  $v_{adj}$  are the same as for the Forward Calculation – (36) and (37) respectively

$V_{batt}$  = Battery Resting Voltage  
 $V_{min}$  = Minimum Allowable System Voltage  
 $R_{batt}$  = Battery Internal Resistance  
 $R_{main}$  = Resistance of Main Power Wiring  
 $R_{br}$  = Resistance of Each Branch Circuit

## 10 Beam Bend Calculator

### 10.1 Geometrical Deformation Resistance

Formulas for deformation resistance constants of different cross-sectional geometries are taken from [StructX](#).

$I$  = Area (Second) Moment of Inertia  
 $J$  = Torsion Constant

#### 10.1.1 Hex

$$I = 0.0601a^4 \quad (67)$$

$$J = 0.1154a^4 \quad (68)$$

$a$  = Distance Between Flats

### 10.1.2 Round

$$I = \frac{\pi}{64}d^4 \quad (69)$$

$$J = \frac{\pi}{32}d^4 \quad (70)$$

$d$  = Diameter

### 10.1.3 Round Tube

$$I = \frac{\pi}{8}d^3h \quad (71)$$

$$J = \frac{\pi}{4}d^3h \quad (72)$$

$d$  = Diameter

$h$  = Wall Thickness

### 10.1.4 Square

$$I = \frac{a^4}{12} \quad (73)$$

$$J = \frac{9}{64}a^4 \quad (74)$$

$a$  = Side Length

### 10.1.5 Rectangular Tube

$$I = \frac{1}{3}x^2yh \quad (75)$$

$$J = \frac{2h^2(x-h)^2(y-h)^2}{h(x+y-h)} \quad (76)$$

$x$  = Length Parallel to Force


$y$  = Length Perpendicular to Force

$h$  = Wall Thickness

## 10.2 Displacement Equations

Displacement formulas are taken from [Shigley's Mechanical Engineering](#) Appendix A-9

### 10.2.1 Force Between Supports

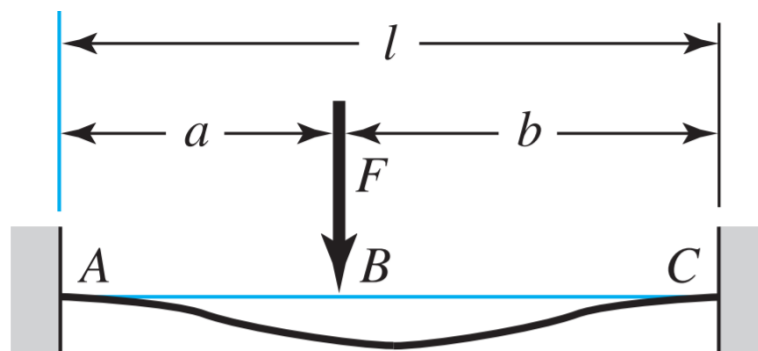

$$y = \frac{Fx^2b^2}{6EI^3}[3al - x(3a + b)] \quad (77)$$

Substitute  $b = l - a$  to get:

$$y = \frac{Fx^2(a - l)^2}{6EI^3}[3al - x(2a + l)] \quad (78)$$

Take the derivative, set equal to zero, and solve for  $x$ :

$$0 = \frac{\partial y}{\partial x} = \frac{Fx(l - a)^2}{2EI^3}(2a(l - x) - lx) \quad (79)$$

$$x = \frac{2al}{2a + l} \quad (80)$$

Substitute (80) into (78) to get:

$$y_{max} = \frac{2Fa^3(l - a)^2}{3EI(2a + l)^2} \quad (81)$$

$y$  = Vertical Displacement

$F$  = Load Force


$a$  = Distance to Closer Support

$l$  = Distance Between Supports

$E$  = Modulus of Elasticity

$I$  = Area Moment of Inertia

### 10.2.2 Cantilevered Force

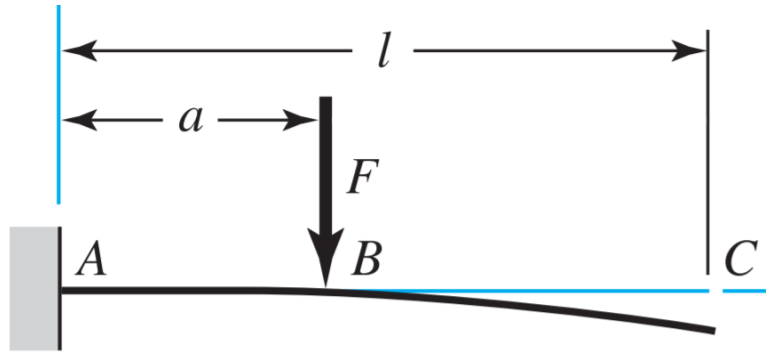

$$y_{max} = \frac{Fa^2}{6EI}(a - 3l) \quad (82)$$

$y_{max}$  = Largest Displacement

$F$  = Load Force

$a$  = Distance to Support

$l$  = Total Length

$E$  = Modulus of Elasticity

$I$  = Area Moment of Inertia

### 10.3 Buckling Force

This formula is taken from the Wikipedia page on [Euler's Critical Load](#)

$$F_{max} = \frac{\pi^2 EI}{(KL)^2} \quad (83)$$

Buckled shape of column shown by dashed line						
Theoretical K value	0.5	0.7	1.0	1.0	2.0	2.0
Recommended design value K	0.65	0.80	1.2	1.0	2.10	2.0
End condition key	 Rotation fixed and translation fixed Rotation free and translation fixed Rotation fixed and translation free Rotation free and translation free					

$F_{max}$  = Maximum Force  
 $E$  = Modulus of Elasticity  
 $I$  = Area Moment of Inertia  
 $K$  = End Condition Constant  
 $L$  = Column Length

### 10.4 Twisting Torque

This formula is taken from [Shigley's Mechanical Engineering](#) §3-12

$$\theta_{max} = \frac{TL}{GJ} \quad (84)$$

$\theta_{max}$  = Largest Angular Displacement  
 $T$  = Applied Torque  
 $L$  = Distance Between Torque and Support  
 $G$  = Shear Modulus  
 $J$  = Torsion Constant

# Derivations

## A Maximum Efficiency Derivation

To find the maximum efficiency, we take the derivative of (10) and set it equal to 0:

$$0 = \frac{\partial \eta}{\partial \tau} = \frac{(\tilde{i}_f(\tau - \tilde{\tau}_s)^2 - \tilde{i}_s \tau^2) \tilde{\omega}_f}{V(\tilde{i}_s \tau + \tilde{i}_f(\tilde{\tau}_s - \tau))^2} \quad (85)$$

Solving for the value of  $\tau$  at which  $\eta$  is maximized:

$$\tau_{\eta_{max}} = \frac{\tilde{\tau}_s \sqrt{\tilde{i}_f}}{\sqrt{\tilde{i}_f} + \sqrt{\tilde{i}_s}} \quad (86)$$

We know that  $\tau_{manip} = G \cdot \tau_{motor}$ , so we can substitute  $\tau_{\eta_{max}}$  for  $\tau_{motor}$ :


$$G = \frac{\tau_{manip}}{\tau_{motor}} = \frac{r \cdot F}{\tau_{\eta_{max}}} = \frac{r \cdot F}{\frac{\tilde{\tau}_s \sqrt{\tilde{i}_f}}{\sqrt{\tilde{i}_f} + \sqrt{\tilde{i}_s}}} \quad (87)$$

And simplifying gives:

$$G = \frac{rF}{\tilde{\tau}_s} \left( 1 + \sqrt{\frac{\tilde{i}_s}{\tilde{i}_f}} \right) \quad (20)$$



## B Chain Length Derivation

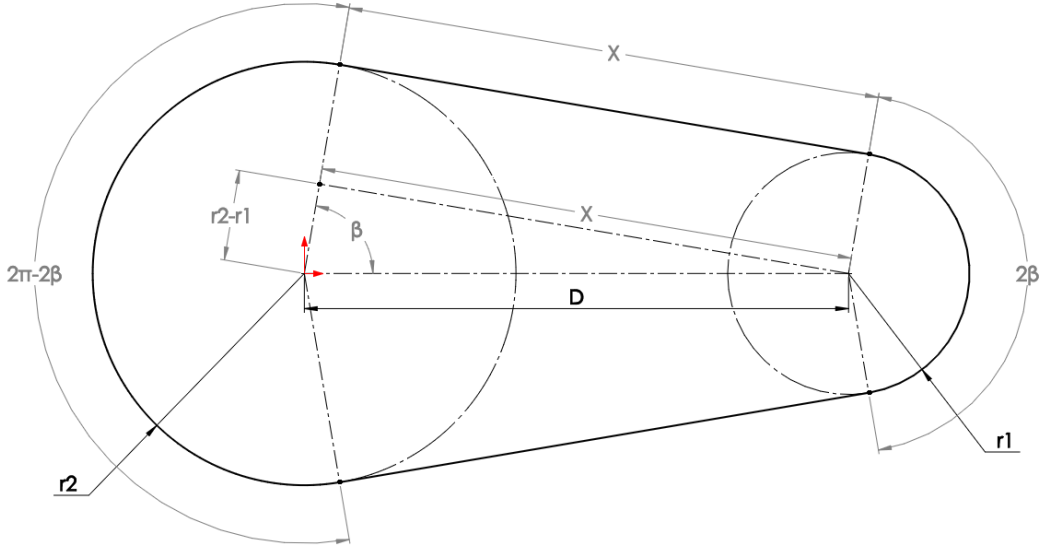

It is clear that:

$$L = 2X + r_1 \cdot 2\beta + r_2 \cdot (2\pi - 2\beta) \quad (88)$$

Looking at the right triangle in the center of the image, we can see that:

$$D^2 = X^2 + (r_2 - r_1)^2 \implies X = \sqrt{D^2 - (r_1 - r_2)^2} \quad (89)$$

$$\beta = \cos^{-1} \left( \frac{r_2 - r_1}{D} \right) = \cos^{-1} \left( \frac{r_1 - r_2}{D} \right) \quad (90)$$

Substituting (89) and (90) into (88) gives:

$$L = 2\sqrt{D^2 - (r_1 - r_2)^2} + r_1 \cdot 2 \cos^{-1} \left( \frac{r_1 - r_2}{D} \right) + r_2 \cdot \left( 2\pi - 2 \cos^{-1} \left( \frac{r_1 - r_2}{D} \right) \right) \quad (91)$$

And rearranging gives:

$$L = 2\sqrt{D^2 - (r_1 - r_2)^2} + 2(r_1 - r_2) \cos^{-1} \left( \frac{r_1 - r_2}{D} \right) + 2\pi r_2 \quad (35)$$

## C Optimal Shifting Speed Derivation

The optimal shifting speed is the speed where both high and low gears produce the same force at the wheel surface.

We will start with the definition of instantaneous motor speed from (8). This can be solved for the motor torque  $\tau$

$$\tau = \tau_s \left( 1 - \frac{\omega}{\omega_f} \right) \quad (92)$$

Using the equations,

$$v_w = \frac{\omega r}{G} \quad (93)$$

$$F_w = \frac{\tau G}{r} \quad (94)$$

we can transform the rotational speed and torque at the motor into the linear speed and force at the wheel

$$F_w = \frac{\tau_s G}{r} \left( 1 - \frac{v_w G}{r \omega_f} \right) \quad (95)$$

To find the optimal shifting speed, we will set the wheel forces at both gear ratios,  $G_1$  and  $G_2$ , and both wheel radii,  $r_1$  and  $r_2$ , equal at the shifting speed  $v_{shift}$

$$\frac{\tau_s G_1}{r_1} \left( 1 - \frac{v_{shift} \cdot G_1}{r_1 \omega_f} \right) = \frac{\tau_s G_2}{r_2} \left( 1 - \frac{v_{shift} \cdot G_2}{r_2 \omega_f} \right) \quad (96)$$

This can then be simplified to

$$v_{shift} = \frac{r_1 r_2 \omega_f}{G_2 r_1 + G_1 r_2} \quad (97)$$

Plugging in  $\omega = \omega_f$  into (93) gives the free speeds  $v_1$  and  $v_2$  for each gear ratio

$$\begin{aligned} v_1 &= \frac{\omega_f r_1}{G_1} \\ v_2 &= \frac{\omega_f r_2}{G_2} \end{aligned} \quad (98)$$

Then it is easy to see that

$$v_{shift} = \frac{1}{\frac{1}{v_1} + \frac{1}{v_2}} = \frac{v_1 v_2}{v_1 + v_2} = v_1 \parallel v_2 \quad (64)$$

## D Projectile Equation Derivations

Starting with basic projectile motion equations:

$$\Delta x = v_i \cos \theta_i \cdot t \quad (99)$$

$$\Delta y = v_i \sin \theta_i \cdot t - \frac{1}{2}gt^2 \quad (100)$$

$$\theta_f = \tan^{-1} \left( \frac{v_{f,y}}{v_{f,x}} \right) = \tan^{-1} \left( \frac{v_i \sin \theta_i - gt}{v_i \cos \theta_i} \right) \quad (101)$$

Solving (99) for  $t$  and substituting into (100) gives:

$$\Delta y = \Delta x \tan \theta_i - \frac{g \cdot (\Delta x)^2}{2v_i^2 \cos^2 \theta_i} \quad (102)$$

We can then substitute in  $\Delta x = d$  and  $\Delta y = h_f - h_i$ :

$$h_f = h_i + d \tan \theta_i - \frac{g \cdot d^2}{2v_i^2 \cos^2 \theta_i} \quad (41)$$

Solving (99) for  $t$  and substituting into (101) gives:

$$\theta_f = \tan^{-1} \left( \frac{v_i \sin \theta_i - g \cdot \frac{\Delta x}{v_i \cos \theta_i}}{v_i \cos \theta_i} \right) = \tan^{-1} \left( \tan \theta_i - \frac{g \cdot d}{v_i^2 \cos^2 \theta_i} \right) \quad (103)$$

Further substituting in (41) into (103) gives:

$$\theta_f = \tan^{-1} \left( \tan \theta_i - \frac{2}{d} (d \tan \theta_i - (h_f - h_i)) \right) \quad (104)$$

And by simplifying we get:

$$\theta_f = \tan^{-1} \left( 2 \frac{h_f - h_i}{d} - \tan \theta_i \right) \quad (42)$$

To calculate the reverse equations, we can solve (104) for  $\theta_i$ :

$$\theta_i = \tan^{-1} \left( 2 \frac{h_f - h_i}{d} - \tan \theta_f \right) \quad (43)$$

Then substitute (41) into (43):

$$\tan \theta_i + \tan \theta_f = \frac{2}{d} \left( d \tan \theta_i - \frac{g \cdot d^2}{2v_i^2 \cos^2 \theta_i} \right) \quad (105)$$

And solve that for  $v_i$ :

$$v_i = \sec \theta_i \cdot \sqrt{\frac{g \cdot d}{|\tan \theta_i - \tan \theta_f|}} \quad (44)$$

## E Pneumatics Simulation Derivation

We know that the energy of the system at any point can be represented by:

$$E = P \cdot V \quad (106)$$

We can find the energy of the system at any timestep by adding the total work done on the system in that time to the energy of the system at the previous step:

$$E_{n+1} = E_n + W_{tot} \quad (107)$$

Substituting (106) into (107) gives:

$$(PV)_{n+1} = (PV)_n + W_{comp} - \sum W_{cyl} \quad (108)$$

Since the volume of the system remains constant, we can divide by  $V$  to get:

$$P_{n+1} = P_n + \frac{W_{comp} - \sum W_{cyl}}{V} \quad (45)$$

Basic thermodynamics says that the work done by compression/expansion of gas at constant pressure can be represented by  $W = P \cdot \Delta V$ . In each actuation of a cylinder gas is compressed twice, once for extension and once for retraction. So for each timestep, the work done on the cylinder can be expressed as:

$$W_{cyl} = ((PAL)_{push} + (PAL)_{pull}) \cdot m \quad (109)$$

$L$  is constant, so it can be factored out. We can also substitute  $A$  for the effective piston areas, giving:

$$W_{cyl} = \left( \frac{\pi D^2}{4} P_{push} + \frac{\pi(D^2 - d^2)}{4} P_{pull} \right) L \cdot m \quad (47)$$

Similarly, we can represent the work done by the compressor as:

$$W_{comp} = \dot{V}_{comp}(P) \cdot dt \cdot 1\text{atm} \quad (46)$$

Note: since  $\dot{V}_{comp}$  is measured at atmospheric pressure,  $P$  must be 1 atm and not the system pressure

## F Equivalent Radius/Load Derivation

To find the equivalent radius, we equate the rotational  $\rightarrow$  linear motion transformation equations for both a wheel (15) and lead screw (56)

$$2\pi r \cdot \omega = v = \omega \cdot np \quad (110)$$

We can then solve for  $r = r_{eq}$  to find the radius that will provide the same rotational  $\rightarrow$  linear motion transformation as the given lead screw

$$r_{eq} = \frac{np}{2\pi} \quad (61)$$

We want to conserve the work done by a lead screw and equivalent wheel across one rotation (where  $x$  can be  $L$  or  $R$ ).

$$W = 2\pi r_{eq} \cdot L_{x,eq} = 2\pi T_x \quad (111)$$

Solving for  $L_{x,eq}$ , we get:

$$L_{x,eq} = \frac{T_x}{r_{eq}} \quad (112)$$