



2026 Arista CloudVision

Common Day 2 Tasks using CloudVision

Agenda

- Using Network Hierarchy
- Front Panel Interface Configuration & Port Profiles
- Interface Diagnostics
- Configuration Management & VLANs
- Software Upgrades
- Compliance & Inventory
- Telemetry and Monitoring
- Topology Tab
- AskAVA

Using Network Hierarchy


Level-Specific Details for Campus Networks

Day 2 - Using Network Hierarchy

- View level/location-specific details
 - Each level provides contextual information about the devices and infrastructure
- Information about each level
 - High-level summary of devices, status, and connectivity at each level
- Finger on the pulse - Network Health
 - View health status of devices within the selected hierarchy level
 - Quickly identify devices with warnings or critical alerts

Logical structure


- Quick issue identification
- Manage many locations from one place

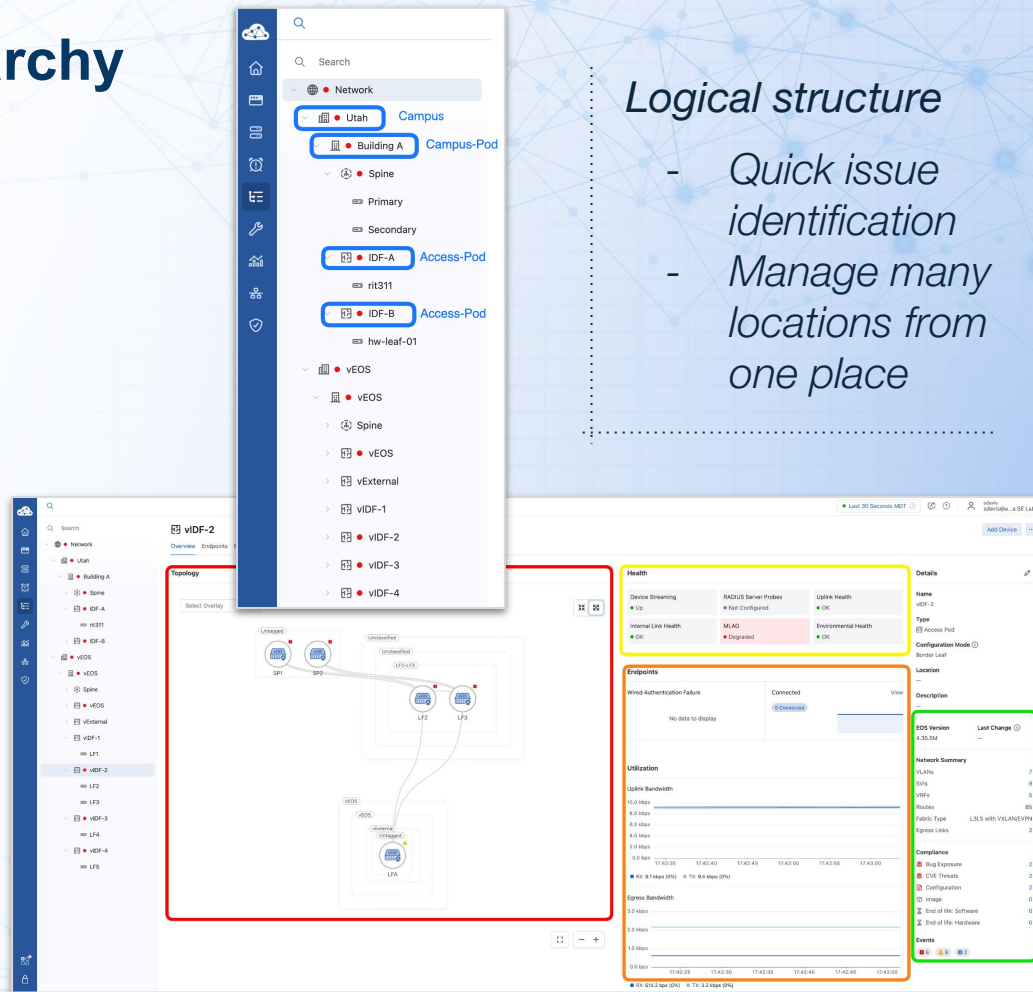

Network Hierarchy - Endpoints & Resources


Endpoints:

- Who is connected where, NOW
- Track current and historical endpoint connectivity by hierarchy level
- View endpoint type, VLAN, and connection status with search and filter capabilities

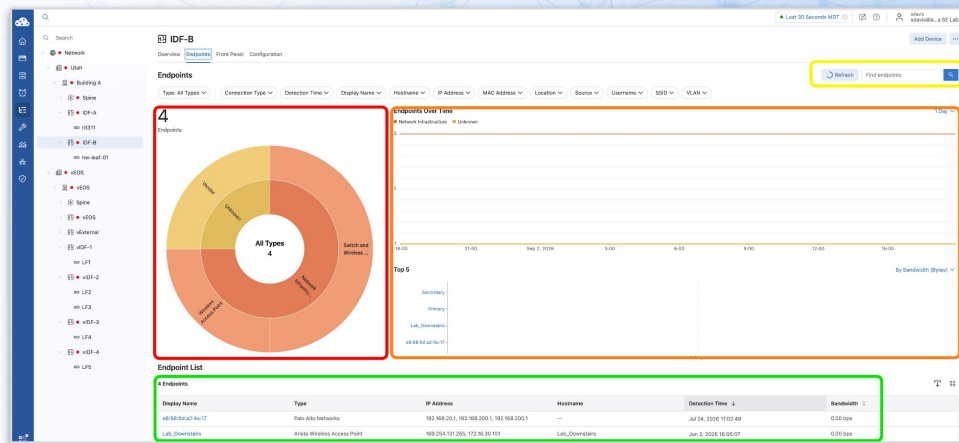

Switch Resource Planning:

- Monitor PoE power consumption and remaining capacity
- Plan for new endpoints and identify switches near budget limits

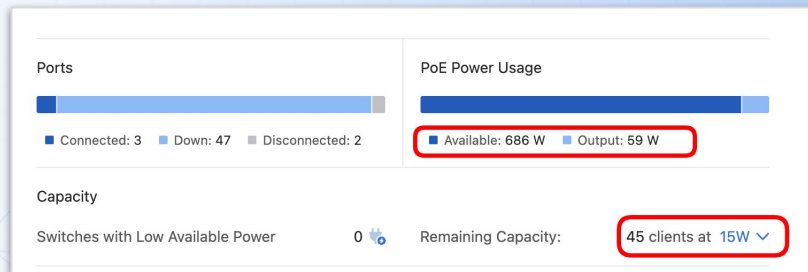

Front Panel Interface Configuration

Configuring Ports and Port Profiles

Configuring Front-Panel Ports

- Port Profiles - Create


- Overview of available port profile features
- Standardize port configurations across the network

- Port Profile - Assign

- Assign profiles to individual or groups of ports
- Consistent configuration reduces errors and simplifies management

- A visual experience!

- Click on individual ports to view and modify settings
- Supports bulk selection for efficient configuration

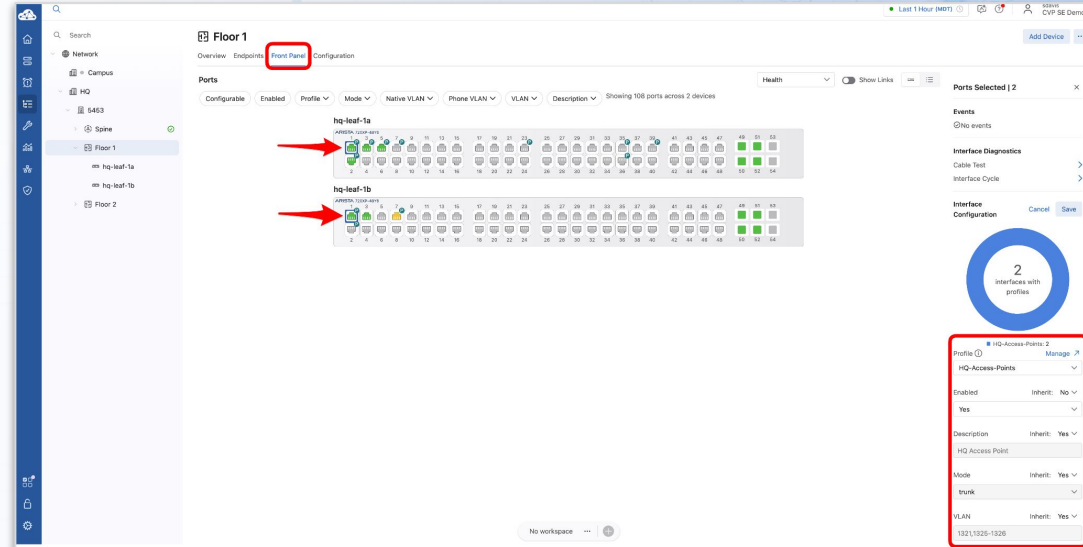



Interface Diagnostics

- Cable Test

- Run cable diagnostics to identify physical layer issues
- Test cable length, status, and signal quality


- Interface Cycle

- Cycle interfaces to resolve connectivity issues
- Bounce ports without physically accessing the switch

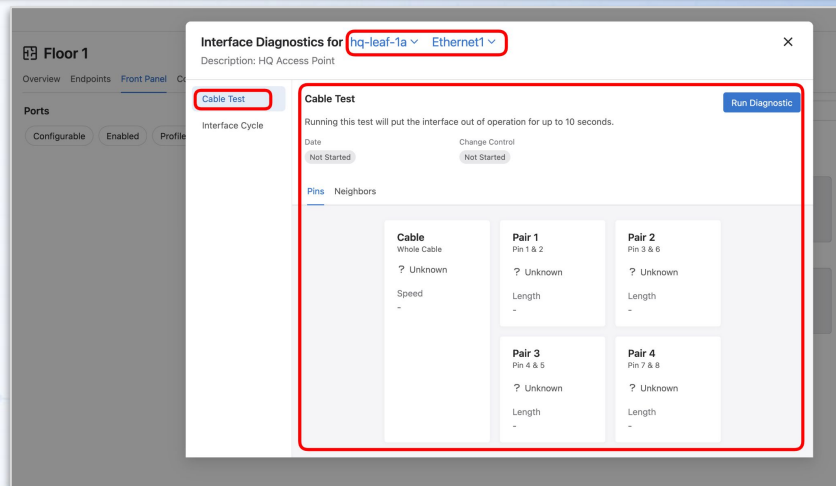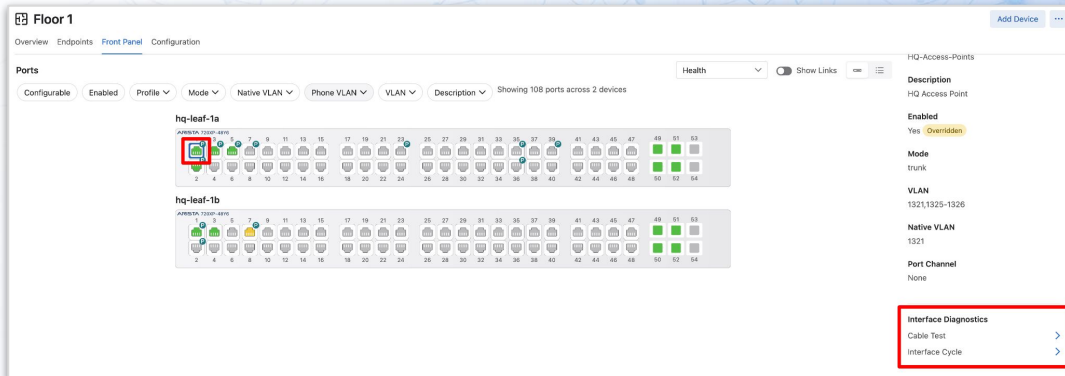

Assign Port Profiles to Multiple Ports simultaneously

- **10 port profiles, 10 different ports, 1 step**
 - Single operation assignment
 - Assign multiple ports to multiple Port Profiles in a single Workspace
 - Streamline bulk configuration changes across the network
 - Review and approve changes before deployment
 - Reduces repetitive tasks and minimizes configuration drift

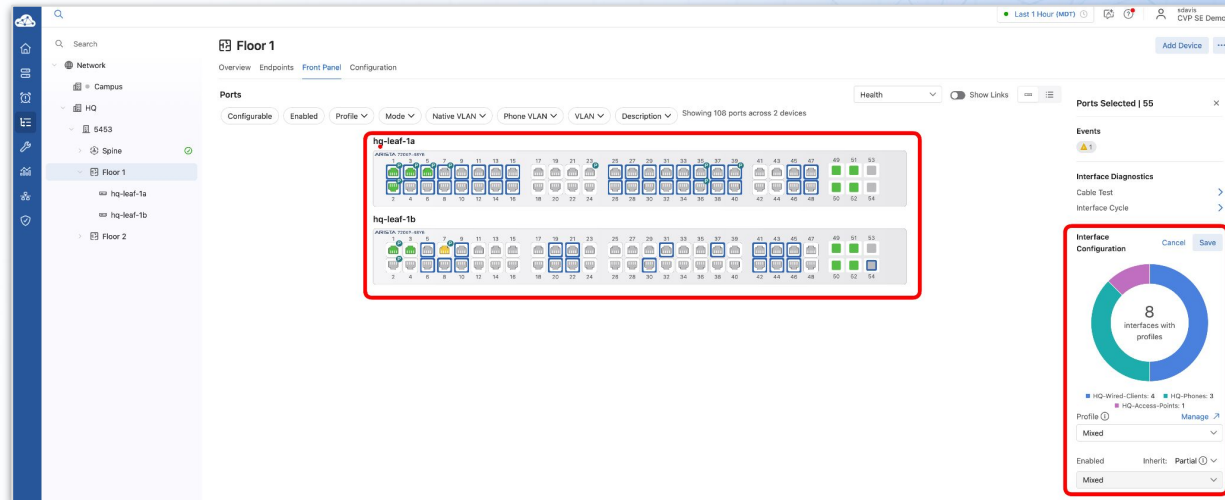

Configuration Management

Adding VLANs and Managing Configuration



Update the existing configuration

Common Config D2 tasks:

- What are common daily activities?
- Configure routing protocols
- Create VLANs
- Define uplink connectivity configuration
- Add, modify, or remove config elements
- *Software upgrades - Next*

Update Campus, Campus Pod & Access Pod configurations

- L2LS, L3LS, EVPN & VXLAN
- Spanning Tree
- Multicast
- Etc.

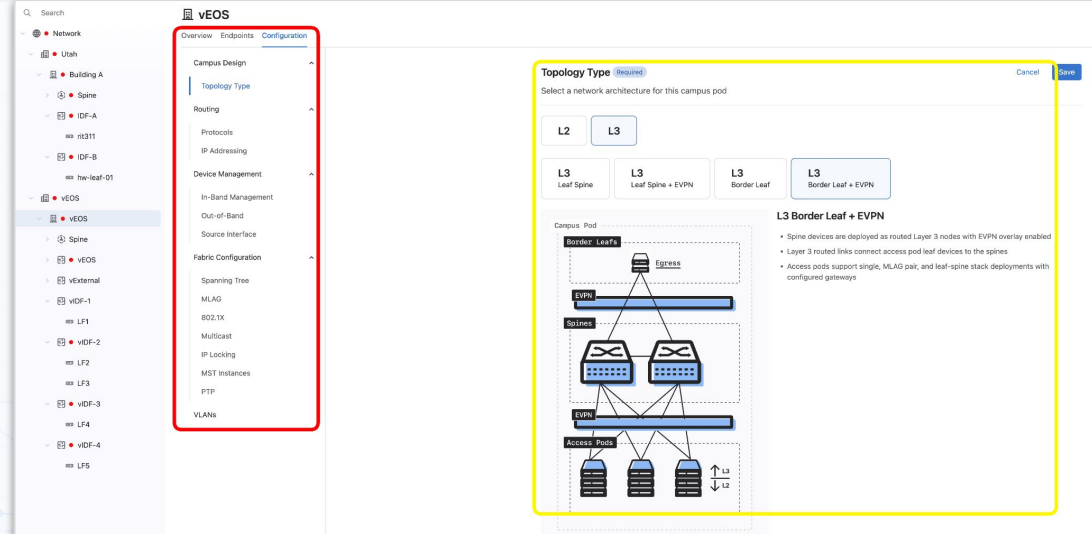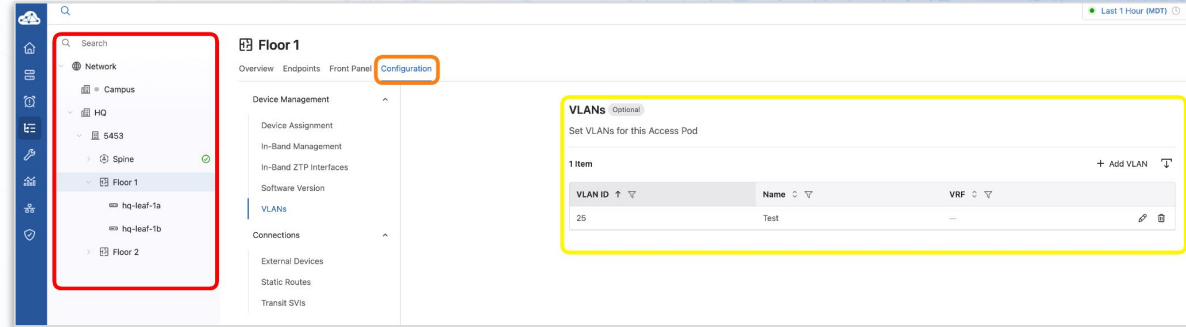

Software Upgrades

Multiple Upgrade Workflows in CloudVision

Software Upgrade Workflows

1. Network Hierarchy Workflow



- Initiate upgrades from within the Network Hierarchy view
- Target specific levels (Campus, Campus Pod, Access Pod)

2. Studio Workflow

- Use the Software Management Studio for advanced upgrade control

3. Download and Assignment

- Single EOS file inside CloudVision
- Download images and assign them to target devices
- **Orchestrate** an upgrade order - Next

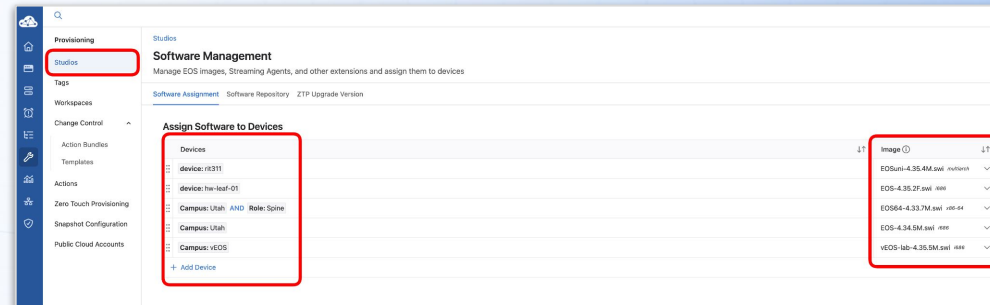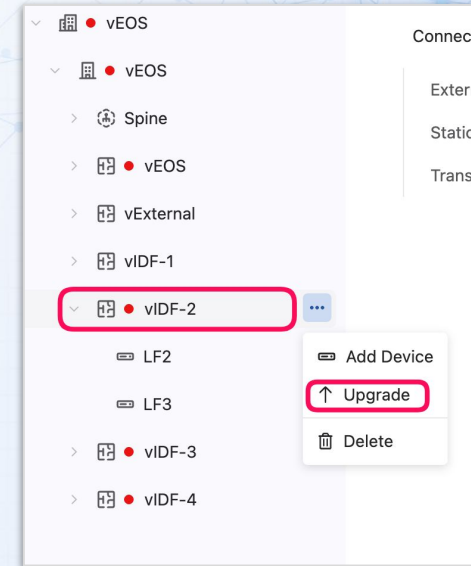

Action Bundles & Templates - Orchestrated Upgrades

Action Bundle Upgrade

Bundle Name

Action bundle Upgrade

Description (optional)

Add action...

Series

Parallel

1

1. Check MLAG Health

Run this action before and after the main provisioning action to ensure that an MLAG device is ready to be upgraded and then to validate that it has upgraded successfully.

DeviceID

Provide via template

2

2. Task

Run this action with a pre-defined taskId to execute the specified network changes.

TaskID

(assigned by template)

3

3. Clean Flash

Delete device files using a file spec and file glob. This works by collecting the existing files on the device that match the file spec, eg "flash:" and then uses the CLI "delete" command for each file that matches the file spec, eg "log.txt." The action protects against deleting the current running image and boot image.

DeviceID

Match task device

FileSpecAndGlob

flash:/EOS-4.30*.swi

4


4. Check MLAG Health

Run this action before and after the main provisioning action to ensure that an MLAG device is ready to be upgraded and then to validate that it has upgraded successfully.

DeviceID

Match task device

- **Action Bundles and Templates**
 - Group upgrade actions into reusable bundles
 - Create templates for standardized upgrade procedures
- **Orchestrated Software Upgrades**
 - Automated, sequenced upgrades with health checks
 - Rolling upgrades to minimize network disruption
 - Pre- and post-upgrade validation steps
 - Rollback capabilities if issues are detected

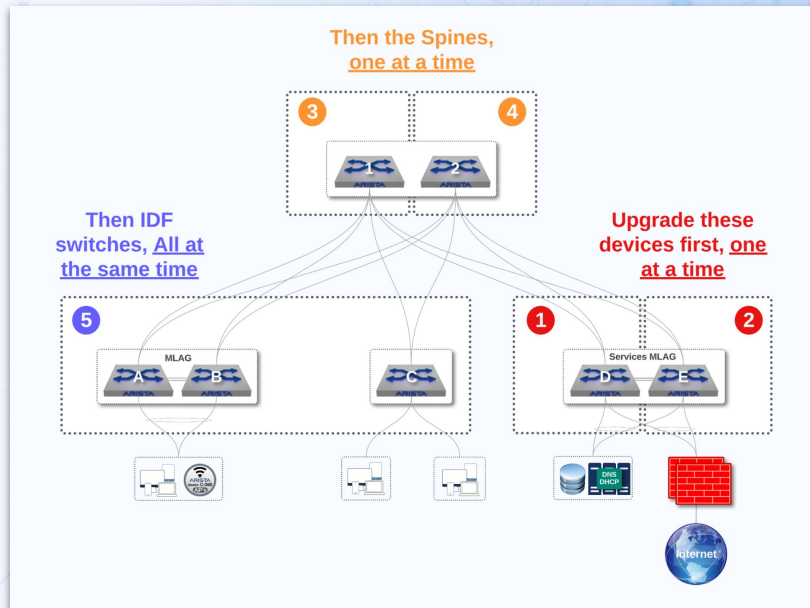

Compliance & Inventory

Monitoring Compliance, Bugs, and Device Status

Device Inventory and analysis

One Place to see everything

Hostname	Streaming	Device Status	Model	Software	Agent	IP Address	MAC Address	Device Type	Device ID
core-rt-1	Active	✖	7050SX2-72Q	4.27.4M	1.19.6	172.28.227.19	44-4c-a8-eb-98-03	EOS	JPE17070875
core-rt-2	Active	✖	7280QR-C72	4.31.6M	1.31.8	172.28.227.20	28-99-3a-2e-73-9d	EOS	JPE17471636
CVP-SE-Demo AGNI #9	Inactive	⚡	—	—	dev	Unassigned	—	Third Party	CVP-SE-Demo AGNI
dct1-leaf-1a	Active	⚡	7280SR-48C6	4.32.4M	1.38.2	172.28.227.6	44-4c-a8-b9-2b-13	EOS	JPE16363196
dct1-leaf-1b	Inactive	⚡	7280SRA-48C6	4.32.4M	1.38.2	172.28.227.7	74-83-ef-19-41-ef	EOS	SSJ7380979
dct1-leaf-2a	Active	⚡	7280TR-48C6	4.32.4M	1.38.2	172.28.227.8	44-4c-a8-2f-60-b8	EOS	FAU16069192
dct1-leaf-2b	Active	⚡	7280TR-48C6	4.32.4M	1.38.2	172.28.227.9	44-4c-a8-a5-1d-0b	EOS	JPE16112416
dct1-leaf-3a	Active	⚡	7280TR-48C6	4.32.4M	1.38.2	172.28.227.10	44-4c-a8-a5-1a-bb	EOS	JPE16112408
dct1-leaf-3b	Active	⚡	7280TR-48C6	4.32.4M	1.38.2	172.28.227.11	44-4c-a8-a5-16-f9	EOS	JPE16112417
dct1-spine-1	Active	✖	7050GX-32S	4.28.8.1M	1.34.5	172.28.227.4	44-4c-a8-3a-7f-13	EOS	JPE15471477
dct1-spine-2	Active	✖	7280QR-C36-M	4.28.8.1M	1.34.5	172.28.227.5	28-99-3a-4a-3b-85	EOS	JPE17091558
hq-floor1-ap1	Active	—	C-250	21.2.0F-35	dev	172.28.237.66	30-86-2d-a0-1c-df	Wireless AP	30862DA01CDF
hq-floor2-ap1	Active	—	C-230	21.2.0F-35	dev	172.28.237.67	30-86-2d-66-85-df	Wireless AP	30862D6685DF
hq-floor2-ap2	Active	—	C-130	13.0.2-28.1902	dev	172.28.237.68	00-11-74-86-0d-af	Wireless AP	001174860DAF
hq-leaf-1a	Active	⚡	720XP-48Y6	4.34.1F	1.39.0	172.28.227.14	94-8e-d3-b4-5f-61	EOS	JPE21181905
hq-leaf-1b	Active	⚡	720XP-48Y6	4.34.1F	1.39.0	172.28.227.15	2c-dd-e9-5d-1c-b9	EOS	JPE21203651
hq-leaf-2a	Active	⚡	720XP-24Z4	4.34.1F	1.39.0	172.28.227.16	fc-bd-67-0e-de-b5	EOS	JPE19303230
hq-leaf-2b	Active	⚡	720XP-24Z4	4.34.1F	1.39.0	172.28.227.17	fc-bd-67-0e-eb-21	EOS	JPE19303261


Fabric-wide tools:

- Device registration
- Connectivity Monitor
- Network Utilization
- Traffic flows
- Compliance Overview - Next

Compliance Overview

Network wide - Device compliance

- View compliance status across the entire fabric
- Bugs / CVEs
 - Identify known bugs and CVEs affecting your network
 - Acknowledge Bugs / CVEs to track remediation
- Configuration and Image Compliance
 - Sync Config / Sync Image to ensure consistency
 - Detect and resolve configuration drift
- End of Life — Hardware / Software
 - Track hardware and software end-of-life dates
 - Plan refresh cycles proactively

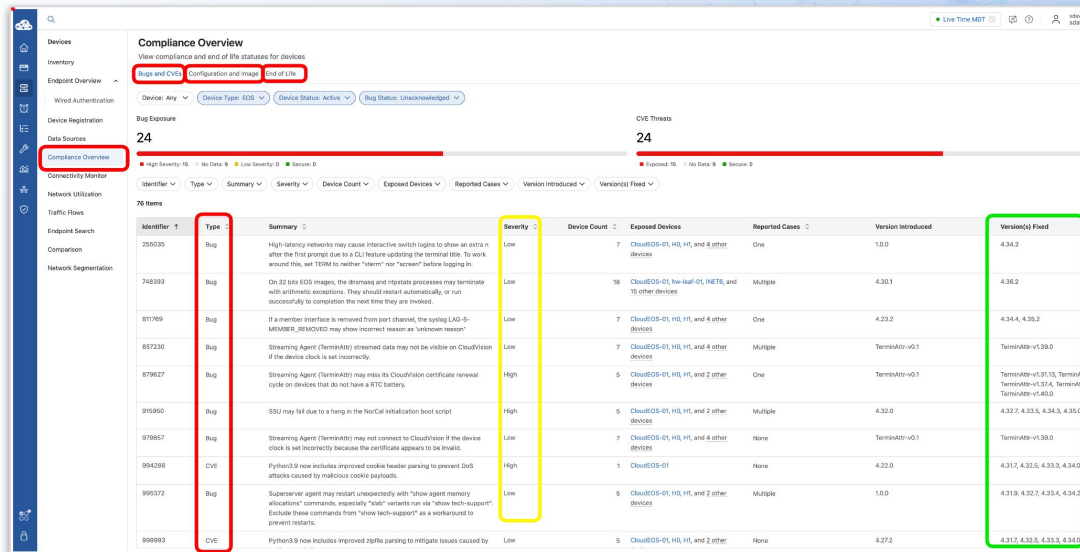

Telemetry and Monitoring

Real-Time and Historical Network Data

What is Telemetry?

- **Telemetry Overview**

- Continuous, streaming data collection from network devices
- Real-time visibility into network state and performance

- **Endpoint information**


- Connected endpoints, authentication status, and details

- **Network Utilization**


- Bandwidth consumption and utilization trends

- **Traffic Flows - Dataplane**

- Visibility into traffic patterns and flow data

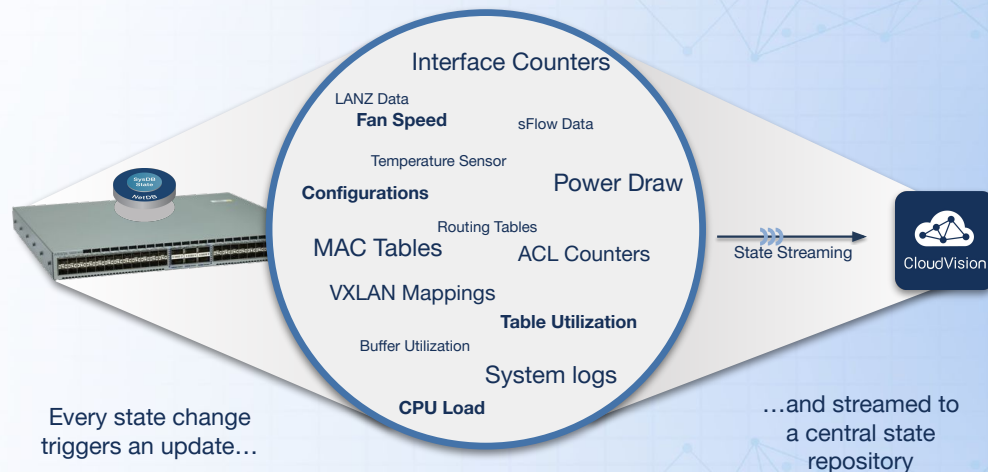

Per Switch Compliance & Telemetry

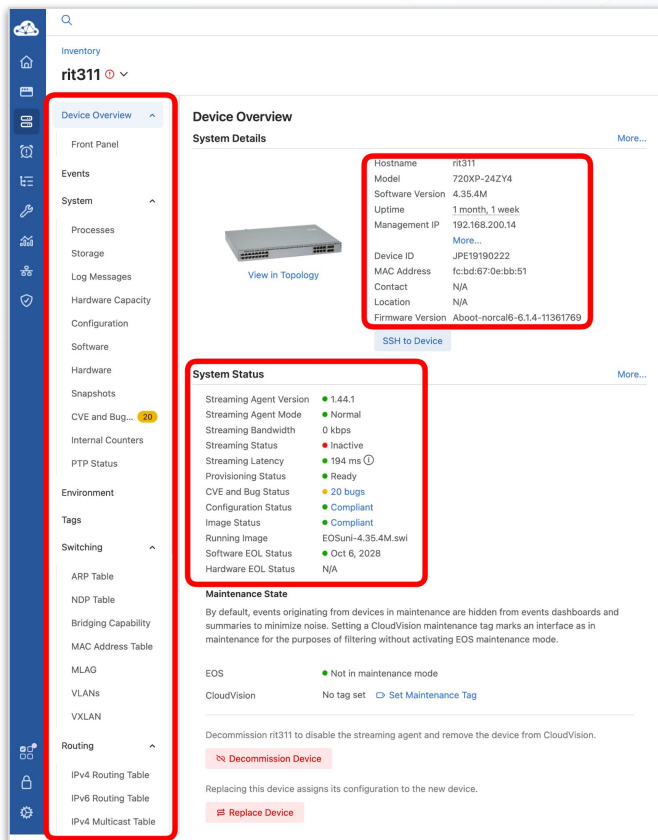



Inventory / Switch View:

1. Per switch CVE and Switch Bug info
 - a. Config based
2. Events — System events and state changes
3. Syslog — Centralized log collection and search
4. Configuration — Running and designed config views
5. Environment — Temperature, fan, and power supply status
6. ARP / MAC Tables — Address resolution and forwarding tables
7. Route Table — IP routing information
 - a. Per VRF
8. BGP Peerings — BGP neighbor state and statistics
9. Traffic Flows — Per-device traffic flow analysis
10. Device Utilization — CPU, memory, and resource usage
11. LLDP neighbors
12. Dot1x state - Succeeded or Failed
13. PoE - Per port power usage


Per Interface Telemetry

- Per Interface Telemetry

- Interface-level statistics and counters
- Input/output rates, errors, discards, and utilization
- Historical trending for capacity planning
- Optical transceiver monitoring (DOM)
- Historical data!

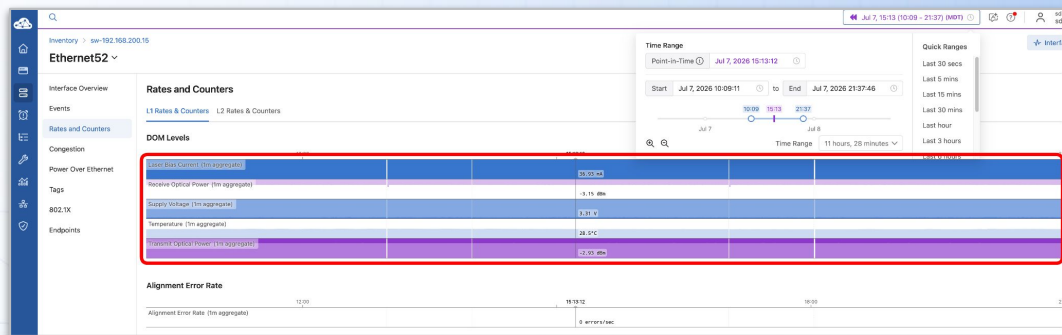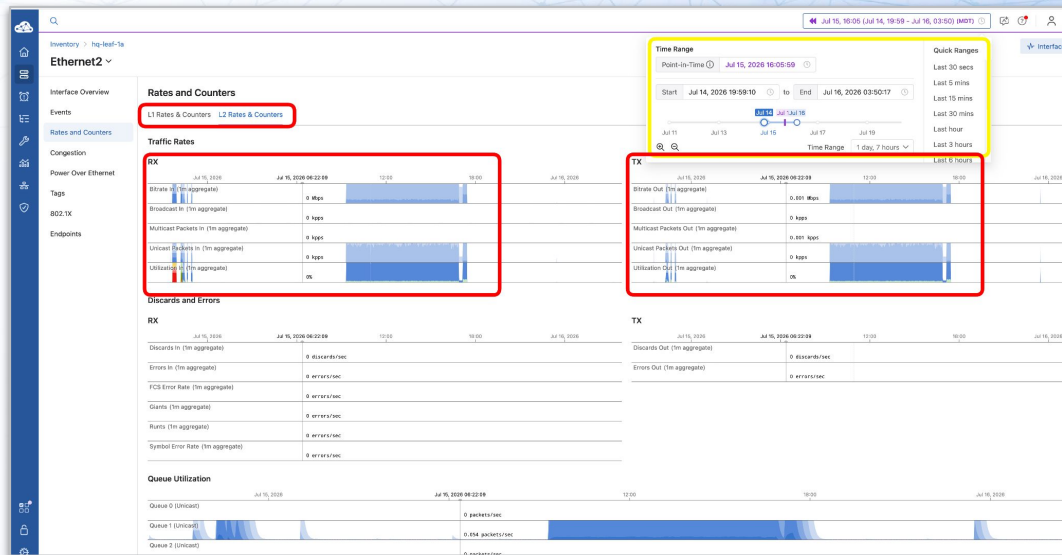


Events and Notifications

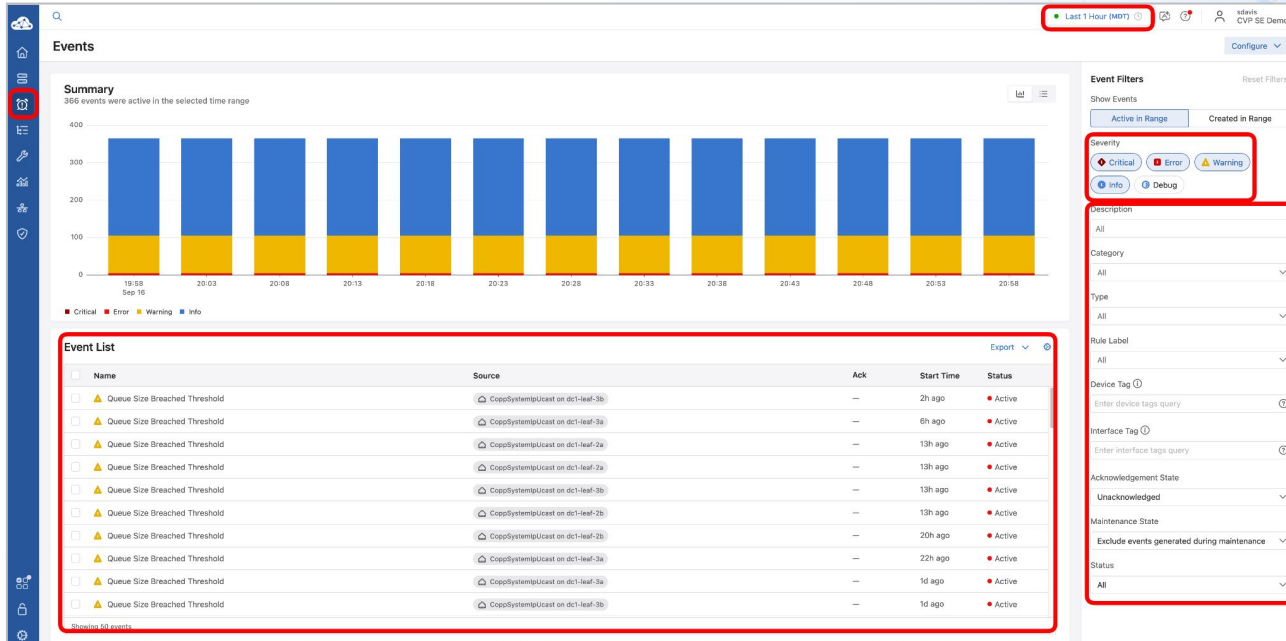

Device to CloudVision streaming:

- Push model
- Faster Notifications
- Makes CloudVision feel like the nerve center for the network
- Proactive vs. Reactive

Events and Notifications - Event example

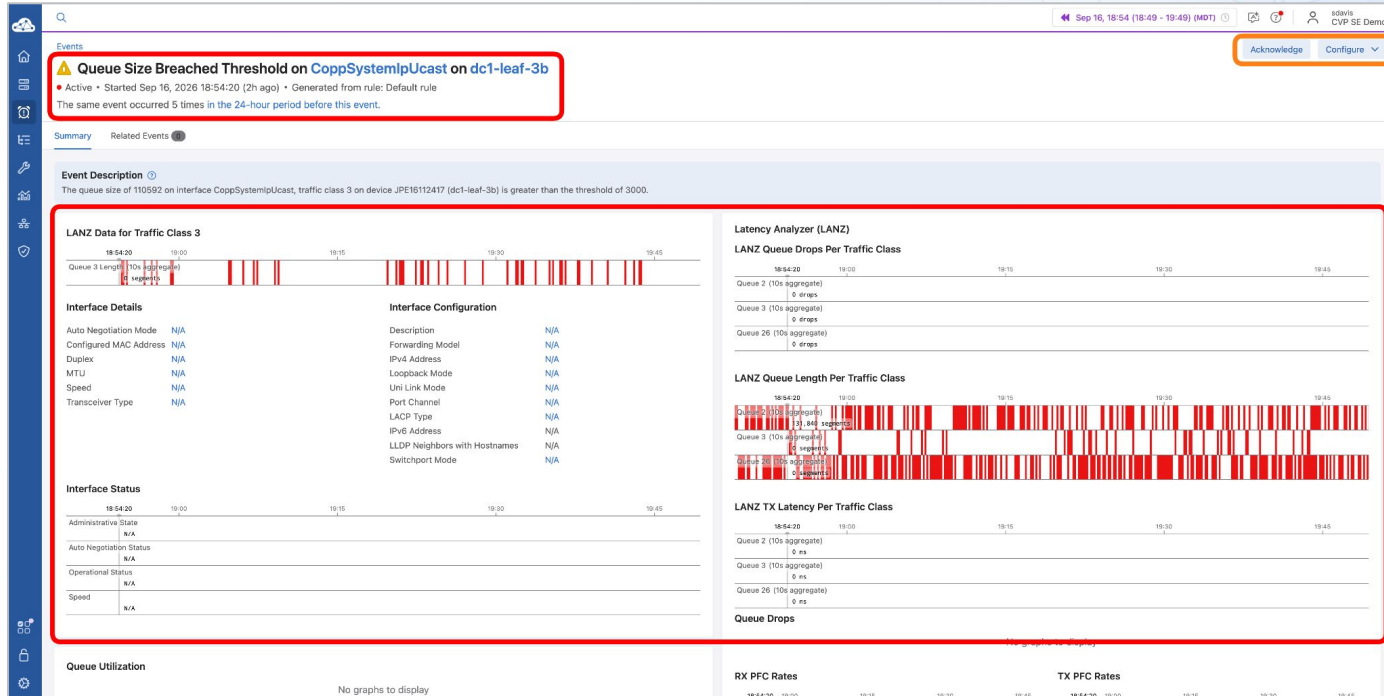

High detail & high adjustability

- Bespoke thresholds for event triggers
- Acknowledge / Silencing
- Custom Events - Syslog based

Events and Notifications - Related Events

Events

VXLAN Config Consistency Check Failure on rit311

• Active • Started Sep 5, 2026 04:26:12 (2w ago) • Generated from rule: Default rule (Fail)
The same event occurred 1 time in the 24-hour period before this event.

Summary **Related Events**

Event Description

The Local VTEP configuration check on device JPE19190222 (i1311) caused a VXLAN consistency check failure.

Sanity Check Results

Result	Name	Description
Warn	VLAN-VNI Map	VLAN 210 does not exist
Warn	VLAN-VNI Map	VLAN 211 does not exist
Warn	VLAN-VNI Map	VLAN 212 does not exist
Warn	VLAN-VNI Map	VLAN 213 does not exist
Warn	VLAN-VNI Map	VLAN 214 does not exist
Warn	VLAN-VNI Map	VLAN 215 does not exist
Warn	VLAN-VNI Map	VLAN 216 does not exist

Related Events!

- “Was there a contributing event that caused this event?”
- Event correlation
- More rapid root-cause determination
- Quick confirmation that your co-worker is “messing” with you

Events

VXLAN Config Consistency Check Failure on rit311

• Active • Started Sep 5, 2026 04:26:12 (2w ago) • Generated from rule: Default rule (Fail)
The same event occurred 1 time in the 24-hour period before this event.

Summary **Related Events**

Related Events

Probability

VXLAN Config Consistency Check Failure (rit311) → **Connectivity Monitor Packet Loss Breached Threshold** (rit311)

- Connectivity Monitor Probe Error (rit311)
- Common Host Connectivity Monitor Events (rit311)
- Device Rebooting (rit311)
- Device Running Configuration Changed (rit311)
- Device Streaming to CloudVision Rate Limited (rit311)

Timeline


4:20:30 4:21:00 4:21:30 4:22:00 4:22:30 4:23:00 4:23:30 4:24:00 4:24:30 4:25:00 4:25:30 4:26:00 4:26:30 4:27:00 4:27:30 4:28:00 4:28:30 4:29:00 4:29:30 4:30:00 4:30:30 4:31:00

Topology Tab

Amazing Flow Visualization

Dataplane & Topology Tab

- Topology Visualization
 - Live flow path selection
 - Maps
 - Interactive network topology view
 - Visualize device connectivity and link status
- Dataplane View
 - Trace traffic paths through the network
 - Identify forwarding behavior and potential issues

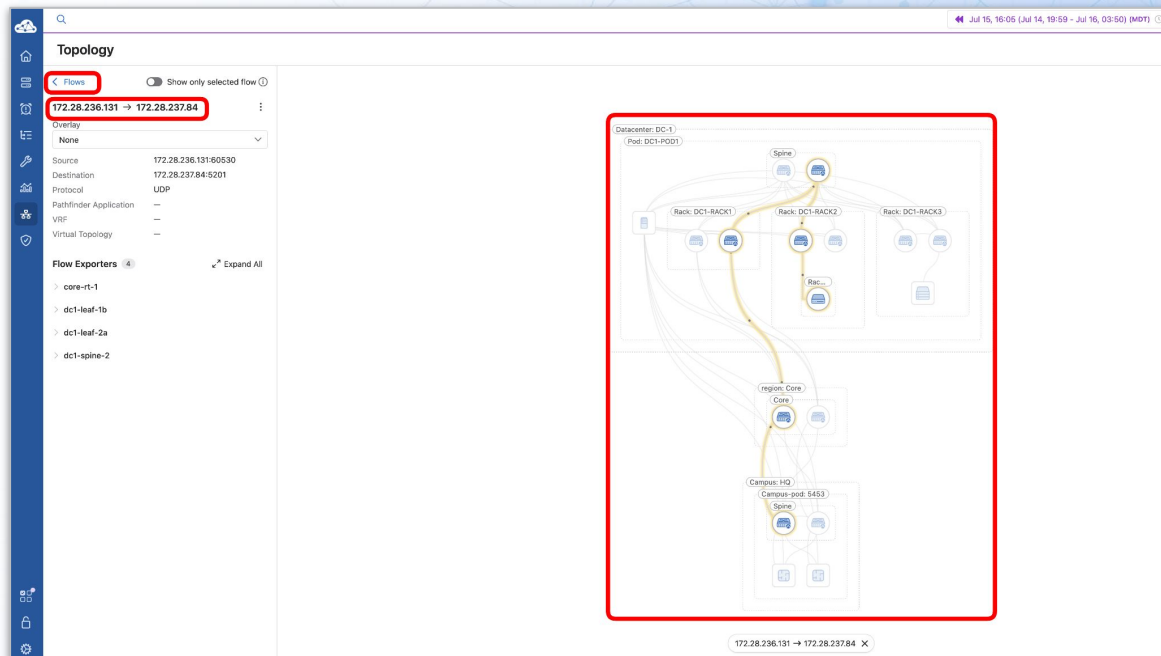

The background of the slide features a complex network diagram. It consists of numerous small blue dots, representing nodes, which are interconnected by thin, light blue lines. These lines form a dense web of triangles and other geometric shapes, creating a sense of connectivity and data flow. The overall color palette is light blue and white, giving it a clean, technological appearance.

AskAVA

AI-Powered Assistance


AskAVA — AI-Powered Network Assistant

• AskAVA Questions

- Natural language interface for querying network state
- Ask questions about device health, configurations, and telemetry
- **OneAVA is COMING!**

• Common Usage

- "What is the status of device X?"
- "Show me interfaces with errors"
- "What changed in the last 24 hours?"
- Accelerate troubleshooting and reduce time to resolution

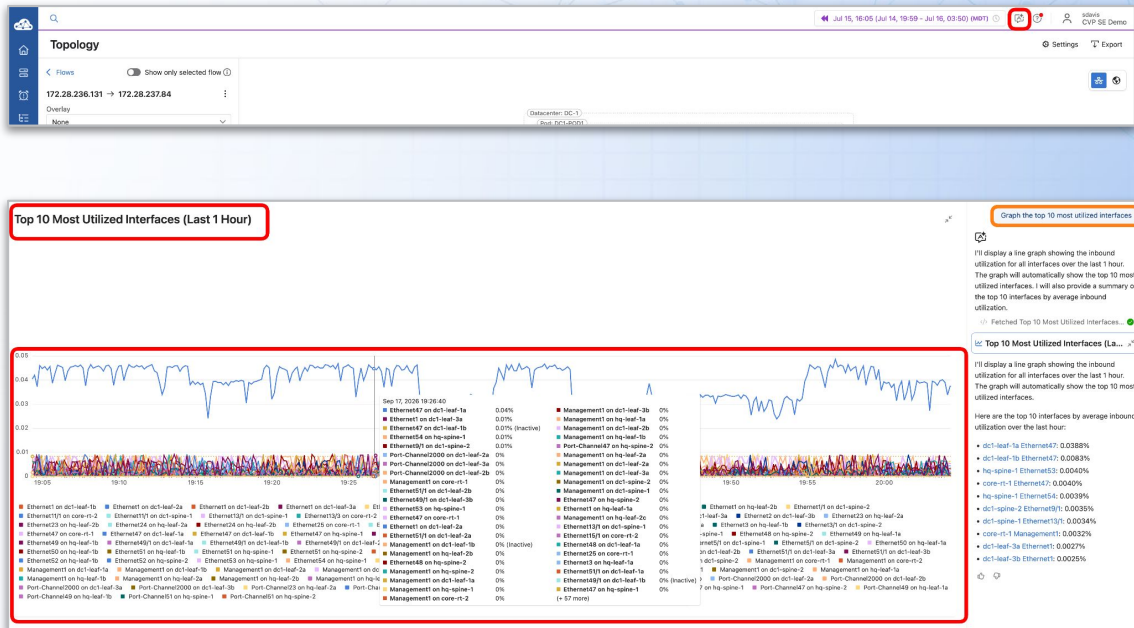

The background of the slide features a light blue grid with a network of nodes and lines, resembling a mesh or a data network, primarily concentrated in the top right and bottom right corners. The Arista logo is positioned in the top left corner.

ARISTA

Thank you!