

RBE 500 Group Assignment #2

Joshua Gross, Arjan Gupta, Melissa Kelly

Problem 1

Create ROS Package for PD Controller

Preliminary Work with Gazebo

Before creating the ROS package for the PD controller we performed some reconnaissance.

When we executed `ros2 topic list`, we saw that the `/forward_effort_controller/commands` topic was part of it. We then executed the following command in an attempt to move the joints.

```
1      ros2 topic pub --once /forward_effort_controller/commands ...  
      std_msgs/msg/Float64MultiArray "{data: [1, 1, 1]}"
```

However, this took no effect. We remember from the last group assignment (Part 1) that we executed a very similar command to make the joints move to a specific position, except in that case the topic we published to was `/forward_position_controller/commands`. This gave us a hint to the fact that Gazebo was preferring the position controller over the effort controller. Upon discovering the `controller_switch.cpp` file in the `rrbot` simulation files, we realized that we must ‘activate’ the effort controller in order to use it. Next, we did some more discovery using terminal commands. We executed

```
1      ros2 service list -t
```

This helped us see that `/controller_manager/switch_controller` was an available service we could use. Since we supplied the `-t` flag to this command, we could also see that `controller_manager_msgs/srv/SwitchController` was the type of message we had to use. To further take note of the message type, we executed

```
1      ros2 interface show controller_manager_msgs/srv/SwitchController
```

Here we could see that `activate_controllers` and `deactivate_controllers` were parameters of the message. Now we put together our findings and executed the following command that we constructed.

```
1      ros2 service call /controller_manager/switch_controller ...  
      controller_manager_msgs/srv/SwitchController "{activate_controllers: ...  
      [\"forward_effort_controller\"], deactivate_controllers: ...  
      [forward_position_controller, forward_velocity_controller]}"
```

Upon doing this, we saw the the prismatic joint drop. This means something took effect. To further confirm the state of each controller, we used the following command,

```
1      ros2 control list_controllers -v
```

Which showed that the position and velocity controllers were now inactive. We now tried our initial command,

```
1      ros2 topic pub --once /forward_effort_controller/commands ...  
      std_msgs/msg/Float64MultiArray "{data: [1, 1, 1]}"
```

Now we saw the robot in Gazebo move! The two revolute joints ‘spun’ in an anti-clockwise direction in the XY plane, whereas the prismatic joint did not do anything. With some more experimentation we realized:

- Acceleration due to gravity, approximated in magnitude to $9.8m/s^2$ was acting on the prismatic joint. Therefore, in order to make it move upward we needed to publish an effort with an acceleration of anything less than $-9.8m/s^2$.
- In order to hold the prismatic joint in at any height, we needed to apply exactly $-9.8m/s^2$ acceleration. The negative sign is a consequence of the direction of motion we have defined in our URDF file.
- Since our joint masses are simply 1, we were able to publish a joint effort as simply -9.8 , for example.
- We also realized that since there was no opposing force readily acting upon the revolute joints, if we executed an effort to them, that effort would keep pushing along the joints.
- In order to hold the revolute joints in a particular angle, we needed to specify that we are applying 0 effort. However this did not instantaneously stop the rotation of these joints, we noticed a de-acceleration effect before the joint came to a stop.
- As for implementing our package, this means that we will first need to execute a service call (by creating a client) to activate the right controller. As for executing efforts via the PD controller, we will need to account for gravity in case of the prismatic joint.

Preliminary Work for Controller

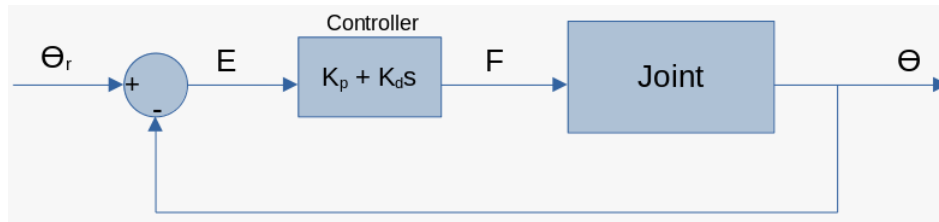


Figure 1: Standard PD controlled closed-loop system

Taking inspiration from how we have modeled PD controllers so far in this course, we can imagine the control for each joint as shown in Figure 1.

Here, the goal position, θ_r will be received via a service call. Our package will must contain a service for this purpose. The current position θ is received via the `/joint_states` topic. The error, E is calculated as $E = \theta_r - \theta$. This error is then with some untuned multiplier (gain) K_p to obtain the first term of our controller.

Next, we need to get the derivative of the error, \dot{E} , which could be expressed as

$$\begin{aligned}\dot{E} &= \dot{\theta}_r - \dot{\theta} \\ \dot{E} &= 0 - \dot{\theta} \\ \dot{E} &= -\dot{\theta} = -v\end{aligned}$$

Therefore the derivative of the error is the negative of v , the velocity of the joint. This velocity can be obtained from the `/joint_states` topic or it can be approximated by looking at the position in the last ‘step’

and the current step. Once we have \dot{E} , we use another untuned multiplier (gain) K_d to obtain the second term of our controller. Therefore, our controller is

$$F = K_p E + K_d \dot{E} = K_p E - K_d v$$

Where F is the resultant effort that we need to apply to the joint.

Writing the ROS Package

Now we create the package just as we've done in our past assignments of this course. Inside the package, we created a `scara_pd_controller.py` file. We created an empty Node in this file which gets called by the main function. We edited the `package.xml` and `setup.py` to make sure that we can build the basic package.

Next, we can create the client that activates the effort controller and deactivates the position and velocity controllers. We added this as the first task that the constructor of our Node performs because of a specific reason, which is that if the client does not find its target service, we must exit the program early, and therefore creating a subscriber/publisher/service would be useless in that case. Furthermore, there is also a reason we choose to exit the program when the target service is not found. This is because if we instead choose to wait until the service is ready, the client makes its call while Gazebo is starting up, which does not properly activate the effort controller. Therefore, the only reliable way to go about this is to have Gazebo running steadily before we launch this Node. Once the Node is launched after the service is already available, the client makes the call inside a member function we defined. We named this member function `activate_effort_controller`. Inside the member function, we assign the string lists to the `activate_controllers` and `deactivate_controllers` parameters of the Request body. Then the client starts an asynchronous call, with a following call to spin until the asynchronous future is complete.

Next, we added a new custom interface by editing our `rbe500_custom_interface` package from the previous package. This interface, which we named `ScaraRefPos.srv` will be used to make the service call to our Node to supply the reference position in order to get the controller started. This interface can be used for a service call. The interface has the 3 joint variables in its request portion and a simple acknowledgement boolean inside its response portion. We now import this message inside our main package's python file. The custom message is used to create the service within our package which will set the reference position for the SCARA robot. We define a callback for this service which sets the position as member variables, as well as a flag to indicate that we are ready to start our controller. After the service is created, we log a message to stdout that informs that we have created the service successfully.

Now we move on to creating the subscriber that receives the joint state information. We subscribe on the `/joint_states` topic and indicate that we intend to receive the `JointState` message from the `sensor_msgs` package. The queue for this subscriber is 100 messages long because information is published at a very high frequency on the joint states topic. We assign a callback for this subscription that firsts checks if we have a reference position to work with, and if not, simply notifies that we are awaiting the same. We added a print after the creation of the subscriber to inform that the creation was successful.

We now create the publisher for sending the joint efforts to Gazebo. This publisher follows our test command closely — the topic we publish to is `/forward_effort_controller/commands`, and the message type is `Float64MultiArray`. The class method that actually does the publishing is called `run_controller`, which we now create. This method is called by the subscription callback after we have received the reference position value. Inside this method, there is a conditional print that outputs the joint positions and velocities on every

100 publishes of the `/joint_states` topic.

Next, we start implementing our untuned controller model in our Node. For this, we defined the K_p and K_d values for each joint, by naming them `Kp1`, `Kd1`, `Kp2`, ... and so on. We initially set all of these to 0.01. We defined the errors and derivative of errors, naming them in the form of `err.q1` and `err_dot.q1`. Then we computed the output controller efforts for each joint by using the controller formula we derived. For the prismatic joint, we also added $-9.8m/s^2$ to the output effort. Then, we published these output efforts.

Now we are at a point to test the functionality of our Node. We re-built and ran our Node. The Node showed printed that it successfully created the service, subscription, publisher, and client. The client in our Node indicated that it was waiting for the Gazebo controller service to come online, so we launched Gazebo, after which the client activated the joint effort controller. The Node then indicated that it was receiving joint information but was waiting for an incoming reference position to be given. We manually made a service call to give a reference position of $q_1 = 72^\circ$, $q_2 = 28^\circ$, $q_3 = 1.05$. This was done using the following command.

```
1      ros2 service call /scara_pd_controller rbe500_custom_interfaces/srv/ScaraRefPos ...  
      "{q1: 1.25664, q2: 0.488692, q3: 1.05}"
```

After this service call, our node indicated that the reference positions were received, and that our controller is ready to start running. Then we began to see repeated messages in the terminal about our controller running along with its current positions and velocities. We could see the positions and velocities changing gradually. Furthermore, the robot in Gazebo was moving very slowly toward the reference position. This means our controller was operational, so now we can move on to the tuning and graphing of the controller.

Problem 2

Tuning the PD Controller

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas

lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Problem 3

Graphing the PD Controller

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies

tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.