Chapter 2
24 Aug 2018

Chapter 2: Operating-System Structures

- Operating System Services
- User Operating System Interface
- System Calls
- Types of System Calls
- System Programs
- Operating System Structure

A View of Operating System Services

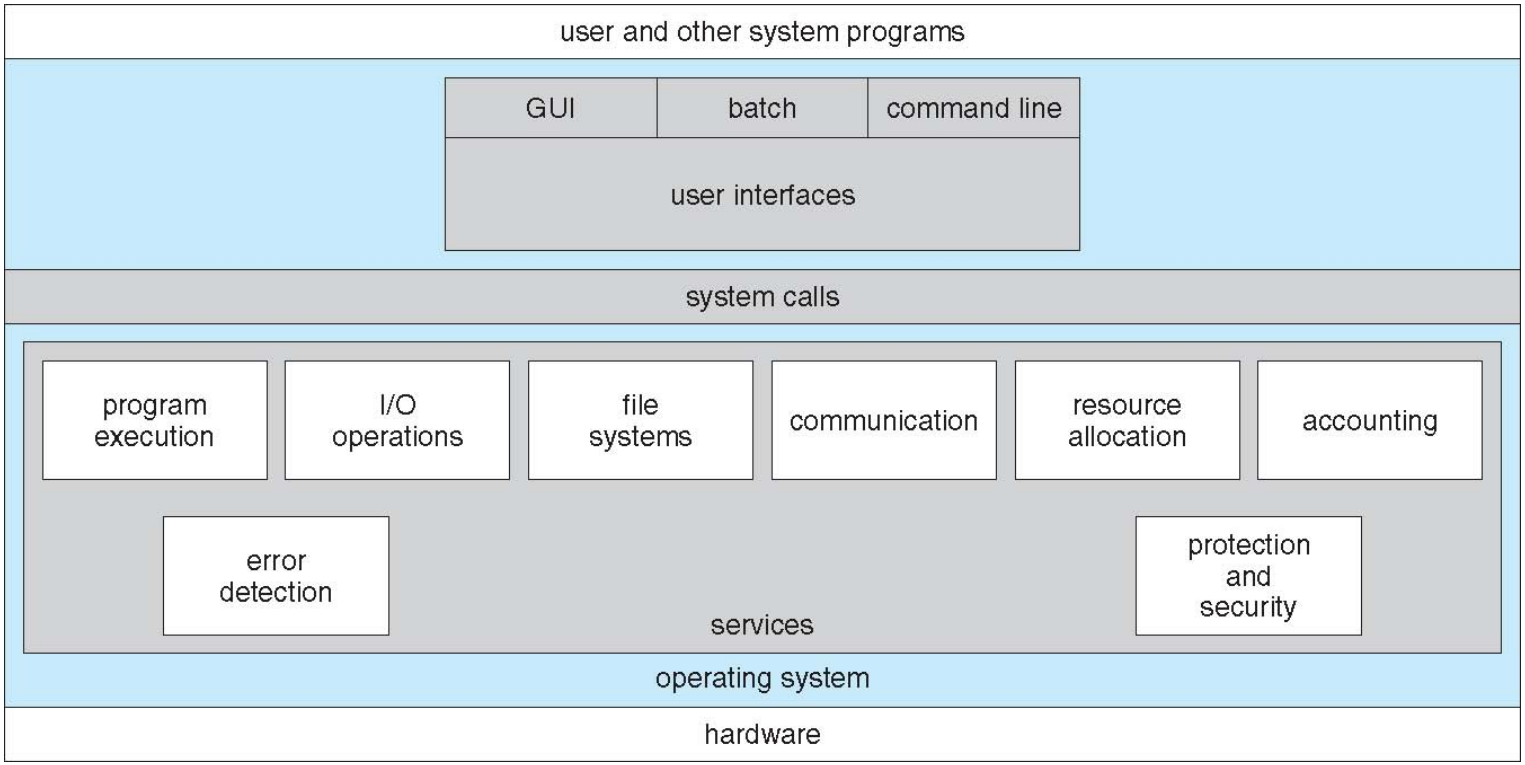

System Calls

- Programming interface to the services provided by the OS
- Typically written in a high-level language (C or C++)
- Mostly accessed by programs via a high-level **Application Program Interface (API)** rather than direct system call use
- Three most common APIs:Win32 API for Windows, POSIX API for POSIX-based systems (including virtually all versions of UNIX, Linux, and Mac OS X), and Java API for the Java virtual machine (JVM)
- APIs provide the comfort to application developers:
  - By providing easy auto filling of certain parameters into system calls!
  - These parameters let access to secure areas!

Example of System Calls

- System call sequence to copy the contents of one file to another file

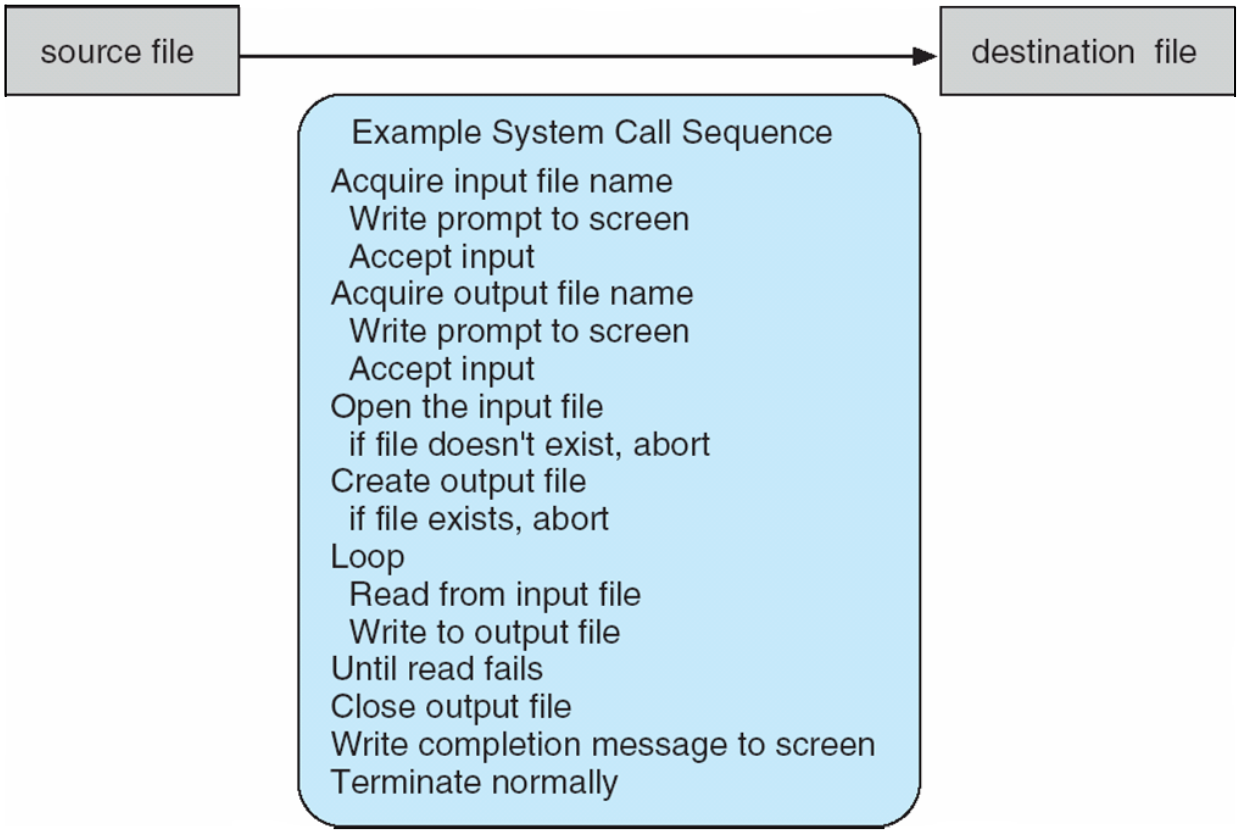

System Call Implementation

- Typically, a number associated with each system call
  - System-call interface maintains a table indexed according to these numbers
- The system call interface invokes intended system call in OS kernel and returns status of the system call and any return values
- The caller need know nothing about how the system call is implemented
  - Just needs to obey API and understand what OS will do as a result call
  - Most details of OS interface hidden from programmer by API
    - Managed by run-time support library (set of functions built into libraries included with compiler)

API – System Call – OS Relationship

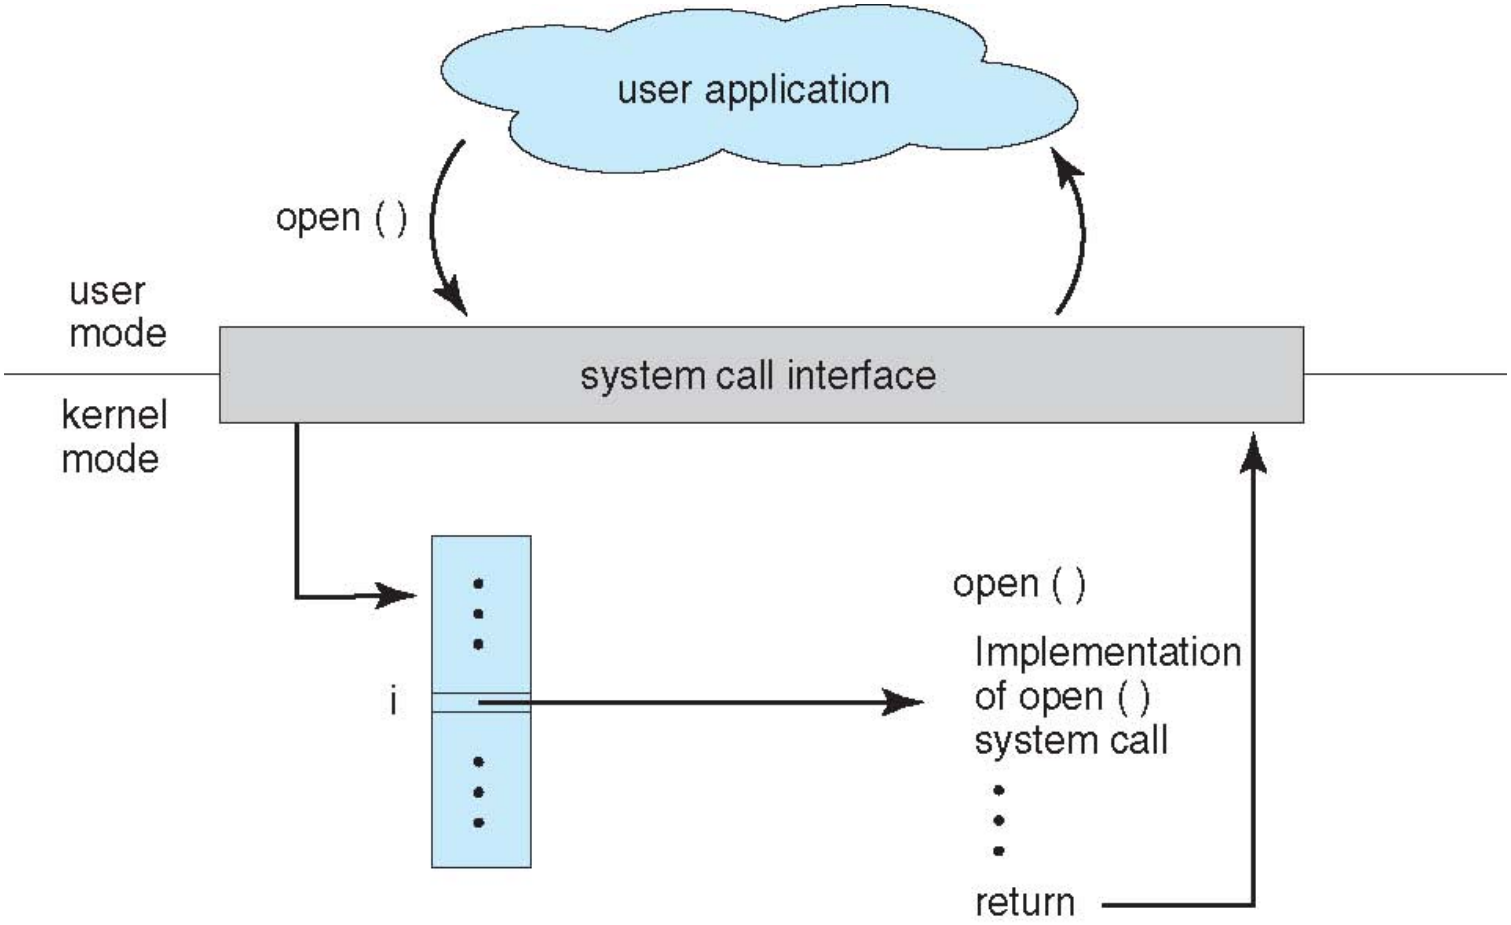

Standard C Library Example

- C program invoking printf() library call, which calls write() system call

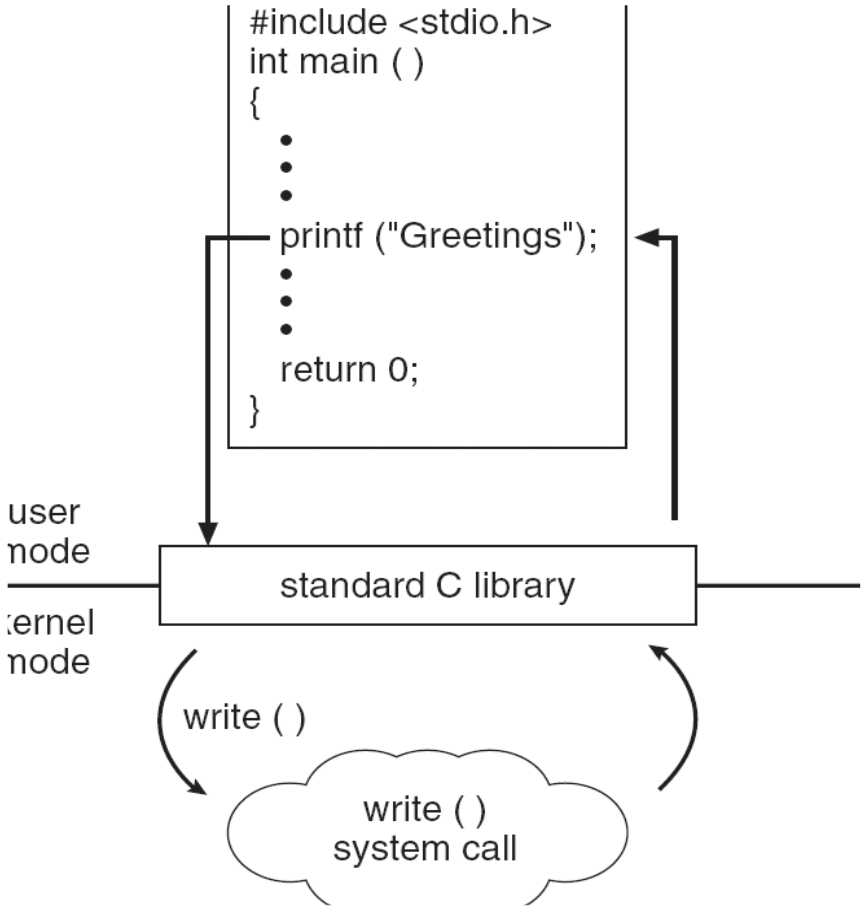

System Call Parameter Passing

- Often, more information is required than simply identity of desired system call
  - Exact type and amount of information vary according to OS and call
- Three general methods used to pass parameters to the OS
  - Simplest: pass the parameters in *registers*
    - In some cases, may be more parameters than registers
  - Parameters stored in a *block,* or table, in memory, and address of block passed as a parameter in a register
    - This approach taken by Linux and Solaris
  - Parameters placed, or *pushed,* onto the *stack* by the program and *popped* off the stack by the operating system
  - Advantage with latter methods: Not limit on the number or length of parameters being passed

Parameter Passing via Table

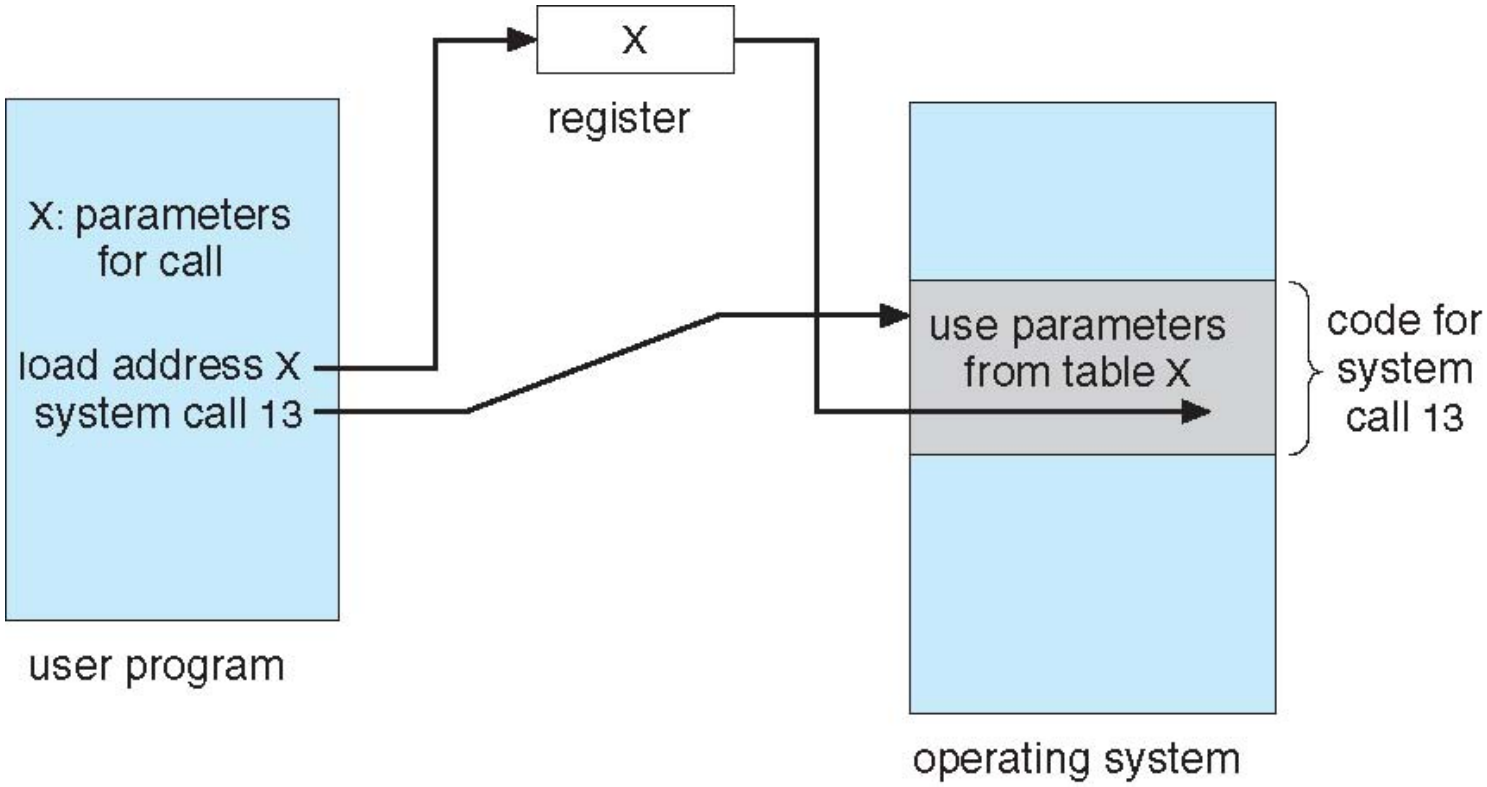

Types of System Calls

- Process control
  - end, abort
  - load, execute
  - create process, terminate process
  - get process attributes, set process attributes
  - wait for time
  - wait event, signal event
  - allocate and free memory
- File management
  - create file, delete file
  - open, close file
  - read, write, reposition
  - get and set file attributes

Types of System Calls (Cont.)

- Device management
  - request device, release device
  - read, write, reposition
  - get device attributes, set device attributes
  - logically attach or detach devices
- Information maintenance
  - get time or date, set time or date
  - get system data, set system data
  - get and set process, file, or device attributes
- Communications
  - create, delete communication connection
  - send, receive messages
  - transfer status information
  - attach and detach remote devices

Example: MS-DOS

- Single-tasking
- Shell invoked when system booted
- Simple method to run program
  - No process created
- Single memory space
- Loads program into memory, overwriting all but the kernel
- Program exit -> shell reloaded

MS-DOS execution

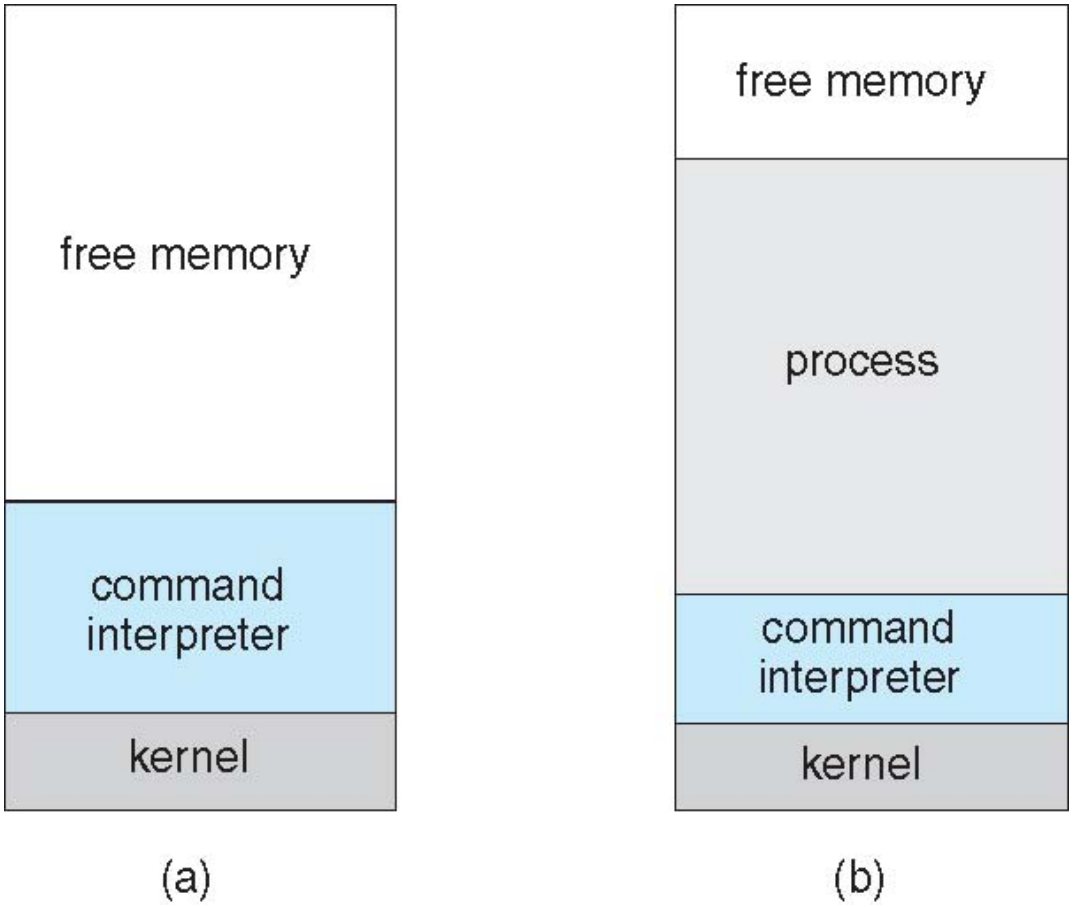

(a) At system startup (b) running a program

Example: FreeBSD

- Unix variant
- Multitasking
- User login -> invoke user's choice of shell
- Shell executes fork() system call to create process
  - Executes exec() to load program into process
  - Shell waits for process to terminate or continues with user commands
- Process exits with code of 0 – no error or > 0 – error code
  - This is the reason for convention of "return 0"
  - And **main()** declared with return type int!

FreeBSD Running Multiple Programs

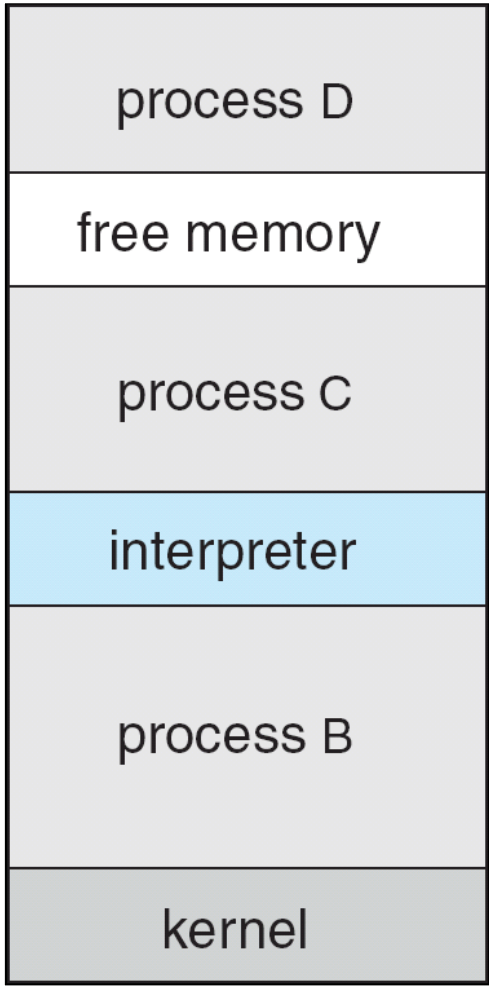

Simple Structure

- MS-DOS – written to provide the most functionality in the least space
  - Not divided into modules
  - Although MS-DOS has some structure, its interfaces and levels of functionality are not well separated

Traditional UNIX System Structure

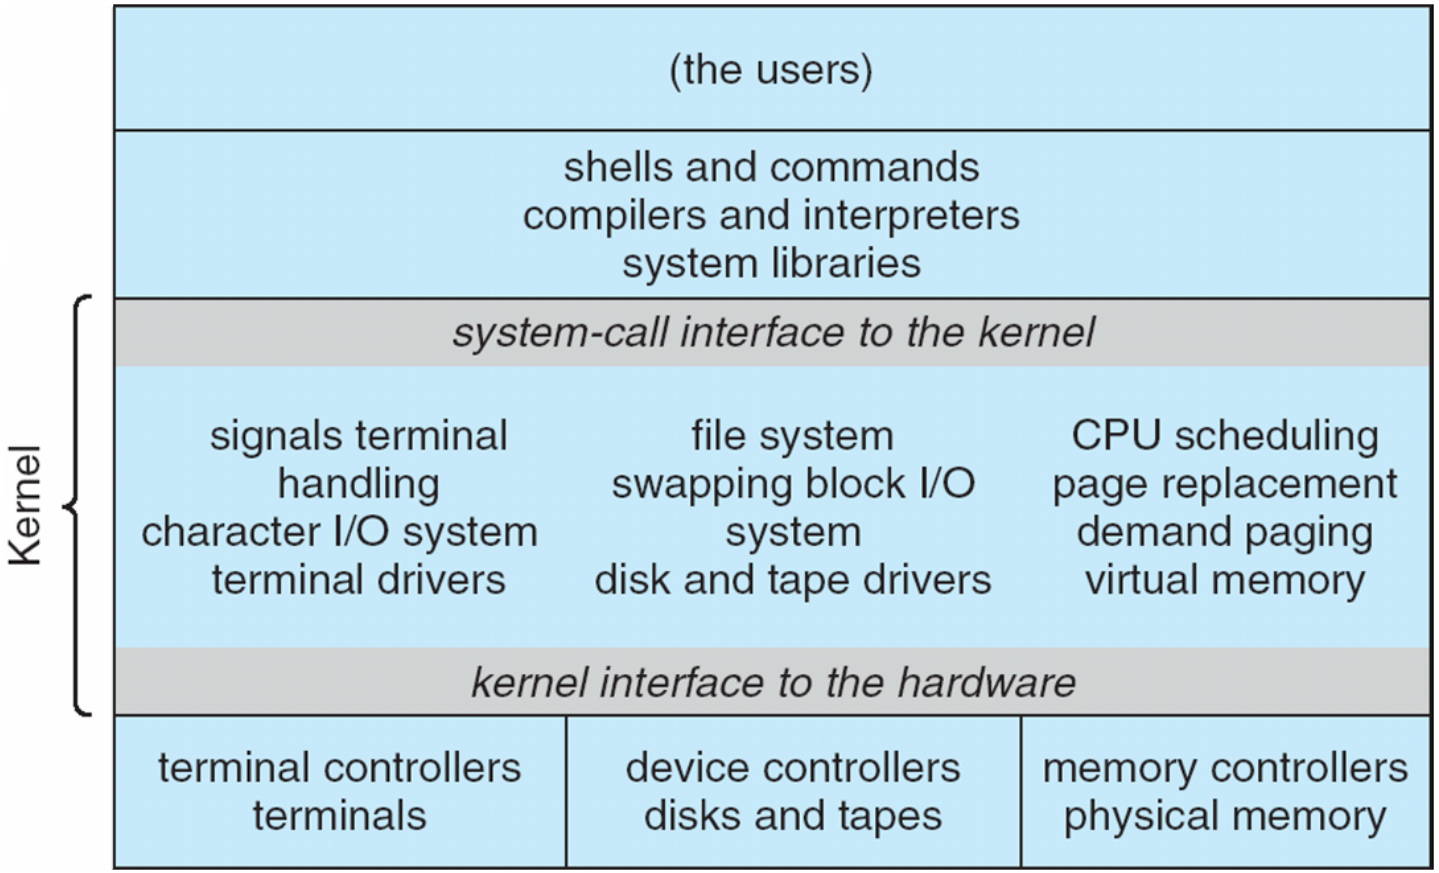

UNIX

- UNIX – limited by hardware functionality, the original UNIX operating system had limited structuring. The UNIX OS consists of two separable parts
  - Systems programs
  - The kernel
    - Consists of everything below the system-call interface and above the physical hardware
    - Provides the file system, CPU scheduling, memory management, and other operating-system functions; a large number of functions for one level

Layered Operating System

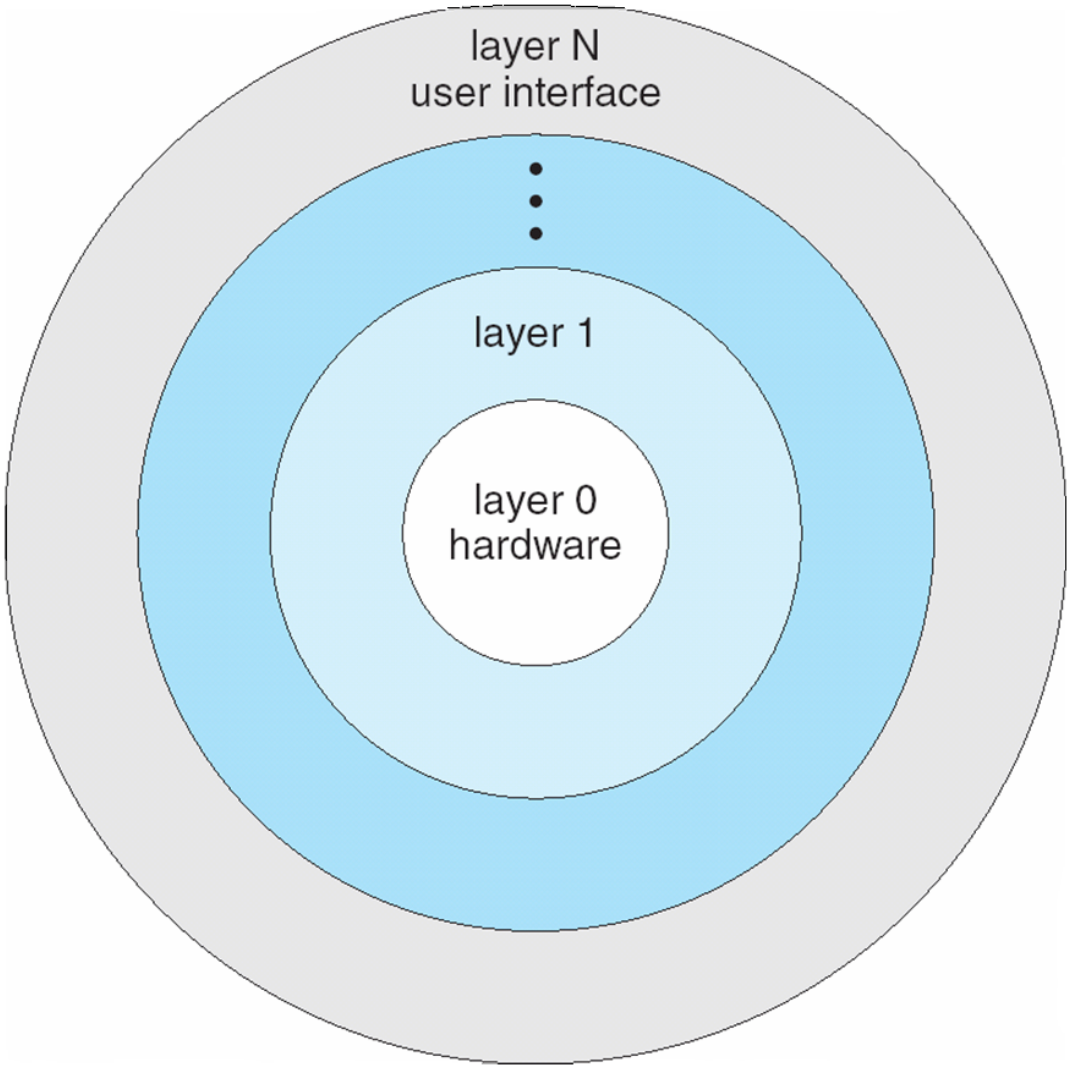

Microkernel System Structure

- Moves as much from the kernel into "*user*" space
- Communication takes place between user modules using message passing
- Benefits:
  - Easier to extend a microkernel
  - Easier to port the operating system to new architectures
  - More reliable (less code is running in kernel mode)
  - More secure
- Detriments:
  - Performance overhead of user space to kernel space communication

Mac OS X Structure

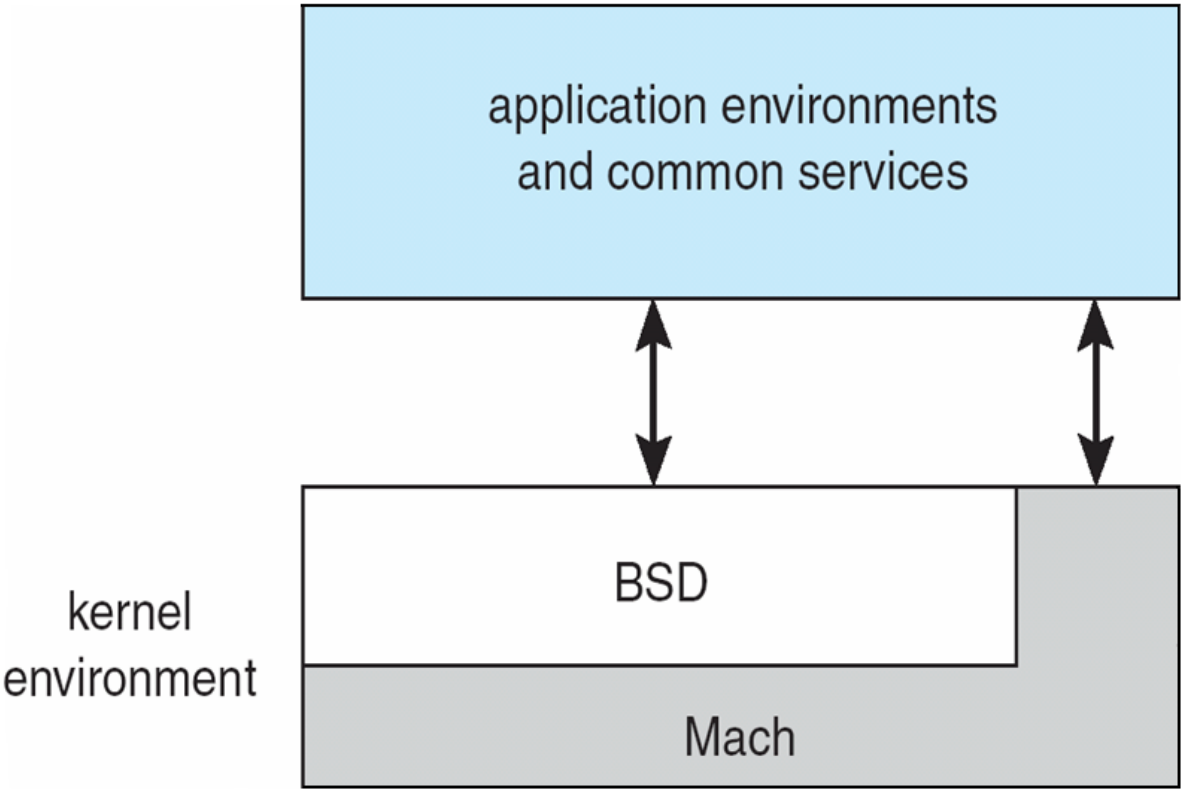

Virtual Machines

- A **virtual machine** takes the layered approach to its logical conclusion. It treats hardware and the operating system kernel as though they were all hardware.
- A virtual machine provides an interface *identical* to the underlying bare hardware.
- The operating system **host** creates the illusion that a process has its own processor and (virtual memory).
- Each **guest** provided with a (virtual) copy of underlying computer.

System Boot

- Operating system must be made available to hardware so hardware can start it
  - Small piece of code – **bootstrap loader**, locates the kernel, loads it into memory, and starts it
  - Sometimes two-step process where **boot block** at fixed location loads bootstrap loader
  - When power initialized on system, execution starts at a fixed memory location
    - Firmware used to hold initial boot code

End of Chapter 2