

Sensor Field Log

1 Readings

Soil moisture and battery voltage for every site in the spring survey.

Site	Date	Moisture (%)	Battery (V)
S01	2026-04-02	22	3.4
S02	2026-04-03	29	3.5
S03	2026-04-04	36	3.6
S04	2026-04-05	43	3.7
S05	2026-04-06	50	3.3
S06	2026-04-07	17	3.4
S07	2026-04-08	24	3.5
S08	2026-04-09	31	3.6
S09	2026-04-10	38	3.7
S10	2026-04-11	45	3.3
S11	2026-04-12	52	3.4
S12	2026-04-13	19	3.5
S13	2026-04-14	26	3.6
S14	2026-04-15	33	3.7
S15	2026-04-16	40	3.3
S16	2026-04-17	47	3.4
S17	2026-04-18	54	3.5
S18	2026-04-19	21	3.6
S19	2026-04-20	28	3.7
S20	2026-04-21	35	3.3
S21	2026-04-22	42	3.4
S22	2026-04-23	49	3.5
S23	2026-04-24	16	3.6
S24	2026-04-25	23	3.7
S25	2026-04-26	30	3.3
S26	2026-04-27	37	3.4
S27	2026-04-28	44	3.5
S28	2026-04-01	51	3.6

S29	2026-04-02	18	3.7
S30	2026-04-03	25	3.3
S31	2026-04-04	32	3.4
S32	2026-04-05	39	3.5
S33	2026-04-06	46	3.6
S34	2026-04-07	53	3.7
S35	2026-04-08	20	3.3
S36	2026-04-09	27	3.4
S37	2026-04-10	34	3.5
S38	2026-04-11	41	3.6
S39	2026-04-12	48	3.7
S40	2026-04-13	15	3.3

These readings come from the spring survey. Volunteers checked every site twice and logged the lower value. Sites in the river valley stayed wetter than the hill sites, as in earlier years. All readings above were taken before the irriga-

tion schedule changed in May, so the dry readings at sites S31 to S40 are expected and need no follow-up.

2 Maintenance steps

Do these steps at every site visit:

1. Clean the sensor probe with a dry cloth.
2. Check the battery voltage and write it in the log.
3. Replace the battery if it reads below 3.4 V.

4. Push the probe back in at a depth of 10 cm.
5. Photograph the site and upload the photo.

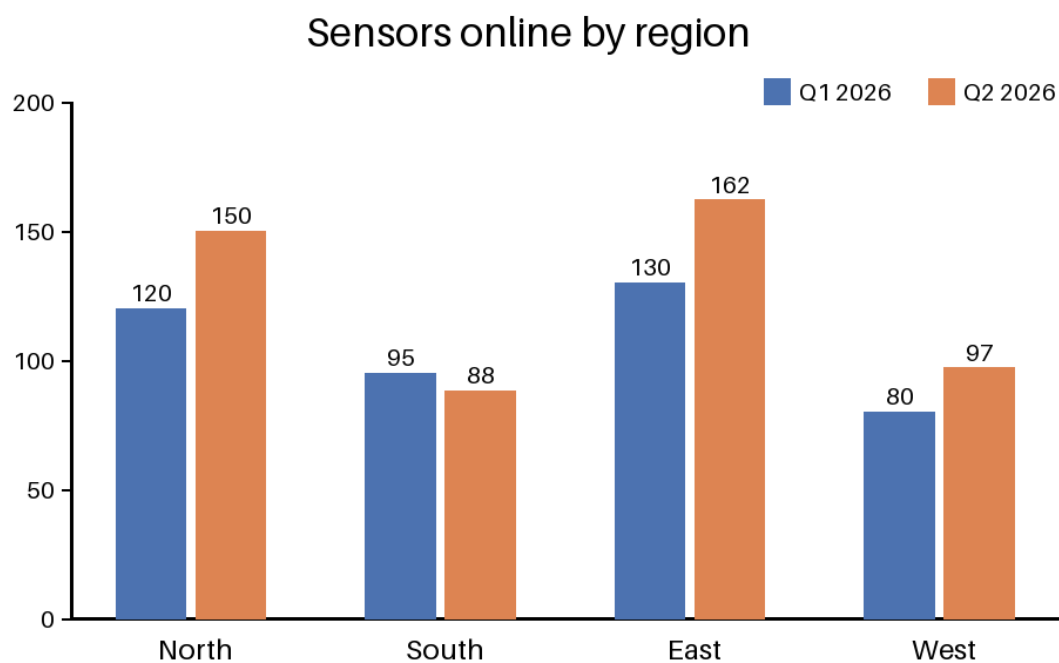


Figure 1: Sensors online by region, Q1 and Q2 2026.

3 Next steps

Repeat the survey after the summer, using the same sites and the same steps.