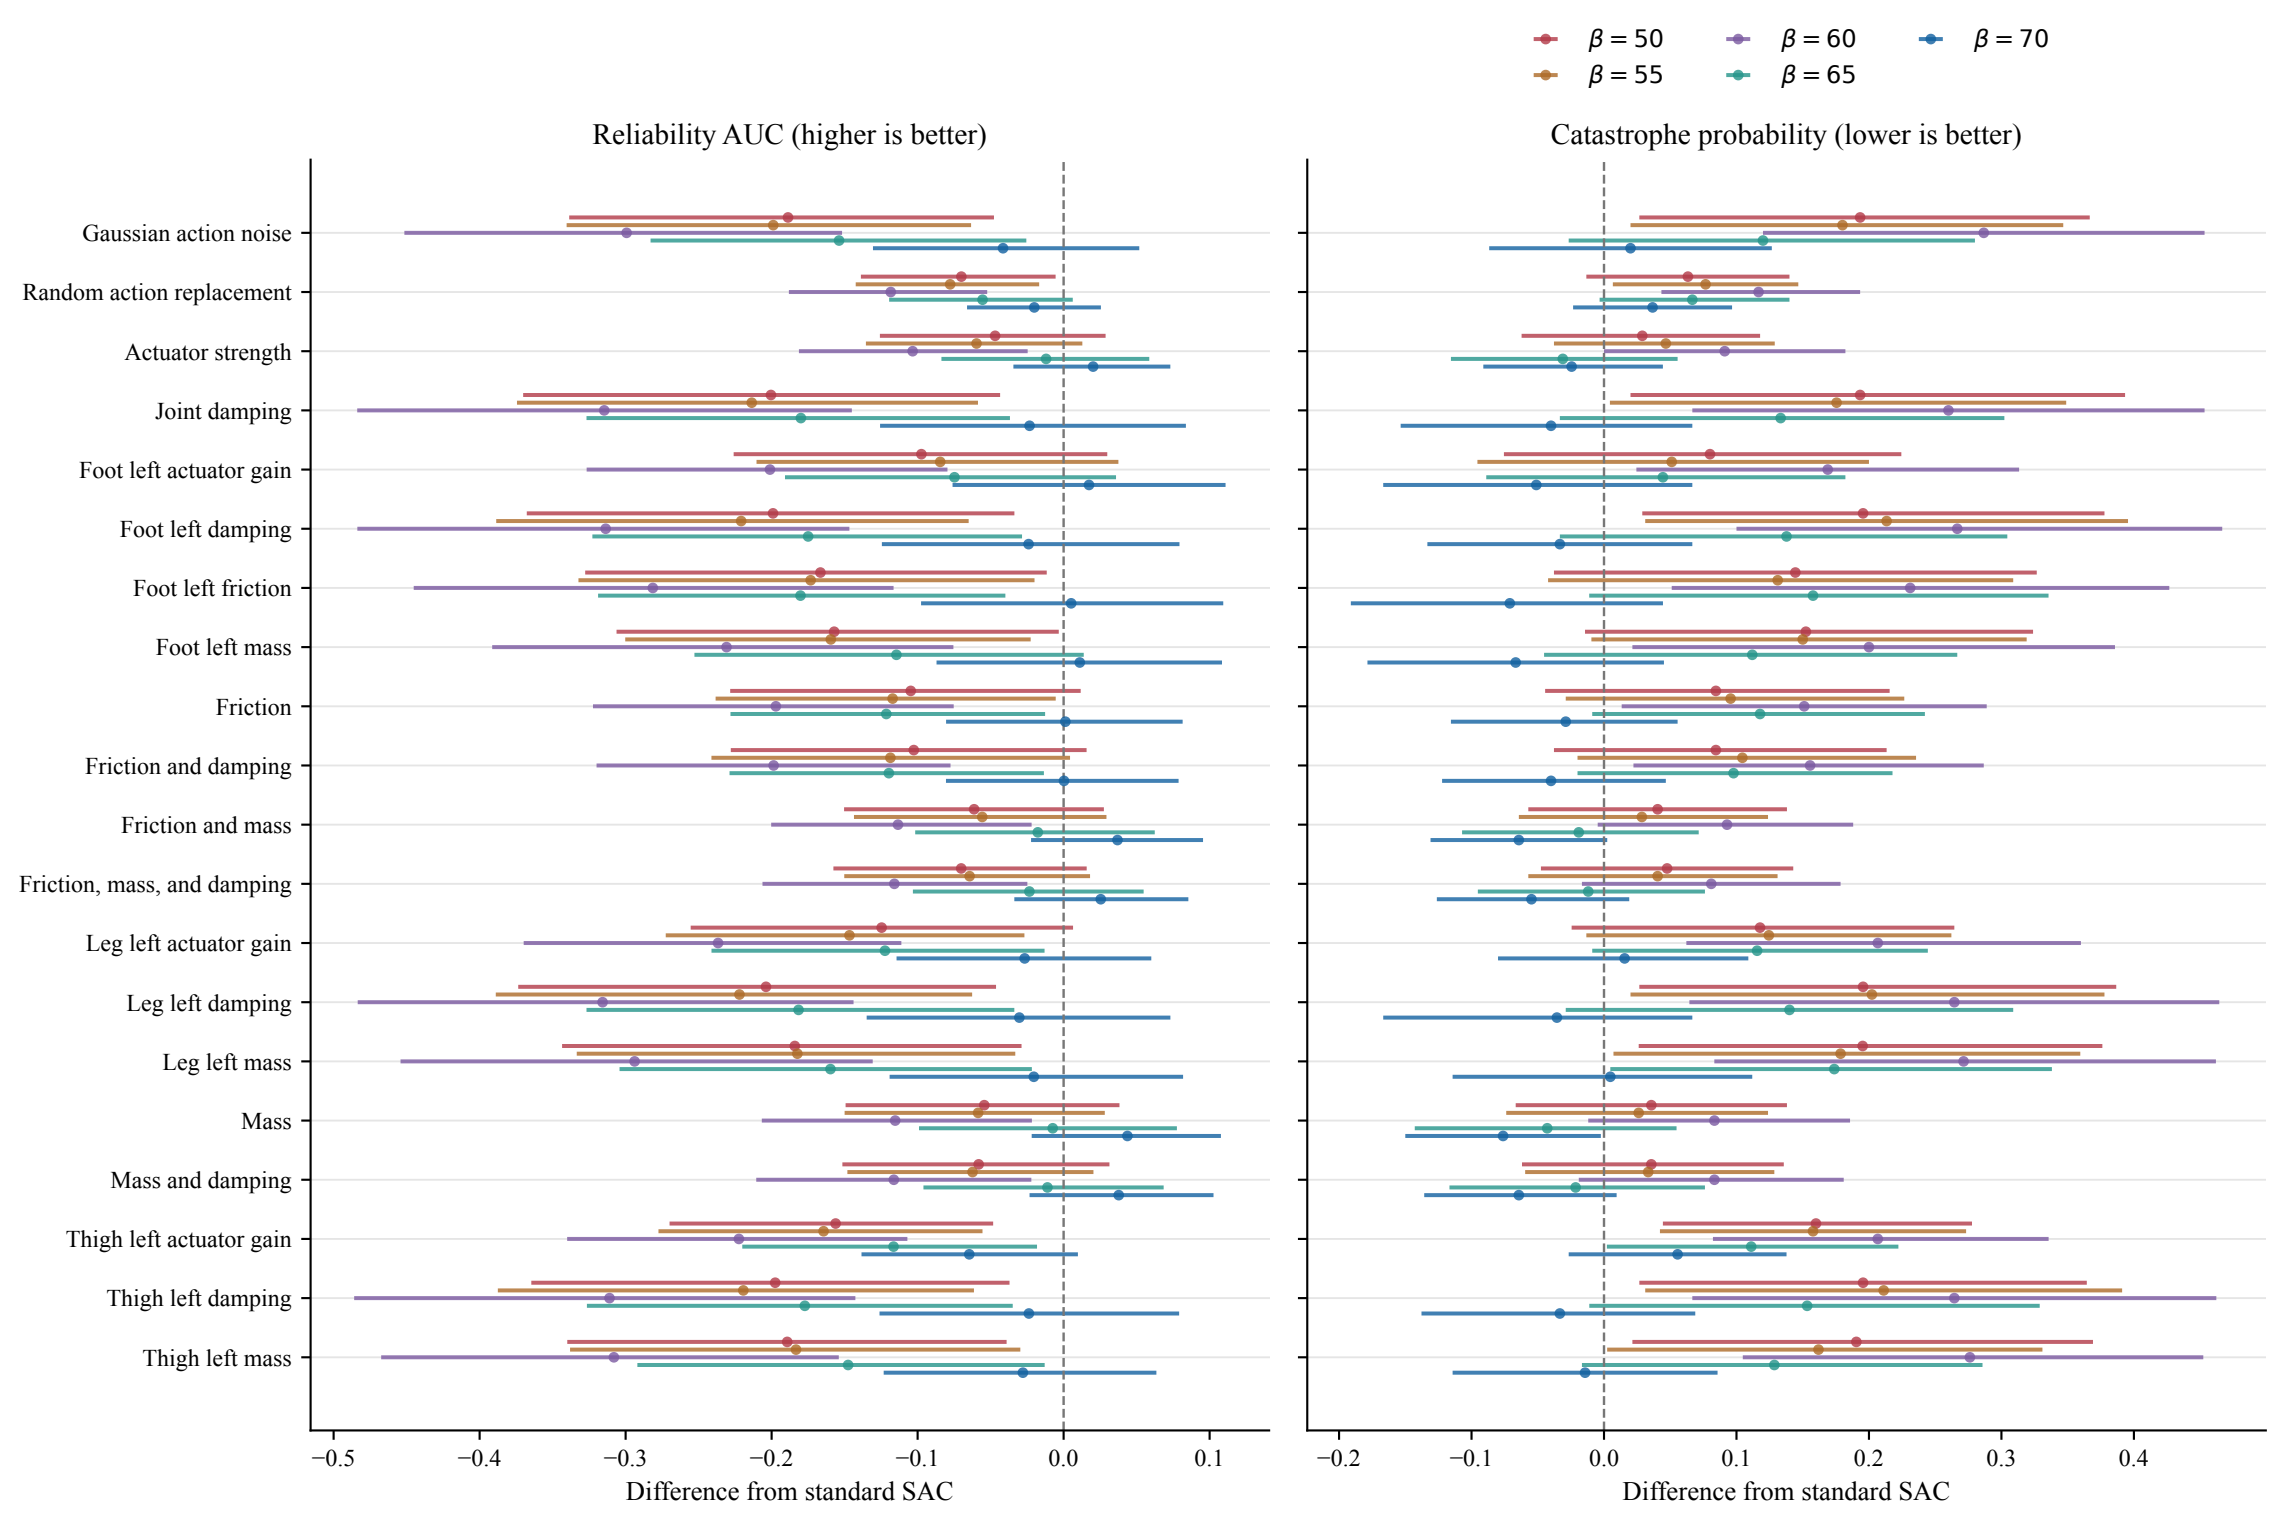
β = 50
β = 55
β = 60
β = 65
β = 70
Reliability AUC (higher is better)
Catastrophe probability (lower is better)
Gaussian action noise
Random action replacement
Actuator strength
Joint damping
Foot left actuator gain
Foot left damping
Foot left friction
Foot left mass
Friction
Friction and damping
Friction and mass
Friction, mass, and damping
Leg left actuator gain
Leg left damping
Leg left mass
Mass
Mass and damping
Thigh left actuator gain
Thigh left damping
Thigh left mass
−0.5
−0.4
−0.3
−0.2
−0.1
0.0
0.1
−0.2
−0.1
0.0
0.1
0.2
0.3
0.4
Difference from standard SAC
Difference from standard SAC