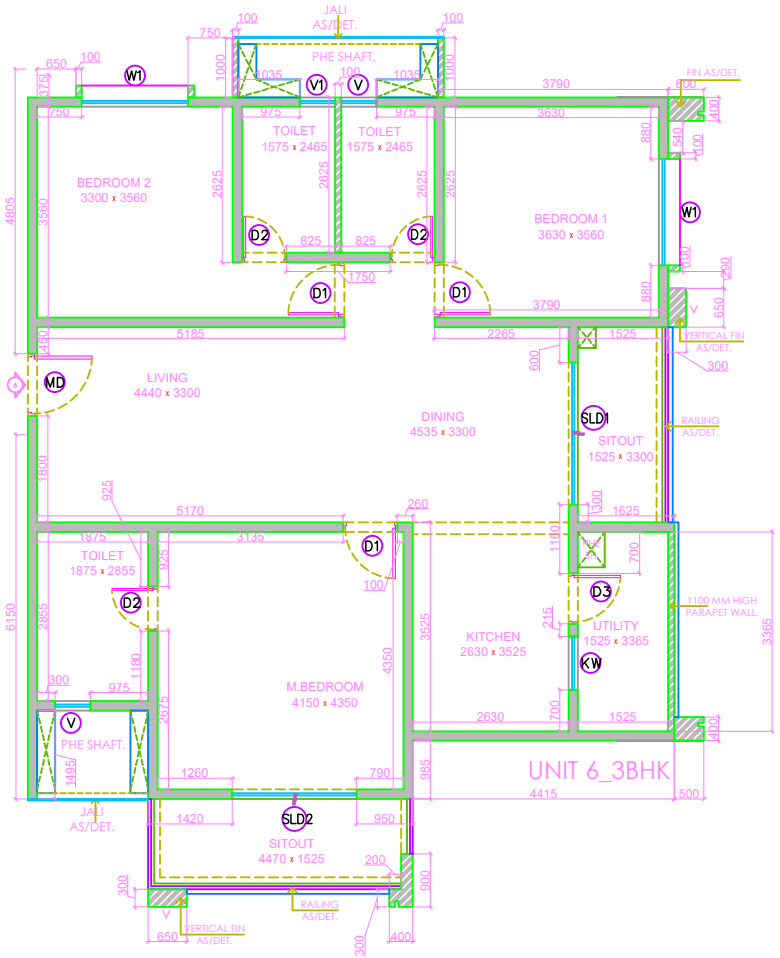


SCHEDULE OF OPENINGS

DOORS

S.No	INDICATION	MATERIAL	DESCRIPTION	STRUCTURAL LINTEL LVL. (- SSL)	FLOORING	TOLERANCE (ON THREE SIDES)	FINISHED LINTEL LVL. (- FFL)	SILL LVL.	FINISHED DOOR SIZE (MM)	STRUCTURAL OPENING SIZE (MM)
1	TLD	GLASS	TOWER LOBBY DOOR	2450 MM	50MM	-	2400 MM	0 MM	2000X2400	-
2	MD	WOOD	MAIN DOOR	2460 MM	50MM	10MM	2400 MM	0 MM	1050X2400	1070X2460
3	FD	FIRE RATED	FIRE DOOR - STAIRCASE	2160 MM	50MM	10MM	2100 MM	0 MM	1200X2100	1220X2160
4	FD	FIRE RATED	FIRE DOOR - F.C.C	2160 MM	50MM	10MM	2100 MM	0 MM	1000X2100	1020X2160
5	D1	WOOD	BEDROOM DOOR	2160 MM	50MM	10MM	2100 MM	0 MM	915X2100	935X2160
6	D2	WOOD	TOILET DOOR	2160 MM	50MM	10MM	2100 MM	0 MM	750X2100	770X2160
7	D3	WOOD	UTILITY DOOR	2160 MM	50MM	10MM	2100 MM	0 MM	850X2100	870X2160
8	D4	WOOD	MAID ROOM DOOR	2160 MM	50MM	10MM	2100 MM	0 MM	915X2100	935X2160
9	D5	WOOD	MAID RM. TOILET DR.	2160 MM	50MM	10MM	2100 MM	0 MM	750X2100	770X2160
10	SLD1	UPVC	SLIDING DOOR_1	2160 MM	50MM	10MM	2100 MM	0 MM	2400X2100	2420X2160
11	SLD2	UPVC	SLIDING DOOR_2	2160 MM	50MM	10MM	2100 MM	0 MM	2100X2100	2120X2160
12	SLD3	UPVC	SLIDING DOOR_3	2160 MM	50MM	10MM	2100 MM	0 MM	1500X2100	1520X2160
13	FHD	FIRE RATED	SHAFT DOOR	2160 MM	50MM	-	2100 MM	450 MM	900X1650	-
14	ESD	FIRE RATED	ELECTRICAL SHAFT DOOR	2160 MM	50MM	-	2100 MM	450 MM	900X1650	-
15	CSD	FIRE RATED	COMMUNICATION SHAFT DOOR	2160 MM	50MM	-	2100 MM	450 MM	900X1650	-
16	VCD	FIRE RATED	LOUVERS FOR STAIRCASE & LLP PRESS.	2160 MM	50MM	-	2100 MM	1250 MM	650X850	-

WINDOWS

S.No	INDICATION	MATERIAL	DESCRIPTION	STRUCTURAL LINTEL LVL. (- SSL)	TOLERANCE ON ALL SIDES	FINISHED LINTEL LVL. (- FFL)	STRUCTURAL SILL LVL. (-SSL)	FINISHED SILL LVL. (-FFL)	FINISHED WINDOW SIZE (MM)	STRUCTURAL OPENING SIZE (MM)
1	W1	UPVC	WINDOW TYPE_1	2155 MM	05MM	2100 MM	945MM	900MM	1800X1200	1810X1210
2	W2	UPVC	WINDOW TYPE_2	2155 MM	05MM	2100 MM	945MM	900MM	1200X1200	1210X1210
3	W3	UPVC	WINDOW TYPE_3	2155 MM	05MM	2100 MM	945MM	900MM	900X1200	910X1210
4	KW	UPVC	KITCHEN WINDOW	2155 MM	05MM	2100 MM	1145MM	1100MM	900X1000	910X1010
5	KW1	UPVC	KITCHEN WINDOW_1	2155 MM	05MM	2100 MM	1145MM	1100MM	750X1000	760X1010
6	SW	UPVC	STAIRCASE WINDOW	2155 MM	05MM	2100 MM	945MM	900MM	1200X1200	1210X1210
7	SW	UPVC	STAIRCASE WINDOW	2155 MM	05MM	2100 MM	1245MM	1200MM	760X1200	760X1210
8	SW2	UPVC	STAIRCASE WINDOW	2155 MM	05MM	2100 MM	1245MM	1200MM	900X1200	910X1210
9	SW3	UPVC	STAIRCASE WINDOW	2155 MM	05MM	2100 MM	1245MM	1200MM	1200X1200	1210X1210
10	CW	UPVC	CORRIDOR WINDOW	2355 MM	05MM	2300 MM	945MM	900MM	1800X1400	1810X1210
11	CW1A	UPVC	CORRIDOR WINDOW	2355 MM	05MM	2300 MM	1545MM	1500MM	1800X800	1810X810
12	CW2	UPVC	CORRIDOR WINDOW	2355 MM	05MM	2300 MM	945MM	900MM	1200X1400	1210X1410

VENTILATORS

S.No	INDICATION	MATERIAL	DESCRIPTION	STRUCTURAL LINTEL LVL. (- SSL)	FINISHED LINTEL LVL. (- FFL)	TOLERANCE ON ALL SIDES	STRUCTURAL SILL LVL. (-SSL)	FINISHED SILL LVL. (-FFL)	FINISHED VENTILATOR SIZE (MM)	STRUCTURAL OPENING SIZE (MM)
1	V	UPVC	VENTILATOR	2155 MM	2100 MM	05MM	945MM	900MM	600X1200	610X1210
2	V1	UPVC	VENTILATOR	2155 MM	2100 MM	05MM	1245MM	1200MM	600X900	610X910

NOTE :
SW1,SW2 & SW3 (STAIRCASE WINDOWS) STARTS FROM MID - LANDING,
SILL HEIGHT 1200MM & LINTEL HEIGHT 2450MM