

FALCON's Response to InPost for Supply of Loop Cross Belt Sorter

May 6, 2025

Offer F25-00184 Rev 0

Doc. No. - Sales/FR/PT/007/R0



Kind Attention –

Mr. Kamil Szumiński

Offer Ref: F25-00184-01;

Date: 06-05-2025

Subject –Techno -Commercial Offer for Cross Belt Sorter project

Location – Poland

Dear Kamil,

Thank you very much for your invitation of April 17th, to offer for the sorter project at **Poland**. Based on the request, the answers received last week, and the experience gathered in previous offer, we worked out details of the design for the sorter systems.

As you will note, we have done an in-depth data analysis and evaluated various solution options best suited for your requirements. Along with the information received, we have put together a **detailed technical proposal** laid out in various sections and sequenced to enable you to get a full insight in our proposed solution and to re-enforce our commitment to being your partner in this strategic initiative.

The core of the sortation system includes the well-known horizontal electrical cross belt (dual belt on one carrier) as well as the Volume Distribution System (VDS) as per delivery to another InPost project.


In subsequent sections, we have highlighted the capabilities and experiences of Falcon Autotech with sections on our Intra-logistics Automation Technologies and references.

To conclude, I would like to add my personal commitment on behalf of Falcon Autotech. As we move through the RFP process, please do not hesitate to contact me and my team. We will be pleased to assist you with any further information or clarifications that you might have and look forward to our management call to finalise.

Best Regards on behalf of the team,

Johan Hoelen (General Manager Europe)

Response to RFP for Cross Belt Sorter

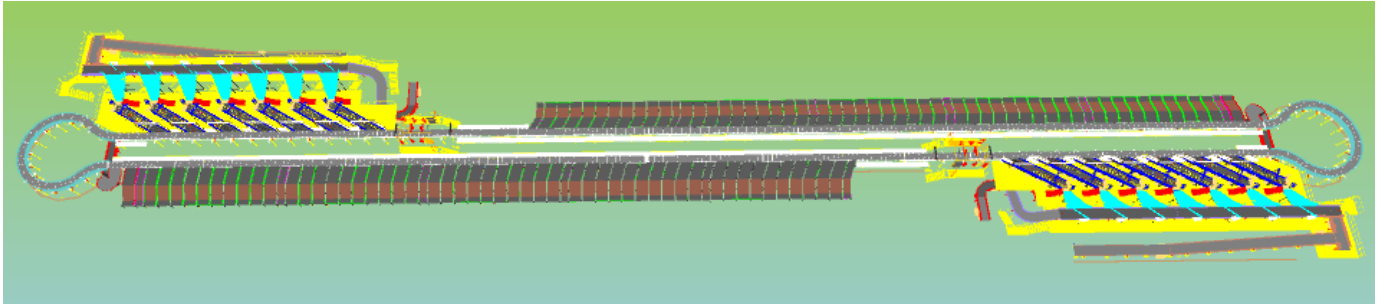

Proposal Reference – F25-00184 –00

Falcon Autotech Private Limited
Plot No. 87, Sector Ecotech-1, Extension-1,
Greater Noida, Uttar Pradesh 201308.

Contact – Adib Hasim
Senior Manager
Mob - +91 9711619998
Adib.hasim@falconautotech.com

Table of Content

1. Glossary	7
2. Executive Summary	8
3. Company Profile	9
4. Falcon's Experience and Achievements in Sortation Space Globally	13
5. Reference Projects	16
5.1 Project 1- (CEP Client, India)	16
5.2 Project 2- (Client – E-Commerce, India).....	17
5.3 Project 3- (Client – E-Commerce, India).....	18
5.4 Project 4- (Client – E-Commerce, India).....	19
5.5 Project 5- (CEP Client, UK)	20
5.6 Project 6- (CEP Client, Sydney).....	21
5.7 Project 7- (CEP Client, Spain) – Mondial Relay	22
6. Handled Shipment Spectrum	23
6.1 Shipment size loadable on the Sorter.....	23
6.2 Shipments to be loaded on Sorter shall have the following characteristics:	23
6.3 Shipment not loadable on the sorter	24
7. Proposed System Description	25
7.1 Objective.....	25
7.2 Summary of the System	25
7.3 Main benefits of the proposed solution.....	25
8. Concept Description	26
9. Layout Overview.....	27
10. Proposed System Capacity Calculations	28
11. System description	29
11.1 Infeed System.....	29
11.2 Arm Based VDS System	31
11.2.1 VDS Conveyor.....	31
11.2.2 VDS Arm	31
11.2.3 VDS Chute	32
11.2.4 Overflow Chute	32
11.3 Induct System.....	33
11.3.1 Loading Conveyor.....	33
11.3.2 Buffer Conveyors.....	34
11.3.3 Spacing Conveyor.....	34

11.3.4	Angle Merge Conveyor.....	35
11.3.5	Top Loader Conveyor	35
11.3.6	Irregular Chute	35
11.4	Loop Cross Belt Sorter.....	36
11.5	5 Side-Automatic Barcode Scanning & Dimensioning System.....	36
11.6	Standard Destination Chute.....	37
11.7	Narrow Destination Chute	37
11.8	Technical/Rejection Chute	38
11.9	Technical reject / Irregular Conveyor	38
11.10	Protection on Ground (Leg Guard & Crash Barrier).....	39
11.11	Mezzanine/Operator & Maintenance Platform.....	40
11.11.1	Mezzanine for Induct & VDS	40
11.11.2	Maintenance Platform for Scanning Tunnel	40
12.	Description of Components of Equipment.....	41
12.1	Cross Belt Sorter - CBS	41
12.2	CBS Carrier	41
12.3	Servo Roller.....	41
12.4	Chassis.....	42
12.5	Linear Synchronous Motor.....	42
12.6	Power Transmission	42
12.7	Data Transmission.....	43
12.8	Carriers positioning System.	43
13.	Technical specifications of CBS	44
14.	Proposed System BOM Details	45
14.1	Mechanical equipment	45
14.2	Electrical Equipment	46
15.	Electrical System.....	47
15.1	Reference Picture of Power Distribution Panel	47
15.2	Main Control Panel (Reference).....	47
15.3	Induct Stations Control Panel (Reference).....	48
16.	Controls Architecture (Ref.)	49
17.	IT Architecture (Ref.)	49
18.	HAA Server (InPost Scope)	50
19.	Key Components Make	51
20.	Program Organisation	52
20.1	Program/ Project Schedule	52

20.2 Program Management..... 52

21. INPOST’s Responsibility 53

21.1 INPOST Responsibilities During the Assembly and Commissioning Phase 53

21.2 Responsibilities of INPOST During the Tests 53

21.3 INPOST Responsibilities During the Training 53

22. System Handover to INPOST..... 54

 User Acceptance Test Parameters 55

23. Commercial Terms..... 57

23.1 Price Sheet 57

23.2 Pricing Terms: 57

23.3 Payment Terms..... 57

24. Warranty Period 58

25. Exclusions 59

Appendices 60

1. Glossary

S. No.	Term	Description
1	RFP	Request For Proposal
2	PPH	Shipments Per Hour
3	ICR	Intelligent Character Recognition
4	MEZZ	Mezzanine
5	FWD	Friction Wheel Drive
6	ECDS	Empty Carrier Detection System
7	AC	Alternating Current
8	DC	Direct Current
9	PLC	Programmable Logic Controller
10	IT	Information Technology
11	BOQ	Bill Of Quantity
12	I/O	Input/ Output
13	PDP	Power Distribution Panel
14	PC	Personal Computer
15	UPS	Uninterrupted Power Supply
16	CBS	Cross Belt Sorter
17	MDR	Motor Driven Roller
18	VDS	Volume Distribution System
19	NL Shipments	Non-Large Shipments
20	SL Shipments	Semi-Large Shipments
21	IPP	Individual Productivity Potential
22	DAP	Design Approval Phase
23	NO(S)	Piece(s)
24	CPH	Carrier Per Hour
25	BPH	Belts Per Hour

2. Executive Summary

Falcon is pleased to confirm its great interest in responding to this RFQ. Our team has been working closely with the relevant stakeholders, with a clear commitment to listening and understanding your needs and ensuring this project's success.

As prime contractor, Falcon ensures its full commitment to successfully completing this project. Following the same objective for the system, we are happy to offer a compliant solution meeting all technical and operational requirements, high-performance, optimized, tailor-made, fast and secure planning, and a competitive price. For full transparency, a compliancy list forms part of our offer.

Our solution is based on the following key characteristics:

- **One Sorter, based on Falcon's own, well-known loop cross-belt technology**
- **14 pcs of Side Loader Induct Line**
- **100 pcs of Destination Chute**
- **4 pcs of Technical Chute**
- **10 pcs of Narrow Chute**
- **2 pcs of Volume Distribution System (VDS System) - Arm Based**
- **2 Sets of Infeed System**
- **14 pcs of Irregular Chute**
- **2 pcs of Overflow Chute for VDS**
- **2 Sets of Irregular Takeout Conveyor**

A tailor-made and simple layout, specifically designed to INPOST The proposed layout, is the result of the technical requirements in the RFP document and our discussions with the relevant stakeholders during the feedback round.

- Simple operational conditions due to one single Linear cross belt sorter.
- Easy maintenance: optimized number of conveyors and concentrated inducts area.

1. **Falcon's reliable and fully CE compliant Parcel sortation systems**

These systems are globally being used by most innovative brands such as Mondial Relay, Aramex, Amazon, Asendia, Fastway, Delhivery and many more. The main and critical components of the FALCON Autotech sorter building blocks, like wheels, motors, belts, bearings, Bus Bars, Communication platforms, PLC's etc., are sourced from some of the best suppliers in the world, such as SEW, Siemens, SICK, Faigle, Vahle and Forbo. This strategic baseline of sourcing policy allows Falcon's customers to be fully confident in the systems' robustness and reliability.

2. **Commitment to quality systems**

Demonstrating Falcon's clear commitment to the INPOST Group's satisfaction, the parcel sortation system, parts and services will be under warranty for 12 months from installation.

3. Company Profile

Falcon Autotech (Falcon) is a global intralogistics automation solutions company. With over 10 years of experience, Falcon has worked with some of the most innovative brands in E-Commerce, CEP, Fashion, Food/FMCG, Auto and Pharmaceutical Industries. With our proprietary software and robust hardware integration capabilities, Falcon designs, manufactures, supplies, implements, and maintains world-class warehouse automation systems globally. Falcon's strong research and development team and the continuous focus on innovation reflect our strong solution line around Sortation, Robotics, Conveying, Vision Systems and IOT. Falcon has done over 1,800 installations across 15 countries on four continents.

FALCON 2.0



Operational since in 2012, Falcon is a global intra-logistic automation solution provider handling parcels, bags, cartons and pieces

Falcon has five key solution lines: 3D Robotics, Sortation systems, Dimensions & Weight Systems, Put/pick To Light & Conveyors, along with rapidly scaling proprietary software called FACTS

Work with leading E-Commerce, CEP, Fashion, Food/FMCG, Auto and Pharmaceutical brands

5 Product Lines

15+ Countries with Live Installations

1800+ Total Installed Systems Globally

1 Million+ Sorts Per Hour of combined Sorting Capacity installed Globally

Long-standing Relationships with industry leaders

News & Articles

FALCON AUTOTECH EXPANDS GLOBAL PRESENCE WITH ITS NEW OFFICE IN AMSTERDAM
Falcon Autotech is pleased to announce the opening of its new office in Amsterdam, Netherlands, marking a significant milestone in the company's expansion into the European market

FALCON AUTOTECH DELIVERS INDIA'S BIGGEST CUTTING-EDGE PARCEL SORTATION PROJECT
With capacity to efficiently handle over 48,000 shipments and 17,000 bags and large parcels, the facility comprises two integrated double-deck CBS spanning over 1.8 KM of loop length, network of 15 KM of belt conveyors and 75 TBCs

Falcon Autotech is currently among the top 15 intralogistics automation companies, our vision is to become top 10 intralogistics automation company in our focused product lines.

Our Vision

To be amongst the Top 10 global intra-logistics automation companies in our focused product lines

The team started out in 2004 solving special purpose automation problems for clients and later established Falcon Autotech in 2012 with strong focus on building standard technology stack spanning across Hardware, Firmware and Software to tackle bigger Supply Chain problems around warehouse automation and material handling. Over the decade, Falcon has made rapid strides and has carved out a niche in some of the world's most cutting-edge technologies: Sortation, Robotics, Conveying, Vision Systems and IOT.

Our Journey


Redefining Intralogistics Automation since 2012



As a leading player in the intra-logistics automation space, Falcon continuously strives to improve the operational efficiencies and accuracies for its clients through its domain knowledge and experience in addition to its wide range of products and solutions. In order to be able to live up to the high expectations set forth by our clients, the team at Falcon realizes the importance of taking up selective applications in focused Industries and deliver world class projects in return.

Industry Process Solutions

Delivering a multitude of game changing process automation solutions to our customers

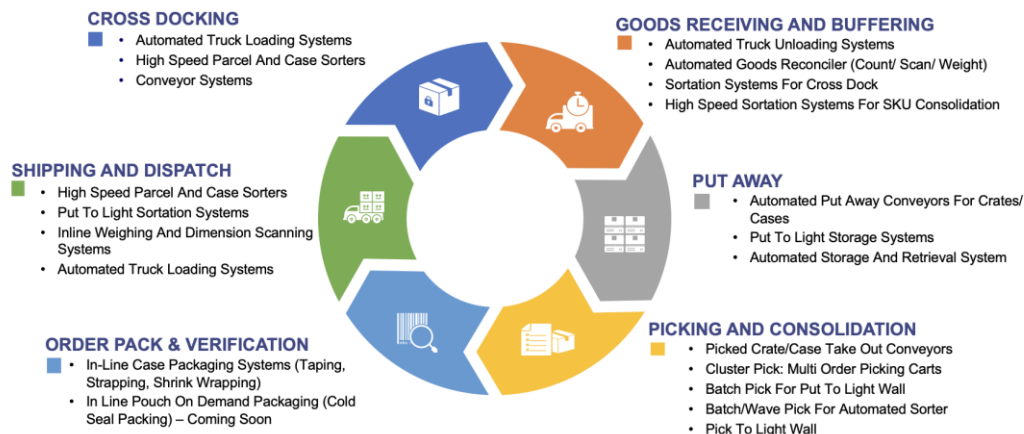




Falcon Autotech has successfully delivered warehouse automation solutions based on smart and innovative combinations of above product lines for effective materials handling, sortation and movement. The process is controlled in real-time by our in house WCS applications. These solutions considerably cut the need for manual operations, improve working conditions and ensure the highest accuracy of the entire process up to final delivery to the recipient.

Over the last 10 years, Falcon has worked with some of the most innovative brands worldwide and has established long standing partnerships. These brands are testimony of our strong focus on delivering superior customer satisfaction and offering end-to-end intralogistics solutions.

Select Key Clients

Some of world's most innovative brands trust us with their intra-logistics warehouse automation requirements

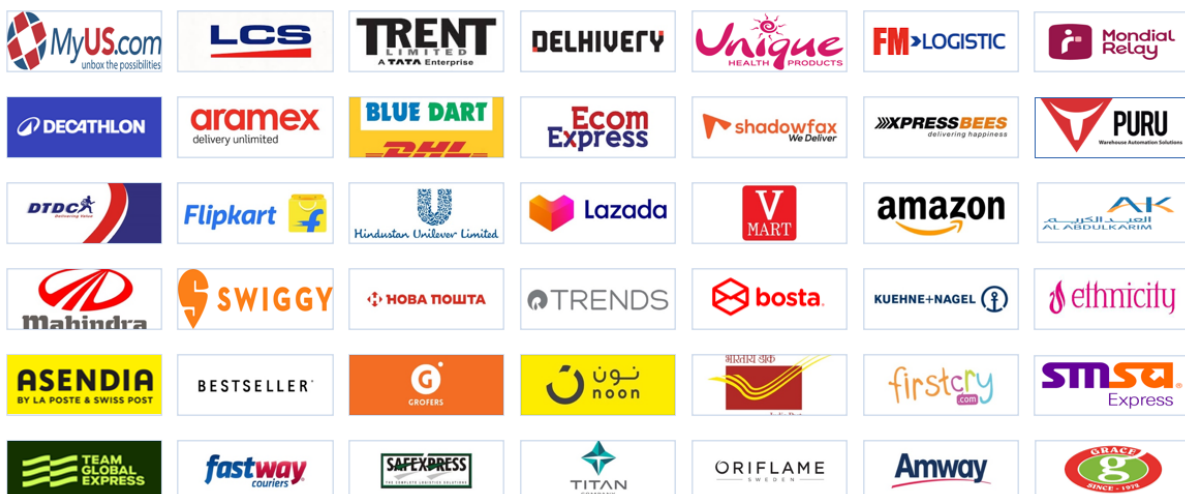

With over 1,800 installations, today Falcon's systems are used all over the globe. Falcon has highly motivated team of 600+ employees supported by over 15 global partners who help us design, manufacture, deliver and maintain automation solutions globally.

Global Market Presence



4. Falcon's Experience and Achievements in Sortation Space Globally

- Ranked among **Top 10 Sortation System Suppliers globally**.
- Currently possess one of **the World's largest portfolios in Sortation Technologies**: 7 In-house technologies.
- Total installed capacity of **10 million Shipments per day** worldwide.
- Only company to be able to offer a **Fully Integrated AMS**.

[NEWSROOM](#)[SERVICES](#)[CONTACT US](#)[FRANÇAIS](#)[SIGN](#)

FALCON AUTOTECH

Falcon Autotech expands its wings by opening its office in The Netherlands, Europe

April 15, 2024 03:32 ET | Source: [Falcon Autotech Private Ltd](#)

[Follow](#)

Share



NEW DELHI, India and AMSTERDAM, April 15, 2024 (GLOBE NEWSWIRE) -- Falcon

Autotech (Falcon), a leading global intralogistics automation solutions provider, opens its



Breaking Barriers and Optimizing Efficiency – Journey of Delivering India's Largest Sortation System

"It was a bold decision. If it didn't work, our company would have shut down," says Naman Jain, founder and CEO of warehouse automation startup Falcon Autotech, referring to a big gamble he had taken more than a decade ago. The year was 2013, Jain and his team were negotiating a deal with a major e-commerce logistics company that had just placed an updated order for a sorter with a capacity of 6,000 parcels per hour. That was 4x the specification earlier agreed upon.

"All the founders came together, and we took a calculated risk," recalls Jain. At the time, Falcon did not have the technology to develop such sorters, and hence, the said client refused to pay any money upfront and offered to pay the machine's price in monthly installments. However, there was a caveat: if it failed even once, Falcon would simply take the machine back and refund the entire amount. Falcon's 'calculated risk' paid off. The machine worked flawlessly and was handed over to the parcel company after 36 months. "We are now doing projects worth INR100 crore. That was unthinkable 10 years back," says Jain.

Falcon Autotech has covered a lot of ground since that big bet. Last month, it installed India's largest sortation equipment at



Economic Times Features Falcon Autotech

Naman Jain
Chief Executive Officer

From sorters to conveyors & robot based systems, here's the top tech warehouses are investing in

India's warehousing industry has travelled a long distance from "godowns" to modern storage facilities called Grade A warehouses.

Warehouse automation is a gradual process. India started off late, but that may actually help it bypass some of the mid-age technologies and adopt the latest ones. While several players are still warming up to automation, which are the



Falcon Announces Successful Go-Live of Automated Parcel Sortation Solution at DTDC's Chennai Facility

New Delhi, India – 2nd Aug 2023: Falcon Autotech, a leading supplier of intralogistics automation solutions, has been selected by DTDC Express Ltd, one of India's leading integrated express logistics company, to automate its parcel sorting operations at its super hub of 1,75,000 sq ft in Chennai, Tamil Nadu. Using its cross belt sorter technology, Falcon has designed DTDC's parcel sorting system, which can handle 6,000 parcels per hour, operate in a 24 X 7 environment, and can be expanded to cater to future growth.

The new linear cross-belt solution leverages cutting-edge technology to automate key sorting processes in DTDC's warehouse, including parcel profiling and sorting. This solution is designed to optimize the space requirements for sorting operations, increase efficiency, and reduce operational costs.

"We are thrilled to see our warehouse automation solution go live with DTDC, this solution is a testament to our commitment to providing innovative intra-logistics solutions that meet the evolving needs of our customers," said Falcon's CEO Naman Jain.



Transforming Indian Retail: The Impact of ASRS on Warehousing Operations

In recent years, the Indian retail industry has experienced unprecedented growth, propelling the nation to become the fifth-largest global retail destination. The industry, marked by its resilience and adaptability, went through significant transformations during the pandemic. While online shopping saw a remarkable surge, the reopening of physical stores ushered in a resurgence of the multi-sensory shopping experience. As a testament to this growth, shopping malls now encompass an astonishing 23.25 million square feet of retail space. However, the evolving consumer preferences have placed substantial pressure on businesses, necessitating the seamless integration of e-commerce and in-store experiences, which, in turn, has led to complex logistics challenges. The traditional warehousing systems struggled to cope with the demand for faster processing and the requirement for expanded storage capacities.

Historically, retailers had heavily relied on manual labor for their warehousing operations. However, the dynamism of today's retail market demands a shift towards automation. Enter Automated Storage and Retrieval Systems (ASRS), a technological revolution that has empowered businesses to strengthen their operations and enhance efficiency. ASRS employs sophisticated

5. Reference Projects

Falcon has a strong legacy in **Warehousing Automation** solutions and references-

1. Expertise in Shipment Sortation, Piece Picking and Handling, Case Picking and Handling.
2. Lifecycle services (maintenance, spares supply chain, support).
3. Full **in-house** expertise (Hardware/Software).
4. Turn-key **tailored** solutions.

The references list presented below focuses on Sortation Solution –

5.1 Project 1- (CEP Client, India)

The System is equipped with two fully automated and interconnected Sub-systems. Sub-System 1 is designed for handling large B2B boxes and E-commerce shipment bags while the Sub-System 2 is designed to handle Small E-commerce packages.


Solution Specifications –

- 48,000 PPH (Double Deck CBS- Shipment Sorter)
- 17,000 PPH (Double Deck CBS- Bag Sorter)
- Building Size: 700,000 Sq. Ft

Key Technology Modules –

- | | |
|---------------------------------------|--------------------------------------|
| • 2 Sets of Double Decker CBS Sorters | • Spiral Chutes with Braking rollers |
| • Mezzanine Structures | • 5-Sided Scanning Tunnels |
| • Automated Singulators | • High speed weighing conveyors |
| • Fully Automatic Inductions | • Direct Bagging Chutes |
| • Semi-Automatic Inductions | • Put to Light Chutes |
| • Telescopic belt conveyors | • Volume Distribution systems |
| • PVC Belt Conveyors | • High Availability Server Systems |
| • Modular Belt Conveyors | • WCS |

Site Pictures –

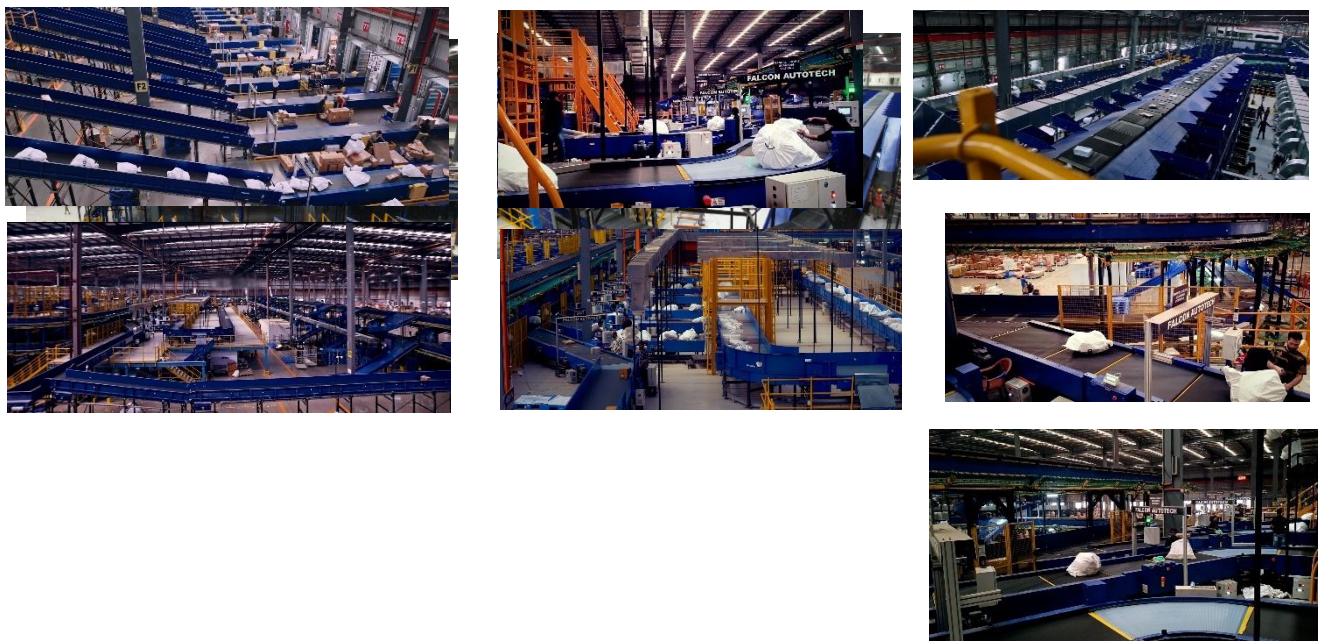

5.2 Project 2- (Client – E-Commerce, India)

Use Case – Destination Sorting of Packed Shipments.

In 2019, Client was looking for a potential automation partner for design and development of a new automated sortation system for B2C shipments. The system should be able to provide maximum uptime with reduced dependency on skilled manpower, and space optimization.


The customer chose Falcon Autotech based on its unique design which could cater to all their pain points, capability of seamless integration with WMS and life cycle support services.

Solution Specifications –

- Throughput: 27,600 PPH
- End Destinations: 410 Direct Outputs
- Building Size: 200,000 Sq Ft

Key Technology Modules –

- Bulk Infeed Conveyors.
- ARB based Volume Distribution System
- Integrated Presort System.
- Irregular Ejection System.
- Automatic Induct Lines.
- Automatic Barcode Scanner with Image Capture.
- Automatic Weight & Volume Measurement System.
- Linear Cross Belt Sorter.
- Smart Sliding Chutes for Direct bagging and Cage Sorting.
- Bag take out system.
- WCS Software System.

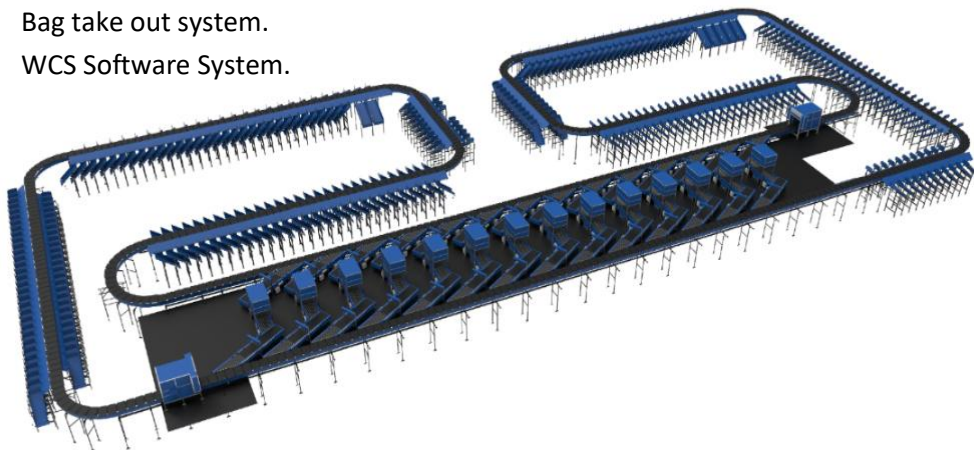

5.3 Project 3- (Client – E-Commerce, India)

Use Case – Destination Sorting of Packed Shipments.

The customer chose Falcon Autotech based on its unique design, capability of seamless integration with WMS and life cycle support services.




Solution Specifications –

- Throughput: 24,000 PPH
- End Destinations: 40 Collection Type Chutes

Key Technology Modules –

- Bulk Infeed Conveyors.
- ARB based Volume Distribution System.
- Irregular Ejection System.
- Automatic Induct Lines.
- Automatic Barcode Scanner with Image Capture.
- Automatic Weight & Volume Measurement System.
- Linear Cross Belt Sorter.
- Smart Collection type chutes
- Bag take out system.
- WCS Software System.

Layout and Site Pictures -

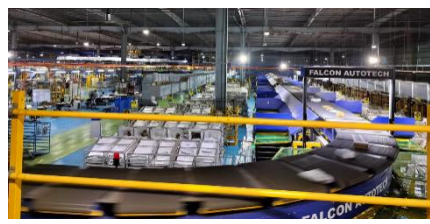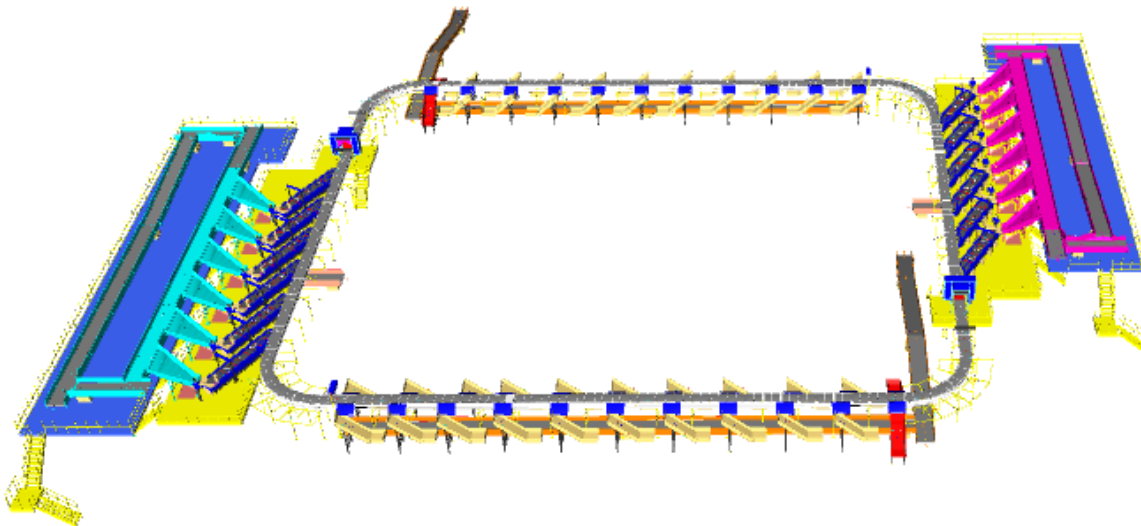

5.4 Project 4- (Client – E-Commerce, India)


Use Case - Destination Sorting of Packed Shipments

Solution Specifications –

- Throughput: 24,000 PPH
- End Destinations: 110
- Building Size: 200,000 Sq. Ft

Key Technology Modules - Linear Cross Belt Sorter with a cell size of 900 x 500 mm

Layout and Site Pictures -

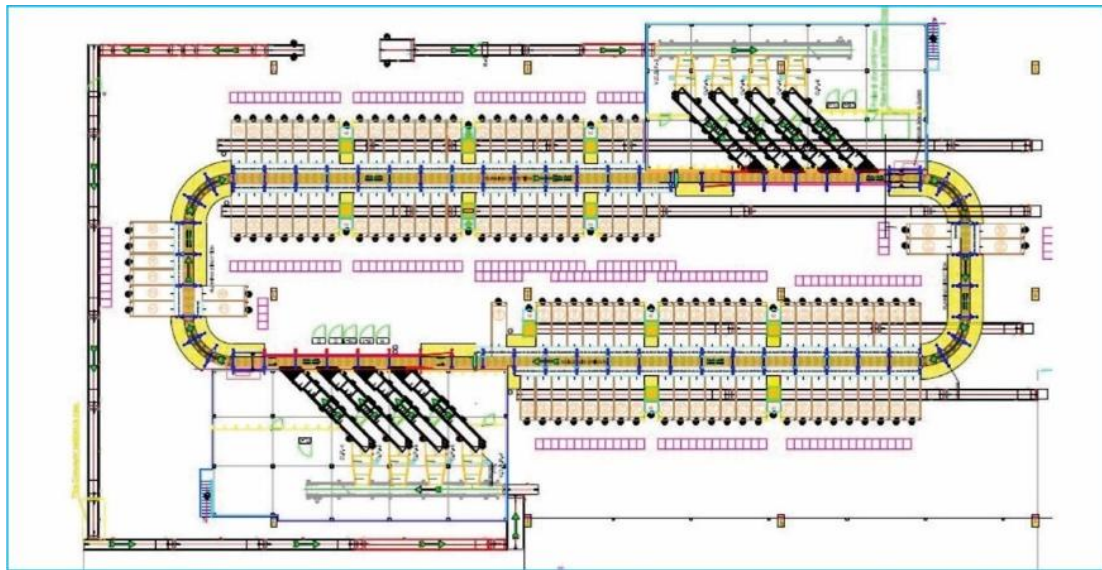

5.5 Project 5- (CEP Client, UK)

This Solution is designed to handle a volume of 7200 shipments per hour. The system is equipped with three infeed conveyors integrated with an automatic label applicator before shipments enter the sortation system. The shipments are sorted using Falcon's Linear Cross Belt Sorter equipped with automatic barcode scanning, dimensioning, weighing and image capture capabilities. The sorter is installed on the mezzanine floor and sorts directly to 58 end destinations.

Solution Specifications –

- Throughput: 7200 PPH
- End Destinations: 58 Pcs

Key Technology Modules –

- Powered Belt Conveyors.
- Automatic Induct Lines.
- Automatic Barcode Scanner with Image Capture.
- Automatic Weight & Volume Measurement System.
- Linear Cross Belt Sorter.
- WCS Software System.

Site Picture –



5.6 Project 6- (CEP Client, Sydney)

Solution is designed for handling a throughput of 16,000 shipments per hour with the help of Falcon's Linear Cross Belt Sorter. The system consists of 2 feeding zones with a total of 10 feedlines. Sorter design enables the van drivers to directly drop the shipments at the dock doors. It has a total of 369 end destinations that are achieved with a combination of direct drops and PTLs. System is integrated with 5 side automatic barcode scanning, weight and volume measurement and automatic detection of oversize and overweight shipments


Solution Specifications –

- Throughput: 16000 PPH
- End Destinations: 369 Pcs

Key Technology Modules –

- Powered Belt Conveyors.
- 2 Induct zone.
- 5 side Automatic Barcode Scanner.
- Automatic Weight & Volume Measurement System.
- Automatic detection of oversize shipment.
- Linear Cross Belt Sorter.
- WCS Software System.

Site Picture –

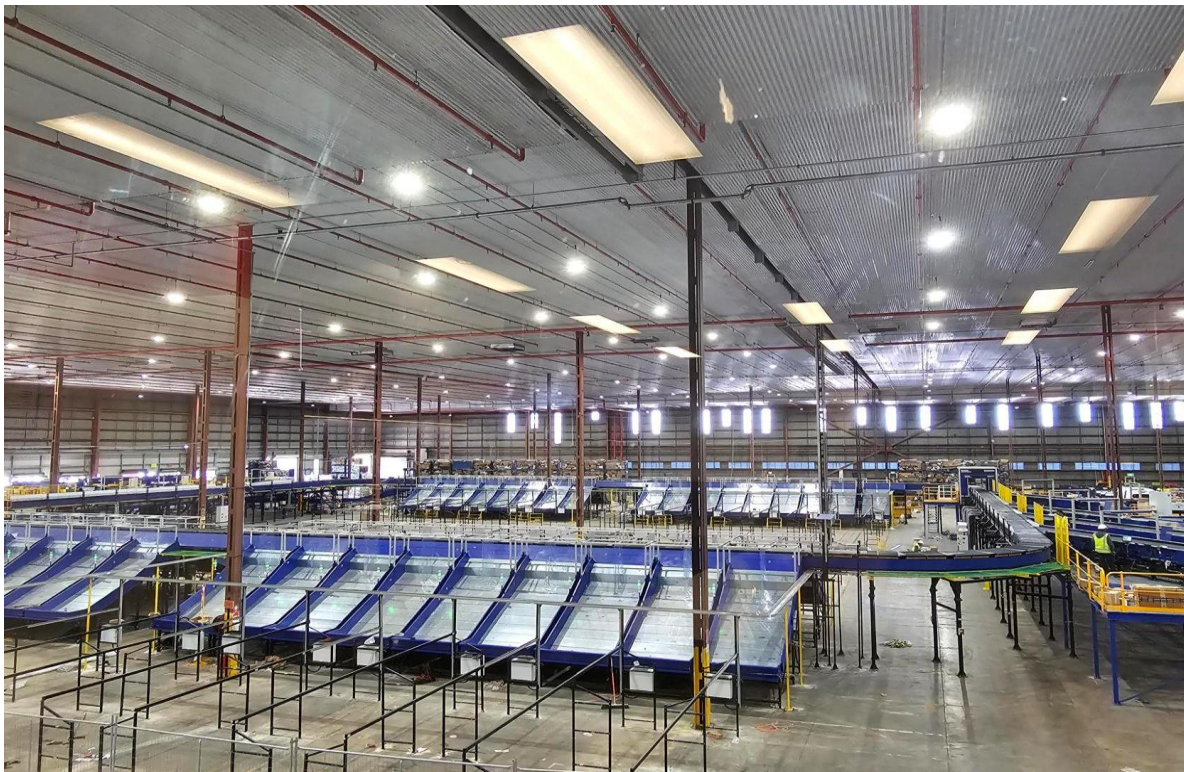

5.7 Project 7- (CEP Client, Spain) – Mondial Relay

Solution is designed for handling a throughput of 2x10,000 shipments per hour with the help of Falcon's Linear Cross Belt Sorter. The system consists of 2 sorter systems each with 1 feeding zones with a total of 1+3 feedlines. The sorter design enables infeed from cages and pallets onto the system inclusive a van line for the van drivers to directly drop the shipments at the dock doors. It has a total of 90 end. System is integrated with weighing in the inducts and 5 side automatic barcode scanning and volume measurement on the sorter. To increase efficiency, the system has automatic detection of oversize and overweight shipments.


Solution Specifications –

- Throughput: 2x 10,000 PPH
- End Destinations: 33 + 57 Pcs

Key Technology Modules –

- Powered Belt Conveyors.
- 2 Induct zones.
- 5 side Automatic Barcode Scanner.
- Automatic Weight & Volume Measurement System.
- Automatic detection of oversize shipment.
- Linear Cross Belt Sorter.
- WCS Software System.

Lay-out –

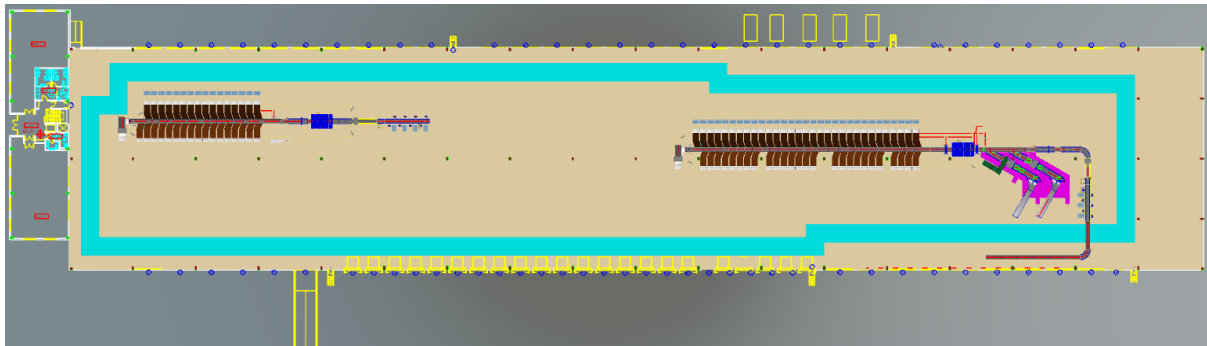

6. Handled Shipment Spectrum

As per the shipment spectrum data provided in the RFP documents, Falcon has studied and analysed the shipment spectrum in detail.

Falcon proposes to use its “Loop Cross Belt Sorter technology for this solution

6.1 Shipment size loadable on the Sorter

Falcon’s Loop Cross belt sorter has a capability to handle the below mentioned shipment sizes and weight.

Specification	Unit	Value
Max Length	mm	800
Max Width	mm	600
Max Height	mm	600
Max Weight	Kg	30
Min length	mm	100
Min Width	mm	100
Min Height	mm	5
Min Weight	gm	50

Note: Height measurable on Dimension System is ≥ 20 mm.

6.2 Shipments to be loaded on Sorter shall have the following characteristics:

1. Centre of Gravity of item must not move during conveyance or sorting.
2. Item must not have magnetic content, otherwise behavior of shipment cannot be guaranteed.
3. Liquid or fragile material, to avoid breaking, spillage or leakage, such as wine bottles, metal cans of paint are designated as non-conveyable items.
4. Shipments shall be perfectly and safely packaged: protrusion or open surfaces are not allowed.
5. Plastic ropes shall be perfectly adherent to the surface of the package.
6. All items with the risk of being damaged during the transport on an automatic sorting system or damaging the sorting system. They must be robust enough to avoid disintegration of container material and loose of contents in the sorting process.
7. Item packaging shall have enough grip to be handled on the belts during the acceleration and referencing phases.
8. Items shall not have slippery surfaces and must be able to withstand acceleration of the items on the belt during the start-stop phases (accelerations up to 0.5 g shall be assured without any sliding or tumbling of the items on the belt conveyor).
9. The shipments must have at least one flat and regular surface providing enough stability during conveyance.
10. All shapes are permitted except spherical, cylindrical, or alike unstable items & shapes.
11. All usual packaging materials are permitted (including paper, carton, plastics, plastic foil, rope, tape, textile, and wood)

6.3 Shipment not loadable on the sorter

All products that are not within the range as described here, are considered non- conveyable products, and must be taken out of the main sorter flow by the operators.


1. Unstable items with a risk to roll or tumble on the sorting system, such as spherical or cylindrical items.
2. Items that have a spherical or cylindrical shape.
3. Items that are packed in material that can damage the conveyors or the sorter.
4. Items that have sharp points (e.g., Nails) or sharp edges, that can damage the conveyors or the sorter.
5. Fragile shipments with contents not sufficiently secured.
6. Items that have been classified as dangerous are designated.
7. Wet items are designated.
8. Items with anti-slip treatment.
9. Items with protruding parts.
10. Items with sharp edges.
11. Inadequately packed items that could be damaged during automatic transportation.
12. Electrostatically loaded items.
13. Loose parts on loads and load carriers, such as adhesive tape, stickers, slips of paper, straps, wrap foil etc. are designated as non- conveyable items.

7. Proposed System Description

7.1 Objective

The purpose of this proposal is to present the design, manufacturing, installation, commissioning, testing, and acceptance testing of the Loop CBS for sorting shipment & boxes as per INPOST Requirement

7.2 Summary of the System

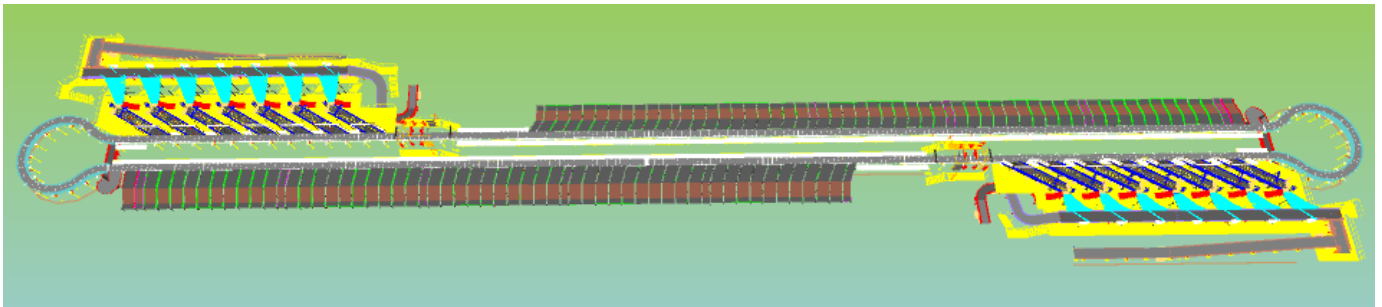

Process flow:


1. **Infeed System:** - Shipments are placed in bulk on the infeed conveyor lines. These shipments are then transported upward via an inclined conveyor to the VDS (Volume Distribution System) Conveyor.
2. **Arm Based VDS System:** On the VDS System shipment will get evenly distributed to the VDS chute by Arm based on timing or sensor logic.
3. **Induct Line:** On the induct line, operators manually place conveyable parcels onto the loading conveyor, ensuring that the barcode is not positioned on the bottom. Irregular parcels are dropped into a dedicated irregular chute located near the operator.
4. **Loop CBS:** - Once shipments enter the Loop CBS, the Cross-Belt Sorter efficiently sorts them into the appropriate output chutes using INPOST's sorting logic.
5. **Scanning & Dimensioning System.** In the proposed solution 5 Side scanning and Dimensioning system are planned on the Cross Belt Sorter system.
6. **Chutes:** - The shipments are discharged into below type of chutes:
 - a. Standard Destination Chute
 - b. Narrow Destination Chute
 - c. Technical Chute

7.3 Main benefits of the proposed solution


The proposed solution has the following advantages:

1. High operational throughput
2. Low occupancy of floor space in the building.
3. Narrow discharge centers for the increased number of splits in limited space.
4. FALCON's CBS can adapt to changing business requirements by adjusting its speed. to match the operational throughput requirement, thereby leading to Power Savings and reduced system Wear & Tear.

8. Concept Description

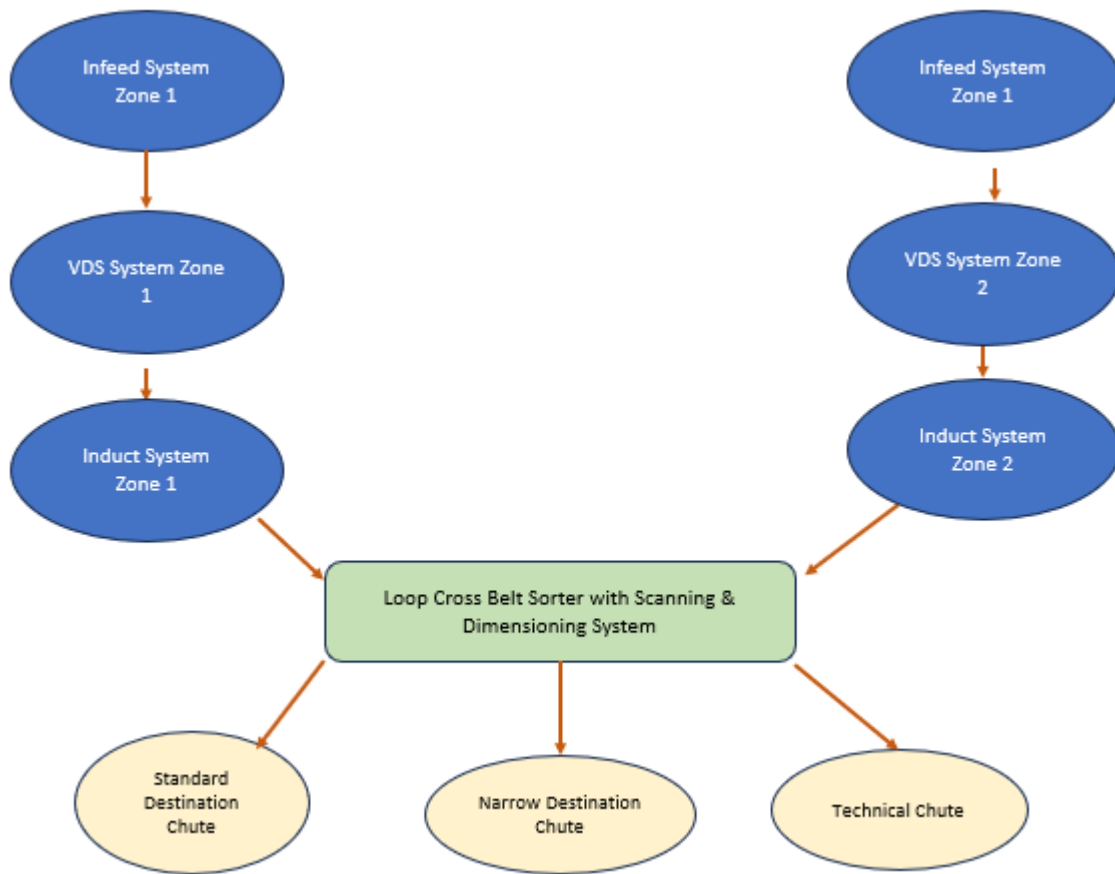

9. Layout Overview

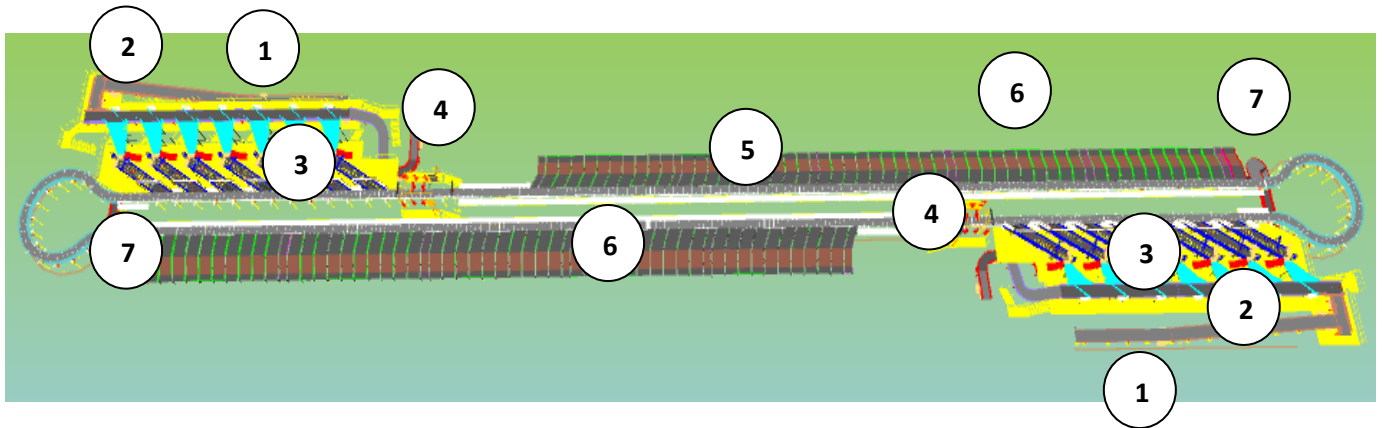

Legend

1. Infeed System
2. VDS System
3. Induct System including chute for irregulars
4. Dimensioning & Scanning System
5. Loop Cross-Belt Sorter (CBS)
6. Destination Chute
7. Technical Chute

10. Proposed System Capacity Calculations

The following table shows the throughput calculation for the sortation system designed based on INPOST RFP requirements.

SPECIFICATION	VALUE
Sorter Type	Loop CBS
Speed	2.7 m/s
Dual Belt Carrier Pitch	1175 mm
Carrier per hour	8,272 CPH
Belts per hour (A)	16,544 BPH
Induct Design Capacity for Single Belt Parcels	2,500 PPH
No of Inducts in each Zone	7 Pcs
Induct Zone Design Capacity	17,500 PPH
Total No of Zone (B)	2 Pcs
Sorter Capacity for single Belt Parcels($A*B*85\%$) with zero recirculation	28,126 PPH
Sorter Capacity for single Belt Parcels($A*1.33*85\%$) with 50% recirculation	18,703 PPH

Note :

*Calculation based on Single Belt Parcels size of upto 600*400 mm*

Above calculation is basis on contonious feeding and no chute full or other operation related issues.

11. System description


11.1 Infeed System

Falcon's Belt Conveyors are modular & robust in design, used for smooth conveying of products over Straight, inclined and declined paths. MS profile is used to build conveyor frame.

The conveyors are supplied with the necessary supports and bolts to fix them to the supporting plane, as well as with the junction elements allowing easy and jam-free passage from one conveyor to the other.

Some Silent Features of Falcon's Belt conveyor:


- Low Noise
- Maximum uptime.
- Minimal maintenance
- High safety standards.
- Fastest ROI.

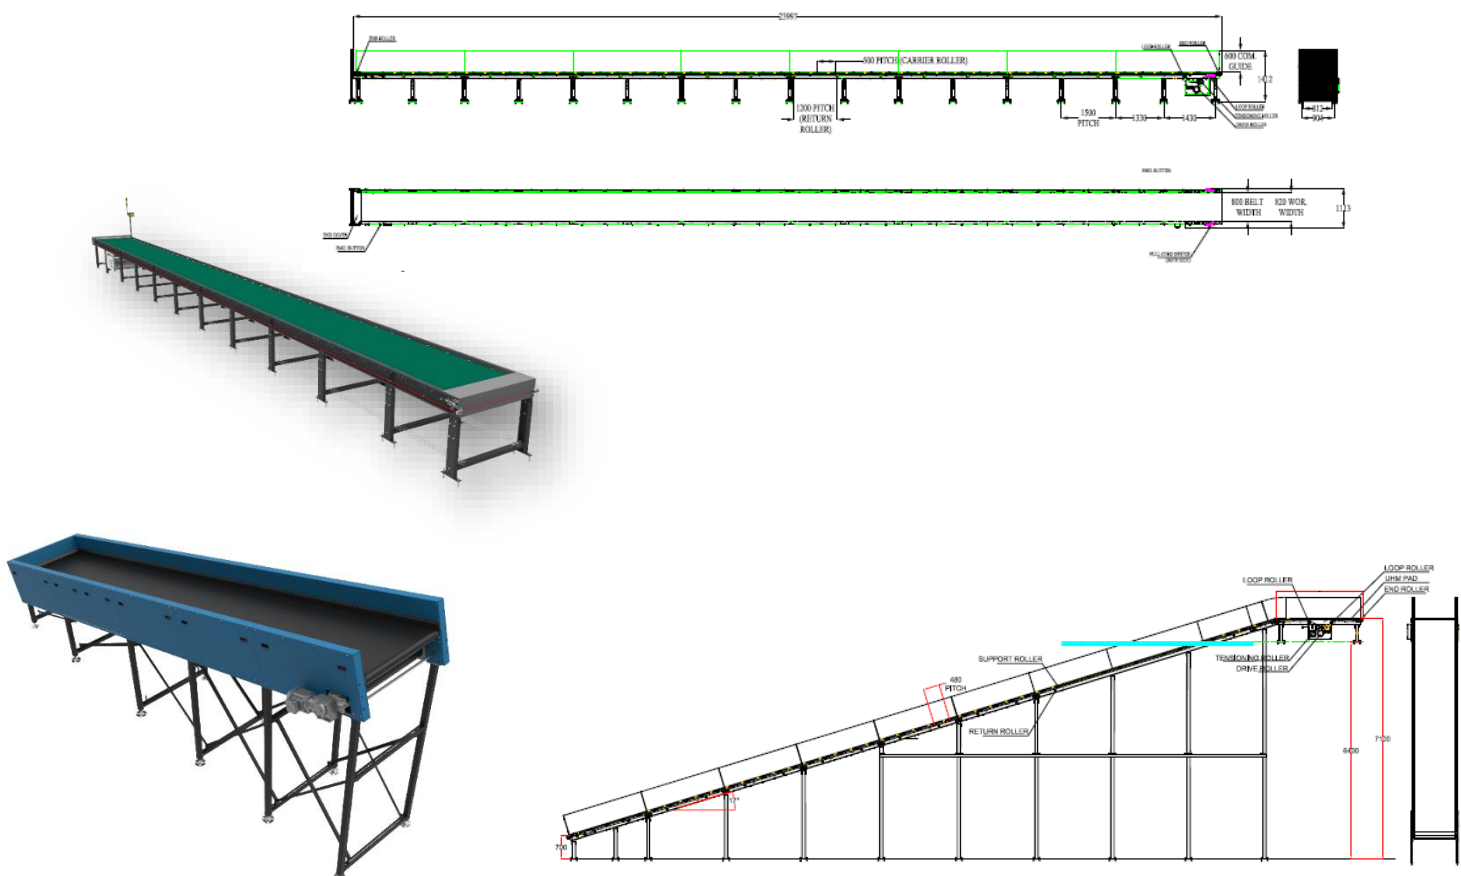

Specification	UOM	Remark
Manufacturer Name	Name	Falcon Autotech
Material of Roller	Type	MS Rollers with Zinc Plating
MOC of Belt	Type	PVC
Belt Thickness	mm	3
Belt Finish	Type	Matt Finish
Belt width	mm	1200
Belt Joint Type	Type	Vulcanized, Endless Belts
Belt Make/Model No.	Make	FORBO/DERCO
Chassis	mm	MS, 3mm Thick, Powder Coated-75 Microns
Idler Roller Pitch on running side (Top)	mm	480
Idler Roller Specs	Spec	Dia.50.8, shaft-12 mm, bearing-6301
End Rollers	Spec	Dia 81.2 x 2.85 Thick, 30mm Shaft Dia, & Bearing Size-UCFH206D1, MOC-EN9, Zinc Plated -25 microns
Drive Rollers	Spec	OUTER Dia 178 PIPE Dia 168x5 Thick, 40mm Shaft Dia, & Bearing Size-UCF208D1, MOC(SHAFT)-EN9, NEOPRENE RUBBER COATING
Motor Shaft	MOC	EN9 Shaft material
Conveyor Under guarding	Spec	MOC-MS, 0.8 to 1mm thickness, Steel Stiffeners at every 600mm to avoid the sagging due to self-weight
Load capacity per unit length of Conveyor	kg/m	40
Type of Guides	Type	Steel guides at 50mm/400mm height basis the position of conveyor on both sides from Conveyor Belt Surface.
Drive Power Rating	kW	Motor Rating depends on Length of the Conveyor
Type of Motor	Type	AC Geared Motor
Ingress Protection	Type	IP 55
Type of Drive System	Type	Direct Shaft Mounted Motor/ Flange Mounted
Type of Drive	Type	Chain drive/Torque Arm type
Gear Motor	make	Sew/Nord/Lenze
Drive	make	Lenze/Siemens/Omron/Allen Bradly
Insulation Class	Type	Yes
Conveyor Speed	m/s	Variable speed to meet TPH requirements
Type of Mounts	Type	Fixed Heights Legs with Grouting Provisions

11.2 Arm Based VDS System


In the proposed solution Arm type Volume Distribution system has been planned. Electric Arm on the modular belt for Inducts Linear Side Arm Diverter System of Falcon Autotech is an extremely cost-effective Sortation system designed for low to medium Volume Centres.

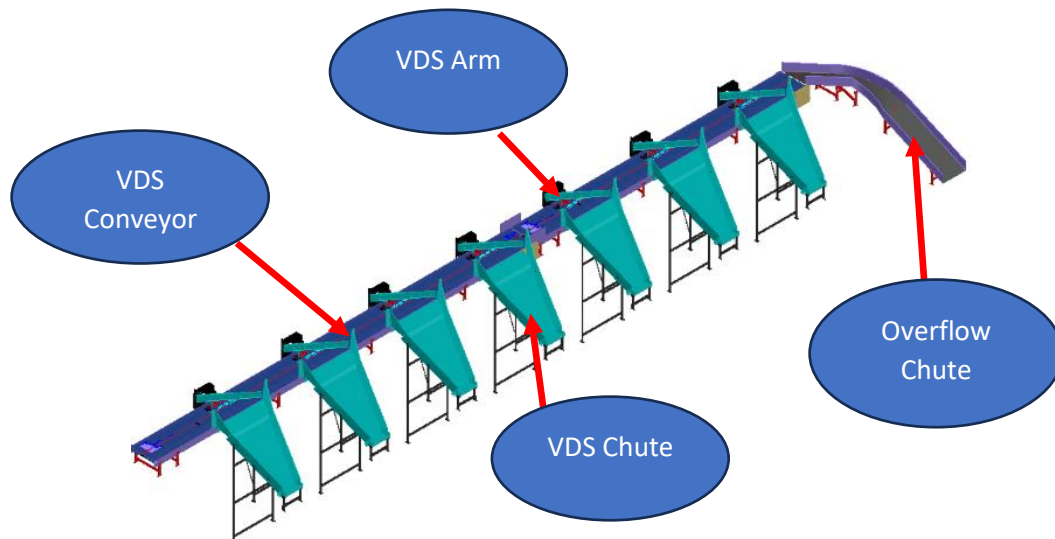

Arm Based Volume Distribution System

11.2.1 VDS Conveyor


In this solution we have designed modular conveyor as VDS Conveyor . On VDS Conveyor Arm is installed to diver the shipment on the VDS Chute.

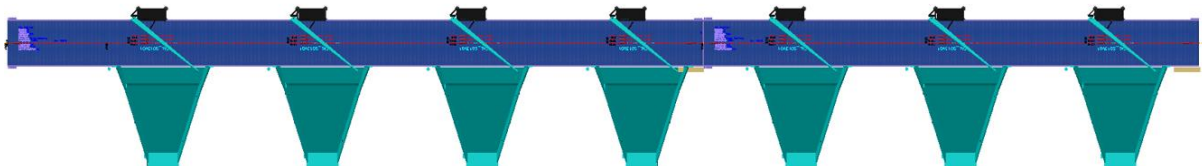

11.2.2 VDS Arm

Linear side arm diverter's simple and modular design gives it advantage of low cost, space saving, and modularity of increasing sorting points in future. This is one of the earliest diverter systems of Falcon Autotech.

Specification	3.0 ARM XL
Property	Value
Actuation method	Electric induction motor
Belt type	Flat top modular
Arm length (mm)	2400
Load Capacity	40 Kg/meter

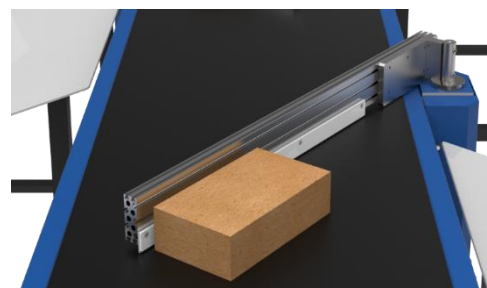


11.2.3 VDS Chute

A VDS chute is a type of chute used for the smooth descent of materials or objects from an elevated position to a lower level (at an operator level). It utilizes base metal to guide and support the flow of items along the chute & collect the shipments within its area.


Each VDS Chute is equipped with below accessories:

- Tower light: 1 Pc
- Chute Full Sensors: 2 Pcs

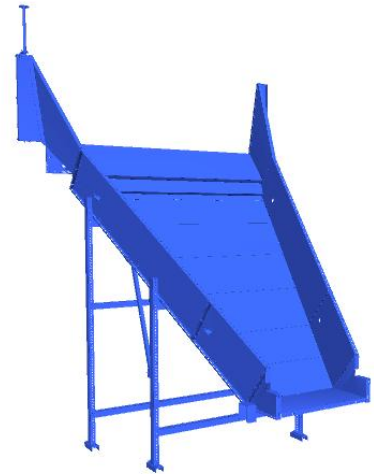

11.2.4 Overflow Chute

At the end of VDS conveyor, one overflow chute has been planned to transfer all the unsorted parcels from the VDS conveyor to the irregular conveyor line for manual process.

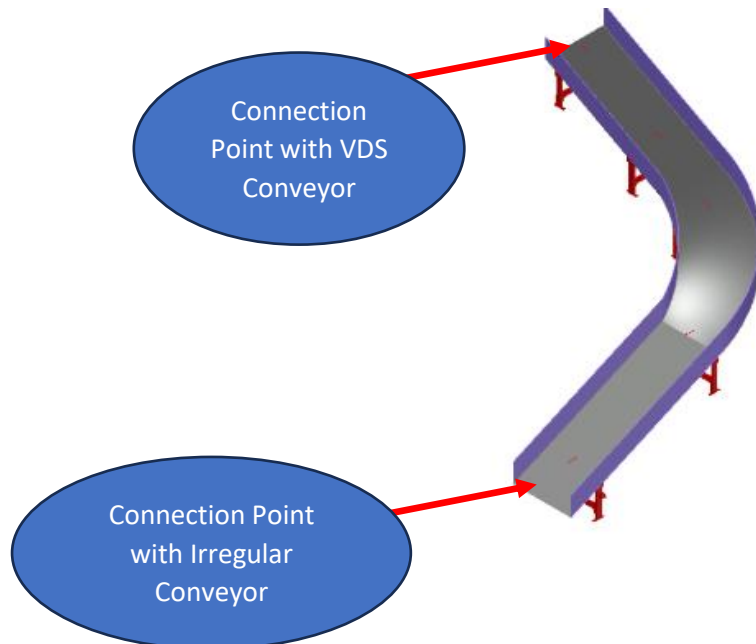


11.3 Induct System

In the proposed solution, 7 manual induct stations are planned for each zone. Each induct is designed to handle an Individual Parcel Processing (IPP) rate of 2,500 parcels per hour per operator. Sensors are placed on the Induct Lines to determine the exact position and dimensions (Length and Width) of the Shipment on the conveyor and prepare the Cross-Belt Cell for receiving the shipment with high precision.


Each induct consists of below modules:

- Loading Conveyor – 1 Pc
- Buffer Conveyor – 2 Pcs
- Spacing Conveyor – 1 Pc
- Angle Merge Conveyor – 1 Pc

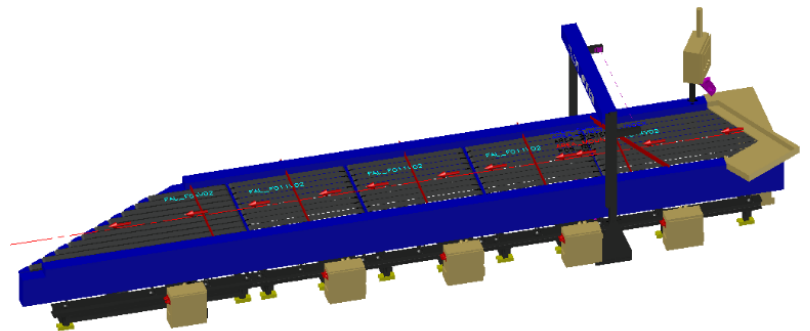

11.3.1 Loading Conveyor


Loading conveyor is a type of conveyor system used to place the parcel, align & release the products for induction onto CBS. It serves as the initial point of entry where products are collected and conveyed to subsequent stages of the process.

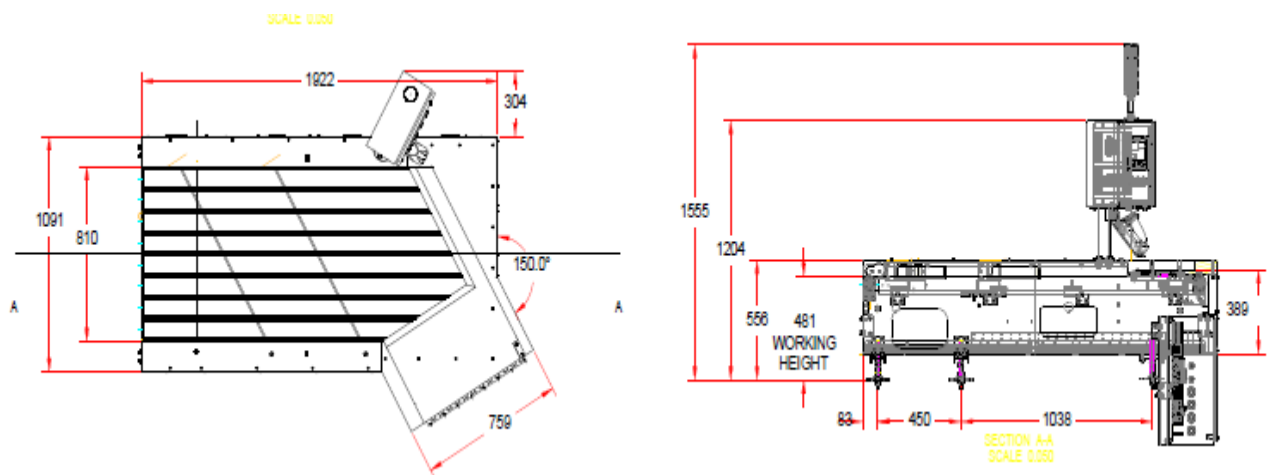

11.3.2 Buffer Conveyors

A buffer conveyor, also known as a buffering conveyor or accumulation conveyor, is a type of conveyor system used to temporarily store or hold items in a controlled manner. Its primary purpose is to manage the flow of items between different stages of a production or handling process when there is a mismatch in the speeds or capacities of the upstream and downstream equipment.

This Conveyors required to maintain the Throughput of Line.

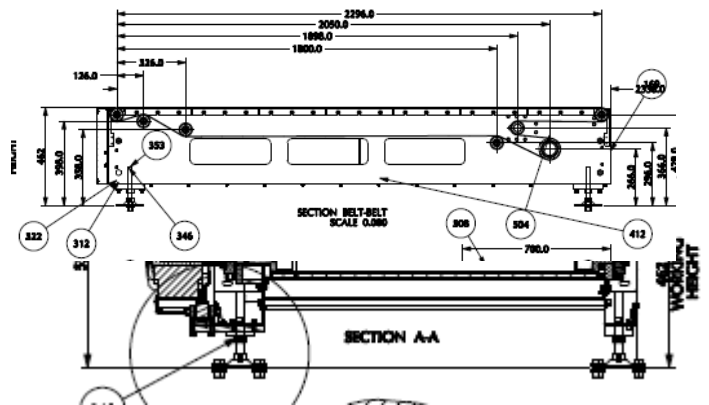

11.3.3 Spacing Conveyor


A spacing conveyor, also referred to as a gapping conveyor or gap optimizer, is a type of conveyor system used to create and maintain consistent gaps or spacing between items as they move along the conveyor line. Its primary purpose is to regulate the flow and spacing of products to ensure smooth operation and efficient downstream processes.

This conveyor is a variable speed special purpose module that creates space between parcels as well as regulates feeding on the Weighing conveyor.




11.3.4 Angle Merge Conveyor

This is 30° triangular Dual Belt high-speed conveyor used for inducing parcel/boxes directly on to the sorter. The Belts are Strip Belts for smooth parcel movement.

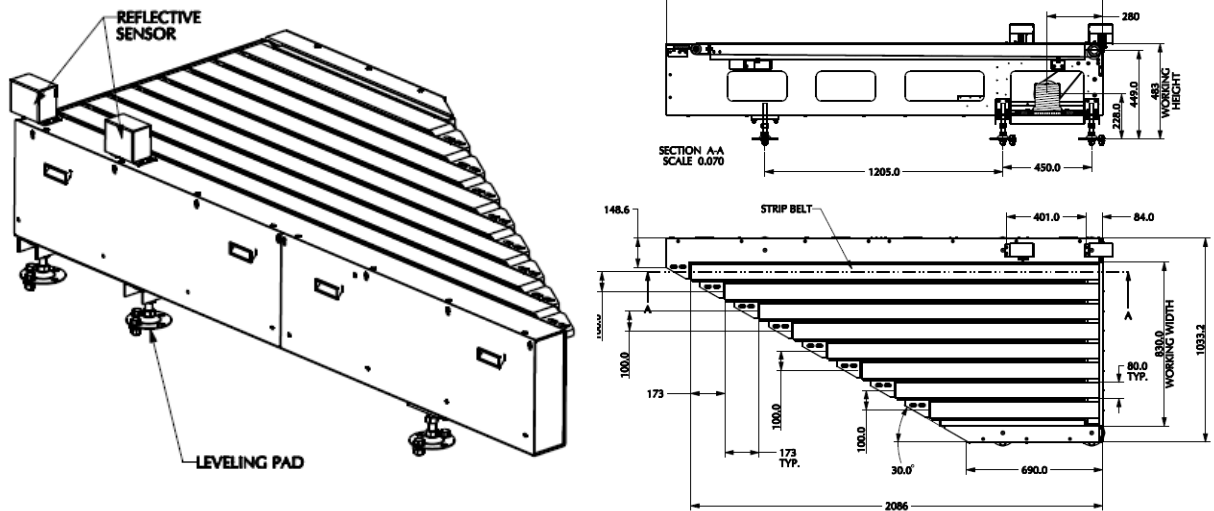


11.3.6 Irregular Chute

On each induct one irregular chute is planned to transfer all the non-conveyable parcels to irregular conveyor

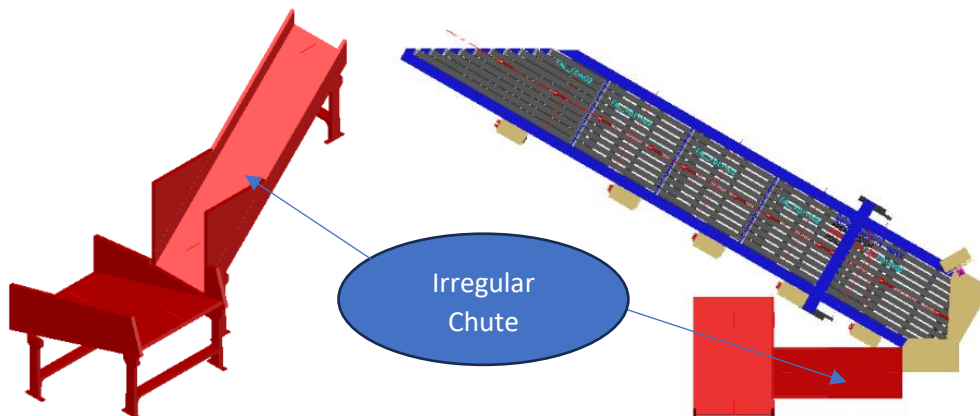

11.4 Loop Cross Belt Sorter

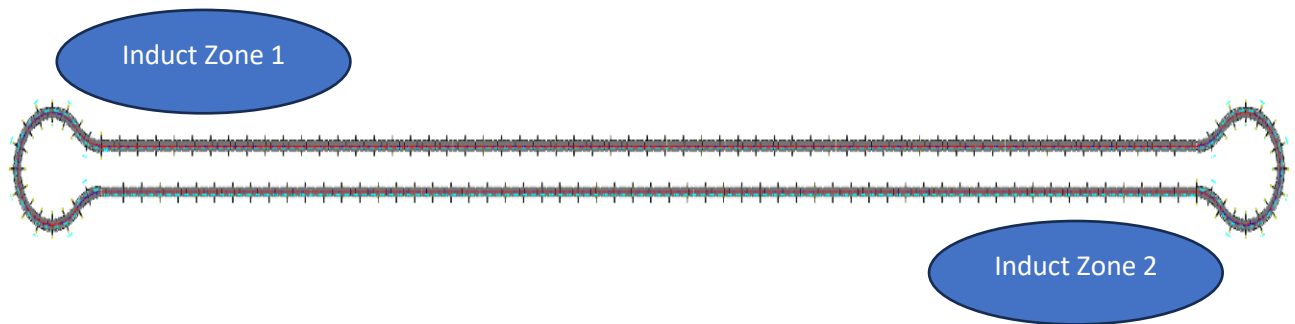

1. The proposed Loop CBS Sorter will be installed on Ground level. The Sorter runs at 2750 mm from Ground level.
2. We have provided solutions with Loop CBS Dual Belt Carriers with 1175 mm pitch and Belt Size of 495 x 800mm.
3. As Shipments pass through the Barcode Scanning Tunnel on the loop sorter, their barcodes are scanned, and chutes are assigned. Once the shipment reaches the respective chute, the carrier carrying the shipment for the chute will actuate and drop the shipment in the assigned chute.

11.5 5 Side-Automatic Barcode Scanning & Dimensioning System

Five-Sided Barcode Scanner present on Cross Belt Sorter to scan 1D codes and 2D codes. The Scanner is also capable of Archiving Shipment Images in Real time.

Specification	UOM	Remark
Manufacturer Name	Name	SICK/Cognex
Barcode Type	Type	1D&2D
Module Size	Mils	≥ 10 for 1D & ≥ 25 for 2D
Number of Codes	Pcs	1
Location	Side	5 Side excluding Bottom
Orientation	Type	Omnidirectional
Color of bars	Color	Black
Under Foil	yes/no	No

Description	Units
Min parcel Height Measurable	20 mm
Dimensional accuracy on standard box	+/- 10 mm


11.6 Standard Destination Chute

In the proposed solution the 100 Pcs of standard destination i.e. collection type chute is designed. Chute considered made of steel and wooden (furniture) boards with reinforced laminate **as per InPost Standard**.

Each chute is equipped with below component:


Chute Full Sensor: 2 Pcs

Beacon Light: 1 Pc & Push Button : 1 Pc

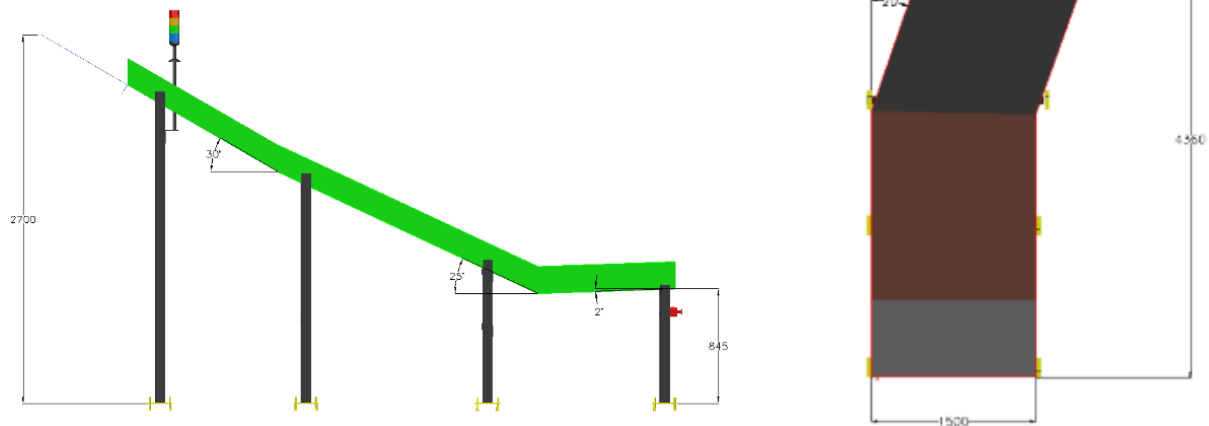

11.7 Narrow Destination Chute


In the proposed solution, 12 Pcs narrow destination chute is also planned to handle max parcel size 400*400 mm. Chute considered made of steel and wooden (furniture) boards with reinforced laminate **as per InPost Standard**.

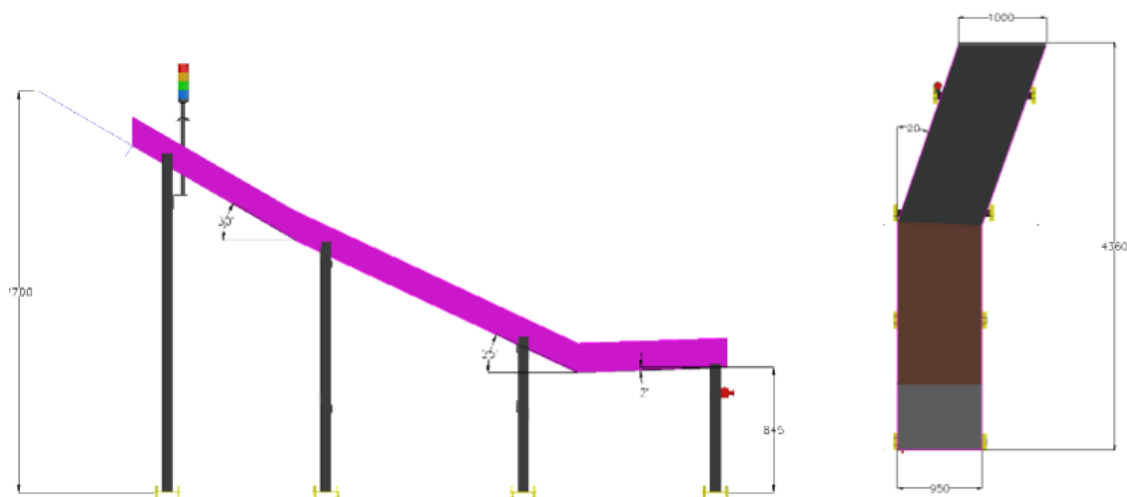


Each chute is equipped with 2 Pcs Chute full sensor, 1 Pc Push Button and 1 Pc Beacon Light.

11.8 Technical/Rejection Chute

In the proposed solution, as per the RFQ document four technical/rejection chutes are planned to manage rejected parcels. Of these, two are standard collection-type chutes, while the other two are 180-degree chutes designed to drop parcels onto the irregular conveyor line.

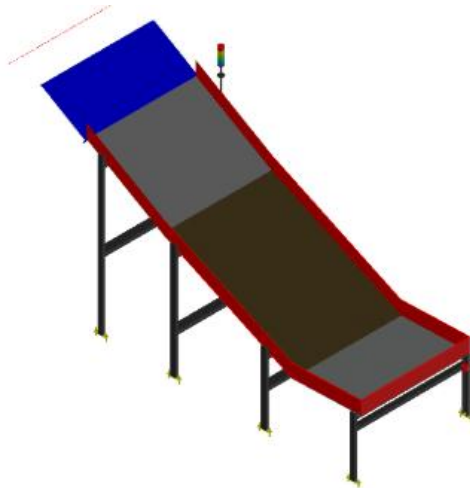


Technical Chute- Standard Type

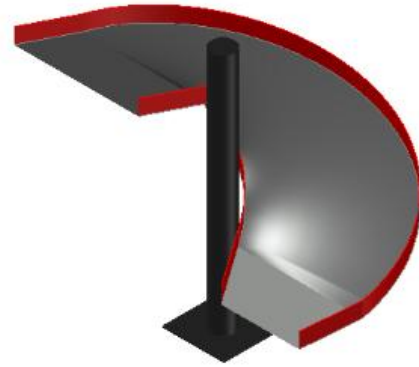

Technical Chute- 180-degree chute



11.9 Technical reject / Irregular Conveyor

As per the RFQ, in each zone one irregular conveyor line is planned to transport all the irregular parcels and parcels from 180 degree chute to the manual processing area.

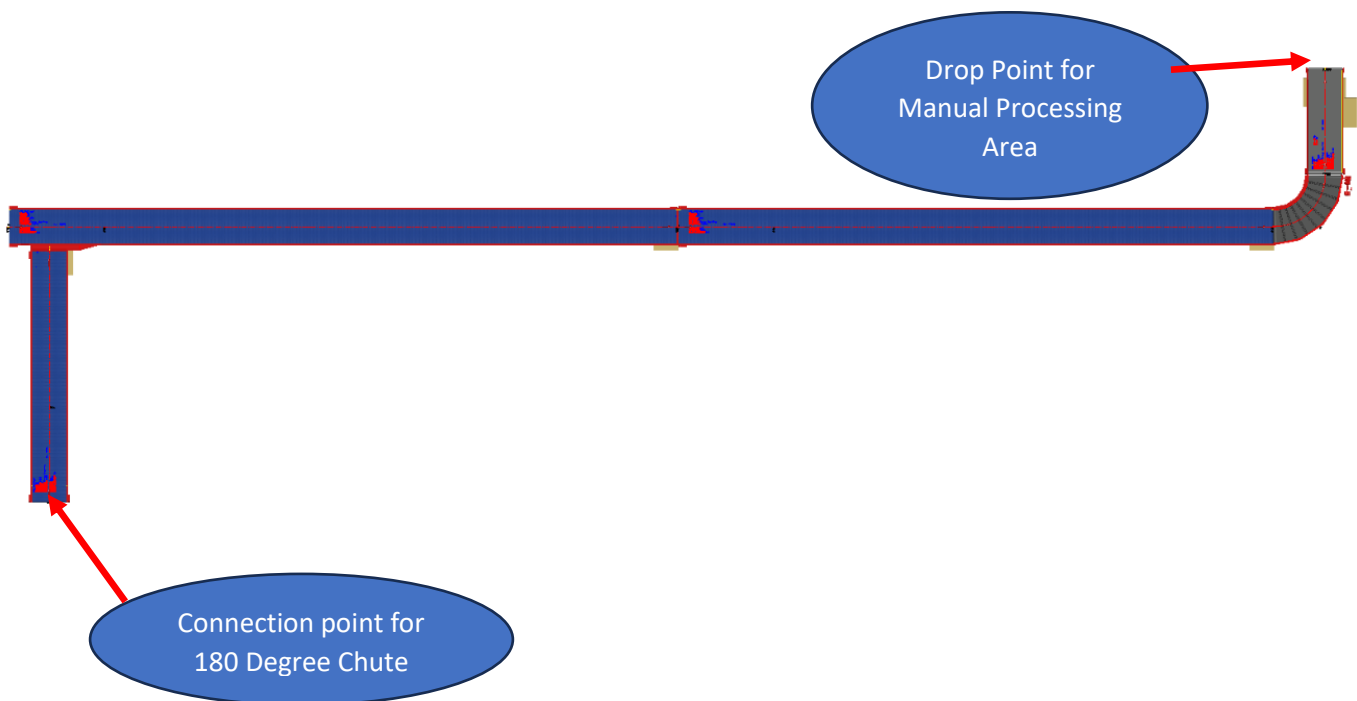


11.10 Protection on Ground (Leg Guard & Crash Barrier)

Leg guards are protective components designed to shield the legs or supports that stabilize machinery. They are essential for preventing accidents, injuries, and equipment damage by covering exposed areas where individuals might come into contact with moving parts or sharp edges. Material for leg guards is considered as MS.

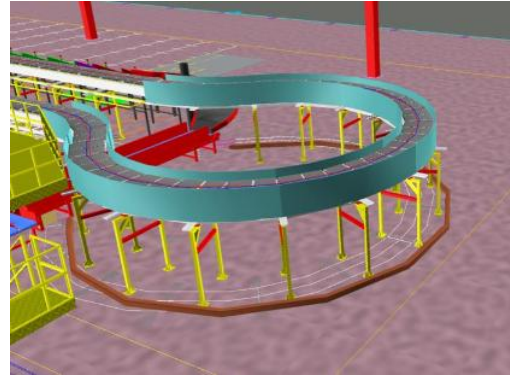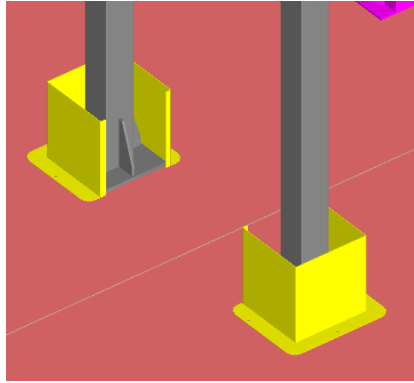

We have considered Falcon standard leg guards (Total 60 Pcs) for all conveyors shown in below picture

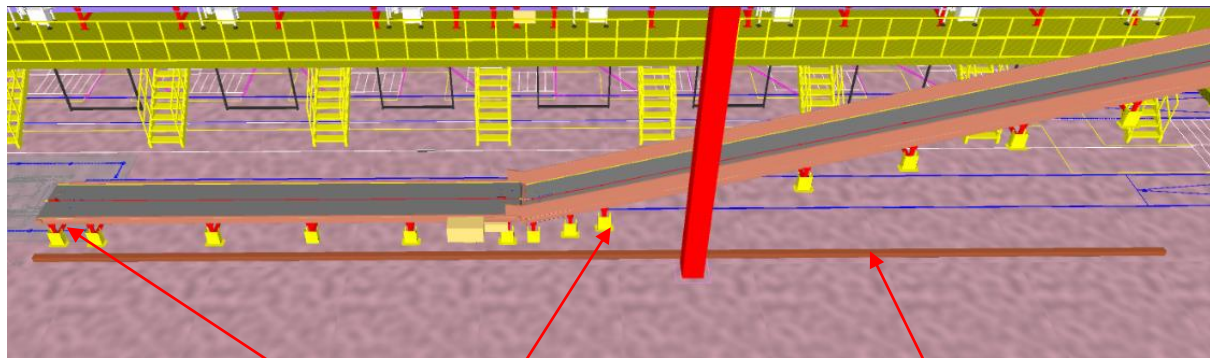

Leg Guards

Crash Barrier

Note: Any additional Leg guard requirement i.e. change in design, increase in qty should be catered through Change Management process. For Chutes and Sorter no protection has considered in Falcon Scope.

11.11 Mezzanine/Operator & Maintenance Platform

11.11.1 Mezzanine for Induct & VDS

Total Area: 201 Square Meters Per Zone


No of Stairs Per Zone: 10 Pcs

Height of Induct Platform: 1950 mm

Height of VDS Platform: 3950 mm



Top View

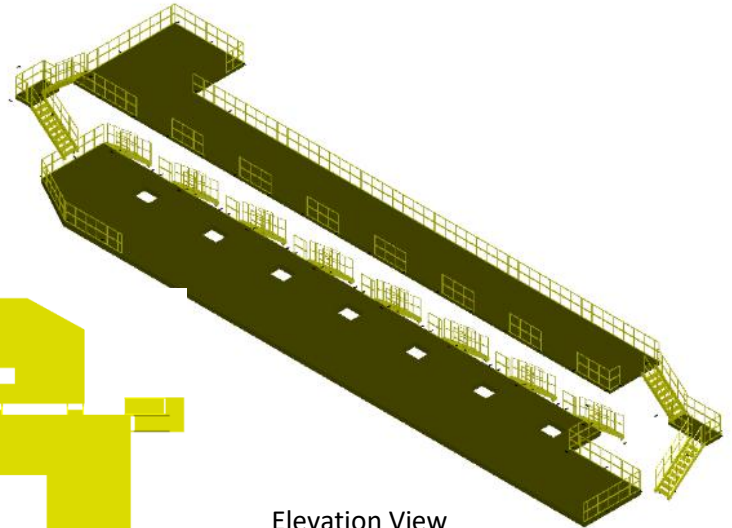

Elevation View


11.11.2 Maintenance Platform for Scanning Tunnel

Total Area: 9 Square Meters each Platform

No of Stairs Per Platform: 2 Pcs

Height of Platform: 1850 mm

No of Platform : 2 Pcs

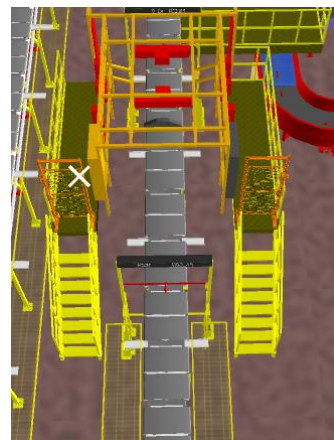


12. Description of Components of Equipment

12.1 Cross Belt Sorter - CBS


Cross Belt Sorter is capable of sorting extremely high volume of versatile products in a gentle manner.

Falcon's Cross belt sorter is powered by high efficiency linear motors and is based on 100% non-touch actuation technology leading throughput capabilities with extremely low noise levels. Falcon's Cross belt sorter is modular in design. It can be easily extendable as per future requirements

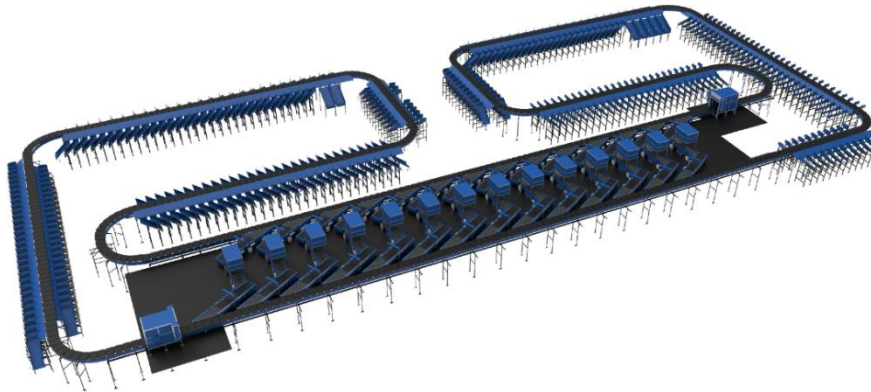

12.2 CBS Carrier

Falcon's CBS offers one of the highest Belt widths to Carrier Pitch Ratio in the market today. This additional belt width makes the system capable of handling larger product sizes without compromising on throughput. This also means reduced "dead area" between Carrier belts which drastically reduces the amount of "inbetweeners" and non-sortable shipment recirculation.

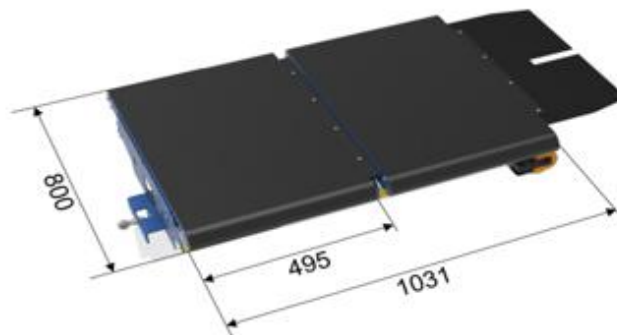

12.3 Servo Roller

High Powered DC Drive Servo Roller are used to actuate the carrier belts, thereby eliminating the need for complicated drive transfer mechanism, and simplifying the system installation and maintenance.




12.4 Chassis

Falcon Autotech's Cross Belt Carrier Chassis is made up of lightweight Aluminum which makes them light yet sturdy. This reduced weight leads to substantial "Power Savings" over a considerable period of usage.



12.5 Linear Synchronous Motor

A Linear Synchronous Motor (LSM) is a type of motor that generates linear motion rather than rotational motion, unlike traditional rotary motors. The linear motion in an LSM is achieved by moving a magnetic field along a straight path, propelling the motor along that same path. LSMs are widely used in various applications requiring precise linear motion, such as magnetic levitation (maglev) trains, automated material handling systems, and even amusement park rides.

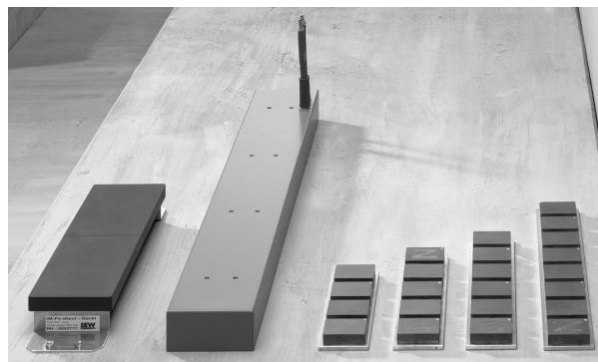


12.6 Power Transmission

Power transmission to Carriers over sliding contacts that require low maintenance and offer high levels of reliability.




12.7 Data Transmission

The R-Coax cable is used for data distribution in the sorter. This is a leaky wave cable, that runs throughout the sorter length transmitting the data. There is one antenna present in the super master carriage, which keeps on receiving the signal from this cable while on the move, wirelessly.

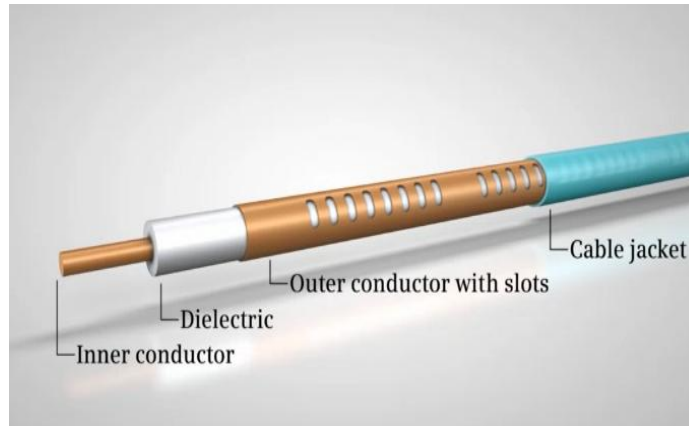

12.8 Carriers positioning System.

Positioning system determines the exact location of each carrier in the Linear at any given point in time. There is a plastic tape strip of barcodes (QR Codes) that is running along the sorter Linear, which is continuously scanned by scanners placed on a Carrier (Master Carrier)

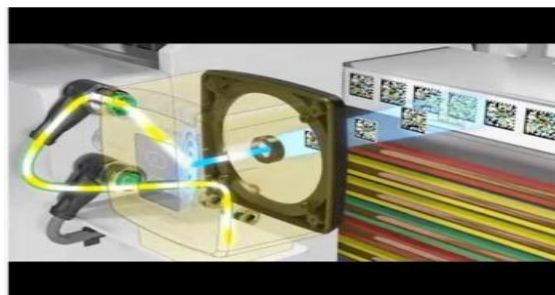

13. Technical specifications of CBS

Items	Make / Number / Execution
Sorter Carrier Type	Loop CBS
Sorter Speed in m/s	2.7 m/s
Sorter Length	~346 m
Sorter Actuation Technology	Electric
Height of Sorter	~2750 mm
Carrier Design	
Carrier Motor Make	Falcon
Carrier Pitch - mm	1175
No. of Carriers for Sorter	295 Pcs.
Drives	
Motor/Drive type	LIM
Power and Data Transmission	
Power Transmission	Over Continuous Bus Bar
Area Requirement (L x B)	Refer Layout

14. Proposed System BOM Details

14.1 Mechanical equipment

Pos.	Qty.	Description	Value
1	1	Conveyor & VDS Package - Powered Belt Conveyors - Modular Belt Conveyor - Curve Conveyor - Electric Arm	~72 metres (8 Modules) ~ 156 metres (10 Modules) 2 Pcs 14 Pcs
2	14	Side Loader Induct Feedlines Consists of - Buffer Conveyor - Spacing Conveyor - Angle Merge - Loading Conveyor	3 Set 2 Set 1 Set 1 Set
3	1	Sorter 1 Loop Cross Belt Sorter - Sorter Height - Sorter Length Including: - Standard Sorter Supports 5 Side Scanning System on each zone - Emergency Stop Buttons - Dimensioning System on each zone	2750mm ~346m
4	1	Chute Package - Standard Destination Chute - Narrow Chute - Technical Chute - VDS Chute - Overflow Chute - Irregular Chute - Chute Full Sensor - Tower lamp/Beacon Light - Push Button	100 Pcs 12 Pcs 4 Pcs 14 Pcs 1 Pc 14 Pcs 264 Pcs 132 Pcs 118 Pcs
5	1	Mezzanine Package - Mezzanine Platform for Induct - Mezzanine Platform for VDS - Maintenance Platform for Scanning Tunnel - Stairs for Operator	403 sq. meters 269 sq. meters 2 Set 20 Set

14.2 Electrical Equipment


Electricals			
1	1	Consists of Main Power Distribution panel Main Control Panel Feedline Control Panels Sorter Drive Panels Network Switches Field Cabling	Included

15. Electrical System


Main power supply will supply Falcon's PDP (Power Distribution Panels) electrical cabinets. PDP cabinets supply the entire system via secondary cabinets:

- Main Control Cabinet
- Induct Control Panels
- Remote Cabinets for Sorter I/O
- Scanner Control cabinets


15.1 Reference Picture of Power Distribution Panel

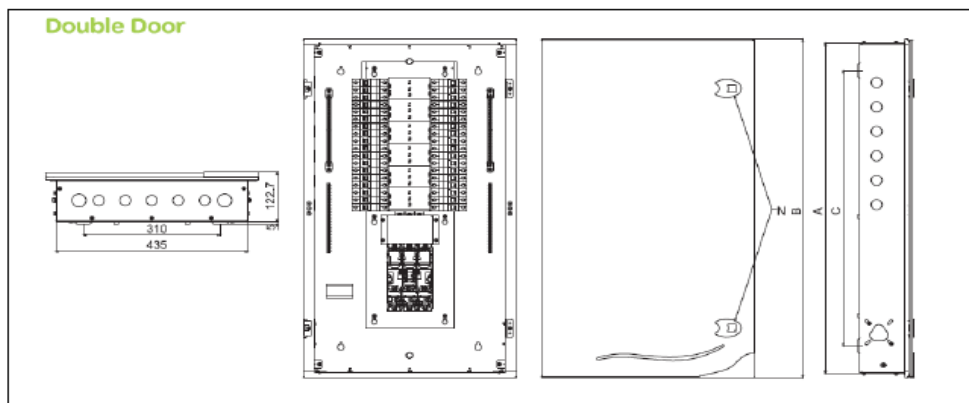

15.2 Main Control Panel (Reference)

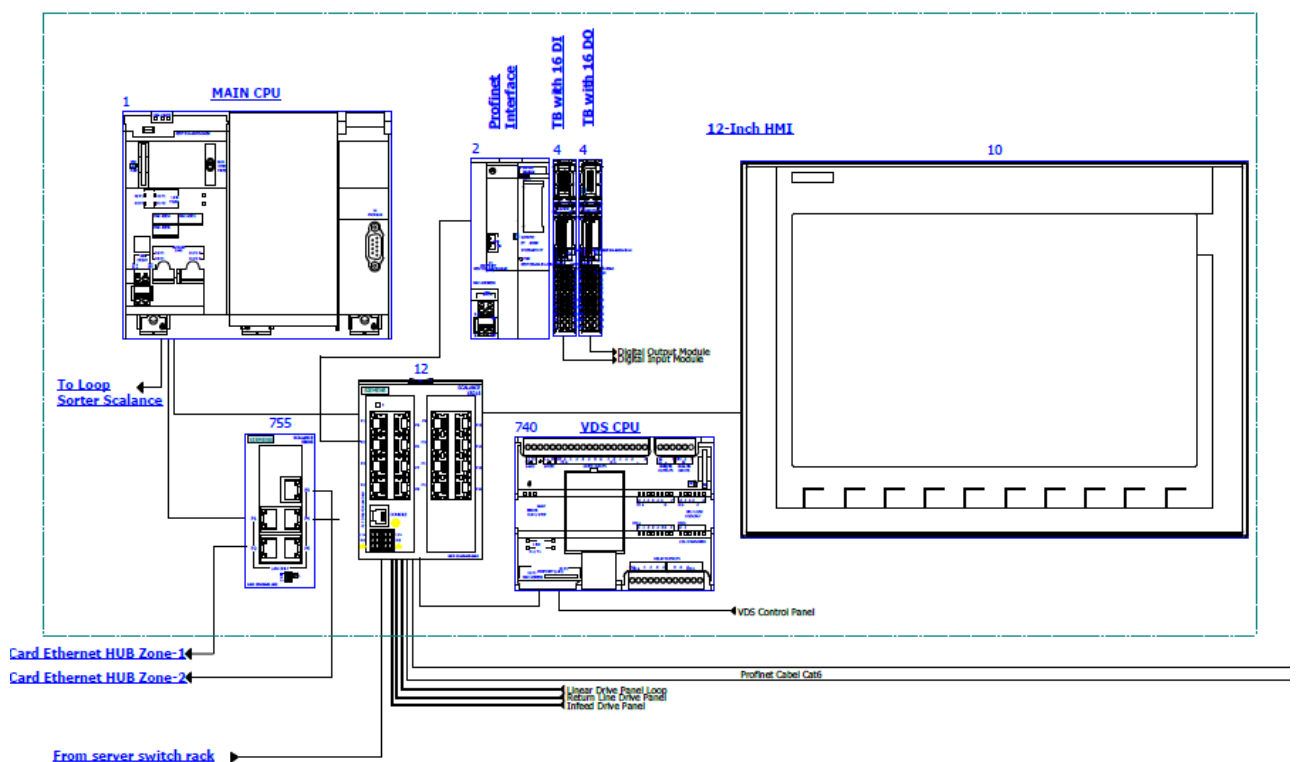

15.3 Induct Stations Control Panel (Reference)

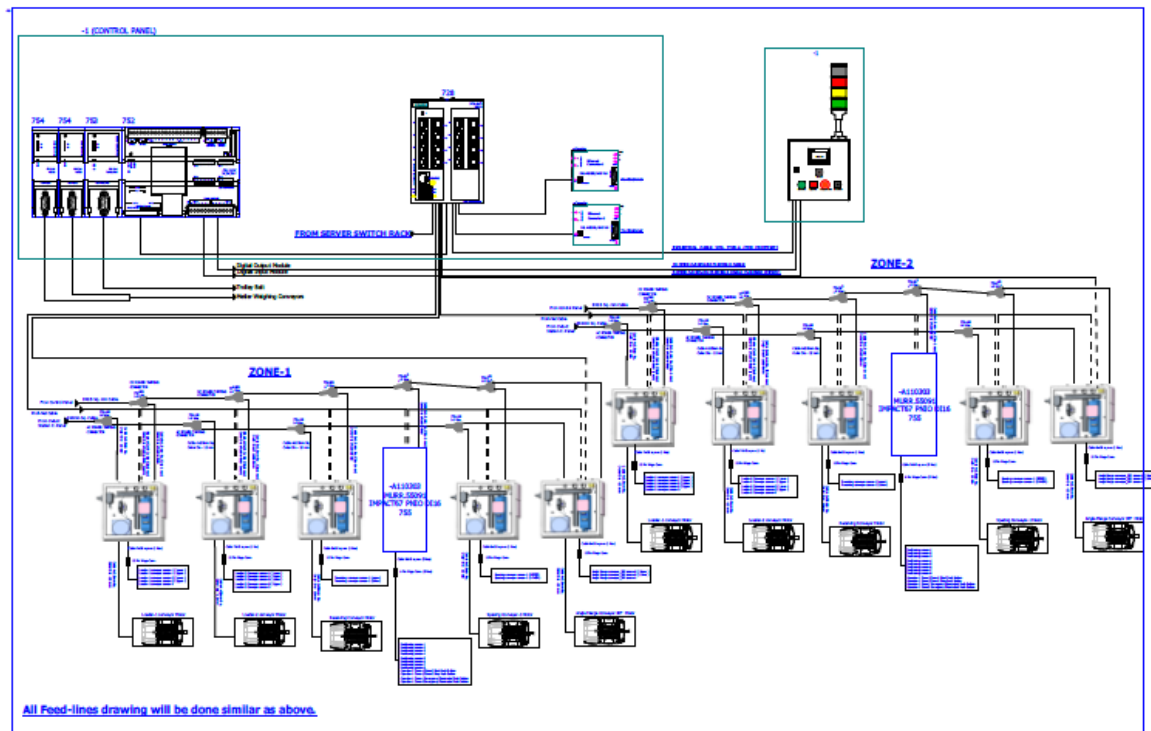

Engines

Three-phase alternating current motors (Induction) will be used through a frequency converter. The engines will be coupled with a converter to improve consumption and reduce the carbon footprint. All motors will have appropriate IP ratings

Sensors

The sensors will be supplied, standardized by type, with connector, with a cable length suitable for easy extraction, suitably protected from possible impacts.


Control command

The proposed solution is based on SIEMENS Programmable Logic Controller technology (PLC) platform. The entire system will be logically divided into Zones (Sorter/ Feed Line/ Linear), each managed by a PLC. The planned primary communication protocol is going to be ProfiNet.


Conveyor interface

The frequency converter of each conveyor allows the acquisition of the signals of the sensors/actuators/GIOs associated with it (e.g. conveyor end detection photocells, blockage detection photocells). Each frequency converter will be connected in series by means of the ProfiNet field bus

16. Controls Architecture (Ref.)

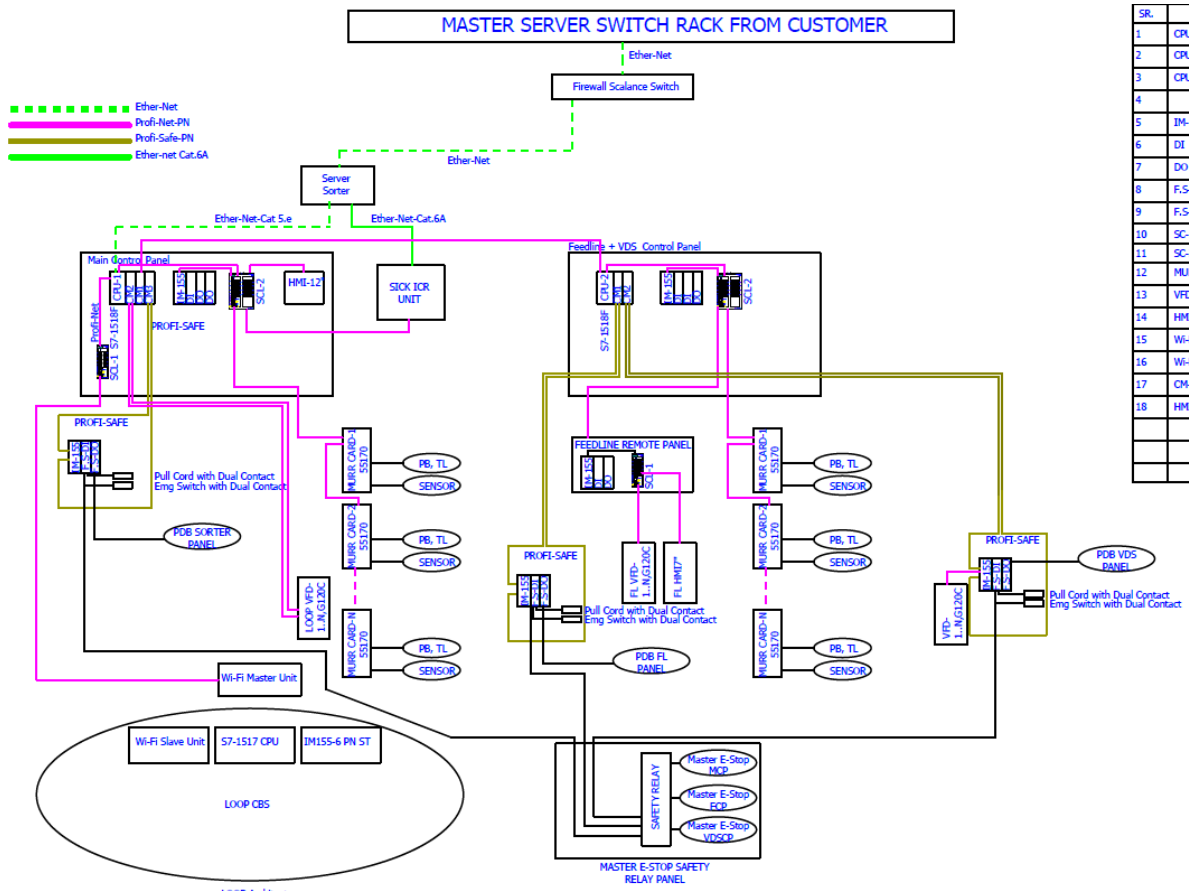

17. IT Architecture (Ref.)

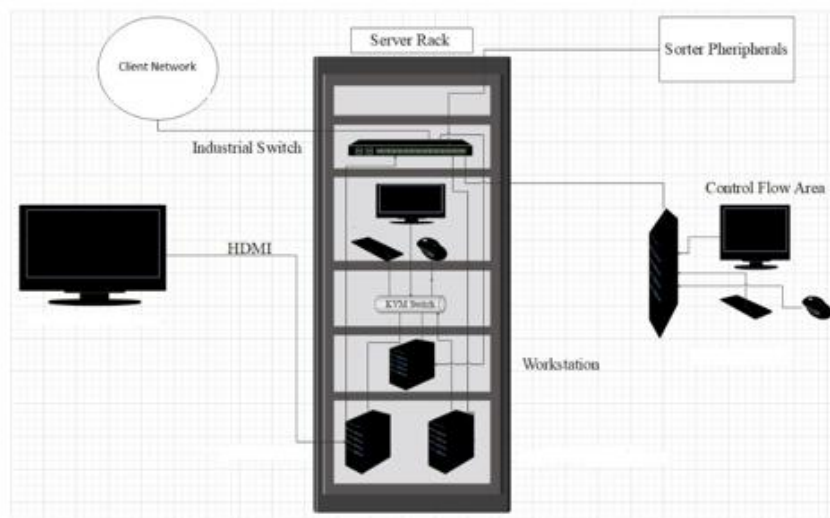

18.HAA Server (InPost Scope)

20Core Config with 128 GB RAM in T550 and 64 GB RAM in T150		
1	Synology_storage_DS723+ 2.6 GHz AMD Ryzen R1600 Dual-Core, 2 x Gigabit Ethernet Ports,2GB ECC DDR4 RAM, 2 x 3.5/2.5" Bays 2 x M.2 2280 Slots , 1x E10G22-T1-Mini 10GbE RJ-45 network upgrade module for compact Synology servers	2 Pcs
2	Dell PowerEdge T550 - Dell T550 8 Bay 3.5 LFF Server,Intel 4316 Processor 20 Core, Base 2.30GHz, Turbo 3.40GHz,Dell 32GB RAM 2Rx4 DDR4 3200MHz RDIMM * 4,Dell 1.2TB HDD 10K RPM SAS 12Gbps 512n 2.5 * 2,Broadcom 5720 Dual Port 1GB Network Card Onboard LOM,Dell Broadcom 5720 Dual Port 1G Network Card,PERC H755 8GB NV Cache Raid Controller,Trusted Platform Module 2.0 V3,Open Manage Enterprise Advanced,iDRAC9, Enterprise 15G,Dell 800W Power Supply for 15G Servers * 2,3 YR ProSupport 4Hr and Mission Critical	2 Pcs
3	DELL Tower Server PowerEdge T150: 4 Bay NHP Server,Intel Xeon E-2314 Processor 2.8GHz 8M Cache,4C/4T,Turbo,65W,TPM,Dell 32GB 2RX8 DDR4 UDIMM 3200MHz ECC X 2 ,480GB SATA SSD Read Intensive 6Gbps 512e 2.5, 1TB Hard Drive X 2 SATA 6Gbps Enterprise 7.2K 512n 3.5in Cabled,Broadcom 5720 Dual Port 1GB Network Card Onboard LOM,Broadcom 5720 DP 1Gb Network Interface Card, Full Height,CusKit,Single Power Supply, 300W, Trusted Platform Module 2.0 V3,iDRAC9, Basic 15G,3YR Pro Support Next Business Day Onsite	1 Pc
4	Windows Server 2019 or Higher	3 Pcs
5	Monitor 19.5 Inch	1 Pc
6	Aten KVM Switch 4 Port	1 Pc
7	Dell USB Mouse	1 Pc
8	Dell USB Keyboard	1 Pc
9	Dlink Lan Cable - 5MTR	10 Pcs
10	Power Cable - 6 AMP	10 Pcs
11	VGA Cable	1 Pc
12	APW 42 AC Server Rack	1 Pc
13	Netgear 24 Port Giga Switch	2 Pcs
14	2 TB SSD Micron	4 Pcs
15	Microteck 1 KVA UPS	3 Pcs


Note : Above is for reference only, actual requirement will be shared during DAP Phase

19. Key Components Make

Items	Make
Belts	Forbo/ Derco
Rollers	Falcon
Cross Belt Carriers	Falcon
LIM	Falcon
Feed Line Motors	Induction Motors – SEW/ Lenze/Similar
Scanners	SICK/Cognex
Encoders	SICK
Sensors	Sick/Leuze/ P&F
PLC	Omron/Siemens
Control Panels	Rittal/ BCH
VFDs	Siemens/Lenze/ AB/ Omron/Siemens
Cables	LAPP/ Equivalent
Switch Gear	Schenider/Equivalent
Bearings	NTN/SKF
Power Transmission Systems	Vahle
HMI's	Omron/Siemens

20. Program Organisation

20.1 Program/ Project Schedule

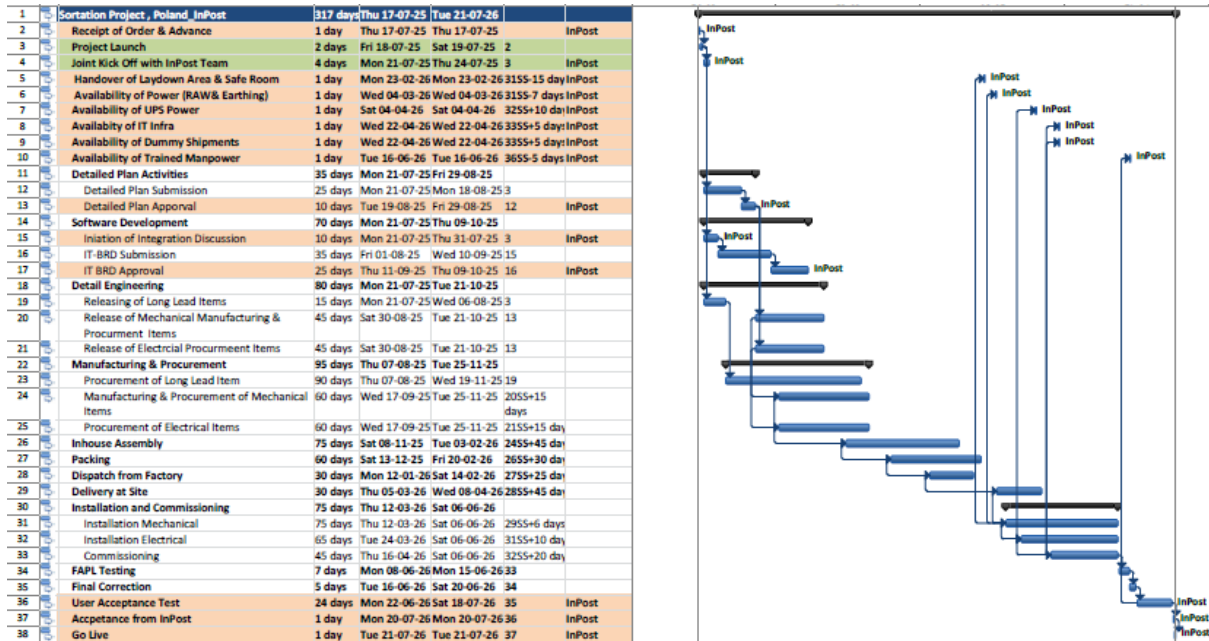

*Above plan is tentative, detailed plan will be shared post order confirmation.

* The plan is based upon standard Falcon colour scheme. InPost colours are possible and will increase the lead time.

20.2 Program Management

For this program, proposed approach covers the following aspects:

1. Creation and monitoring of the project plan.
2. Communication with INPOST
3. Weekly/Fortnightly Meeting INPOST to share the Project Status.
4. Scheduling resource management.
5. Management of risks and opportunities.
6. Management of the requirements.
7. Management of the list of anomalies or reservations.

21. INPOST's Responsibility

21.1 INPOST Responsibilities During the Assembly and Commissioning Phase

- Provision of the site complex and office area facilities.
- Free provision, during the installation phase, of the power supply necessary for the installation activities (estimated at 20 kW).
- Provision, during the commissioning phase, of the power supply necessary for the operation of the shipmentsorting system free of charge at the date of FALCON need.
- Provision of the IT system functionality in accordance with the specification at the date of FALCON need.
- The customer is responsible for a safe working environment and makes arrangements for the working area('s) to be protected against direct weather influences.
- The customer provides adequate lighting, heating, and ventilation to create a normal working environment.
- The cost of temporary storage that may be required (other than in the immediate vicinity of the installationsite) is not included in the scope of delivery of this quotation. This also applies to temporary storage that may be required because materials are ready for delivery (in accordance with the schedule) but cannot be delivered due to hold-ups on the customer's side.

21.2 Responsibilities of INPOST During the Tests


- Provision of the test loads and barcode labels required for the tests.
- Provision of personnel required for test activities (loading and unloading operations).
- Provision of the necessary information to sort the shipments correctly.
- Verify with FALCON the quality and conformity of the test loads (labels, cartons).
- Will need to provide the necessary staff to collect information on the tests and to verify and confirm testresults with FALCON.

21.3 INPOST Responsibilities During the Training

- Provision of a list of participants for each available training course 3 days before the start of the course.
- Provision of a classroom equipped with a whiteboard, video projector, projection screen, and enough spacefor desks or tables and chairs for the trainer and trained staff.
- Check the prerequisites of the people who have to follow the training, e.g. the qualifications of the technicalstaff.
- The invitation of staff to attend the training courses will be at the expense of INPOST.

22.System Handover to INPOST

The system handover will be following the shown below workflow. Each of the stages are defined in the document below.

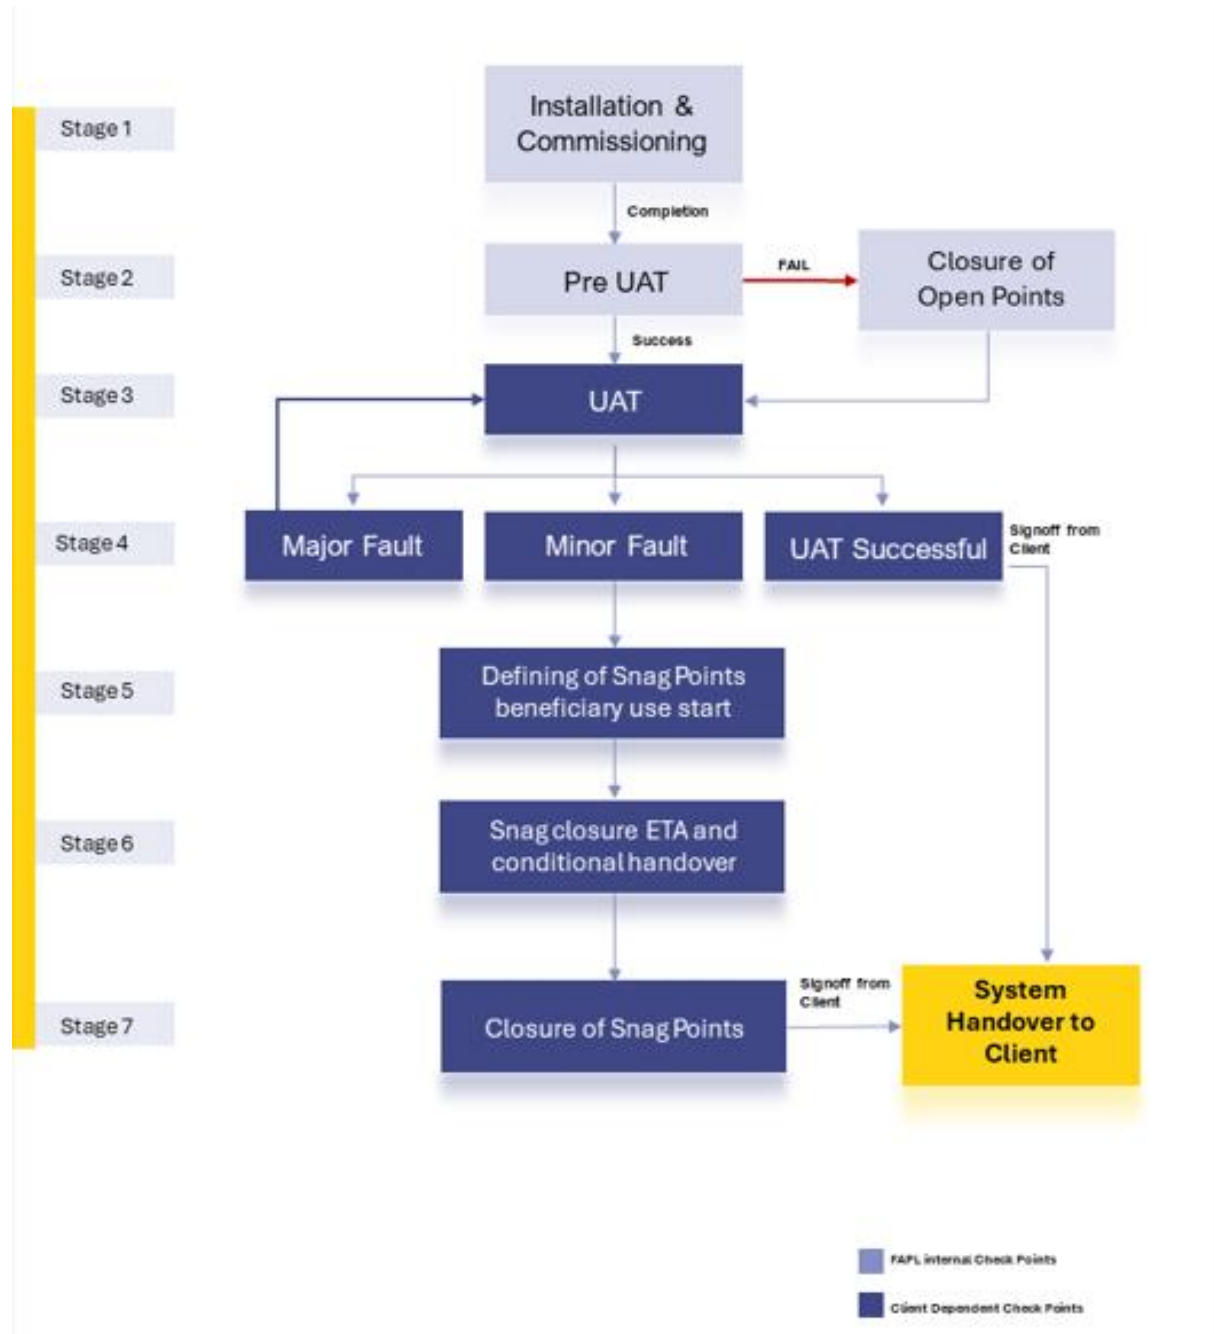

Installation and Commissioning – Completion of all the activities to get the system up and running.

Pre-UAT – Pre-UAT (User Acceptance Testing) involves a series of preparatory steps and tests conducted before the formal UAT phase begins. This stage ensures that the system is ready for end-user testing and meets the necessary requirements and standards. Below are some key checks of Pre UAT:

- **Physical Verification:** Ensure all functional and non-functional requirements are clearly defined and understood. Verify that all the necessary specifications for the sorting system are documented.
- **Integration Testing:** Conduct integration tests to ensure all components (conveyors, scanners, sorters, control systems, etc.) work together seamlessly. Validate the interfaces between the sorting system and other warehouse management systems (WMS) and databases.
- **Performance Testing:** Test the system's performance with some dummy product to ensure it can handle the expected volume of parcels or items. This test also done to identify and rectify any performance bottlenecks or inefficiencies.
- **Functional Testing:** Execute test cases to verify that the system performs all required functions correctly. Include scenarios for different types of products, error handling, and edge cases.

By thoroughly conducting pre-UAT activities, Falcon team will ensure that the system is stable, efficient, and ready for the formal UAT phase, where end-users can validate its functionality and performance in a real-world scenario.

UAT (User Acceptance Test)

User Acceptance Testing (UAT) for a Cross Belt Sorter System is the final phase in the implementation process where the end users test the system to ensure it meets their requirements and works as expected in a real-world scenario

Falcon will provide the UAT Schedule to Client prior to the commencement of any tests. The UAT Schedule will include the following:

- Test prerequisites.
- Daily plan/schedule
- Personnel responsibilities
- Dashboard data and test loads required.
- Specific test procedures
- Expected test results.

User Acceptance Test Parameters

Below are the parameters/test to be done at site during the UAT :

- Sorter Throughput Test
- Sorter Accuracy Test
- Barcode Reading Test

**SOP for all test will be shared during DAP stage. In case client require sample SOP for review , same will be shared during contract finalisation stage also.*

Note: In conducting this evaluation/UAT, Falcon team adhere to its Standard Operating Procedure

Minor & Major Faults

Any faults encountered during Testing will be categorized by Falcon as either Minor or Major faults as defined below.

- **Minor Faults** are defined as those affecting a limited area or single component that has no impact on the test. Minor Faults will be added to the System Snag point list and will not inhibit the continuation of testing.
- **Major Faults** are defined as those having impact that result in the inability to demonstrate the subject functionality. Major Faults may require re-starting of the test.

System Snag Point

Once the UAT completed, all the minor faults will be considered as snag points. Falcon team will publish Snag Point List information to the client.

System Snag Point list information will include the following:

1. Issue.
2. Date identified.
3. Area and/or unit.
4. Category (mechanical, electrical, or software).
5. Remedy responsibility (responsible person[s] or organization[s]).
6. Target completion date.
7. Snag point completion verification and signoff.

Once the snag point list information's shared with client, client can start the beneficiary use of system and also Client needs to sign off on Start of System Warranty and conditional handover .

Practice for Snag Point Sign Off:

1. Falcon personnel will maintain and distribute the System Sang List throughout UAT.
2. As each issue is corrected, Client will verify the resolution and provide sign-off for that issue on the System Snag Point List.

System Handover Letter

After successful completion of Acceptance Testing or closure of all snags, Falcon will furnish Client a letter, which will address the following:

- The subject System has been installed and accepted by Client.
- The final payment amount that is required and the designated due date.

23.Commercial Terms

23.1 Price Sheet

The underneath prices are a summary of the price sheet included in Appendix 1.

S. No	Component	Qty per set	Set	UOM		Price
1	CBS, Induct & Scanning Package	1	1	Set	€	1,378,771
2	Infeed, Rejection Conveyors & VDS Package	1	1	Set	€	283,868
3	Chute Package	1	1	Set	€	528,223
4	Mezzanine Package	1	1	Set	€	669,174
4	Software Packages	1	1	Set	€	16,304
5	Installation & Commissioning Package	1	1	Set	€	597,012
6	Packaging & Documentation	1	1	Set	€	143,002
7	Project Management and Engineering Charges	1	1	Set	€	89,234
8	Freight	1	1	Set	€	191,818
9	Spare Kit as per InPost List	1	1	Set	€	54,604
10	Protection on Ground	1	1	Set	€	15,000
Total system price					€	3,967,012
11	Recommended Spare Package by Falcon	1	1	Set	€	174,734
12	Hotline Support	1	1	Set	€	25,000
13	Warranty Inspection	1	1	Set	€	36,000
Total Package					€	4,202,746

23.2 Pricing Terms:

- Scope as described in the offer – Included
- Taxes extra as applicable
- Custom Duty: Extra as applicable
- Laydown area in customer scope
- Assembly tools like forklifts and hoisting machines - Included
- CE Declaration of Conformity: Included
- **All prices are as per comments in the compliancy sheet (attached with this offer)**

23.3 Payment Terms

Payment Percentage	Stage
20%	Advance along with LOI/ PO
20%	After DAP Completion
40%	Before Dispatch
10%	Against Installation
10%	Against Handover

24. Warranty Period

Falcon offers Comprehensive warranty for 1 year (Starts from the date of beneficiary use, max 30 days after readiness of commissioning).

The warranty covers the following support:

- 24 X 7 Telephonic, Email and Remote Service Support. **(as per optional Package i.e. Hotline Support)**
- 12 Pcs Preventive & 12 Pcs Breakdown Visits per Year **(as per optional Package i.e. Warranty Inspection)**
- Regular Software updates and Bug Fixes.
- Supply of Mechanical and Electrical components in case of failure (excluding damages as mentioned in the Exclusion Clause)

The warranty does not apply to the replacement or repair of:

- Normal wear and tears.
- Consumables. (For ex: Carbon Brush, Wheels, Bearing, Current Collector, Timing Belt etc. Detailed list of consumables will be shared after the DAP approval)
- Faulty articles continued:
 - Failure to comply with the manufacturer's recommendations (logistics documentation, Technical Information Note, retrofit document) and the rules of the trade.
 - Negligence or abnormal use of equipment.
 - Anomalies produced by an environment of use, storage or transport that does not comply with the specifications or recommendations of Falcon: packaging, temperature, hygrometry, sector, insulation, etc.
 - A defect due to a cause external to the supplies and services of Falcon.
- Equipment other than that is supplied by Falcon.
- Items that can be repaired exclusively by Falcon that have been repaired or attempted repairs other than those carried out by Falcon.
- Items that fail due to normal wear and tear of one or more of its components or whose tamper-evident seals (varnish, strip, etc.) have been broken or whose serial numbers have been removed or modified.
- Items damaged during transport to Falcon due to the use of unsuitable packaging.

Note: Transportation cost for sending faulty items to Falcon Factory from the site will be in INPOST Scope and new items from Falcon factory to site will be in scope of Falcon.

25. Exclusions

The scope of supply includes all parts which are defined in the Supplier's quotation.

All other parts which are not defined in the Supplier's quotation do not belong to the Supplier's scope of supply and are excluded. The following parts are also excluded:

- Server System and its standard software
- PC for SCADA
- Construction Power
- Mezzanine & Staircase not mentioned in BOM
- Maintenance Platform / Lift required for maintenance activity
- Collection Bins / roller cages / pallets
- Safety Fencing not shown in layout
- Workstations
- Building infrastructure; building structure, doors, fire exits, levelling devices, building extinguisher and fire alarm system, building heating and lighting system.
- Electrical power supply and wiring to the main control cabinets.
- UPS for Controls and Drives
- Network Cabling up to the Main Server Rack
- Intermediate wiring to parts which are to be supplied by the Purchaser/others.
- Emergency/Uninterruptable power supply
- Fire-alarm and fire protection devices.
- Traffic and route markings
- Laydown Area
- Ram protection devices other than the leg guards/crash barriers specified in offer / price sheet
- Cat walks, bridges, maintenance aisles and platforms
- All kind of network incl. Local Area Network (LAN/WLAN), exceeding the scope described in Scope of Supply
- Any Kind of Civil work
- Any adjustment of the Supplier's scope of supply to local rules and regulations
- X-Ray machines
- Simulation and 3D animation of the sorter system
- Interface with other equipment not specified in this offer.
- Provision of facilities for the control room (furniture, air conditioning, heating, etc.).
- The supply and installation of fencing around the different corridors.
- Any item specifically indicated as not forming part of the subject matter of the Seller's supply in the offer documentation.

Appendices

Appendix 1: Pricing lists_Poland_2025-02-17

Appendix 2: Layout_ 2111181253_Inpost,Poland_Loop CBS_Rev 02_CV *

Appendix 3: Provisional Project Plan

Appendix 4: Compliancy list InPost F25-00124_2025-02-17

Appendix 5: Standard component list Falcon

Appendix 6: QA v1.0_Falcon

Appendix 7: NDA_2024-09-18_signed

Appendix 8: KYC_Falcon_Signed

Appendix 9: Non-cooperation with Russia and Belarus statement_filled

Appendix 10.a: Suppliers_Code_of_Conduct_Appendices_EN_v1.1_Signed

Appendix 11: FP General information_hCB Poland_Signed

* To view the lay-out, you can download a free Autodesk Navis viewer here: <https://www.autodesk.com/eu/products/navisworks/3d-viewers>